XA-82-2

DATA SHEET

PRODUCT INFO

INTERFACE
8x 10/100/1000

POWER
9-43 VDC: No PoE Out
44-57 VDC: PoE Out

PoE & POWER BUDGET
240 W

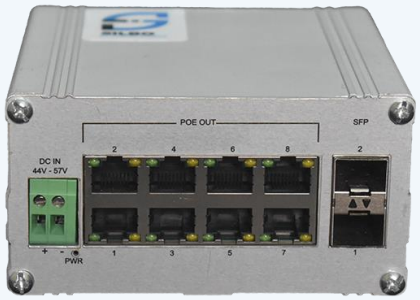

Hardware Specification

Ethernet	8 x 10/100/1000 Mbps (MDI/MDIX)
SFP	2 x SFP
Status LED	PWR(On/Off), LAN Activity LED (Green: Active connection, Orange: 1000 Mbps), SFP Status LED (Green: Connection status)
PoE	LAN Port 1 – 8 (PoE Out)
PoE Standard	802.3at & 802.3af
PoE Budget (Per Port)	30 W (Max)
Total PoE Budget	240 W(Max)
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	Spring Loaded 2 wire connector
Input Voltage Range	9-57 Vdc (PoE out will work from 44-57Vdc Input)
Power Consumption	5.5 W (Non PoE) / 245.5 W (With PoE)
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	56 mm x 110 mm x 114 mm (W x H x D)
Weight	300 Gm
Other	Grounding Screw

Operational & Environmental

Storage Temperature	-30 ~ 70 ˚C
Operating Temperature	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

Standard Packaging

XA-82-2 with Industrial Aluminium Enclosure

SPATIAL MEASUREMENT:

Top View

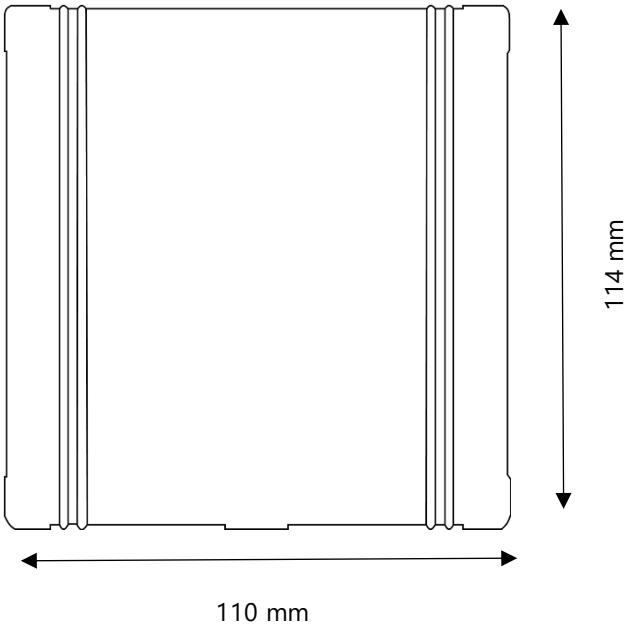

Front View

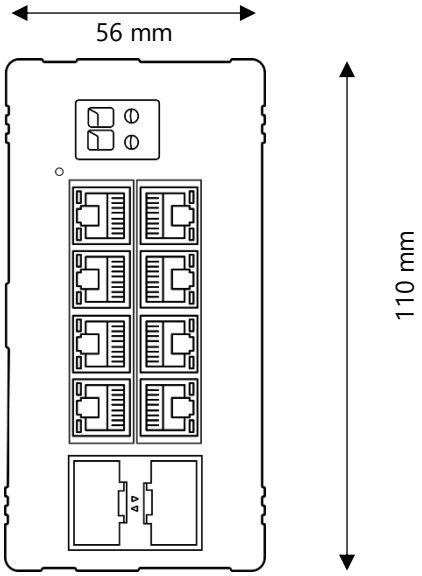

*All rights reserved, subject to change without prior notice.

Get in touch:

sales@invendis.com

www.silbonetworks.com

Invendis Technologies India Private Limited
No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM
2nd Stage, Bangalore – 560 068