Invendis™
Invent, Discover.

MADE IN BHARAT

SILBO™
An Invendis Product

PRODUCT CATALOGUE

2026

Invendis Technologies India Private Limited
No. 230, 1st Cross, 38th Main, BOOHBCS Layout, BTM 2nd Stage, Bangalore – 560 068
Telephone: + 91 6361509463

www.silbonetworks.com, www.invendis.com
sales@invendis.com
Phone No: + 91 6361509463

INDEX-ROUTERS, GATEWAYS, SWITCHES, AND OTHERS

ROUTERS	PAGE NUMBER
INTEL X6425	3
INV-CE-XX	4
INV-CEA-XX	5
INV-CEB-XX	6
INV-CD-XX	7
RTSXX	8
RU60	9
ROXX	10
RTXX	11
RVXX	12
RV00	13
RDxx	14
REXX	15
RI44	16

GATEWAYS	PAGE NUMBER
IEXX	17
IAXX	18
RFNXX	19
IABXX	20
IACXX	21
IAFXX	22
IDXX	23
IDBXX	24
ISENSE	25

SWITCHES	PAGE NUMBER
XA82-2	26
XB82-2	27
XC80-1	28
XD50-1	29
XF100-1	30
XG-82-2L	31
PC3XX	32

PRODUCT NAME	PAGE NUMBER
MC-X	33
MT7621-01	34
RT65-O	35
RN50-PCBA	36
RVW 50 with M12	37
IDF	38
NMS	39
Mini UPS	40

Invendis™
Invent, Discover.

INTEL X6425

BRIEF PRODUCT SPECIFICATIONS

CPU
Intel X86 Atom X6425E, 4 cores up to 3 GHz turbo frequency

RAM
Up to 32 GB SODIMM DDR4 3200

STORAGE
1x M.2 (Key-B), 512 GB SATA SSD Module (Up to 1 TB)

ETHERNET
10/100/1000 MBPS (2x I226 Intel), 2xRTL8125BG(Realtek)

OS
Oracle Linux v9.5 and above Ubuntu 23, Windows 10 and above

Wi-Fi
1x M.2 (Key-E) Asia RF AW 7915-AED, 802.11b/g/n/ac/ax Wi-Fi module, 2.4GhZ and 5GHz Dual band and Dual concurrent (DBDC) Wi-Fi module, Supports hotspot. Alternatively, MT7981 based 802.11b/g/n/ac/ax Wi-Fi module supports hotspot and easy mesh

CELLULAR
1x M.2 (Key-B), Telit FN990A28 5G Module with GPS

POWER
19 VDC/24 VDC

INTERFACE
2x USB 2.0 and 1x HDMI

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

INV CE-XX

ORDERING INFORMATION

INV-CX-x7425e-XX-XXX-X

D - Mini-PC/POS/NUC
E - SDWAN
Ea - Industrial PC
Eb - 6 PORT SDWAN

EX Part No. for
Mini-PC - INV-CD60-214-H
SDWAN - INV-CE65-214-C

Display : C - Console
H - HDMI

EMMC : 1 - 8GB
2 - 16GB
3 - 32GB
4 - 64GB
5 - 128GB

SSD : 1 - 128GB
2 - 256GB
3 - 512GB
4 - 1TB

SO-DIMM : 1 - 4GB
2 - 8GB
3 - 16GB
4 - 32GB
5 - 64GB

M.2 Modem : 0 - No Cellular
4 - 4G Modem
5 - 5G Modem

WiFi Module : 0 - No WiFi
6 - WiFi6

BRIEF PRODUCT SPECIFICATIONS

CPU
Intel X7425E, 4 cores up to 3.4GHz Turbo Frequency

RAM
32GB DDR5 SODIMM (Max)

STORAGE
One M.2 (B Key, 2280), Up to 512GB SSD, Up to 128GB eMMC

ETHERNET
4 × 10/100/1000 (RTL811H)

OS
Open WRT, Ubuntu, Windows 11 and
Windows IOT core

Wi-Fi
One M.2 (E Key, 3052 for Wifi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0)

CELLULAR
One M.2(B Key, supports both types 3042 and 3052) with USB2.0 and USB3.0 Supporting both 4G and 5G Modems. (Cellular module to be Separately Ordered)

POWER
12V DC, DC Jack

INTERFACE
2x USB 2.0, 1 x HDM, 1 x USB Console

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

INV-CEA-XX

ORDERING INFORMATION

INV-CX-x7425e-XX-XXX-X

D - Mini-PC/POS/NUC
E - SDWAN
Ea - Industrial PC
Eb - 6 PORT SDWAN

EX Part No. for
Mini-PC - INV-CD60-214-H
SDWAN - INV-CE65-214-C

Display : C - Console
H - HDMI

EMMC : 1 - 8GB
2 - 16GB
3 - 32GB
4 - 64GB
5 - 128GB

SSD : 1 - 128GB
2 - 256GB
3 - 512GB
4 - 1TB

SO-DIMM : 1 - 4GB
2 - 8GB
3 - 16GB
4 - 32GB
5 - 64GB

M.2 Modem : 0 - No Cellular
4 - 4G Modem
5 - 5G Modem

WiFi Module : 0 - No WiFi
6 - WiFi6

BRIEF PRODUCT SPECIFICATIONS

CPU
Intel X7425E, 4 cores with 3.4GHz Turbo Frequency.

RAM
64GB DDR5 SODIMM (Max) (Memory to be Separately Ordered)

STORAGE
One M.2 (B Key,2280), Upto 512GB SSD, Upto 64GB eMMC (Memory to be Separately Ordered)

ETHERNET
4x 10/100/1000 Ports ((Realtek RTL8111H)

OS
Ubuntu/Oracle Linux/OpenWRT/Windows

Wi-Fi
One M.2 (E Key, 3052 for Wifi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0) (WiFi module to be Separately Ordered)

CELLULAR
One M.2(B Key, supports both types 3042 and 3052) with USB2.0 and USB3.0 Supporting both 4G and 5G Modems. (Cellular module to be Separately Ordered), One M.2 slot with dual SIM optional

POWER
12V DC , DC Jack

INTERFACE
4x USB 2.0, 2 x Isolated RS232, 2x Isolated RS485, 4X Isolated DIOs (Configurable), 1x HDMI (Optional)

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

INV-CEB-XX

ORDERING INFORMATION

INV-CX-x7425e-XX-XXX-X

D - Mini-PC/POS/NUC
E - SDWAN
Ea - Industrial PC
Eb - 6 PORT SDWAN

Display : C - Console
H - HDMI

EMMC : 1 - 8GB
2 - 16GB
3 - 32GB
4 - 64GB
5 - 128GB

SSD : 1 - 128GB
2 - 256GB
3 - 512GB
4 - 1TB

SO-DIMM : 1 - 4GB
2 - 8GB
3 - 16GB
4 - 32GB
5 - 64GB

M.2 Modem : 0 - No Cellular
4 - 4G Modem
5 - 5G Modem

WiFi Module : 0 - No WiFi
6 - WiFi6

EX Part No. for
Mini-PC - INV-CD60-214-H
SDWAN - INV-CE65-214-C

BRIEF PRODUCT SPECIFICATIONS

CPU
Intel X7425E, 4 cores with 3.4GHz Turbo Frequency

RAM
Upto 64 GB DDR5 SODIMM (Max)(Memory to be separately ordered)

STORAGE
One M.2 (B Key,2280), Upto 512GB SSD, Upto 64GB eMMC ((Memory to be Separately Ordered)

ETHERNET
6 x 10/100/1000 Ports (5 X 10/100/1000 (Realtek RTL8111H)) and 1X 10/100/1000 (TI DP83867))

OS
Ubuntu/Oracle Linux/OpenWRT/Windows/VyOS

Wi-Fi
One M.2 (E Key, 3052 for Wifi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0) (WiFi module to be Separately Ordered)

CELLULAR
One M.2(B Key, supports both types 3042 and 3052) with USB2.0 and USB3.0 Supporting both 4G and 5G Modems. (Cellular module to be Separately Ordered), One M.2 slot with dual SIM optional

POWER
12V DC , DC Jack

INTERFACE
2 x USB 2.0, Optional 2 x USB 2.0, 2 x RS 232 (Optional), 1 x RS232

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

INV-CD-XX

BRIEF PRODUCT SPECIFICATIONS

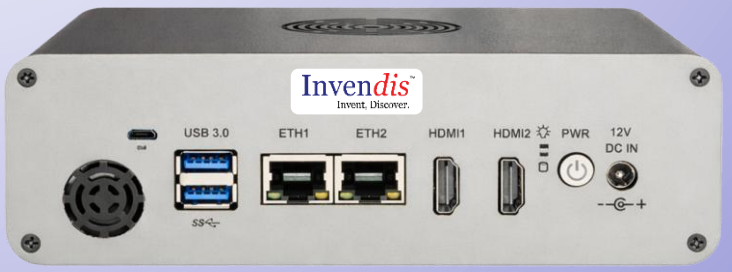

CPU
Intel X7425E, 4 cores with 3.4GHz Turbo Frequency

RAM
Upto 64 GB DDR5 SODIMM (Max)

STORAGE
One M.2 SATA, Upto 512GB SSD , Upto 64GB eMMC

ETHERNET
2 X 10/100/1000 (RTL811H)

OS
Oracle Linux v9.5 and above
Ubuntu 23, Windows 10 and above

Wi-Fi
One M.2 (E Key, 2230 for Wi-Fi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0)

POWER
12V DC, DC Jack

USB
2 x USB 3.0, 4x USB 2.0, 2 x HDMI

DISPLAY
2 x HDMI, 1 x LVDS (Optional)
2 x RS232 (Optional)

ORDERING INFORMATION

INV-CX-x7425e-XX-XXX-X

D - Mini-PC/POS/NUC
E - SDWAN
Ea - Industrial PC
Eb - 6 PORT SDWAN

Display : C - Console
H - HDMI

EMMC : 1 - 8GB
2 - 16GB
3 - 32GB
4 - 64GB
5 - 128GB

SSD : 1 - 128GB
2 - 256GB
3 - 512GB
4 - 1TB

SO-DIMM : 1 - 4GB
2 - 8GB
3 - 16GB
4 - 32GB
5 - 64GB

M.2 Modem : 0 - No Cellular
4 - 4G Modem
5 - 5G Modem

WiFi Module : 0 - No WiFi
6 - WiFi6

EX Part No. for
Mini-PC - INV-CD60-214-H
SDWAN - INV-CE65-214-C

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RTSXX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7981, 1GB DDR4 RAM, 128MB NAND

ETHERNET
4 LAN 10/100/1000
1 WAN 10/100/1000
2 SFP

OS
Open-WRT Linux

Wi-Fi
Dual-Band Wi-Fi, AP/Station, External 5dBi antennas

CELLULAR
Dual Modem 5G/4G/3G with Dual SIM, External 5dBi antenna 2x 5G Modem)

POWER
9-30 DC IN (Dual power Source 2PIN Screw Terminal or DC JACK)

INTERFACE
2x USB 2.0 and 1x HDMI

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
⊗	⊗	NA	NA	RTS00
✓	⊗	4G	Single Modem	RTS04-1
✓	⊗	4G	Dual Modem	RTS04-2
✓	⊗	5G	Single Modem	RTS05-1
✓	⊗	5G	Dual Modem	RTS05-2
⊗	WiFi-6	NA	NA	RTS-60
✓	WiFi-6	4G	Single Modem	RTS64-1
✓	WiFi-6	4G	Dual Modem	RTS64-2
✓	WiFi-6	5G	Single Modem	RTS65-1
✓	WiFi-6	5G	Dual Modem	RTS65-2

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RU60

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7981, 1GB DDR 4 RAM, 1Gb NAND

ETHERNET
1 LAN 10/100/1000
1 WAN 10/100/1000

OS
Open-WRT Linux

Wi-Fi
Dual-Band Wi-Fi, AP/Station, External 5dBi antenna

POWER
12 VDC IN

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
⊗	Wi-Fi 6	NA	NA	RU60

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RO XX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7981, 1GB DDR4, RAM, 128MB NAND

ETHERNET
2 x 10/100/1000 WAN
4 x 10/100/1000 LAN
1 SFP Port

OS
Open WRT 21/23

Wi-Fi
Dual Band Wi-Fi, AP Station, External 5dBi antennas, Easy Mesh

CELLULAR
Dual Modem 5G/4G/3G with dual SIM, external 5dBi antenna

POWER
9-30 VDC

INTERFACE
1 USB Host

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
✓	Wi-Fi-6	5G	Dual Modem	RO65-2
✓	Wi-Fi-6	5G	Single Modem	RO65-1
⊗	Wi-Fi-6	NA	NA	RO60
✓	Wi-Fi-6	4G	Dual Modem	RO64-2
✓	Wi-Fi-6	4G	Single Modem	RO64-1

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RTXX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7981 1GB DDR 4 RAM, 128 MB NAND

ETHERNET
4 x LAN 10/100/1000
1 WAN 10/100/1000

OS
OpenWRT Linux

Wi-Fi
Wi-Fi-6, AP Station, External 5dBi antenna, Easy Mesh

CELLULAR
Dual M.2 Modem 5G/4G/3G with Dual SIM, External 5dBi antenna

POWER
9-30 DC IN

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
⊗	⊗	NA	NA	RT00
✓	⊗	4G	Single Modem	RT04-1
✓	⊗	4G	Dual Modem	RT04-2
✓	⊗	5G	Single Modem	RT05-1
✓	⊗	5G	Dual Modem	RT05-2
⊗	WiFi-6	NA	NA	RT-60
✓	WiFi-6	4G	Single Modem	RT64-1
✓	WiFi-6	4G	Dual Modem	RT64-2
✓	WiFi-6	5G	Single Modem	RT65-1
✓	WiFi-6	5G	Dual Modem	RT65-2

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RVXX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512 MB DDR3 RAM, 32MB Flash

ETHERNET
1 x WAN 10/100/1000
4x LAN 10/100/1000

OS
Open WRT Linux

Wi-Fi
Dual Band Wi-Fi, AP Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
12 VDC Input

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
✓	Wi-Fi 5	4G	Single Modem	RV54-1
✓	Wi-Fi -5	4G	Dual Modem	RV54-2
✓	⊗	4G	Single Modem	RV04-1
✓	⊗	4G	Dual Modem	RV04-2
⊗	Wi-Fi 5	⊗	⊗	RV50

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RV00

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512MB DDR 3 RAM, 32 MB Flash

ETHERNET
1 x WAN 10/100/1000
4x LAN 10/100/1000

OS
Open WRT Linux

POWER
12 VDC Input

INTERFACE
1 x USB 2.0

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
⊗	⊗	⊗	⊗	RV00

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RDxx

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128MB DDR2 RAM, 32 MB Flash

ETHERNET
1 x WAN 10/100
4 x LAN 10/100

OS
Open WRT Linux

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
9-30 VDC

INTERFACE
1 x RS485, 1 x RS232

ORDERING INFORMATION

Wi-Fi	Cellular	4G/5G	RS485	RS232	Gateway Software	Part Number
✓	✓	4G	⊗	⊗	⊗	RD44-A
⊗	✓	4G	⊗	⊗	⊗	RD04-A
⊗	✓	4G	⊗	⊗	✓	RD44-B
⊗	✓	4G	✓	⊗	✓	RD04-B
✓	✓	4G	⊗	✓	✓	RD44-C
⊗	✓	4G	✓	✓	✓	RD04-C
⊗	⊗	NA	⊗	⊗	⊗	RDS00
✓	✓	4G	✓	✓	✓	RDS44

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

REXX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 256MB DDR 2 RAM, 32 MB Flash

ETHERNET
1 x WAN 10/100
3 x LAN 10/100

OS
Open WRT Linux

Wi-Fi
2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
Dual Modem 4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
12 VDC IN

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
✓	Wi-Fi 2.4	4G	Dual Modem	RE44
✓	⊗	4G	Dual Modem	RE04

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RI44

BRIEF PRODUCT SPECIFICATIONS

CPU
QCA9531, 128MB DDR RAM, 32 MB Flash

ETHERNET
1 x WAN 10/100/1000 (WAN configurable with Passive POE IN 802.3af)
4 x LAN 10/100/1000

OS
Open WRT Linux

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
-48 VDC

INTERFACE
2 x RS485

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	RS485	No Of Modem	Final Product
✓	Wi-Fi 2.4	4G	✓	Single Modem	RI44

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IEXX-X-XX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128MB DDR 2 RAM, 32 MB Flash

ETHERNET
1 x LAN 10/100
1 x WAN 10/100

OS
Open WRT Linux

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
Single SIM (ESim /Physical SIM)
4G/3G/2G External 5dBi

POWER
9-36 VDC

INTERFACE
1 x RS485 ,2 x Configurable DIO

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No Of Modem	Final Product
✓	Wi-Fi	4G	Single Modem	IE44-A
✓	Wi-Fi	4G	Single Modem	IE44-C
✓	Wi-Fi	4G	Single Modem	IE44-A-EX1 (e-SIM)

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IAXX-X

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128MB DDR 2 RAM, 32 MB Flash

ETHERNET
1 x LAN 10/100
1 x WAN 10/100

OS
Open WRT Linux

Wi-Fi
2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
9-30 VDC IN

INTERFACE
1x RS485

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	RS485	No Of Modem	Final Product
✓	Wi-Fi 2.4	4G	✓	Single Modem	IA44-C
✓	Wi-Fi 2.4	4G	✓	Single Modem	IA44-B (WITH 4GB eMMC)
✓	Wi-Fi 2.4	4G	⊗	Single Modem	IA44-A
⊗	✓	NA	✓	NA	IA40-C

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RFNXX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128MB DDR 2 RAM, 32 MB Flash

ETHERNET
1 x LAN 10/100
1 x WAN 10/100

OS
Open WRT Linux

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
9-30 VDC IN

INTERFACE
1x RS485 or 1x DI and 1x DO

ORDERING INFORMATION

Cellular	Wi-Fi	RS485	DIO	4G/5G	No Of Modem	Final Product
✓	Wi-Fi 2.4	⊗	⊗	4G	Single Modem	RFN44-A
✓	Wi-Fi 2.4	✓	⊗	4G	Single Modem	RFN44-B (RS485)
✓	Wi-Fi 2.4	⊗	✓	4G	Single Modem	RFN44-C (1x DI, 1x DO)

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IABXX-X

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128MB DDR 2 RAM, 32 MB Flash

ETHERNET
1 x LAN 10/100
1 x WAN 10/100

OS
Open WRT Linux

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
9-30 VDC IN

INTERFACE
1x RS485,4x DIO , 1x RS232, 2x AI, 1X ISO 24V OUT , 1 x USB H

ORDERING INFORMATION

Cellular	Wi-Fi	RS485	RS232	4G/5G	No of Modem	Final Product
✓	Wi-Fi 2.4	✓	✓	4G	Single Modem	IAB44-C
✓	Wi-Fi 2.4	✓	✓	4G	Single Modem	IAB44-B (4GB eMMC)
✓	⊗	✓	✓	4G	Single Modem	IAB04-B (4GB eMMC)
✓	⊗	✓	✓	4G	Single Modem	IAB04-C

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IACXX-X

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128MB DDR 2 RAM, 32 MB Flash

ETHERNET
4 x LAN 10/100
1 x WAN 10/100

OS
Open WRT Linux

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
9-30 VDC

INTERFACE
1x RS485,2x DIO

ORDERING INFORMATION

Cellular	Wi-Fi	RS485	4G/5G	No of Modem	Final Product
✓	Wi-Fi 2.4	✓	4G	Single Modem	IAC44-C
✓	Wi-Fi 2.4	⊗	4G	Single Modem	IAC44-A
✓	⊗	⊗	4G	Single Modem	IAC04-A
✓	⊗	✓	4G	Single Modem	IAC04-C

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IAFXX-X

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128 MB DDR 2 RAM, 32 MB Flash

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

ETHERNET
1 x WAN 10/100
1 x LAN 10/100

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

OS
Open WRT Linux

POWER
-48 VDC IN

INTERFACE
4x AI, 1x ISO 24v OUT, 2x RS485, 2x DI/DO, 2X DI/Pulse Input, 1x USB-H

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	RS485	No of Modem	Final Product
✓	Wi-Fi 2.4	4G	⊗	Single Modem	IAF44-C1
✓	Wi-Fi 2.4	4G	✓	Single Modem	IAF44-C2
✓	⊗	4G	✓	Single Modem	IAF04-C2
⊗	⊗	4G	⊗	Single Modem	IAF04-C1

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IDXX-X

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512 MB DDR 3 RAM, 64 MB Flash

ETHERNET
1 X WAN 10/100/1000
3 X LAN 10/100/1000

OS
Open WRT Linux

Wi-Fi
Dual-Band Wi-Fi, AP/Station, External 5dBi antennas

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

POWER
9-30 VDC

INTERFACE
1x RS485

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	RS485	No of Modem	Final Product
✓	Wi-Fi 5	4G	✓	Single Modem	ID55-B (4GB eMMC)
✓	⊗	4G	⊗	Single Modem	ID55
✓	Wi-Fi 5	4G	✓	Single Modem	ID54-B (4GB eMMC)
✓	⊗	4G	⊗	Single Modem	ID54

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IDBXX-X

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512 MB DDR 3 RAM, 32 MB Flash

Wi-Fi
Wi-Fi 2.4 GHz, 300 MBPS AP Station, External 5dBi antennas

ETHERNET
1 X WAN 10/100/1000
3 X LAN 10/100/1000

CELLULAR
4G/3G/2G with Dual SIM, External 5dBi antenna

OS
Open WRT Linux

POWER
9-30 VDC

INTERFACE
1x RS485, 1x RS232,4xDI/O, 2xAI, 1xUSB-H

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	RS485	RS232	No Of Modem	Final Product
✓	Wi-Fi 5	5G	✓	✓	Single Modem	IDB55-B
✓	Wi-Fi 5	5G	⊗	⊗	Single Modem	IDB55
✓	Wi-Fi 5	4G	✓	✓	Single Modem	IDB54-B
✓	Wi-Fi 5	4G	⊗	⊗	Single Modem	IDB54

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

iSENSE VIOLET

BRIEF PRODUCT SPECIFICATIONS

CPU
Dual Core 0.88GHz, 512MB RAM, eMMC support upto 32 GB, 32 MB Flash

POWER
20-60VDC

ETHERNET
4 X 10/100/1000 MBPS

INTERFACE
1 x USB 3.0, 4 x RS485, 1x RS232, 24 x DI, 8 x DO, 8 x AI, 2 x RTD

OS
Linux OS

ORDERING INFORMATION

Wi-Fi	Cellular	4G/5G	RS485	RS232	DIO	Part Number
✓	✓	4G	✓	✓	24	iSense Violet Plus Pro
✓	✓	4G	✓	✓	12	iSense Green Plus Pro
✓	✓	4G	✓	✓	6	iSense Blue Plus Pro

Invendis™
Invent, Discover.

XA-82-2 Gigabit Ethernet Unmanaged Switch

BRIEF PRODUCT SPECIFICATIONS

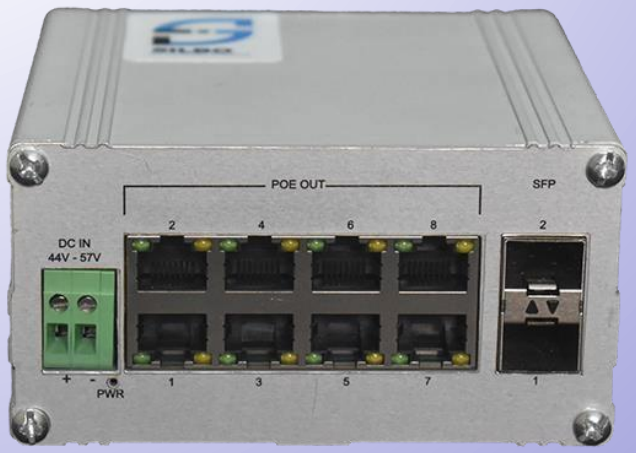

PoE BUDGET
240 W
30W Max per port

POWER
9-43 VDC: No PoE out
44-57 VDC PoE out

ETHERNET
8 x 10/100/1000

INTERFACE
2 X SFP Port

ORDERING INFORMATION

Cellular	Wi-Fi	PoE	PoE Budget	Final Product
⊗	⊗	✓	240 W 30w Max Per Port	XA82-2 Unmanaged PoE Switch

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

XB-82-2 Gigabit Ethernet Unmanaged Switch

BRIEF PRODUCT SPECIFICATIONS

ETHERNET
8 x 10/100/1000

POWER
9-57 VDC

INTERFACE
2 X SFP Port

ORDERING INFORMATION

Cellular	Wi-Fi	PoE	PoE Budget	Final Product
⊗	⊗	✓	240 W 30W Max Per Port	XB82-2 Unmanaged PoE Switch

Back to Index | Detailed Specifications

Invendis™
Invent, Discover.

XC-80-1 Fast Ethernet Unmanaged Switch

BRIEF PRODUCT SPECIFICATIONS

ETHERNET
8 x 10/100

POWER
9-30 VDC

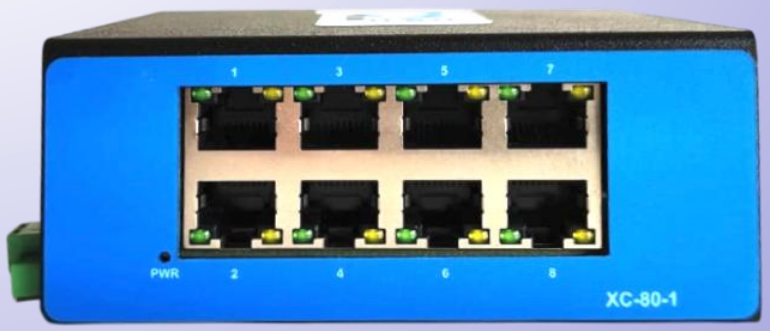

ORDERING INFORMATION

Cellular	Wi-Fi	PoE	PoE Budget	Final Product
⊗	⊗	✓	240 W 30W Max Per Port	XC-80-1 Unmanaged PoE Switch

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

XD-50-1 Fast Ethernet Unmanaged Switch

BRIEF PRODUCT SPECIFICATIONS

ETHERNET
5 x 10/100

POWER
9-30 VDC

ORDERING INFORMATION

Cellular	Wi-Fi	PoE	PoE Budget	Final Product
⊗	⊗	✓	240 W 30W Max Per Port	XD50-1 Unmanaged PoE Switch

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

XF-100-1 Fast Ethernet Unmanaged Switch

BRIEF PRODUCT SPECIFICATIONS

ETHERNET
10 x 10/100

POWER
9-30 VDC

ORDERING INFORMATION

Cellular	Wi-Fi	PoE	PoE Budget	Final Product
⊗	⊗	✓	240 W 30W Max Per Port	XF-100-1 Unmanaged PoE Switch

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

XG-82-2L Gigabit Ethernet Managed Switch

BRIEF PRODUCT SPECIFICATIONS

PoE BUDGET
240 W

POWER
44-57 VDC PoE out

ETHERNET
8 x 10/100/1000

INTERFACE
2 X SFP Port

ORDERING INFORMATION

Cellular	Wi-Fi	PoE	PoE Budget	Final Product
⊗	⊗	✓	240 W	XG82-2L Gigabit Ethernet Managed Switch

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

PC3XX

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7628, 128 MB DDR 2 RAM, 32 MB Flash

POWER
12-24 VDC

RAM
Up to 16 GB SODIMM DDR5

INTERFACE
2 X RS485

ETHERNET
1 x LAN 10/100

ORDERING INFORMATION

Cellular	Wi-Fi	RS485	No of RS485	Final Product
⊗	⊗	✓	1	PC310
⊗	⊗	✓	2	PC311
⊗	✓	✓	1	PC312

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

MC-X

BRIEF PRODUCT SPECIFICATIONS

ETHERNET
10/100/1000 Base T to 1000 Base SX

POWER
5-12 VDC IN

INTERFACE
1x RJ45
1x Fiber Port (Duplex SC Type Connector)

ORDERING INFORMATION

Type of Optical Port	Final Product
1 x RJ 45, 1 x Fiber	ISMC1-SD851G-S5
1 x RJ 45, 1 x Fiber	ISMC1-SD311G-10
1 x RJ 45, 1 x Fiber	SMC1-SD311G-20

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

MT7621-01 ODU

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512MB DDR 2 RAM, 32 MB Flash

CELLULAR
4G/3G/2G with Dual SIM Active Passive, One External 5dBi antenna (IP66) and One 5dBi auxiliary internal flexi antenna

ETHERNET
1 x 10/100/1000 (External)
1 x 10/100/1000 (Internal)

POWER
Active PoE IN (IEEE 802.3af/at (48V-57V))

OS
Open WRT Linux

INTERFACE
1x 10/100/1000 (External) with PoE IN, 1 x 10/100/1000 internal for configuration

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No of Modem	Final Product
✓	⊗	4G	Single Modem	MT7621-01 ODU

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RT65-ODU

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7981 1GB DDR 2 RAM, 128 MB NAND

ETHERNET
4 x LAN 10/100/1000
1 WAN 10/100/1000

OS
OpenWRT Linux

Wi-Fi
Wi-Fi-6, AP Station, External 5dBi antenna, Easy Mesh

CELLULAR
Dual M.2 Modem 5G/4G/3G with Dual SIM, External 5dBi antenna

POWER
9-30 DC IN

HOUSING
IP67

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No of Modem	Final Product
✓	WiFi 6	5G	Single Modem	RT 65-ODU

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RN50-PCB-A

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512 MB DDR 3 RAM, 32MB Flash

ETHERNET
1 x WAN 10/100/1000 M12 Connector
1x LAN 10/100/1000 M12 Connector

OS
Open WRT Linux

Wi-Fi
Dual Band Wi-Fi, AP Station, External 5dBi antennas

POWER
Active PoE 44-57 VDC

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No of Modem	Final Product
⊗	WiFi-5	⊗	Single Modem	RN 50 PCB-A

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

RVW 50 with M12

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512 MB DDR 3 RAM, 32MB Flash

ETHERNET
1 x WAN 10/100/1000 M12 Connector
3x LAN 10/100/1000 M12 Connector (Configurable)

OS
Open WRT Linux

Wi-Fi
Dual Band Wi-Fi, AP Station, External 5dBi antennas

POWER
Active PoE 44-57 VDC

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No of Modem	Final Product
⊗	WiFi-5	⊗	Single Modem	RVW 50

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

IDF

BRIEF PRODUCT SPECIFICATIONS

CPU
MediaTek MT7621, 512 MB DDR RAM, 32 MB Flash

Wi-Fi
Dual-Band Wi-Fi, AP/Station, External 5dBi antennas

ETHERNET
1 X WAN 10/100/1000
3 X LAN 10/100/1000

CELLULAR
5G/4G/3G/2G with Dual SIM, External 5dBi antenna

OS
Open WRT Linux

POWER
-48 VDC

INTERFACE
2x RS485

ORDERING INFORMATION

Cellular	Wi-Fi	4G/5G	No of Modem	Final Product
✓	Wi-Fi 5	5G	Single Modem	ID55-B
✓	Wi-Fi 5	5G	Single Modem	ID55
✓	Wi-Fi 5	4G	Single Modem	ID54-B
✓	Wi-Fi 5	4G	Single Modem	ID54

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

NMS

BRIEF PRODUCT SPECIFICATIONS

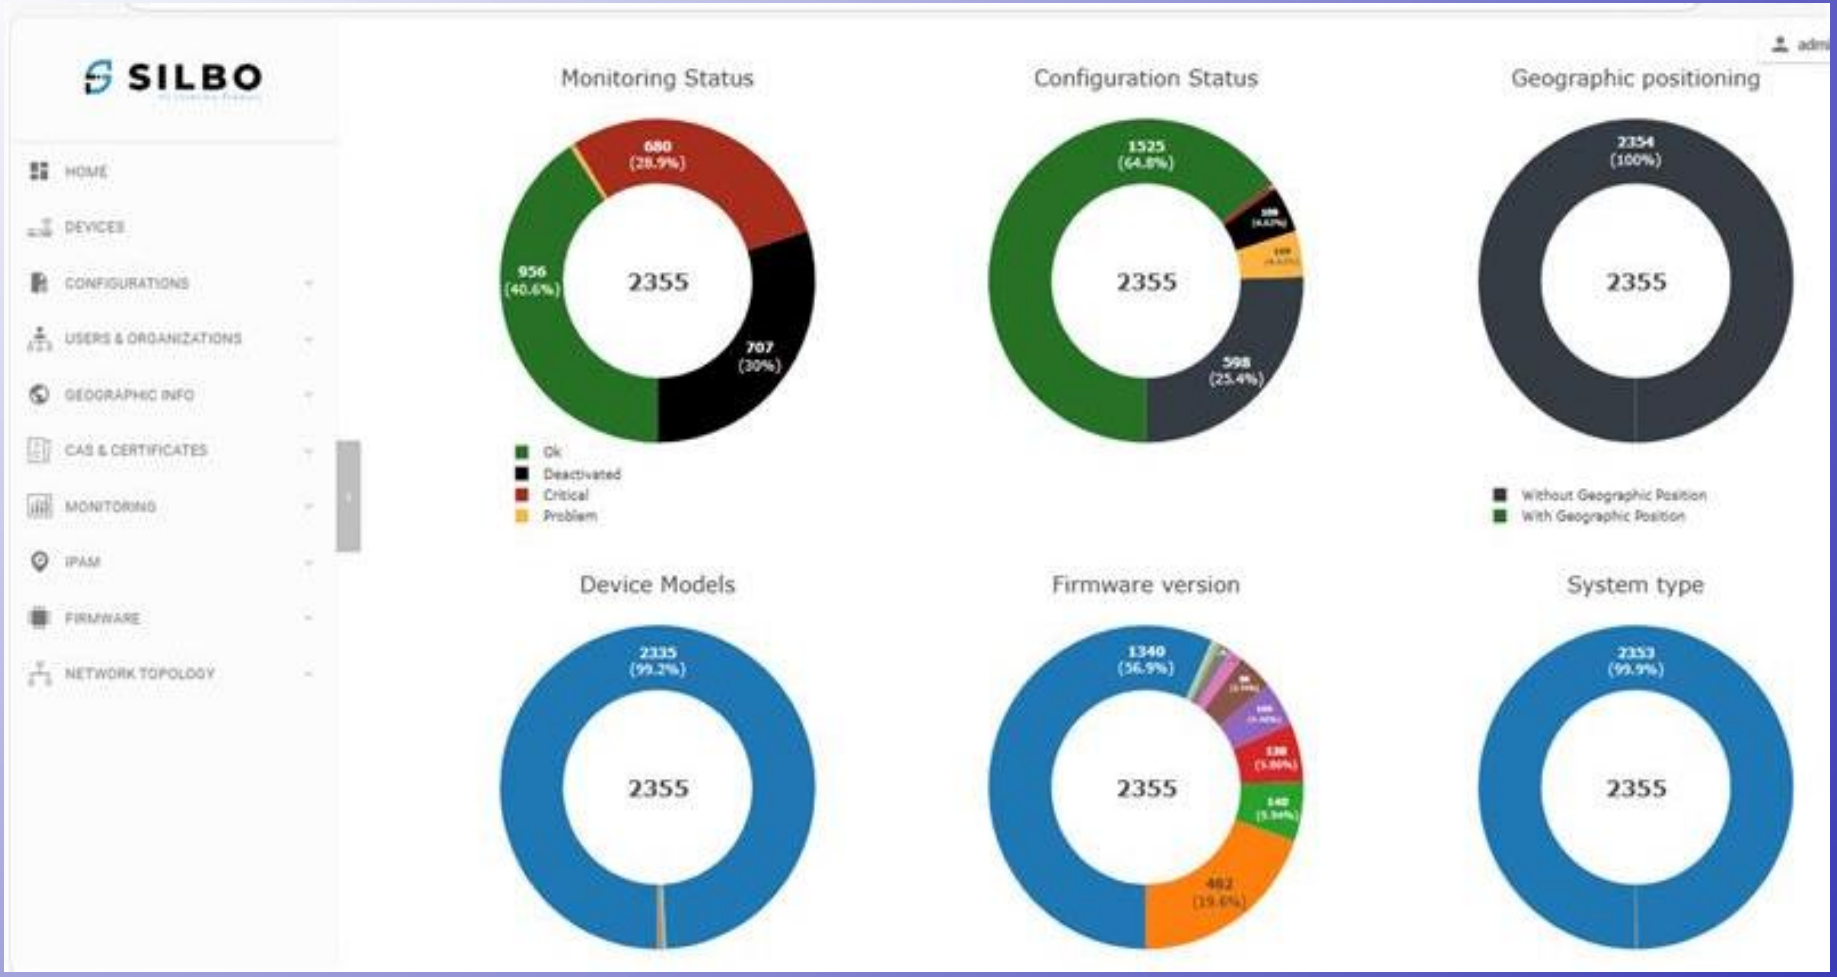

- Easy Remote Monitoring of Routers, Gateways from anywhere
- Remote Configuration of Routers or Gateways without having public IP at remote site
- Report generation helps easy debugging

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

Mini UPS

BRIEF PRODUCT SPECIFICATIONS

BATTERY

Replaceable and Selectable battery (18650/26650)

POWER

19 Whr, backup time 3-5 hours
38 Whr, backup time 9-10 hours

INPUT/OUTPUT

Input : 12 V
Output: 12 V, 2A/3A

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

INTEL X6425
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	Intel X86 Atom, X6425E, 4 cores with base frequency 2GHz and Turbo Frequency of upto 3GHz
RAM	Up to 32 GB SODIMM DDR4 3200 MHz
Storage	1x M.2 (Key-B), 512 GB SATA SSD Module (Up to 1 TB
Ethernet	10/100/1000 MBPS (2x I226 Intel) , 2x RTL8125BG(Realtek
Cellular	1x M.2 (Key-B)- Telit FN990A28 5G Module with GPS Dual Nano Physical SIM with SIM tray (1x Active, 1xPassive)
USB	2x USB 2.0
WiFi (Hotspot andEasyMesh)	1x M.2 (Key-E) Asia RF AW 7915-AED, 802.11b/g/n/ac/ax Wi-Fi module, 2.4GhZ and 5GHz Dual band and Dual concurrent (DBDC) Wi-Fi module, Supports hotspot. Alternatively MT7981 based 802.11b/g/n/ac/ax Wi-Fi module supports hotspot and easy mesh
Reset	System Reset/Power ON/OFF (Optional)
Antenna	Cellular: 4x 5G SMA GNSS: 1xGPS-SMA, Wi-Fi: 2x Wi-Fi (2x2) – RP SMA
Enclosure	Aluminium Enclosure
Mounting	Desktop Mount
Design	Fanless
Dimensions (W × H × D)	150mmx210mmx65mm (LxWxH)
Input Power	19 VDC DC Jack
Storage Temp	-20 - 75°C
Operating Temp	0 -50°C
Humidity	10 – 90% (non condensing)
Ingress Protection Rating	IP30

SOFTWARE ASPECT	DETAILS
Operating System	Oracle Linux v.9.5 and above Ubuntu 23, Windows 10 and above

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

INV-CE-XX

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	Intel X7425E, 4 cores with 3.4GHz Turbo Frequency.
RAM	32GB DDR5 SODIMM (Max) (Memory to be Separately Ordered)
Ethernet	4 X 10/100/1000 (Realtek RTL8111H),
Cellular	One M.2(B Key, supports both types 3042 and 3052) with USB2.0 and USB3.0 Supporting both 4G and 5G Modems. (Cellular module to be Separately Ordered)
SIM	2x Nano SIM
Wi-Fi	One M.2 (E Key, 3052 for Wifi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0) (WiFi module to be Separately Ordered)
Storage	One M.2 (B Key,2280), Upto 512GB SSD, Upto 64GB eMMC ((Memory to be Separately Ordered)
TPM	Firmware/Hardware TPM (Optional)
RTC Battery Backup	3V, CR2032
Input Power	12V DC , DC Jack
Button	Software Reset
LEDs	Power, SATA, WiFi (depending on WiFi module), Cellular Activity (depending on modem),Link and Activity for Ethernets
Antenna	Cellular: 4 x SMA Connector,Wi-Fi: 1x SMA connector for 5Ghz and 1 x SMA connector for 2.4Ghz
USB	2 x USB2.0
HDMI	1 (Optional)
Console	1 x Type B Micro USB
Custom Expansion Interface	Two types of cards are available, 1.Two additional 1Gbps Ethernets and 4G M.2 interface 2. 5G M.2 interface, Two isolated RS485, Two Isolated RS232 and 4 DIOs (size of the box will increase)
Enclosure	Aluminum Enclosure
Mounting	Desktop Mount, Rack Mount, Vesa Mount, Wall Mount
Design	Fan less
Dimensions	150mm X 160mm X 55mm (L X W X H)
Storage Temperature	-20 ~ 75℃
Operating Temperature	0 ~ 50℃
Humidity	10 ~ 90% (non-condensing)
Operating System	Ubuntu/Oracle Linux/OpenWRT/Windows
Boot Loader	Intel Slim Boot Loader

Invendis™
Invent, Discover.

INV-CEA-XX

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	Intel X7425E, 4 cores with 3.4GHz Turbo Frequency.
RAM	64GB DDR5 SODIMM (Max) (Memory to be Separately Ordered)
Ethernet	Four 10/100/1000 Ports ((Realtek RTL8111H)
Cellular	One M.2(B Key, supports both types 3042 and 3052) with USB2.0 and USB3.0 Supporting both 4G and 5G Modems. (Cellular module to be Separately Ordered), One M.2 slot with dual SIM optional
SIM	2x Nano SIM (additional 2 X nano SIM optional)
Wi-Fi	One M.2 (E Key, 3052 for Wifi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0) (WiFi module to be Separately Ordered)
Storage	One M.2 (B Key,2280), Upto 512GB SSD, Upto 64GB eMMC ((Memory to be Separately Ordered)
TPM	Firmware/Hardware TPM (Optional)
RTC Battery Backup	3V, CR2032
Input Power	12V DC , DC Jack
Button	Software Reset
LEDs	Power, SATA, WiFi (depending on WiFi module), Cellular Activity (depending on modem),Link and Activity for Ethernets
Antenna	Cellular: 4 x SMA Connector, Wi-Fi: 1x SMA connector for 5Ghz and 1 x SMA connector for 2.4 Ghz
USB	4 x USB2.0
RS232	2 X Isolated RS232
RS485	2 X Isolated RS485
Digital Inputs/Outputs	4 X Isolated DIOs (Configurable as Input or Output)
HDMI	1 (Optional)
Console	1 x Type B Micro USB
Enclosure	Aluminum Enclosure
Mounting	Desktop Mount, Rack Mount, Vesa Mount, Wall Mount
Design	Fan less
Dimensions	150mm X 250mm X 55mm (L X W X H)
Storage Temperature	-20 ~ 75℃
Operating Temperature	0 ~ 50℃
Humidity	10 ~ 90% (non-condensing)
Operating System	Ubuntu/Oracle Linux/OpenWRT/Windows
Boot Loader	Intel Slim Boot Loader

Back to Index
Brief Specifications

INV-CEB-XX

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	Intel X7425E, 4 cores with 3.4GHz Turbo Frequency.
RAM	64GB DDR5 SODIMM (Max) (Memory to be Separately Ordered)
Ethernet	6 x 10/100/1000 Ports (5 X 10/100/1000 (Realtek RTL8111H)) and 1 X 10/100/1000 (TI DP83867))
Cellular	One M.2(B Key, supports both types 3042 and 3052) with USB2.0 and USB3.0 Supporting both 4G and 5G Modems. (Cellular module to be Separately Ordered), One M.2 slot with dual SIM optional
SIM	2x Nano SIM (additional 2 X nano SIM optional)
Wi-Fi	One M.2 (E Key, 3052 for Wifi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0) (WiFi module to be Separately Ordered)
Storage	One M.2 (B Key,2280), Upto 512GB SSD, Upto 64GB eMMC ((Memory to be Separately Ordered)
TPM	Firmware/Hardware TPM (Optional)
RTC Battery Backup	3V, CR2032
Input Power	12V DC , DC Jack
Button	Software Reset
LEDs	Power, SATA, WiFi (depending on WiFi module), Cellular Activity (depending on modem),Link and Activity for Ethernets
Antenna	Cellular: 4 x SMA Connector,Wi-Fi: 1x SMA connector for 5Ghz and 1 x SMA connector for 2.4 Ghz
USB	2 x USB2.0, Optional 2 X USB 2.0
RS232	2 X RS232 (Optional)
HDMI	1 (Optional)
Console	1 x Type B Micro USB
Enclosure	Sheet Metal Enclosure with Aluminum Heat Sink
Mounting	Desktop Mount, Rack Mount, Vesa Mount, Wall Mount
Design	Fan less
Dimensions	150mm X 250mm X 55mm (L X W X H)
Storage Temperature	-20 ~ 75℃
Operating Temperature	0 ~ 50℃
Humidity	10 ~ 90% (non-condensing)
Operating System	Ubuntu/Oracle Linux/OpenWRT/Windows/VyOS
Boot Loader	Intel Slim Boot Loader

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

INV-CD-XX

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	Intel X7425E, 4 cores with 3.4GHz Turbo Frequency
RAM	64GB DDR5 SODIMM (Max)
Flash	One M.2 NVME PCIE X 2, Upto 512GB , Upto 64GB eMMC
USB	2 x USB3.0, 4 x USB2.0
WiFi	One M.2 (E Key, 3052 for Wi-Fi/BLE Module 802.11b/g/n/ac/ax (1 x PCIe, 1 X USB2.0)
Reset	Software Reset, Power
Antenna	Wi-Fi: 2x SMA connector for 5 and 2.4 GHz
Enclosure	Aluminium Enclosure
Mounting	Desktop Mount
Design	Fanless
Dimensions (W × H × D)	150mm X 123mm X 35mm (L X D X H)
Weight	995 gm
Input Power	12V DC , DC Jack
Storage Temp	-20°C ~ 75°C
Operating Temp	0°C ~ 50°C
Humidity	10% ~ 90% (Non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	Ubuntu/Oracle Linux/OpenWRT/Windows Intel Slim Boot Loader

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

RTS 64-2

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7981 1.3GHz dual core ARM Cortex A53
RAM	1GB DDR4
Flash	128 NAND
SIM	2x Nano SIM (Active), Option for Active/Passive
USB	1x USB 3.0 / USB 2.0 Host
WiFi	802.11b/g/n/ac/ax
Reset	Pinhole Reset Button
Antenna	Cellular: 4x SMA Connector, Wi-Fi: 3x SMA connector
Enclosure	Sheet Metal Enclosure
Mounting	DIN Rail Mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	190 x 45 x 120 mm (W x H x D)
Weight	700 gm
Input Power	9-30 VDC
Storage Temp	-20 ~ 65 ˚C
Operating Temp	0 - 50°C
Humidity	10 – 90% (non condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi, Mesh WiFi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n/ac/ax
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF (Planned)
Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
Other Networking	Black/whitelisting
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP	Server & Client with/without MPPE Encryption
Remote Management	NMS Remote monitoring of SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Device
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

RU60

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7981
RAM	1 GB DDR4
Flash	1 Gb NAND
WAN	1 × 10/100/1000
LAN	1 × 10/100/1000
USB	1 × USB-H
WiFi	802.11 b/g/n/ac & AX (Upcoming)
Reset	Pinhole Reset Button
Antenna	Wi-Fi: Up to 2 SMA connectors
Enclosure	Metal Enclosure
Mounting	Din-rail mount (Optional accessory)
Design	Fanless
Dimensions (W × H × D)	209 × 30 × 154 mm
Weight	950 g
Power Supply	Optional PSU (12 V DC)
Input Power	12 V DC
Storage Temp	-30°C ~ 70°C
Operating Temp	-20°C ~ 60°C
Humidity	10% ~ 90% (Non-condensing)
Ingress Protection Rating	IP30

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point, Station, Guest Wi-Fi, Repeater, EasyMesh
Encryption	TKIP, AES
Wi-Fi Technology	802.11 b/g/n/ac/ax, 20 MHz / 40 MHz / 80 MHz channels
Authentication	WPA (PSK), WPA2 (PSK), Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF (Planned)
Routing	Static routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, PPP, SSH, DHCP, SNMP (Planned), TR069 (Planned)
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forwarding, traffic rules, SNAT, zone-to-zone traffic control
DHCP	Static and Dynamic
Failover	Configurable Failover between Wired and Wi-Fi WAN
Authentication	Pre-shared key, X.509 certificates
VLAN	Port-based VLAN, Tag-based VLAN 802.1ad
Other Networking	MAC binding, black/whitelisting
VPN	OpenVPN, IPsec, GRE, L2TP, PPTP, GRE over IPsec (Planned)
OpenVPN	TUN/TAP (Planned)
IPsec	IKEv1, IKEv2, up to 4x VPN IPsec clients; Encryption: DES, 3DES, AES128/192/256
PPTP/L2TP WAN	WAN with PPTP/L2TP configuration for secure broadband connection (Planned)
Remote Management	NMS Remote monitoring of SILBO Networking products
NMS VPN	Remote access of SILBO and non-SILBO networking products using NMS VPN
Supported Languages / Tools	Shell scripting, C, C++, Python (Optional)
SDK Package	Provided with built environment (Optional)

Invendis™
Invent, Discover.

RO65-2

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7981
RAM	1 GB DDR4
Flash	128 MB NAND
WAN	2 x 10/100/1000
LAN	4 x 10/100/1000
SIM	2x Nano SIM (Active)
WiFi	802.11b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 8x SMA Connector, Wi-Fi: 5x SMA Connector
Enclosure	Sheet Metal Enclosure
Mounting	DIN Rail Mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	210 x 25 x 135 mm (WxHxD)
Weight	950 gm
Input Power	9-30 VDC
Storage Temp	-30 - 70°C
Operating Temp	0 - 50°C
Humidity	10 – 90% (non condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n/ac
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Device
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

RT65

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7981 1.3GHz dual core ARM Cortex A53
RAM	1GB DDR4
Flash	128 MB NAND
WAN	1 x 10/100/1000
LAN	4 x 10/100/1000
SIM	2x Nano SIM (Active), Option for Active/Passive
WiFi	802.11b/g/n/ac/ax
Reset	Pinhole Reset Button
Antenna	Cellular: 8x SMA Connector, Wi-Fi: 5x SMA Connector
Enclosure	Sheet Metal Enclosure
Mounting	DIN Rail Mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 55 x 144 mm (W x H x D)
Weight	480 gm
Power Supply	12V/2A
Input Power	9-30 VDC
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n/ac
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Dynamic Routing (BGP,OSPF etc)
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP, SNMP, PPPoE
Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Device
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

RV54-2

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7621
RAM	512 MB DDR3
Flash	32 MB
WAN	1x 10/100/1000
LAN	4x 10/100/1000
SIM	2x Nano SIM (2x Active), Option for Active/Passive
WiFi	802.11b/g/n/ac
Reset	Pinhole Reset Button
Antenna	Cellular: 4x SMA Connector, Wi-Fi: 2x SMA connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 60 x 95 mm (W x H x D)
Weight	390 gm
Input Power	12V DC
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n/ac
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advance Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

RV00

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7621
RAM	512MB DDR3
Flash	32/64 MB
WAN	1x 10/100/1000
LAN	4x 10/100/1000
USB	1 x USB 2.0
RTC	Built-in RTC
Reset	Pinhole Reset Button
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 26 x 95 mm (W x H x D)
Weight	200 gm
Input Power	12 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Routing	Static routing, Dynamic Routing (BGP,OSPF etc)
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP, SNMP, PPPoE
Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

RD44-A

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
WAN	1x 10/100
LAN	4x 10/100
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector Wi-Fi:2x SMA Connector
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	123.2 x 28 x 120.6mm (W x H x D)
Weight	370 gm
Input Power	9-30 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n/ac
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advance Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

RE44

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128/256 MB
Flash	32MB
WAN	1x 10/100
LAN	3x 10/100
SIM	2x Nano SIM (Active)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 4x SMA Connector Wi-Fi:2x SMA Connector
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	123.2 x 28 x 120.6mm (W x H x D)
Weight	360 gm
Input Power	12 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advance Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

RI44

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	Qualcomm QCA9531
RAM	512MB
Flash	32MB
WAN	1x 10/100/1000 (WAN/LAN configurable with a Passive POE IN 802.3af)
LAN	4x 10/100/1000
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 1x SMA Connector, Wi-Fi: 1x SMA connector
Enclosure	Sheet Metal Enclosure
Mounting	Wall Mount Bracket
Design	Fanless
Dimensions (W × H × D)	281 x 34 x 119mm (W x H x D)
Weight	985 gm
Input Power	-48 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advance Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

IE-44A-EX1

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
WAN	1x 10/100
LAN	1x 10/100
SIM	Single SIM (eSIM / Physical SIM) 4G/3G/2G, External 5dBi antennas
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector Wi-Fi:2x SMA Connector
Enclosure	Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	97 x 28 x 84 mm (W x H x D)
Weight	280 gm
Input Power	9-36 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	-20 ~ 60 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advance Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

IA44-C
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
WAN	1x 10/100
LAN	1x 10/100
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector Wi-Fi:2x SMA Connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 44 x 94 mm (W x H x D)
Weight	280 gm
Input Power	9-30Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	-20 ~ 60 ˚C
Humidity	10 ~ 90% (non-condensing)
Ingress Protection Rating	IP30

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

RFN44-A
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
WAN	1x 10/100
LAN	1x 10/100
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector Wi-Fi:2x SMA Connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	112 x 35 x 99 mm (W x H x D)
Weight	297 gm
Input Power	9-30Vdc
Storage Temp	-20 ~ 60 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)
Ingress Protection Rating	IP30

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

IAB44-C
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
WAN	1x 10/100
LAN	1x 10/100
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector Wi-Fi:2x SMA Connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 44 x 94 mm
Weight	427 gm
Input Power	9-30Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

IAC44-A
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
WAN	1x 10/100
LAN	1x 10/100
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector Wi-Fi:2x SMA Connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 44 x 94 mm (W x H x D)
Weight	400 gm
Input Power	9-30Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	-20 ~ 60 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

IAF44-C
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
WAN	1x 10/100
LAN	1x 10/100
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
RTC	Built-in RTC
Serial Interface	4x AI, 1x ISO 24v OUT, 2x RS485, 2x DIDO, 2X DI/Pulse Input, 1x USB-H
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector Wi-Fi:2x SMA Connector
Power Connector	Molex 4-pin Snug fit connector
Input Voltage Range	-48 Vdc
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 44 x 94 mm (W x H x D)
Weight	400 gm

SOFTWARE ASPECT	DETAILS
Routing	Static routing, Advanced Static Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Connection Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall features	Port forwarding, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
NMS	Remote Monitoring C Management Platform for SILBO Networking products
Gateway Protocols	Modbus TCP Slave, Modbus TCP Master, Modbus RTU
SMS Commands	Reboot Command, Uptime Command
Standard Packaging	IAF44-C Cellular Gateway with Industrial Aluminium Housing, 2x Cellular Rubber Duck Antennas, 2x Wi-Fi Rubber Duck
Antennas	0.5-meter Power Cord, 1x AI, 1x ISO 24v OUT, 2x RS485, 1x DI/DO, 1X DI/Pulse Input, 01-meter Ethernet cable.

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

ID54-B
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	512MB
Flash	64MB
WAN	1x 10/100/1000
LAN	3x 10/100/1000
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n/ac
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector, Wi-Fi: 4x SMA connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 44 x 94 mm (W x H x D)
Weight	400 gm
Input Power	9-30 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	-20 ~ 60 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Wi-Fi Mode	Access Point (AP), Station, AP & Client, Guest Wi-Fi
Encryption	TKIP, AES, TKIP & AES
Wi-Fi Technology	802.11 b/g/n
Authentication	WPA (PSK), WPA2 (PSK), WPA3 (PSK), WPA & WPA2 Mixed Mode, WPA2 & WPA3 Mixed Mode
TX Power	Configurable
Wi-Fi Scheduler	Scheduled ON/OFF
Routing	Static routing, Advanced Static Routing, Dynamic Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

IDB54
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	512MB
Flash	32MB
WAN	1x 10/100/1000 (Configurable WAN/LAN)
LAN	3x 10/100/1000
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n/ac
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector, Wi-Fi: 4x SMA connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 44 x 94 mm (W x H x D)
Weight	400 gm
Input Power	9-30 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	-20 ~ 60 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Routing	Static routing, Advanced Static Routing, Dynamic Routing
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

iSENSE VIOLET
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	Dual Core 0.88GHz,512MB RAM, eMMC support up to 32GB.
RAM	Onboard RTC with battery backup/temperature sensor
Onboard Temperature Sensor	Onboard Temperature Sensor
Flash	32 MB Flash
WAN	1 X 10/100/1000 MBPS
LAN	3 X 10/100/1000 MBPS
Digital Inputs	24 with isolation (External/self powered)
Digital Outputs	8 potential free outputs (SPDT Relay)
Temperature Sensor	2 external temperature sensor probes
Safety	RoHS compliant, EMC Certification (Optional)
RS485	4 X RS485
RS232	1 X RS232
Analog Input	Voltage-2 with Isolation (Range: -60 to 60V), Current-2 with isolation (Range: 4-20mA)
Output Voltage	DO Opto Operates with internal 12V, Contact Rating 100mA @30V DC
Interface Connectors	Terminal Block 3.81 mm with screws
Design	TBD Sheet Metal with powder coating
Weight	1 kg 853 gm
Input Power	20 to 60 Volts DC
Storage Temp	-40°C to 85°C
Operating Temp	-10°C to 70°C
Humidity	90% non-condensing

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Software Support	Router Software, Modbus serial, Modbus TCP, SNMP, HTTP, MQTT
Routing	Static routing, Dynamic Routing (BGP,OSPF etc)
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP, SNMP, PPPoE
Monitoring	Ping Reboot, Scheduled Periodic Reboot, Hardware Watchdog (Enable / Disable)
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wire guard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

XA-82-2 Gigabit Ethernet Unmanaged Switch
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

ASPECT	DETAILS
Ethernet	8 x 10/100/1000 Mbps (MDI/MDIX)
SFP	2 x SFP
Status LED	PWR(On/Off), LAN Activity LED (Green: Active connection, Orange: 1000 Mbps), SFP Status LED (Green: Connection status)
PoE	LAN Port 1 – 8 (PoE Out)
PoE Standard	802.3at & 802.3af
PoE Budget (Per Port)	30 W (Max)
Total PoE Budget	240 W(Max)
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	Spring Loaded 2 wire connector
Input Voltage Range	9-57 Vdc (PoE out will work from 44-57Vdc Input)
Power Consumption	5.5 W (Non PoE) / 245.5 W (With PoE)
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	56 mm x 110 mm x 114 mm (W x H x D)
Weight	300 Gm
Other	Grounding Screw
Standard Packing	XA-82-2 with Industrial Aluminium Enclosure

Invendis™
Invent, Discover.

XB-82-2 Gigabit Ethernet Unmanaged Switch
HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

ASPECT	DETAILS
Ethernet	8 x 10/100/1000 Mbps (MDI/MDIX)
SFP	2 x SFP
Status LED	PWR(On/Off), LAN Activity LED (Green: Active connection, Orange: 1000 Mbps), SFP Status LED (Green: Connection status)
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	Spring Loaded 2 wire connector
Input Voltage Range	9-57 Vdc
Power Consumption	5.5 W
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	56 mm x 110 mm x 114 mm (W x H x D)
Weight	451 Gm
Other	Grounding Screw
Standard Packing	XB-82-2 with Industrial Aluminium Enclosure

Invendis™
Invent, Discover.

XC-80-1 Fast Ethernet Unmanaged Switch

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

ASPECT	DETAILS
Ethernet	8 x 10/100 Mbps (MDI/MDIX)
Status LED	PWR(On/Off), LAN Activity LED.
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	2 Pin Screw TB
Input Voltage Range	9-30 Vdc
Power Consumption	<5W
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	45 mm x 110 mm x 95 mm (W x H x D)
Weight	386 Gm
Other	Grounding Screw
Standard Packing	XC-80-1 with Sheet Metal Enclosure

Invendis™
Invent, Discover.

XD-50-1 Fast Ethernet Unmanaged Switch

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

ASPECT	DETAILS
Ethernet	5 x 10/100 Mbps (MDI/MDIX)
Status LED	PWR(On/Off), LAN Activity LED.
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	2 Pin Screw TB
Input Voltage Range	9-30 Vdc
Power Consumption	<5W
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	27 mm x 112 mm x 94 mm (W x H x D)
Weight	307 gm
Other	Grounding Screw
Standard Packing	XD-50-1 with Sheet Metal Enclosure

Invendis™
Invent, Discover.

XF-100-1 Fast Ethernet Unmanaged Switch

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

ASPECT	DETAILS
Ethernet	10 x 10/100 Mbps (MDI/MDIX)
Status LED	PWR(On/Off), LAN Activity LED.
MAC Address table entries	2000
Jumbo Frame	9216 bytes
Buffer size	128 KB
Power Connector	Spring Loaded 2 wire connector
Input Voltage Range	9-30 Vdc
Power Consumption	<5W
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions	45 mm x 116 mm x 90 mm (W x H x D)
Weight	416 Gm
Other	Grounding Screw
Standard Packing	XF-100-1 with Sheet Metal Enclosure

Invendis™
Invent, Discover.

XG-82-2L Gigabit Ethernet Managed Switch

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

ASPECT	DETAILS
Ethernet	8 x 10/100/1000 Mbps (MDI/MDIX)
SFP	2 x SFP
Status LED	PWR(On/Off), LAN Activity LED (Green: Active connection, Amber: 1000 Mbps), PoE Out LED, SFP Status LED, SYS LED.
MAC Address table entries	8K
Jumbo Frame	15K Byte
Buffer size	4 Mbit
Power Connector	Option 1: 2 x Screw Terminal block, Option 2: Spring Loaded 2 Pin Terminal block and DC Jack
Input Voltage Range	44-57 VDC
Power Consumption	Idle: 6W, Full Load: 250W
Enclosure	Industrial Aluminium Enclosure/Sheet Metal
Mounting	Option 1: Din Rail Mount, Option 2: Table top
Design	Fanless
Dimensions	200 mm x 120 mm x 55mm (WxLxH)
Weight	675 Gm
Standard Packing	Option 1: Switch, 2x TB Connectors and Din Rail. Option 2: Switch, 1x TB Connector.

Invendis™
Invent, Discover.

PC310

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
LAN	1x 10/100
Serial Interface	2 x RS485
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	80 x 26 x 78 mm (W x H x D)
Weight	400 gm
Input Power	12-24V
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0 ~ 50˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

PC311

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
LAN	1x 10/100
Serial Interface	2 x RS485
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	80 x 26 x 78 mm (W x H x D)
Weight	400 gm
Input Power	12-24V
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0 ~ 50˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

PC312

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7628
RAM	128MB
Flash	32MB
LAN	1x 10/100
Serial Interface	1 x RS485
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Enclosure	Sheet Metal Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	80 x 26 x 78 mm (W x H x D)
Weight	400 gm
Input Power	12-24V
Storage Temp	-30 ~ 70 ˚C
Operating Temp	0 ~ 50˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking Devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

MC X

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
Description	10/100/1000 Base-T to 1000 Base-LX
Fiber Wavelength	1310nm
Max Distance	10Km
Ports	One RJ - 45 and One Fiber port (Duplex SC type connector)
Mode	Single - mode
Auto MDI Support	Yes
Input Voltage Range	5-12 VDC IN
Enclosure	Steel Metal Enclosure
Dimensions	92 x 66 x 26 mm (HxWxD)
Weight	187 gm
Working Temperature	0 ~ 70℃
Humidity	5% to 90%

SOFTWARE ASPECT	DETAILS
Standard Packaging	MC-1 Media Converter with Sheet Metal Housing , 01-meter Ethernet cable, Power Adaptor

Invendis™
Invent, Discover.

MT7621-01 ODU

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7621
RAM	512MB
Flash	32MB
Ethernet	1x 10/100/1000 (External) with PoE IN, 1 x 10/100/1000 internal for configuration
SIM	2x Nano SIM with Tray (1x Active & 1x Passive)
WiFi	NA
Reset	Pinhole Reset Button
Antenna	Cellular: 1x N Type Connector, 1x UFL connector
Enclosure	ABS/PC IP66 Housing
Mounting	WALL Mount, Poll Mount
Design	Fanless
Dimensions (W × H × D)	140 x 75 x 224 mm (W x H x D)
Weight	950 gm
Input Power	Active PoE IN (IEEE 802.3af/at (48V-57V)
Storage Temp	-20 ~ 60 ˚C
Operating Temp	-0 ~ 50 ˚C
Humidity	10 ~ 90% (non-condensing)
Ingress Protection Rating	IP66 Housing

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Cellular Mode	4G (LTE) - Cat 4 up to 150 Mbps, 3G - up to 42 Mbps, 2G - up to 236.8 Kbps
Routing	Static routing, Advanced Static Routing,
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Invendis™
Invent, Discover.

RT65-ODU

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7981 1.3GHz dual core ARM Cortex A53
RAM	1GB DDR4
Flash	128 MB NAND
WAN	1 x 10/100/1000
LAN	4 x 10/100/1000
SIM	2x Nano SIM (Active), Option for Active/Passive
WiFi	802.11b/g/n/ac/ax
Reset	Pinhole Reset Button
Antenna	Cellular: 8x SMA Connector, Wi-Fi: 5x SMA Connector
Enclosure	IP67 Enclosure
Mounting	DIN Rail Mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 55 x 144 mm (W x H x D)
Weight	480 gm
Input Power	9-30 VDC

SOFTWARE ASPECT	DETAILS
Routing	Static routing, Dynamic Routing (BGP,OSPF etc)
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP, SNMP, PPPoE
Internet Connectivity	MultiWAN (Ethernet, Cellular, Wi-Fi), Failover, Load Balancing
Firewall features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
NMS	Remote Monitoring C Management Platform for SILBO Networking products
Wi-Fi	Access Point, Client, Easy mesh
Standard Packaging	RT65-ODU Cellular Router with sheet Metal housing, 8x Cellular Rubber Duck Antennas, 5x Wi-Fi Rubber Duck Antennas, Power Adapter, 01-meter Ethernet cable.

Invendis™
Invent, Discover.

RN50-PCB-A

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7621
RAM	256/512MB DDR3
Flash	32/64 MB
WAN	1x 10/100/1000 (M12 Connector)
LAN	1x 10/100/1000 (M12 Connector)
WiFi	802.11b/g/n/ac
Reset	Pinhole Reset Button
Antenna	Wi-Fi: 2x SMA connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	209 x 30 x 154 mm (W x H x D)
Input Power	Active PoE 44-57 VDC

SOFTWARE ASPECT	DETAILS
Routing	Static routing, Dynamic Routing (BGP,OSPF etc)
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP, SNMP, PPPoE
Internet Connectivity	Multi-WAN (Ethernet, Cellular, Wi-Fi), Failover, Load Balancing
Firewall features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wire guard, Zero Tier, IPIP Tunnel
NMS	Remote Monitoring C Management Platform for SILBO Networking products
Wi-Fi	Access Point, Client, Easy mesh
Standard Packaging	RN50-ODU Cellular Router with sheet Metal housing, 2x Wi-Fi Rubber Duck Antennas, Power Adapter, 01-meter Ethernet cable.

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

RVW 50 with M12

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7621
RAM	256/512MB DDR3
Flash	32/64 MB
WAN	1x 10/100/1000 (M12 Connector)
LAN	3x 10/100/1000 (M12 Connector)
WiFi	802.11b/g/n/ac
Reset	Pinhole Reset Button
Antenna	Wi-Fi: 2x SMA connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	209 x 30 x 154 mm (W x H x D)
Input Power	Active PoE 44-57 VDC

SOFTWARE ASPECT	DETAILS
Routing	Static routing, Dynamic Routing (BGP,OSPF etc)
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP, SNMP, PPPoE
Internet Connectivity	Multi-WAN (Ethernet, Cellular, Wi-Fi), Failover, Load Balancing
Firewall features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wire guard, Zero Tier, IPIP Tunnel
NMS	Remote Monitoring C Management Platform for SILBO Networking products
Wi-Fi	Access Point, Client, Easy mesh
Standard Packaging	RVW50 Cellular Router with sheet Metal housing, 2x Wi-Fi Rubber Duck Antennas, Power Adapter, 01-meter Ethernet cable.

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

IDF

HARDWARE AND SOFTWARE

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
CPU	MediaTek MT7621
RAM	256/512 MB DDR 3
Flash	32/64 MB
WAN	1x 10/100
LAN	3x 10/100
SIM	2x Nano SIM (1x Active, 1x Passive)
WiFi	802.11 b/g/n
Reset	Pinhole Reset Button
Antenna	Cellular: 2x SMA Connector, Wi-Fi: 4x SMA connector
Enclosure	Industrial Aluminium Enclosure
Mounting	DIN rail mounting Kit (Optional)
Design	Fanless
Dimensions (W × H × D)	110 x 44 x 94 mm (W x H x D)
Weight	500 gm
Input Power	-48 Vdc
Storage Temp	-30 ~ 70 ˚C
Operating Temp	-20 ~ 60 ˚C
Humidity	10 ~ 90% (non-condensing)

SOFTWARE ASPECT	DETAILS
Operating System	OpenWRT-based Linux OS
Routing	Static routing, Advanced Static Routing,
Network Protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, HTTP, HTTPS, SCP, PPP, SSH, DHCP
Monitoring	Ping Reboot, Scheduled Periodic Reboot
Firewall Features	Port forward, traffic rules, SNAT, Zone forwarding, Parental Control, Masquerading, MSS Clamping, Loopback IP, Loopback Rules.
DHCP	Static and Dynamic
VLAN	Tagged VLAN, Untagged VLAN
VPN	Open VPN, IPsec, GRE, L2TP, PPTP, Wireguard, Zero Tier, IPIP Tunnel
OpenVPN	TUN/TAP with TLS Certificates
IPsec	IKEv1, IKEv2, Aggressive/Main Mode
PPTP/L2TP WAN	Server & Client with/without MPPE Encryption
Remote Management	Remote Monitoring & Management Platform for SILBO Networking products
NMS VPN	Remote Access of SILBO and non-SILBO Networking devices
Supported Languages / Tools	Shell scripting, C, C++
SDK Package	SDK package with built environment provided (Optional)

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

NMS

SOFTWARE SPECIFICATIONS

DETAILED PRODUCT SPECIFICATIONS

FEATURE	DETAILS
Centralized Monitoring	View health, performance, and status of all routers on a single dashboard.
Remote Configuration	Push updates, modify settings, and change firmware remotely.
Auto-Provisioning	Automatically configure new routers when added to the network.
Secure Management	HTTPS, VPN, SSH, and encrypted communication.
Real-Time Analytics	Monitor uptime, signal strength, bandwidth usage, and connected clients.
Event & Alert Logging	Receive alerts for device disconnection, high usage, or firmware failure.
Supports Multi-Vendor	Compatible with OpenWRT-based devices

DEPLOYMENT	DETAILS
Device Compatibility	OpenWRT
Scalability	10 to 10,000+ devices
Protocol Support	HTTP(S), SSH
Alerts & Logging	Email
Web Interface	Responsive UI, Role-Based Access, Device Grouping

USE CASES

- ISP Router Management
- Smart City IoT Gateways
- Enterprise Network Monitoring
- Energy & Infrastructure Remote Sites

Invendis™
Invent, Discover.

Mini UPS

HARDWARE SPECIFICATIONS

DETAILED PRODUCT SPECIFICATIONS

HARDWARE ASPECT	DETAILS
Input/Output	12 V Input, 12V/2A/3A Output
Output Port	Dual Output port
Battery	User replaceable (18650/26650), overcharge and discharge protection. Thermal protection
Power	19 Whr, backup time 3-5 hours/ 38 Whr, backup time 9-10 hours
On/Off	Auto turn on feature
LED Indicators	Charging and output power status indicators
Protection	Short Circuit Protection

Invendis™
Invent, Discover.

INDEX-ENERGY METERS

PRODUCT NAME	PAGE NUMBER
Multi-Function Meter	81
DC Meter	82
AC Meter	83
Branch Circuit Power Meter	84

Back to Main Index

Invendis™
Invent, Discover.

Multi-Function Meter

BRIEF PRODUCT SPECIFICATIONS

POWER
85-270V AC/DC

INTERFACE
1 x Display
4 x Device Controls

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

DC Meter

BRIEF PRODUCT SPECIFICATIONS

POWER
20-60 VDC IN
1-100 A/200A DC

INTERFACE
1 x RS 485 Port
1 x Display

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

AC Meter

BRIEF PRODUCT SPECIFICATIONS

POWER
48 VDC IN

INTERFACE
1 x RS 485 Port
1 x Display

Back to Index

Detailed Specifications

Invendis™
Invent, Discover.

Branch Circuit Power Meter

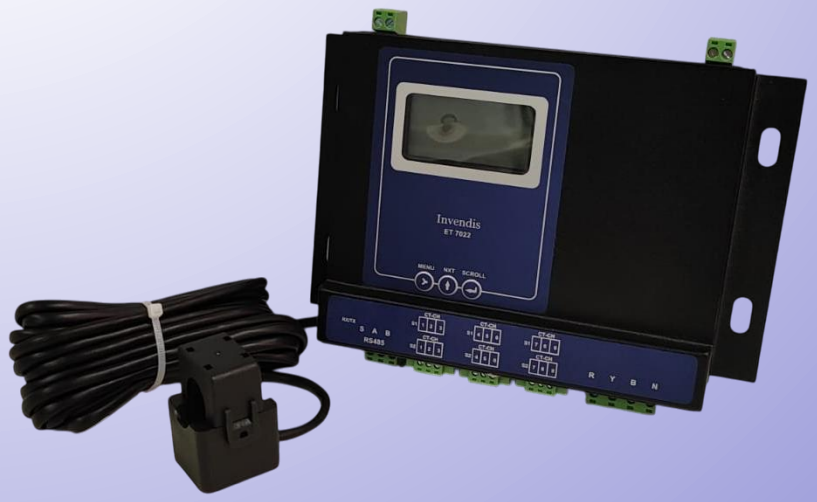

BRIEF PRODUCT SPECIFICATIONS

POWER
85-270V AC/DC

INTERFACE
Isolated RS485: 3 wire communication port with MODBUS protocol

Back to Index
Detailed Specifications

Invendis™
Invent, Discover.

Multi-Function Meter

HARDWARE SPECIFICATIONS

DETAILED PRODUCT SPECIFICATIONS

Description	Specification
Meter Type	Three phase multi functional panel mountable meter
Voltage	Phase Wise- LL, LN, Max and Min Values
Current	L1, L2, L3- Max and Min Values and neutral current
Line Frequency	Hz
Current Rating	CT Primary Programmable (CTS 1A/5A)
Active Power	Total kW and phase wise
Apparent Power	Total kVA and phase wise
Reactive Power	Total kVAR
Energy	Total kWh and phase wise
Apparent Energy	Total kVAH phase wise
Reactive Energy	Total kVARH quadrant wise
Apparent Import/Export Energy	kVAH
Load Hour	Hr: min
Aux Supply	85-270V AC/DC
Voltage Range	60-415 V (Line to Line)
Current	CT Primary Programmable, Secondary 5A
PF Range	0.5 lag to unity to 0.5 lead
Resolution	0.1kW/kVA
RTC	Available
Memory	Data Storage

Invendis™
Invent, Discover.

DC Meter

HARDWARE SPECIFICATIONS

DETAILED PRODUCT SPECIFICATIONS

Description	Specifications
Measurement Parameters	
DC Voltage	1 Channel
DC Current	4 Channel
DC Supply	From Rectifier DC voltage (i.e., self-powered)
Range of Measurement Parameters	
DC Voltage	20 - 60 V DC
DC current	1-100A / 200A DC
Resolution of Measurement Parameters	
DC Voltage	0.1 V or better
DC Current	0.2A or better
Measurement Input Method	
DC Voltage	2 pins Direct Input Connected to Rectifier Output
DC Current	4 pin connectors for each channel
Measurement Accuracy	
DC Voltage	1% FSR @25 degree C or better
DC Current	1% FSR @25 degree C or better, between 5 to 95% of FSR
Temperature Coefficient	0.05% / degree C
Derived Parameters	
Power	kW
Energy	kWh
Range of Derived Parameters	
Power	0 - 65kW
Energy	0 -100000 kWh

Invendis™
Invent, Discover.

AC Meter

HARDWARE SPECIFICATIONS

DETAILED PRODUCT SPECIFICATIONS

Specifications	Measurements
AC Current Measurement	Average, AR, AY, AB
AC Voltage Measurement	Average, VLL (RY, YB, BR), VLN (RN, YN, BN)
Power Factor (PF)	Average & Phase wise
Active Power (kW)	Total & Phase wise
Apparent Power (kVA)	Total & Phase wise
Frequency (Hz)	45 to 65 Hz
Active Energy (kWh)	Both EB & DG
AC Current Measurement	Average, AR, AY, AB
AC Voltage Measurement	Average, VLL (RY, YB, BR), VLN (RN, YN, BN)
Power Factor (PF)	Average & Phase wise
Active Power (kW)	Total & Phase wise
Apparent Power (kVA)	Total & Phase wise
Isolation (RS485)	2000VAC Isolation between communication &other circuits
Power Input	48V DC
Operating temperature	-10°C to +55°C
Storage temperature	-25°C to +70°C
Humidity	5% to 95% non-condensing

Invendis™
Invent, Discover.

Branch Circuit Power Meter

HARDWARE SPECIFICATIONS

DETAILED PRODUCT SPECIFICATIONS

Description	Specification
Meter Type	Single and three phase
Voltage	Phase Wise- LL, LN, Max and Min Values
Current	I1, I2, I3
Line Frequency	Hz
Current Rating	CT Primary Programmable, CTS 1A/5A
Active Power	Total KW and Phase Wise
Energy	Total kWh, Phase Wise
Power Factor	Lag/Lead
Aux Supply	85-270V AC/DC
Voltage Range	60 V to 415 V (Line to Line)
Current	CT Primary Programmable, Secondary 5A
Indicators	LCD and LED for power on and communication indication
Operating Temperature	0-50 °C
Storage Temperature	0-75 °C
Relative Humidity	upto 95% non condensing
Weight	750 g approx (BCPM)
Dimensions	185 x 110 x 30 (Wx Hx D) BCPM with enclosure
Mounting	Din Rail Mounting - both BCPM and CT card
Communication Port	Isolated RS485: 3 wire communication port with MODBUS protocol
Baud rate	Default with 9600
Parity	None Selectable

Back to Index
Brief Specifications

Invendis™
Invent, Discover.

Back to Index