


LDV_HYB
Gasoline Hybrid Light Duty Vehicle

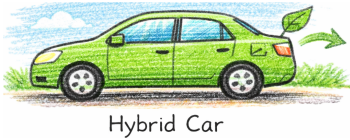

Inputs / Outputs

dir	comm	unit	group
Input	GSL	PJ	i
Output	PLDVHWY	MPKm	o
Output	PLDVCTY	MPKm	o

Efficiency (ceff)

	comm	use2cact	cact2cout	share.up
2	PLDVHWY	679.995	2.03	0.4
3	PLDVCTY	502.401	2.03	0.8

Key Parameters

cap2act	12.04
olife	16 years
stock	0 1000 Vehicles
cap unit	1000 Vehicles
act unit	million km, city
cost unit	USD/(Vh*km)

Fuel Efficiency

Mode	Fuel	L/100 km	km/kWh	MJ/km	mpg (US)
Highway	GSL	4.30	2.45	1.47	54.70
City	GSL	5.82	1.81	1.99	40.41

Vehicle Parameters

Fuels	GSL	Primary fuel	GSL
Efficiency (highway)	4.3 L/100km	Efficiency (city)	5.82 L/100km
Annual distance	12,043 km/yr	Capacity unit	1000 vehicles
Load/vehicle (hwy)	2.03 passengers	Load/vehicle (city)	2.03 passengers
Max share (highway)	40%	Max share (city)	80%
Vehicle cost	8,414 USD	Annual fixed cost	25 USD/yr
Lifetime	16 yr		

Capacity bounds


region	year	stock	cap.lo	cap.up	cap.fx	ncap.lo	ncap.up	ncap.fx	ret.lo	ret.up	ret.fx
IND	2024	0	NA	NA	NA	NA	NA	NA	NA	NA	NA


Costs [USD/(Vh*km)]

Fixed O&M	0.02
Investment cost	8.41

Share Mix Constraints

Schematic

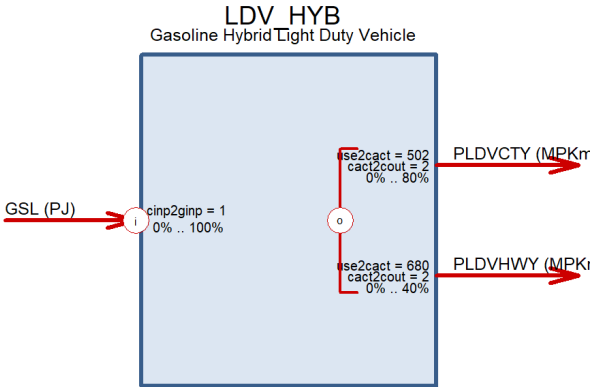

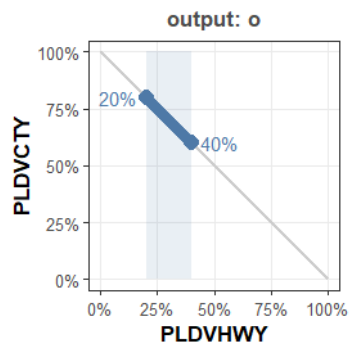

Levelized Cost 0.17 [USD/(Vh*km)], 0.08 [USD/(Passenger*km)]

