Miniature faking

In close-up photo, the depth of field is limited.

http://en.wikipedia.org/wiki/File:Jodhpur_tilt_shift.jpg

Miniature faking

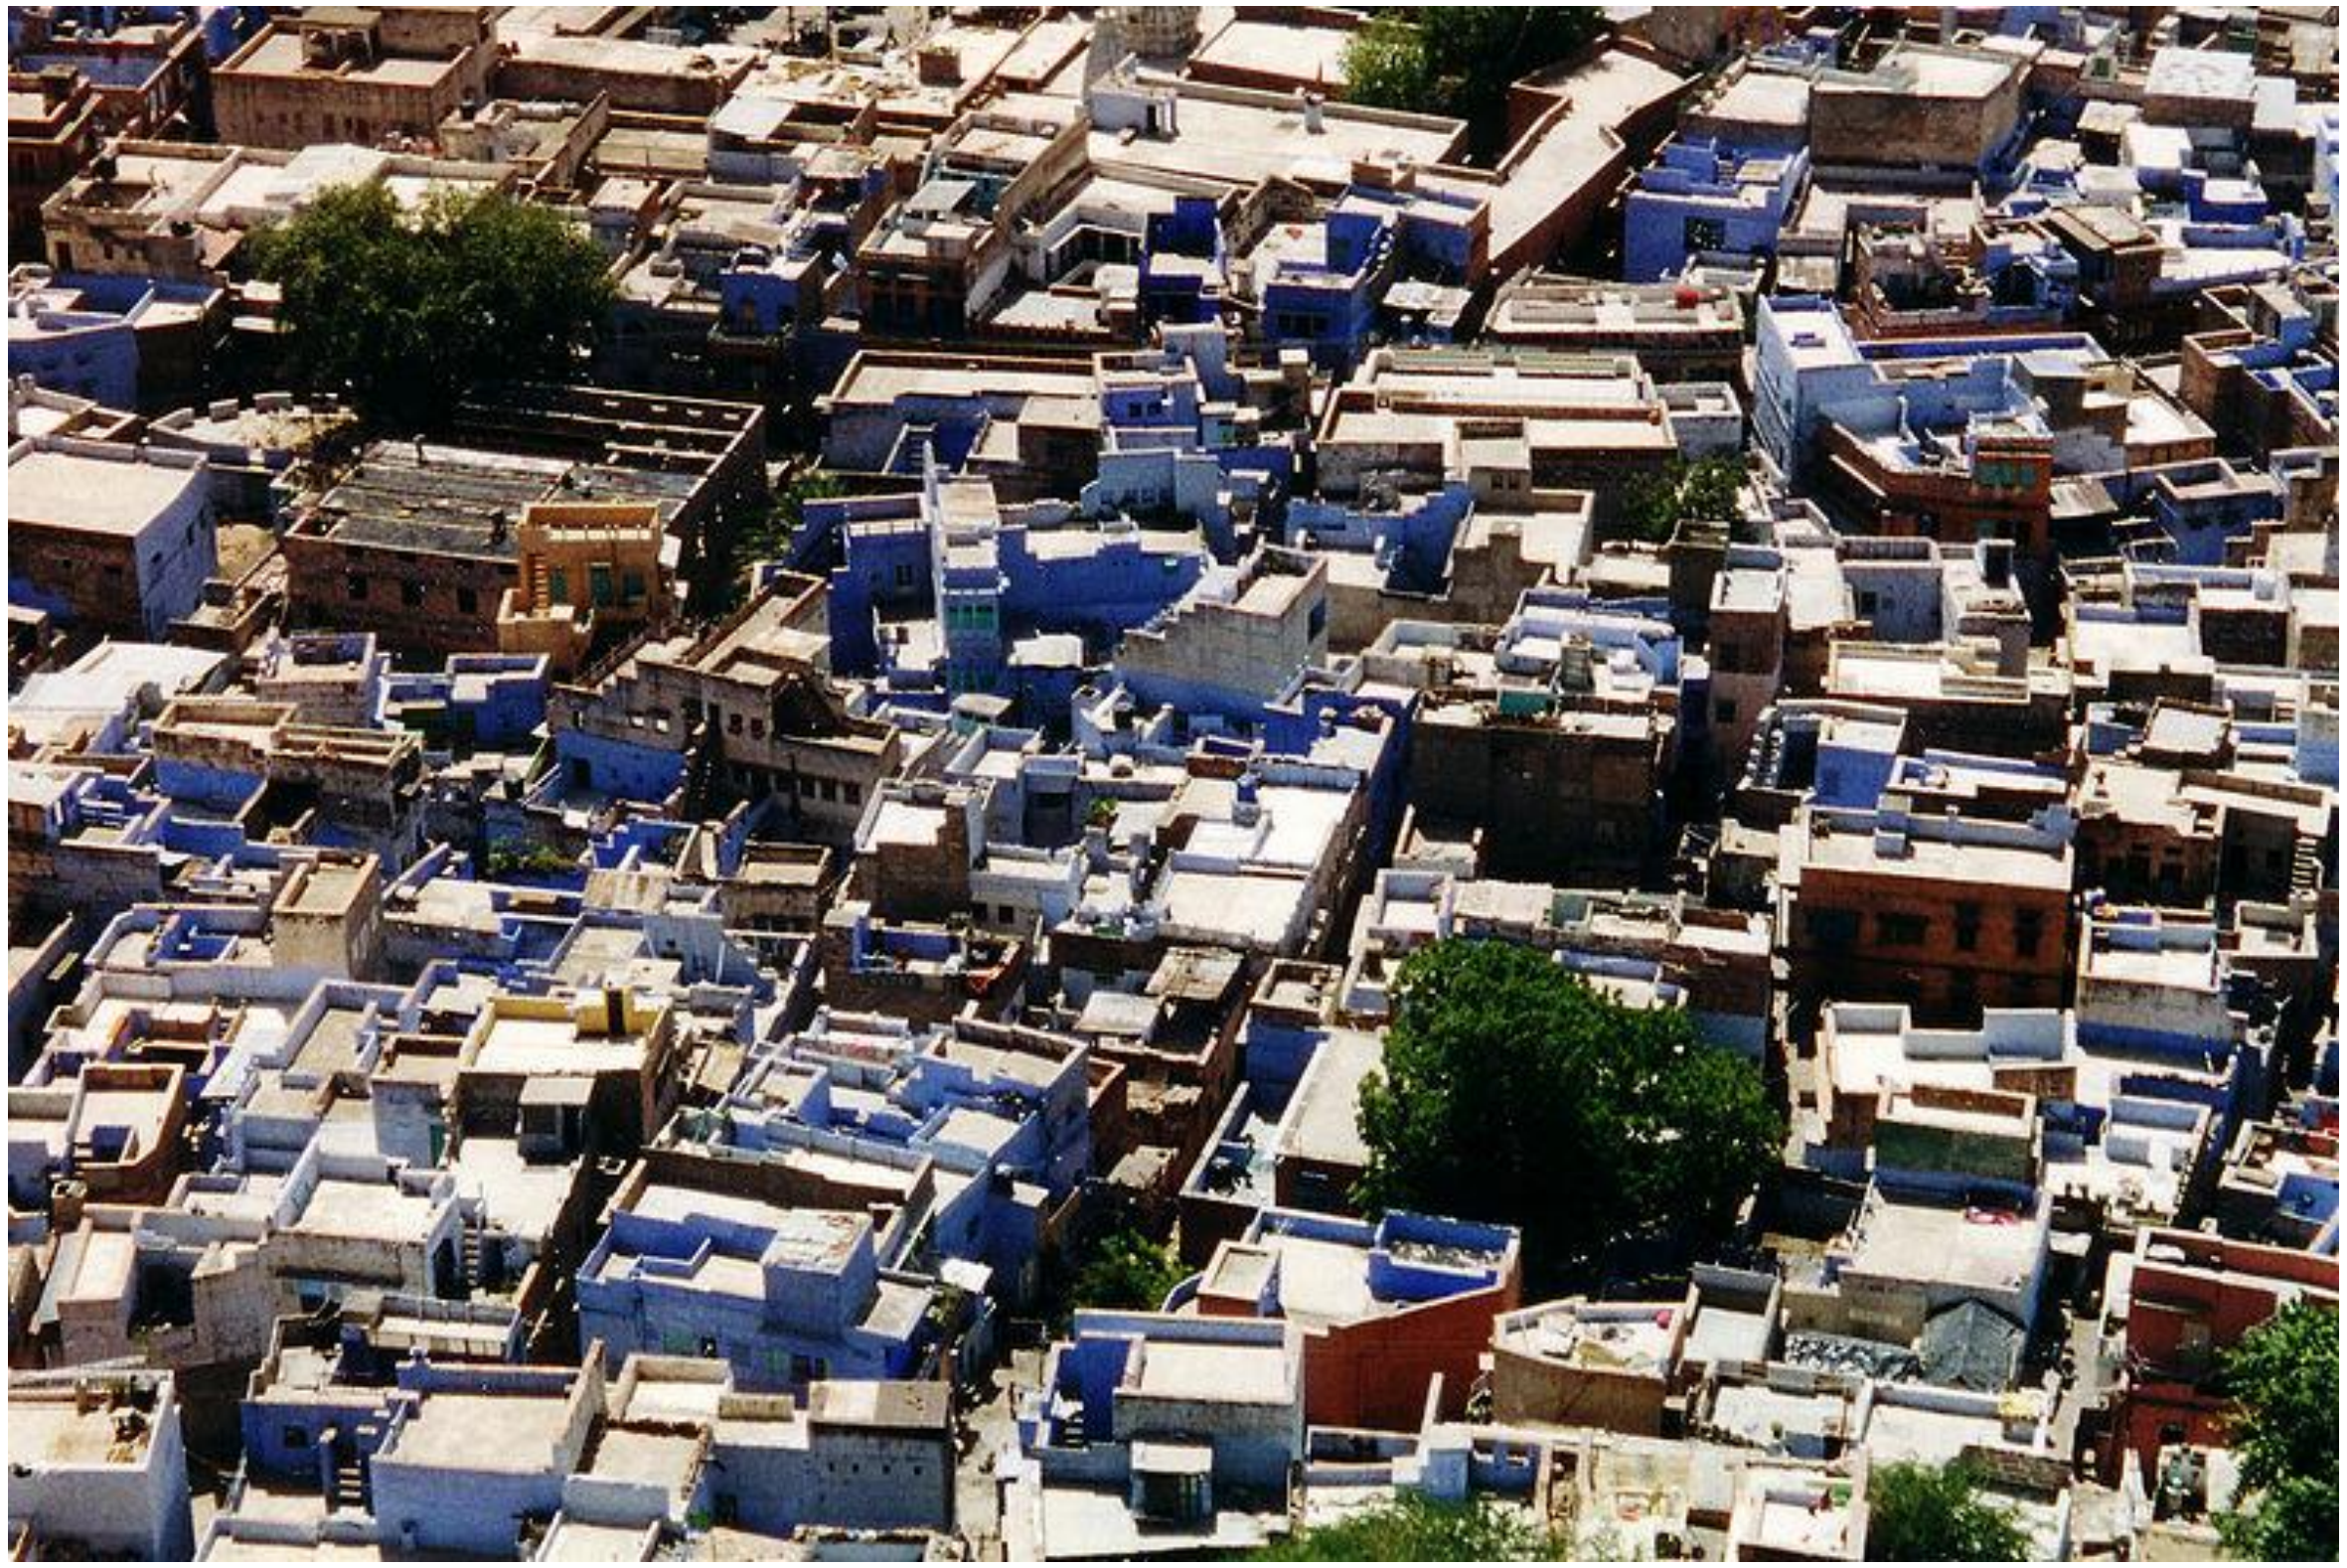

Miniature faking

http://en.wikipedia.org/wiki/File:Oregon_State_Beavers_Tilt-Shift_Miniature_Greg_Keene.jpg

Review

- Previous section:
  - Model fitting and outlier rejection

Review: Hough transform

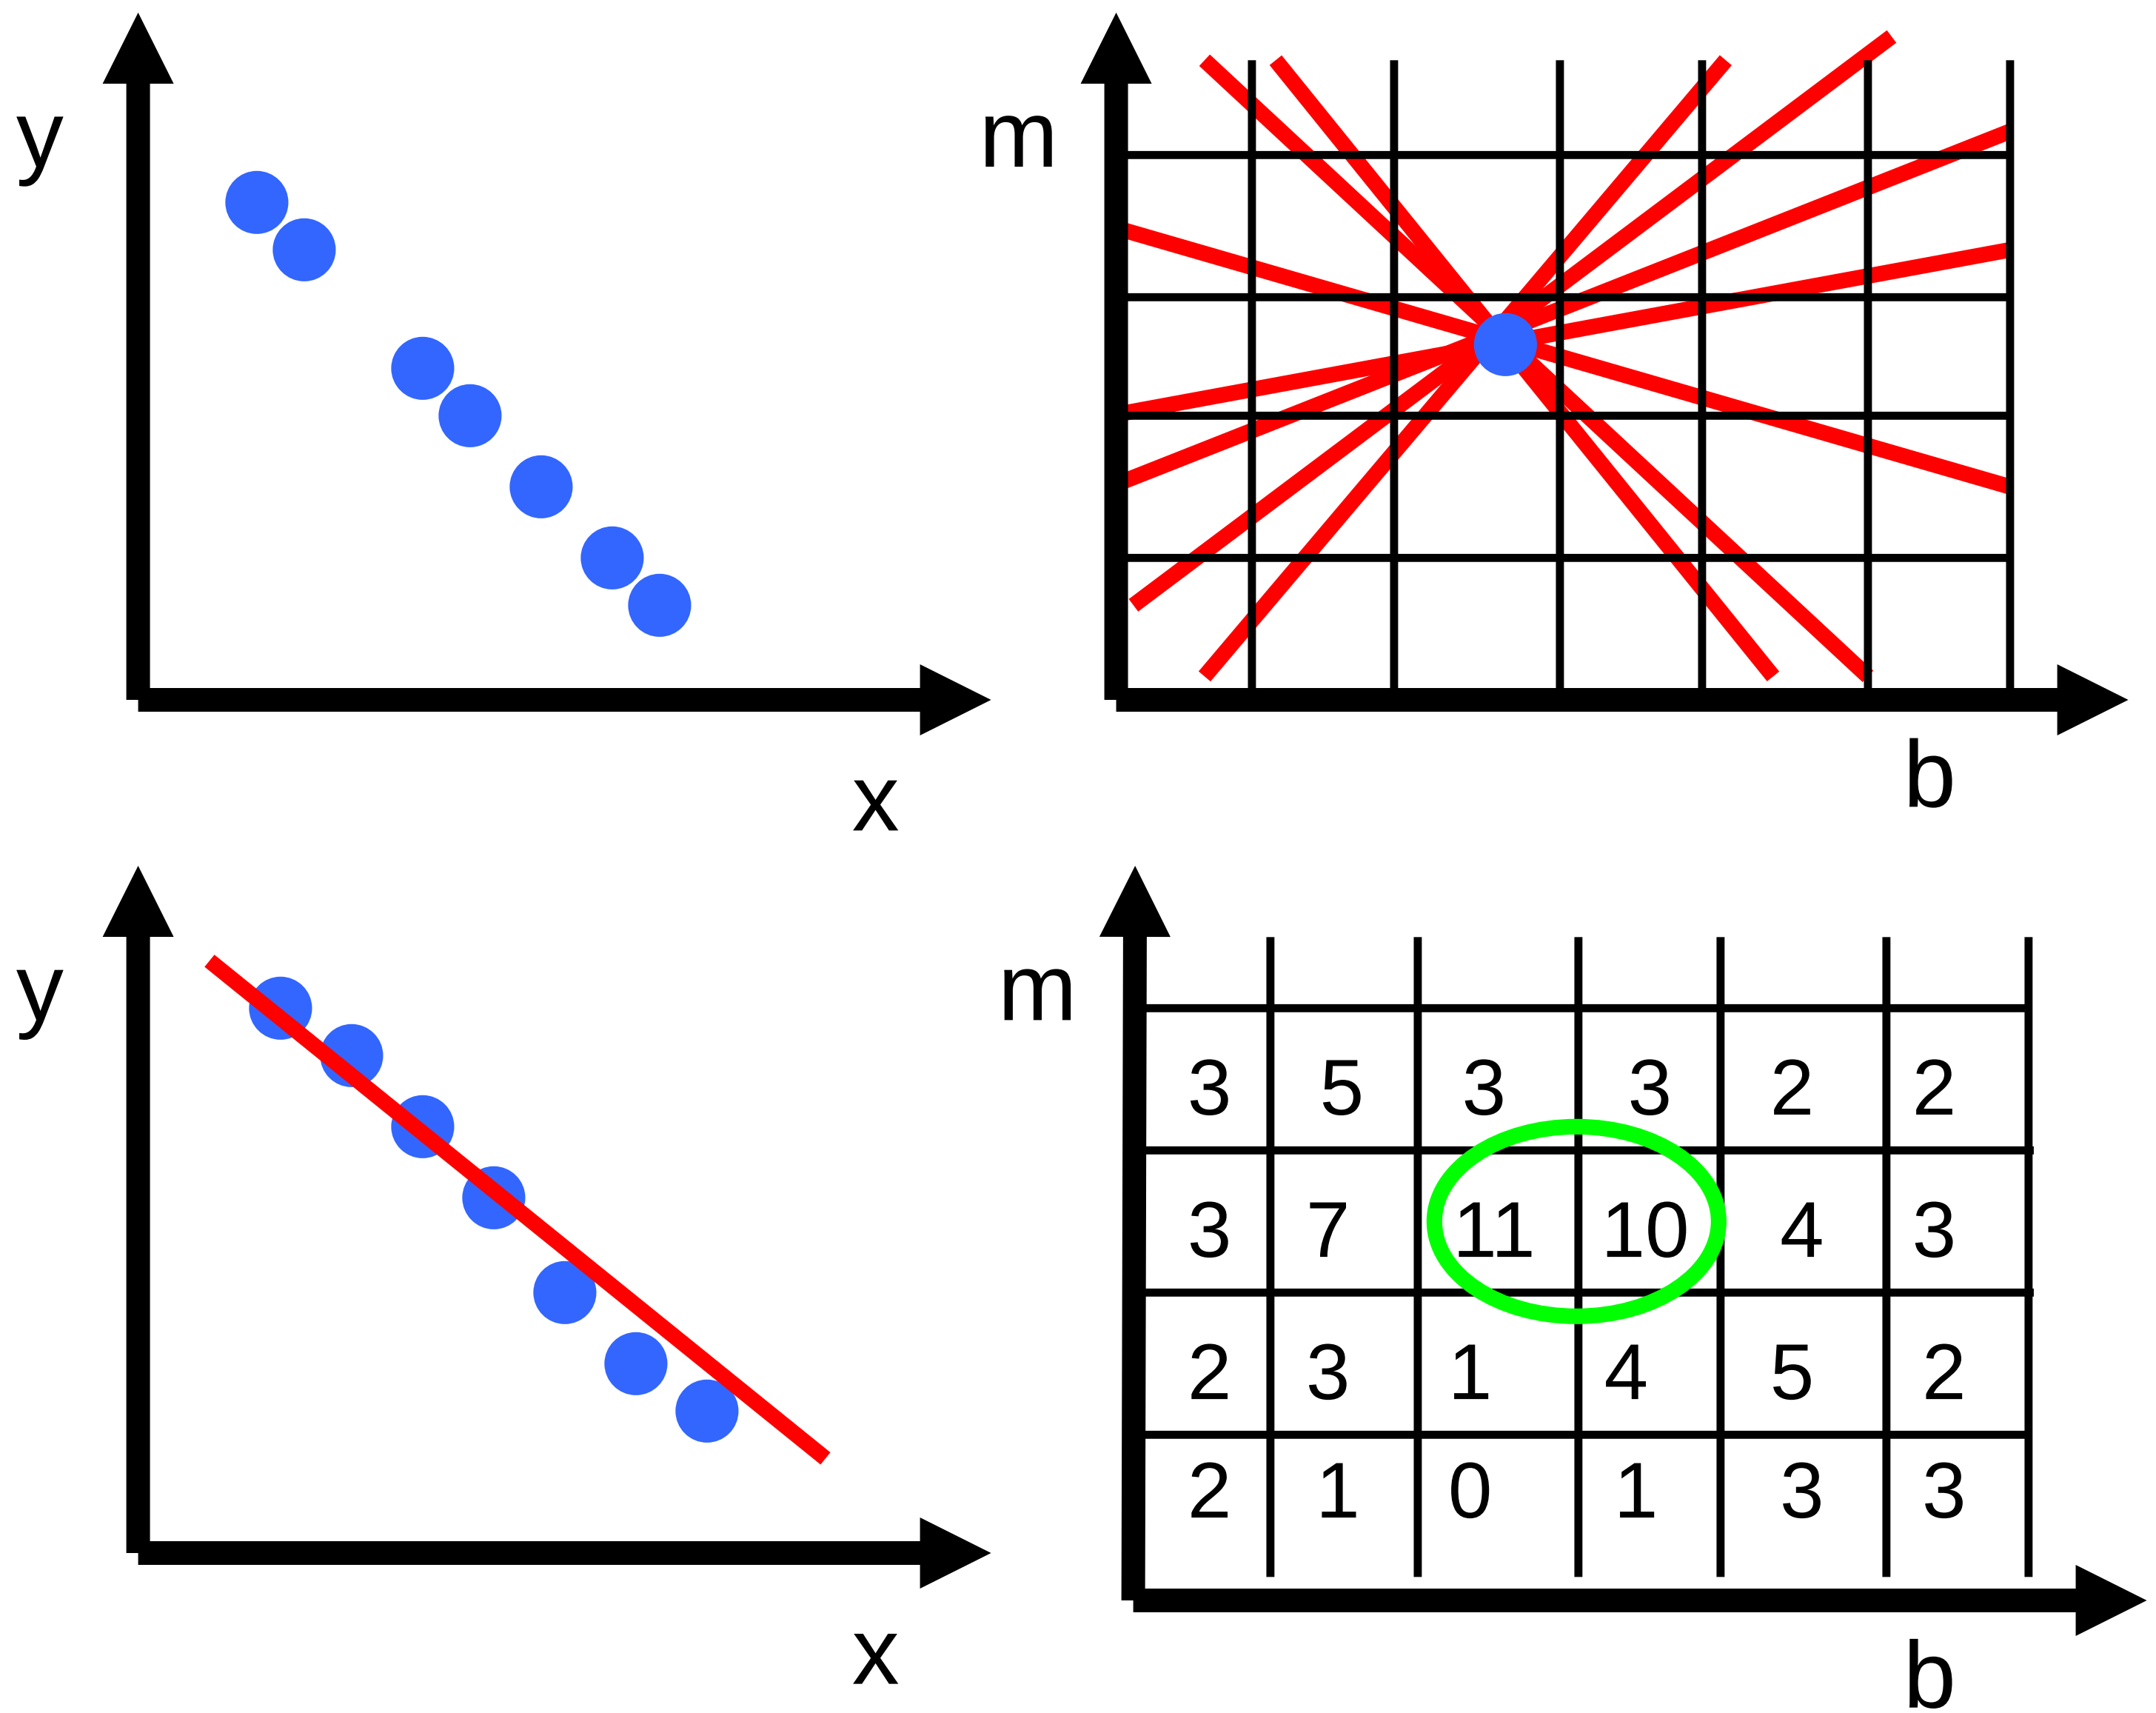

Slide from S. Savarese

Review: RANSAC

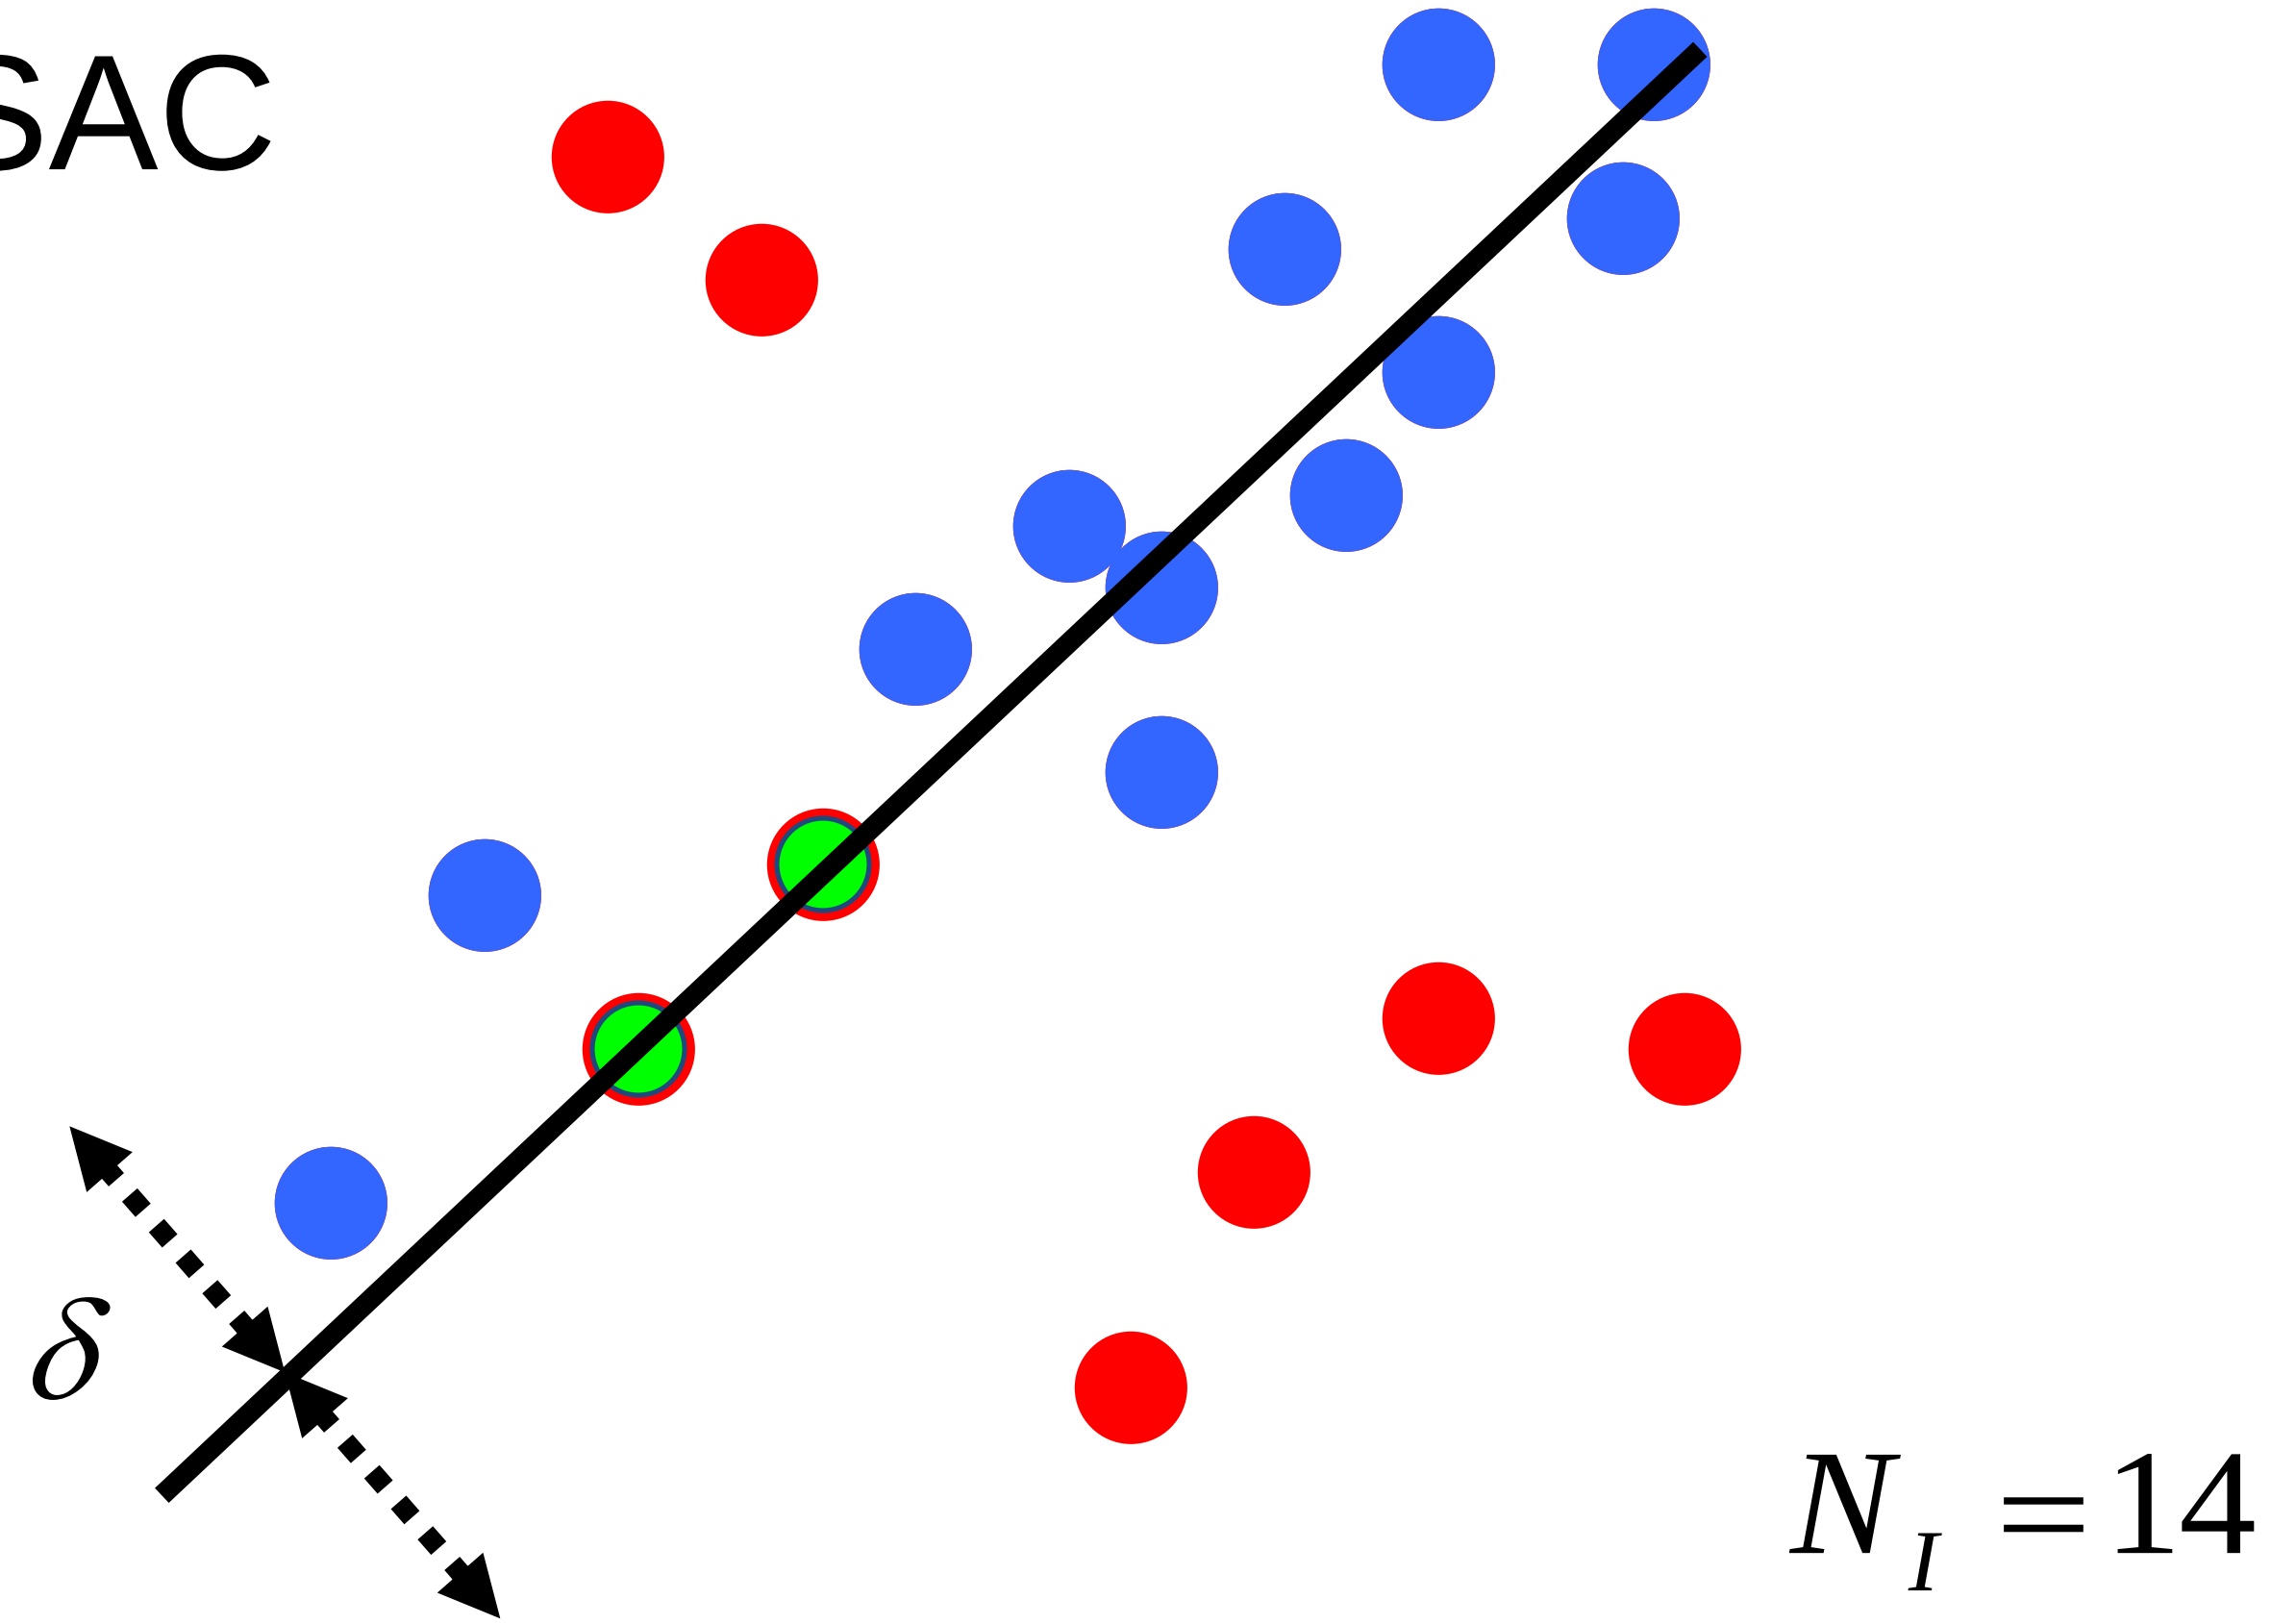

Algorithm:

1. **Sample** (randomly) the number of points required to fit the model (#=2)
2. **Solve** for model parameters using samples
3. **Score** by the fraction of inliers within a preset threshold of the model

Repeat 1-3 until the best model is found with high confidence

Review: 2D image transformations

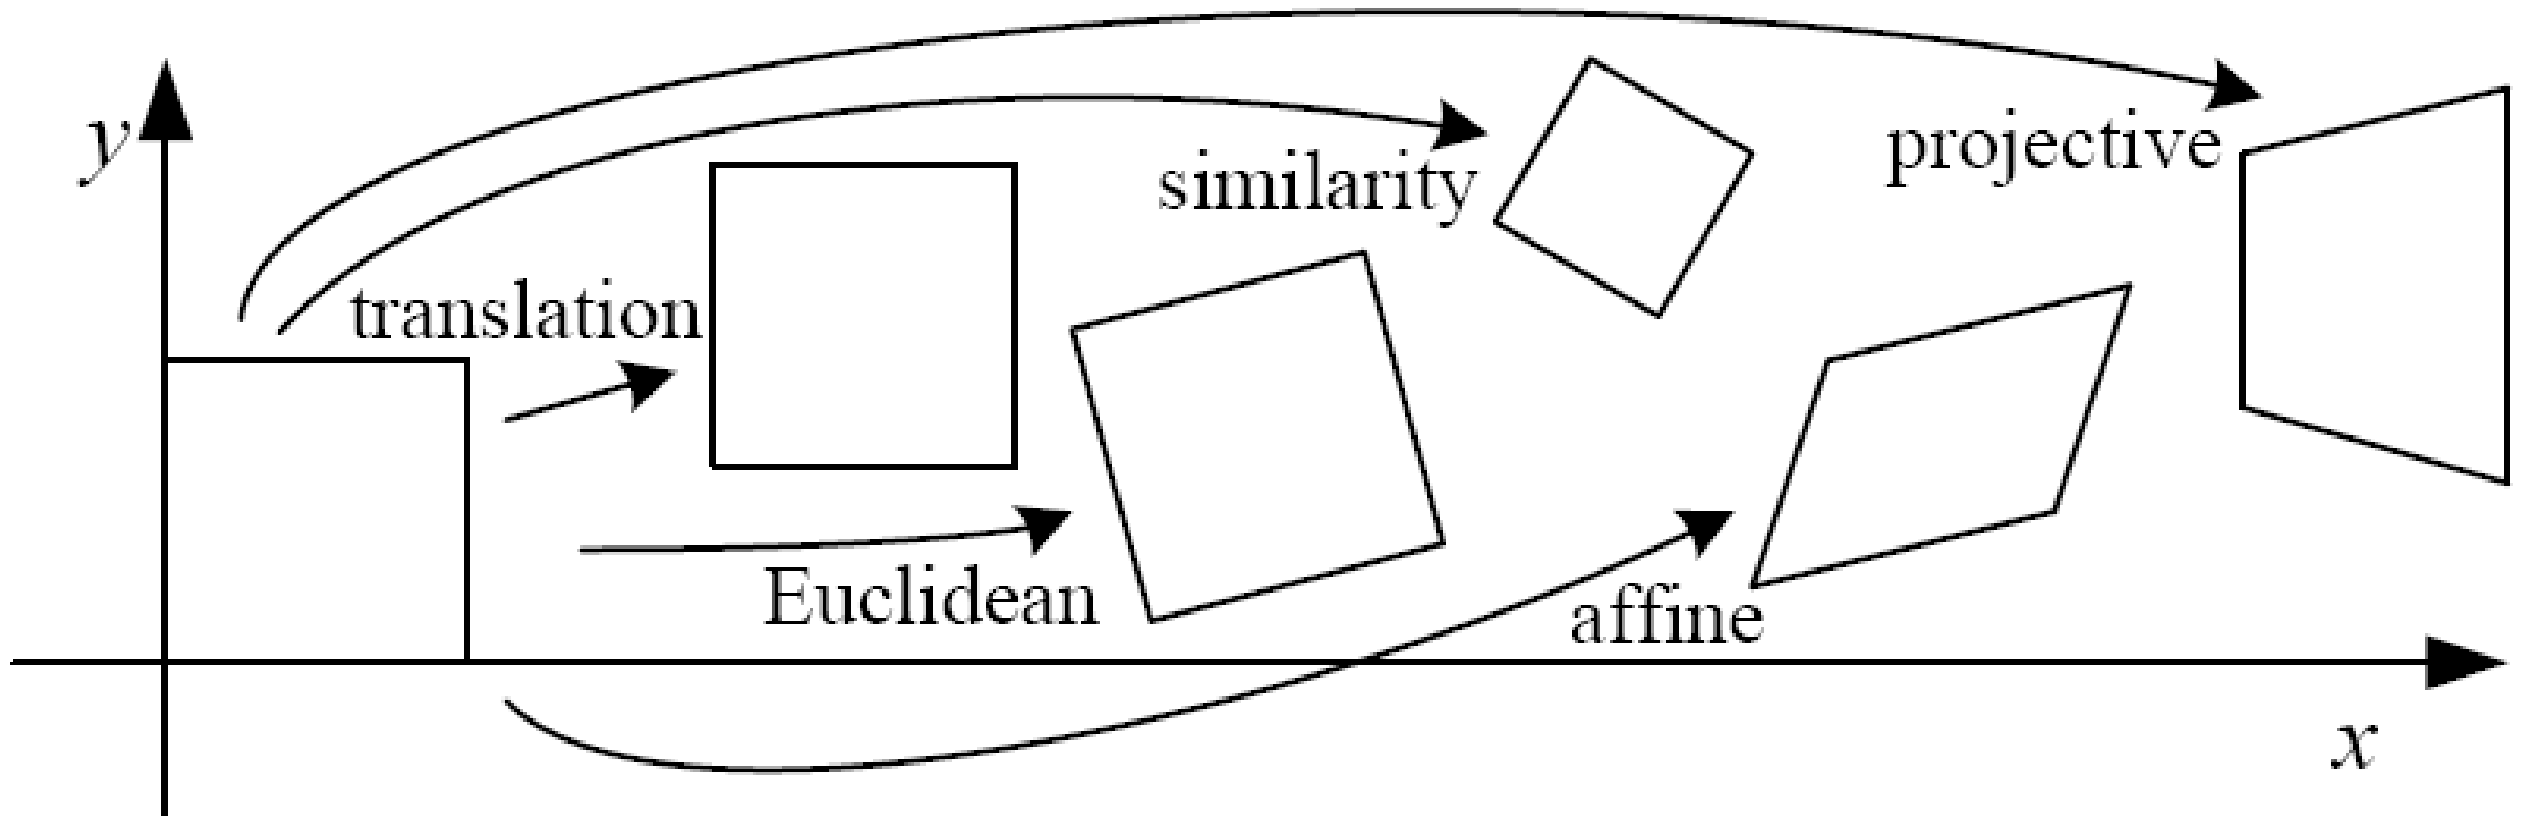

Name	Matrix	# D.O.F.	Preserves:	Icon
translation	$\begin{bmatrix} \boldsymbol{I} \mid \boldsymbol{t} \end{bmatrix}_{2\times 3}$	2	orientation $+ \cdots$	
rigid (Euclidean)	$\begin{bmatrix} \boldsymbol{R} \mid \boldsymbol{t} \end{bmatrix}_{2\times 3}$	3	lengths $+ \cdots$	
similarity	$\begin{bmatrix} s\boldsymbol{R} \mid \boldsymbol{t} \end{bmatrix}_{2\times 3}$	4	angles $+ \cdots$	
affine	$\begin{bmatrix} \boldsymbol{A} \end{bmatrix}_{2\times 3}$	6	parallelism $+ \cdots$	
projective	$\begin{bmatrix} \tilde{\boldsymbol{H}} \end{bmatrix}_{3\times 3}$	8	straight lines	

Szeliski 2.1

This section – multiple views

- Today – Intro to multiple views and Stereo. Camera Calibration (if we have time).
- Wednesday– Epiplar Geometry and Fundamental Matrix. Stereo Matching (if there is time).
- Both lectures are the core of what you need for project 3.
- Next Monday – Optical Flow
- Next Wednesday – Quiz 1

Oriented and Translated Camera

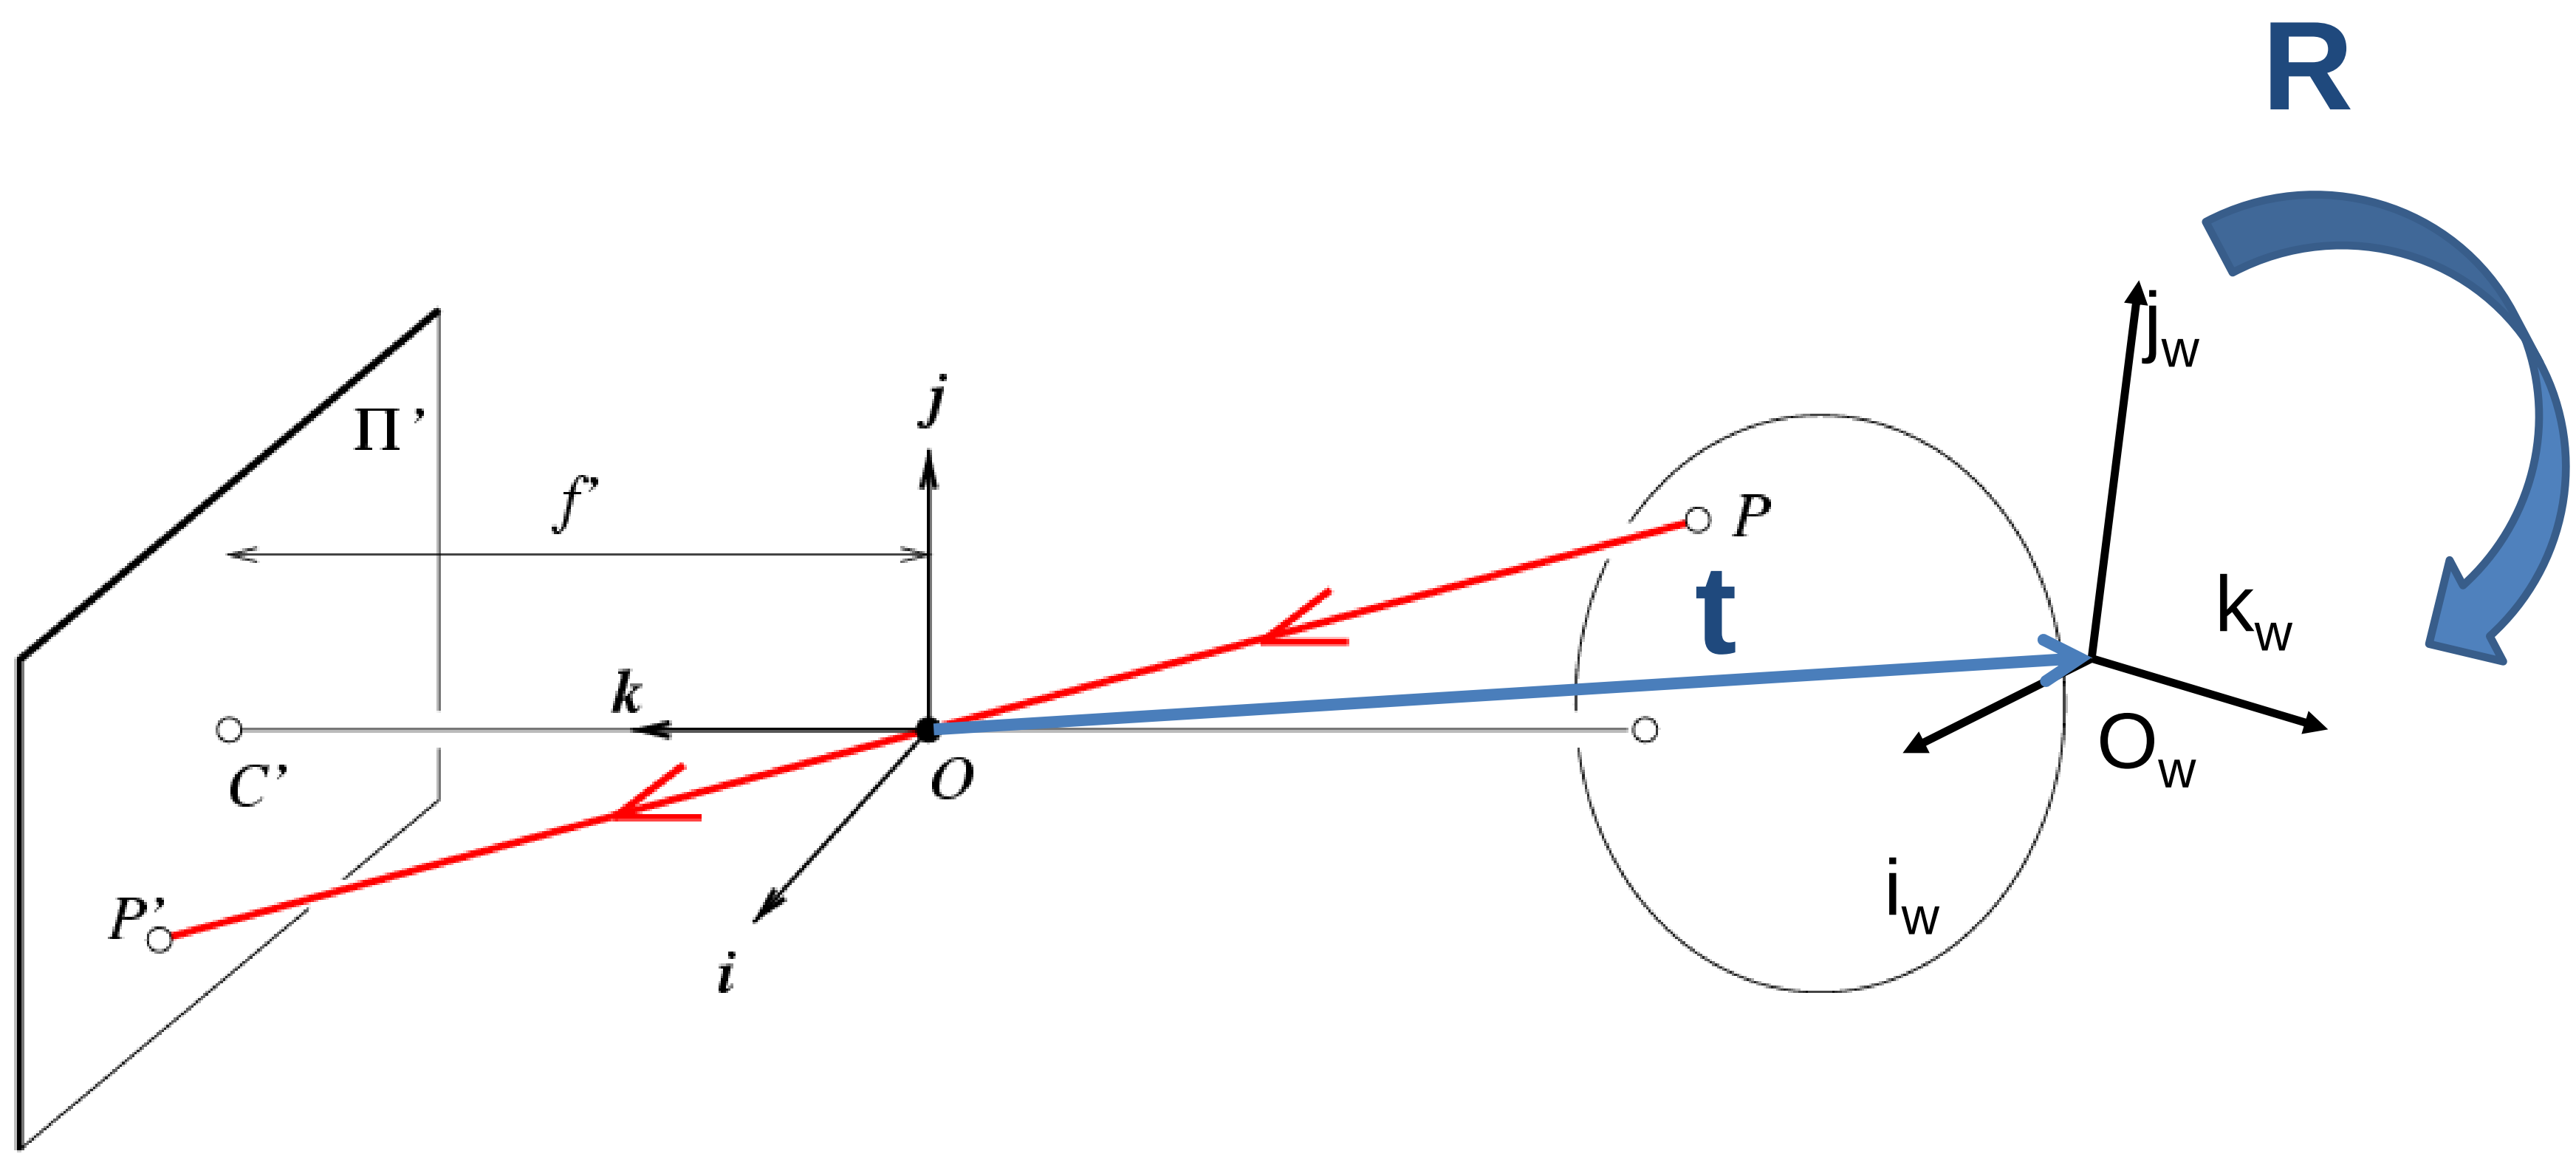

Degrees of freedom

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{R} & \mathbf{t}\end{bmatrix}\mathbf{X}$$

$$w\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \overset{5}{\begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix}} \overset{6}{\begin{bmatrix} r_{11} & r_{12} & r_{13} & t_x \\ r_{21} & r_{22} & r_{23} & t_y \\ r_{31} & r_{32} & r_{33} & t_z \end{bmatrix}} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

How to calibrate the camera?

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{R} & \mathbf{t}\end{bmatrix}\mathbf{X}$$

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} * & * & * & * \\ * & * & * & * \\ * & * & * & * \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Stereo: Intro

Computer Vision

James Hays

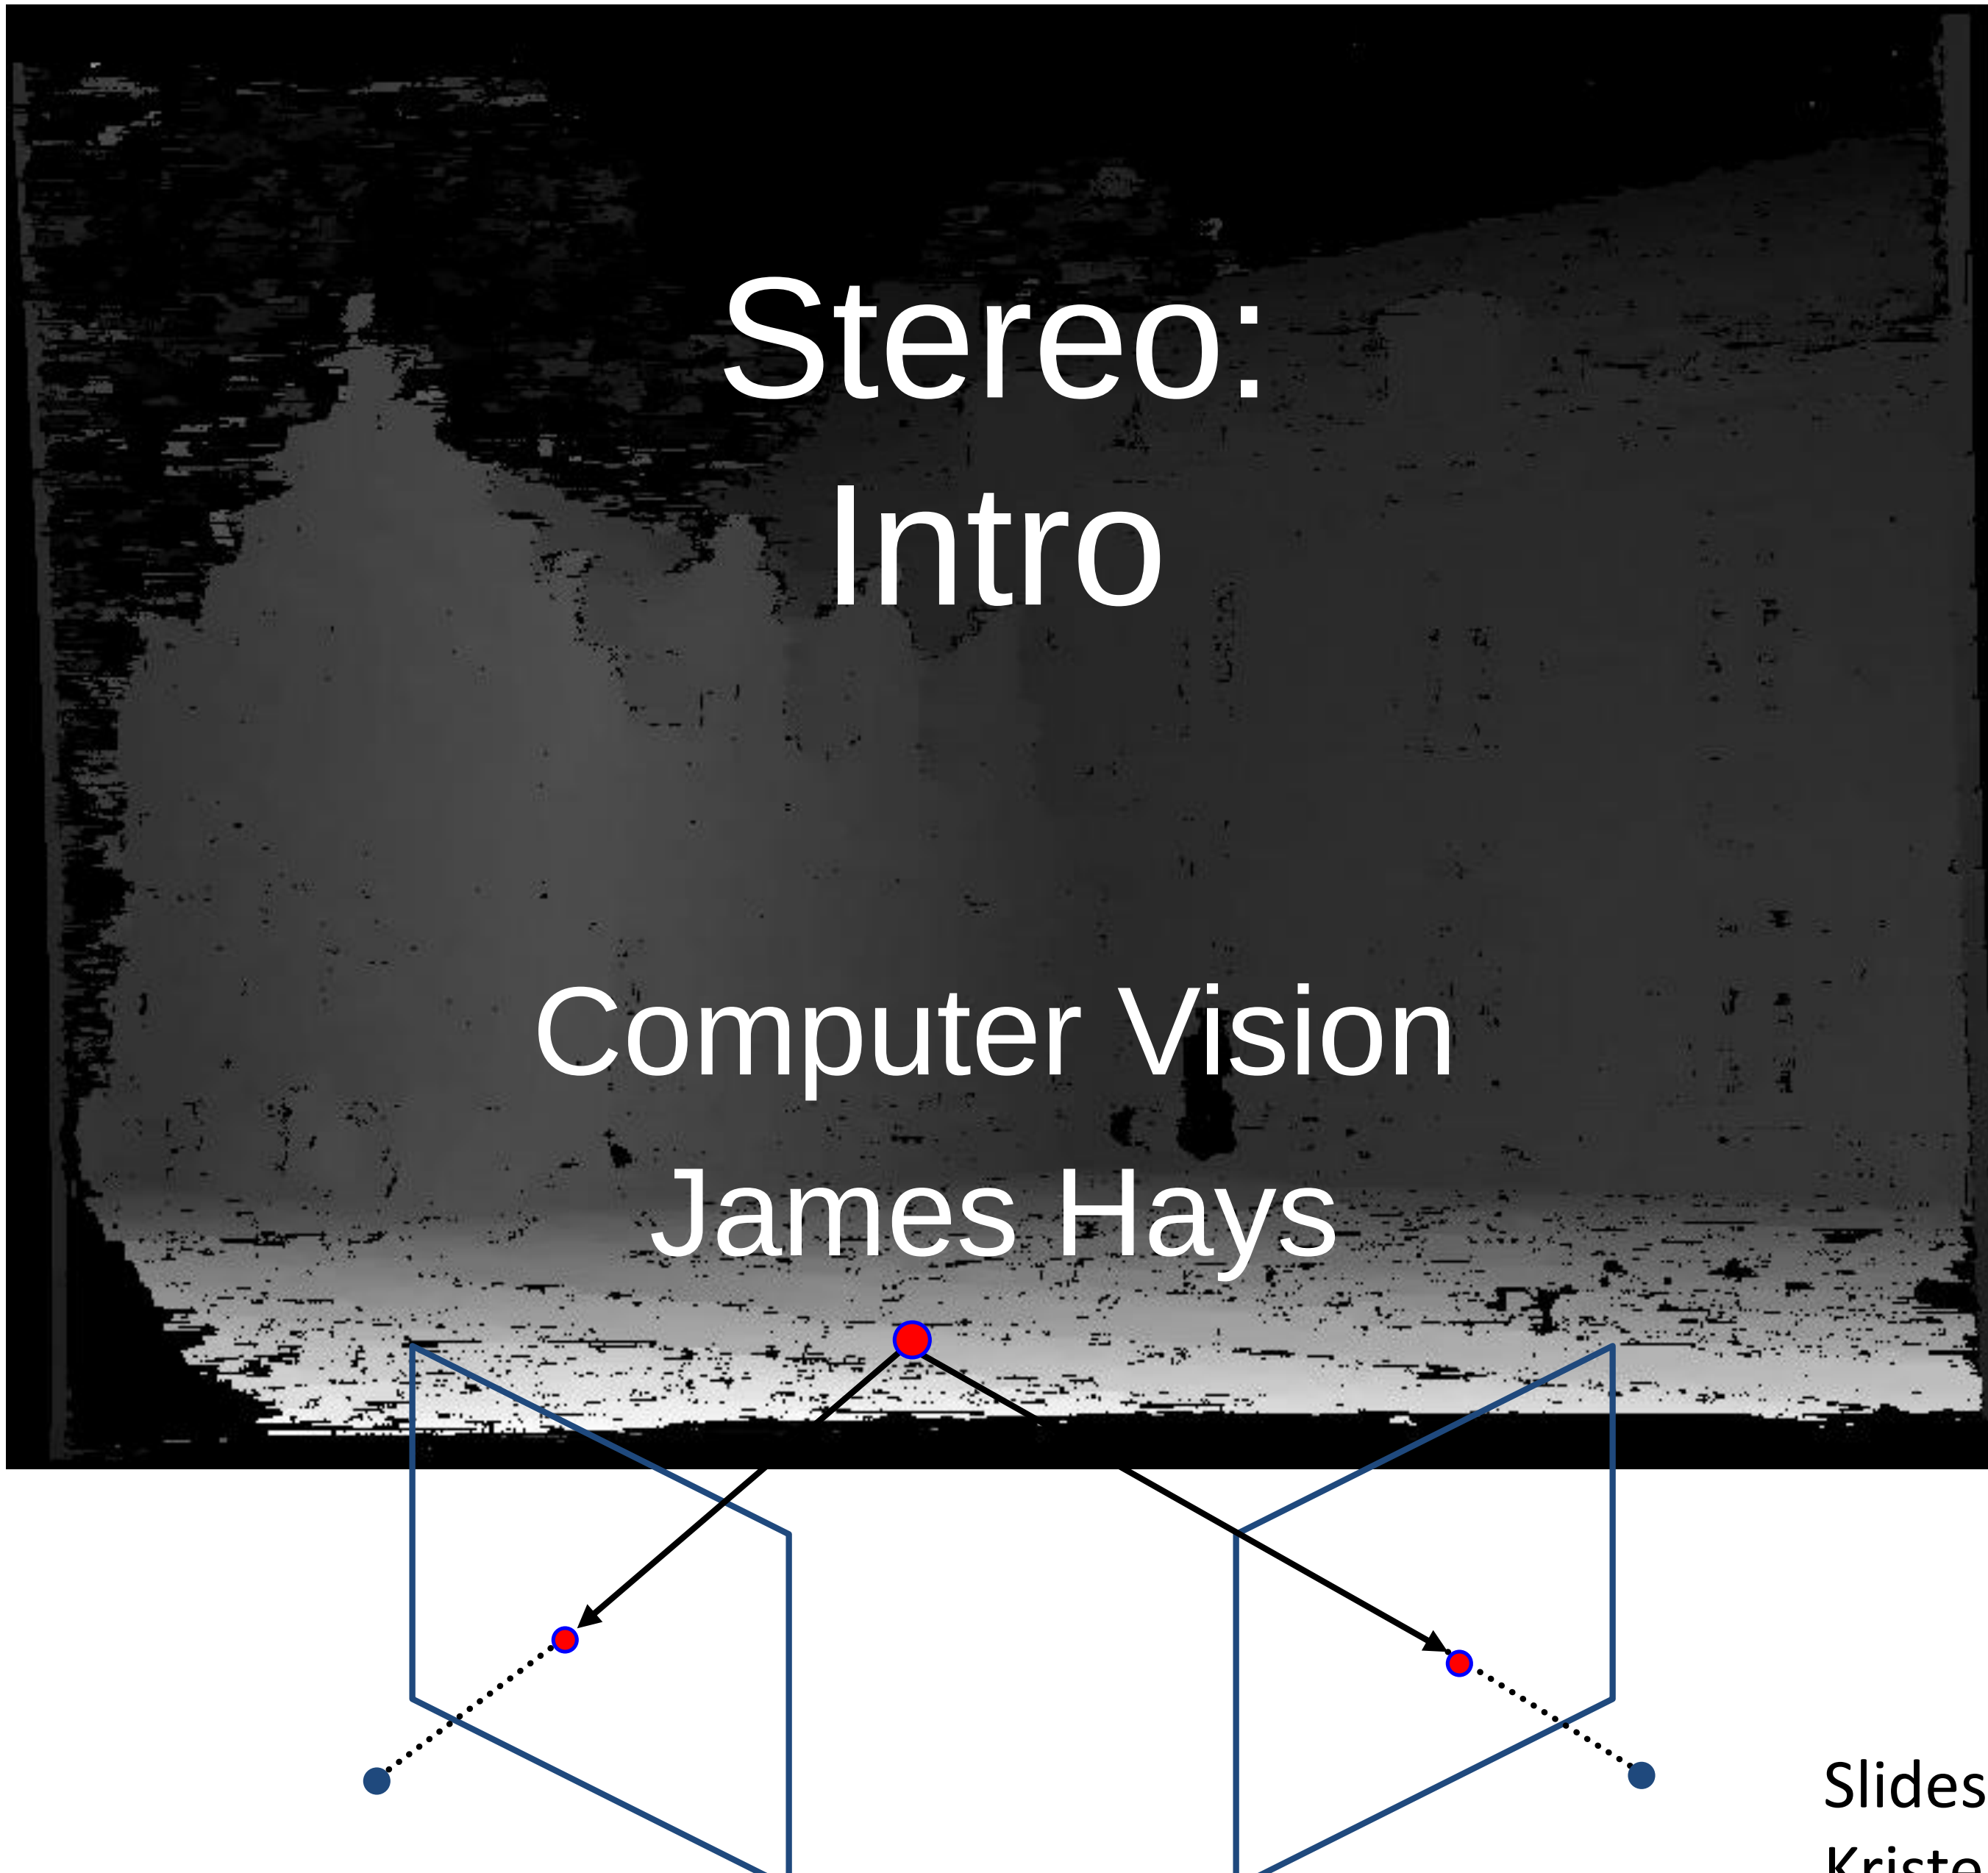

Slides by
Kristen Grauman

Multiple views

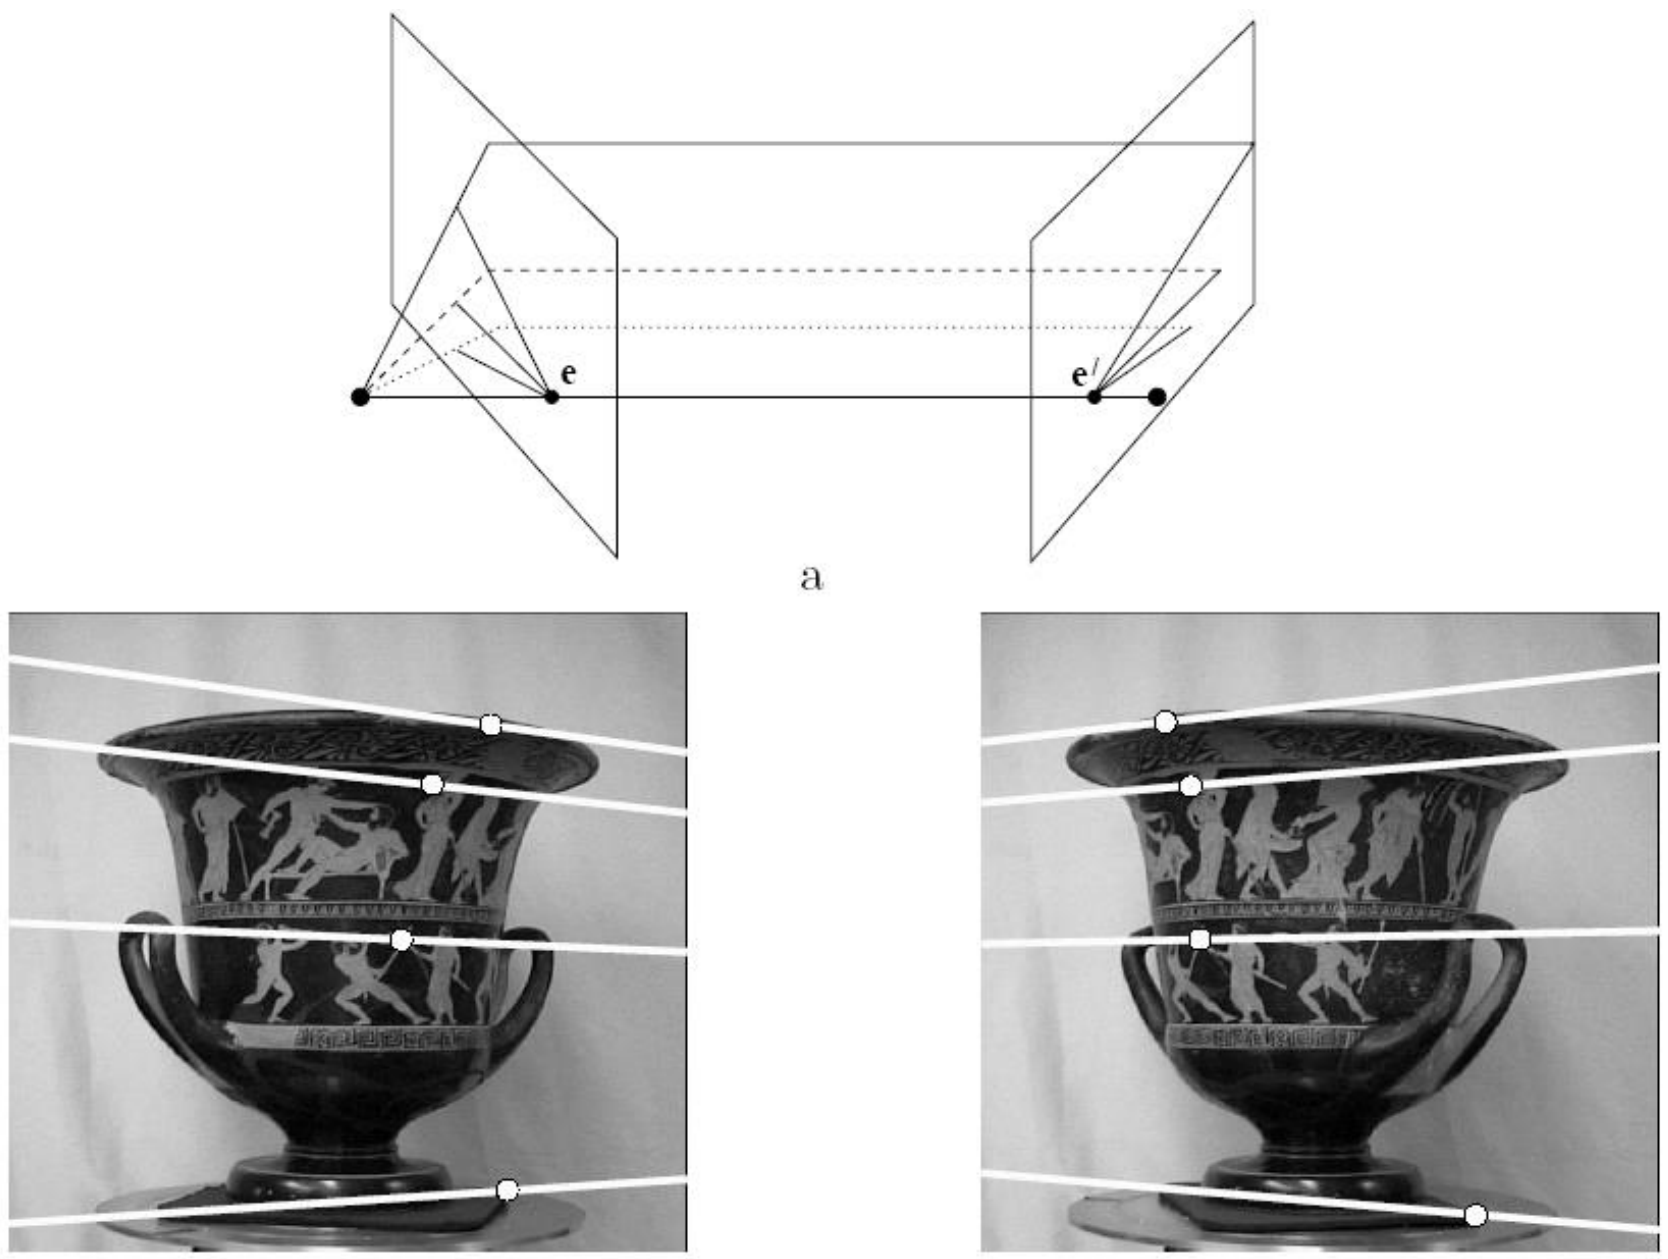

Hartley and Zisserman

stereo vision
structure from motion
optical flow

Why multiple views?

- Structure and depth are inherently ambiguous from single views.

Images from Lana Lazebnik

Why multiple views?

- Structure and depth are inherently ambiguous from single views.

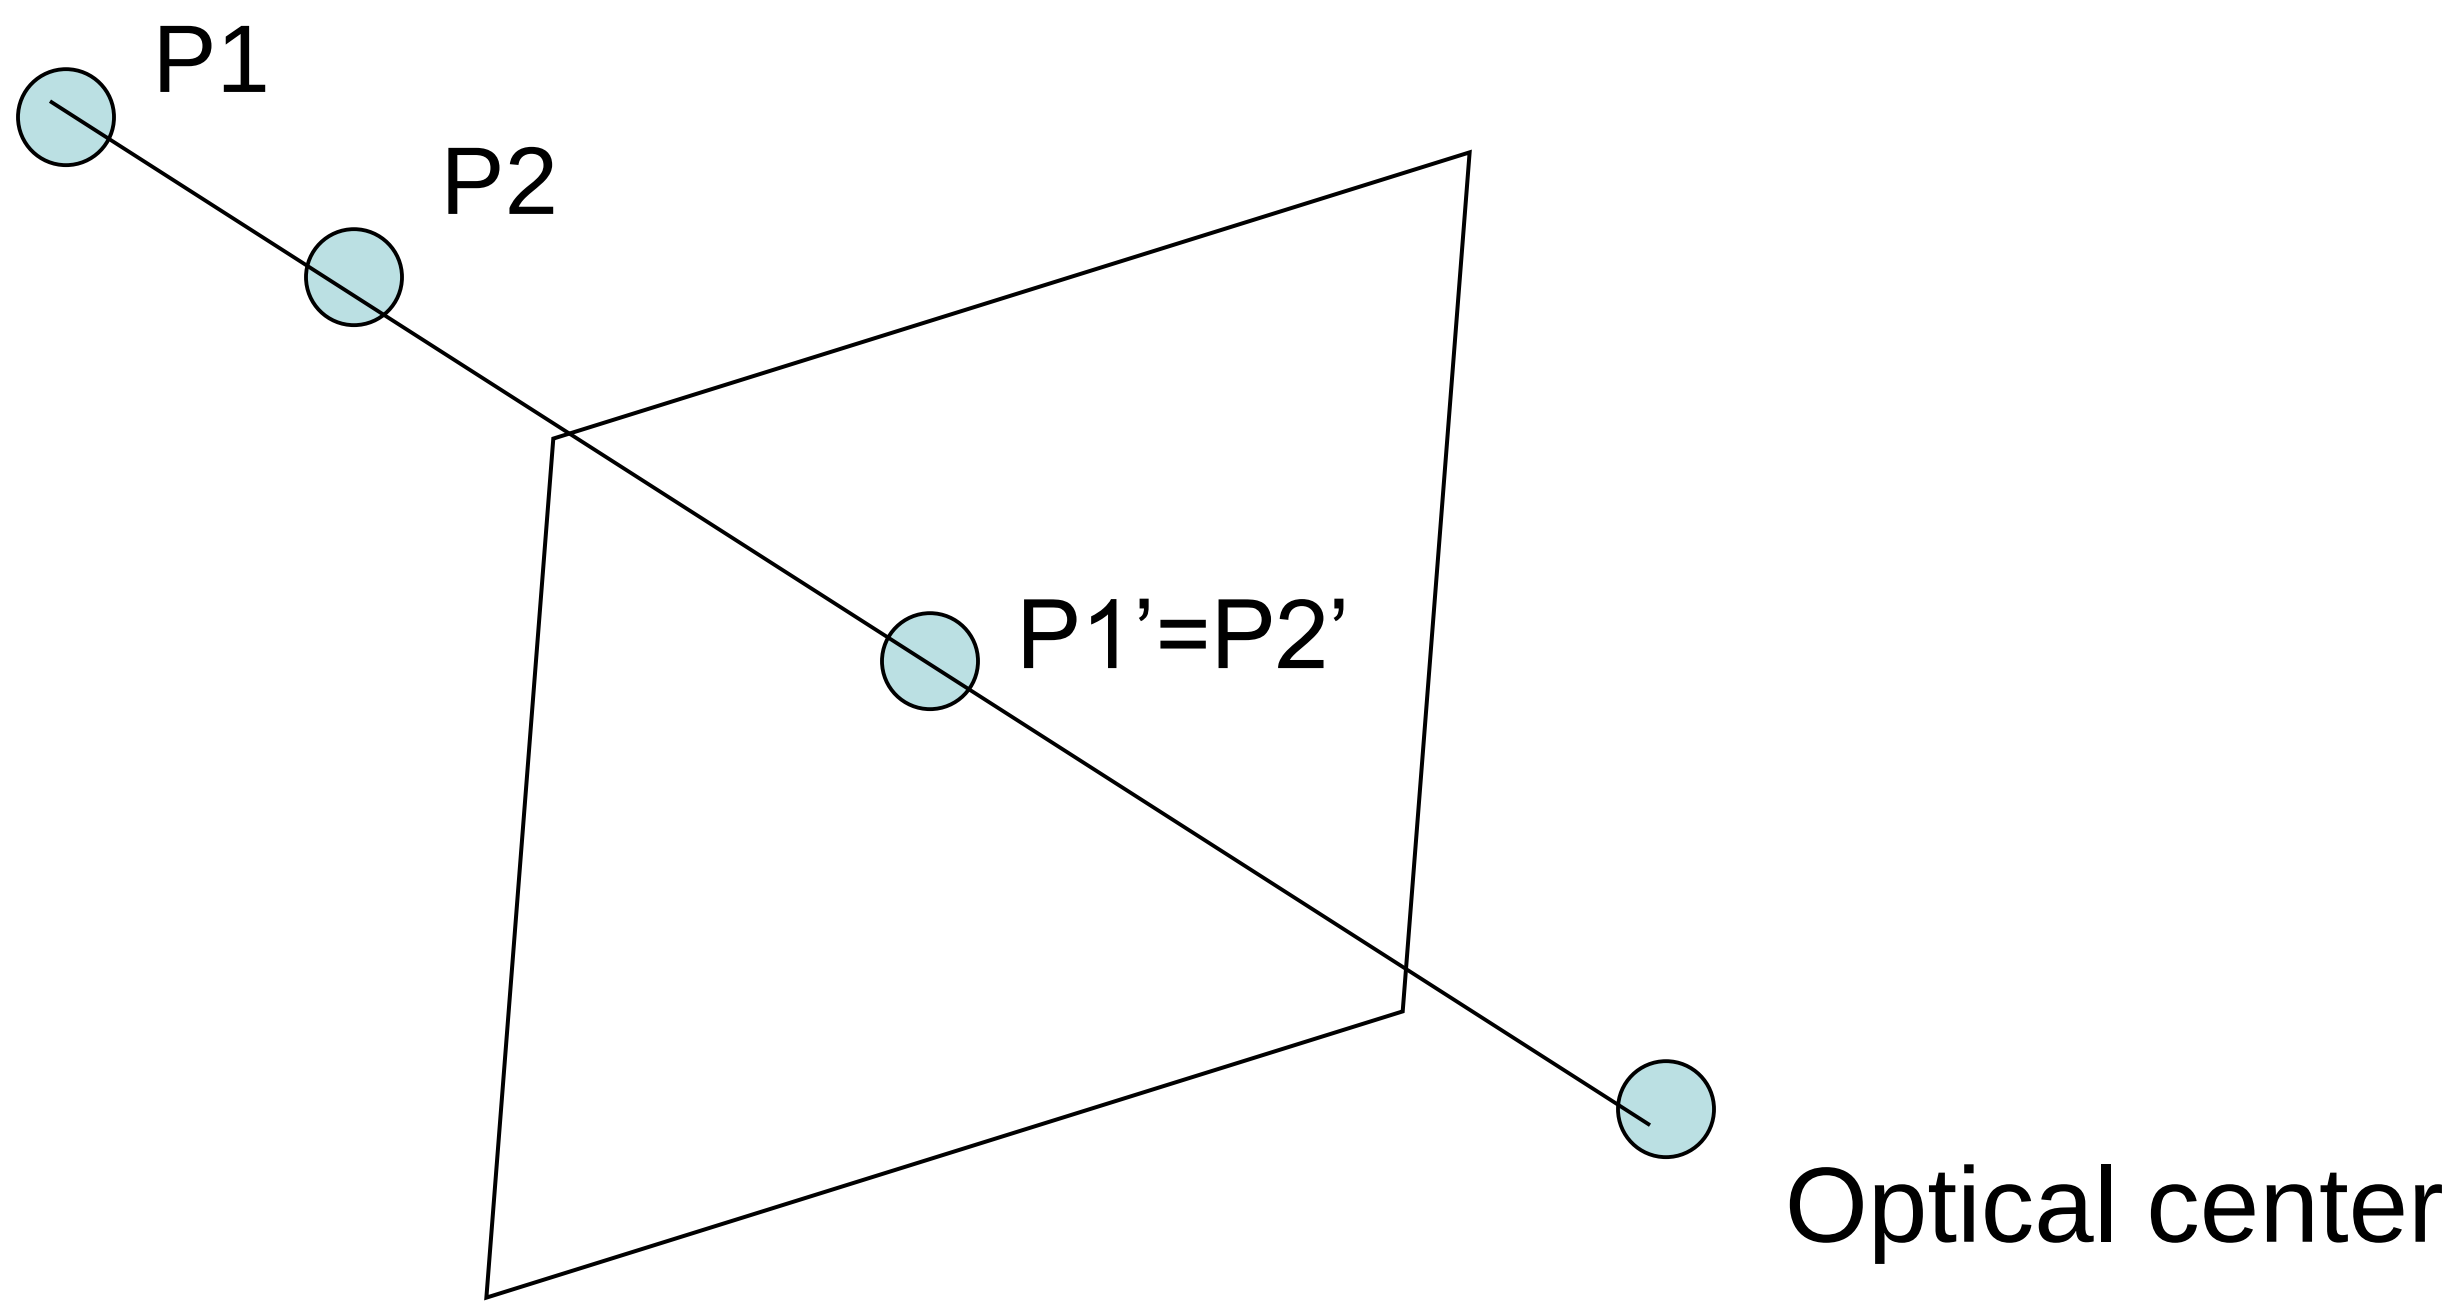

- What cues help us to perceive 3d shape and depth?

Shading

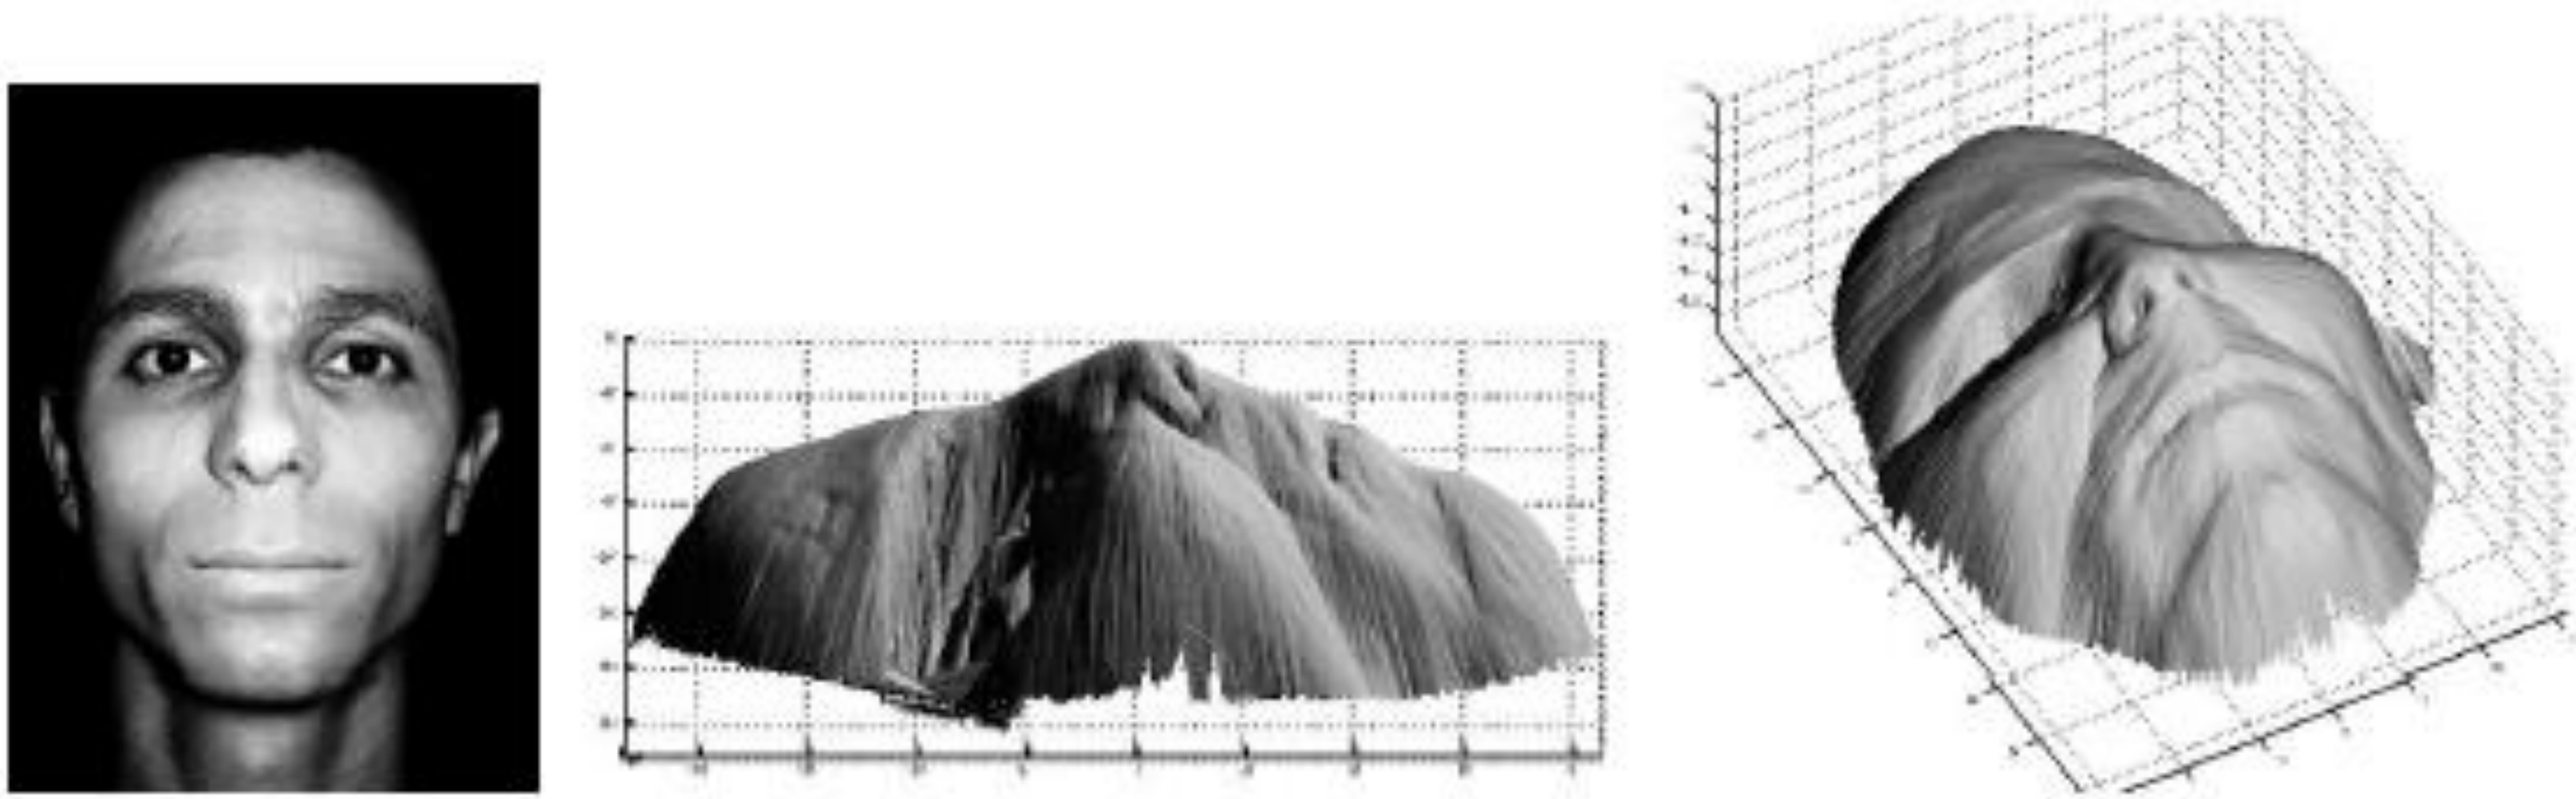

a) b) c)

[Figure from Prados & Faugeras 2006]

Focus/defocus

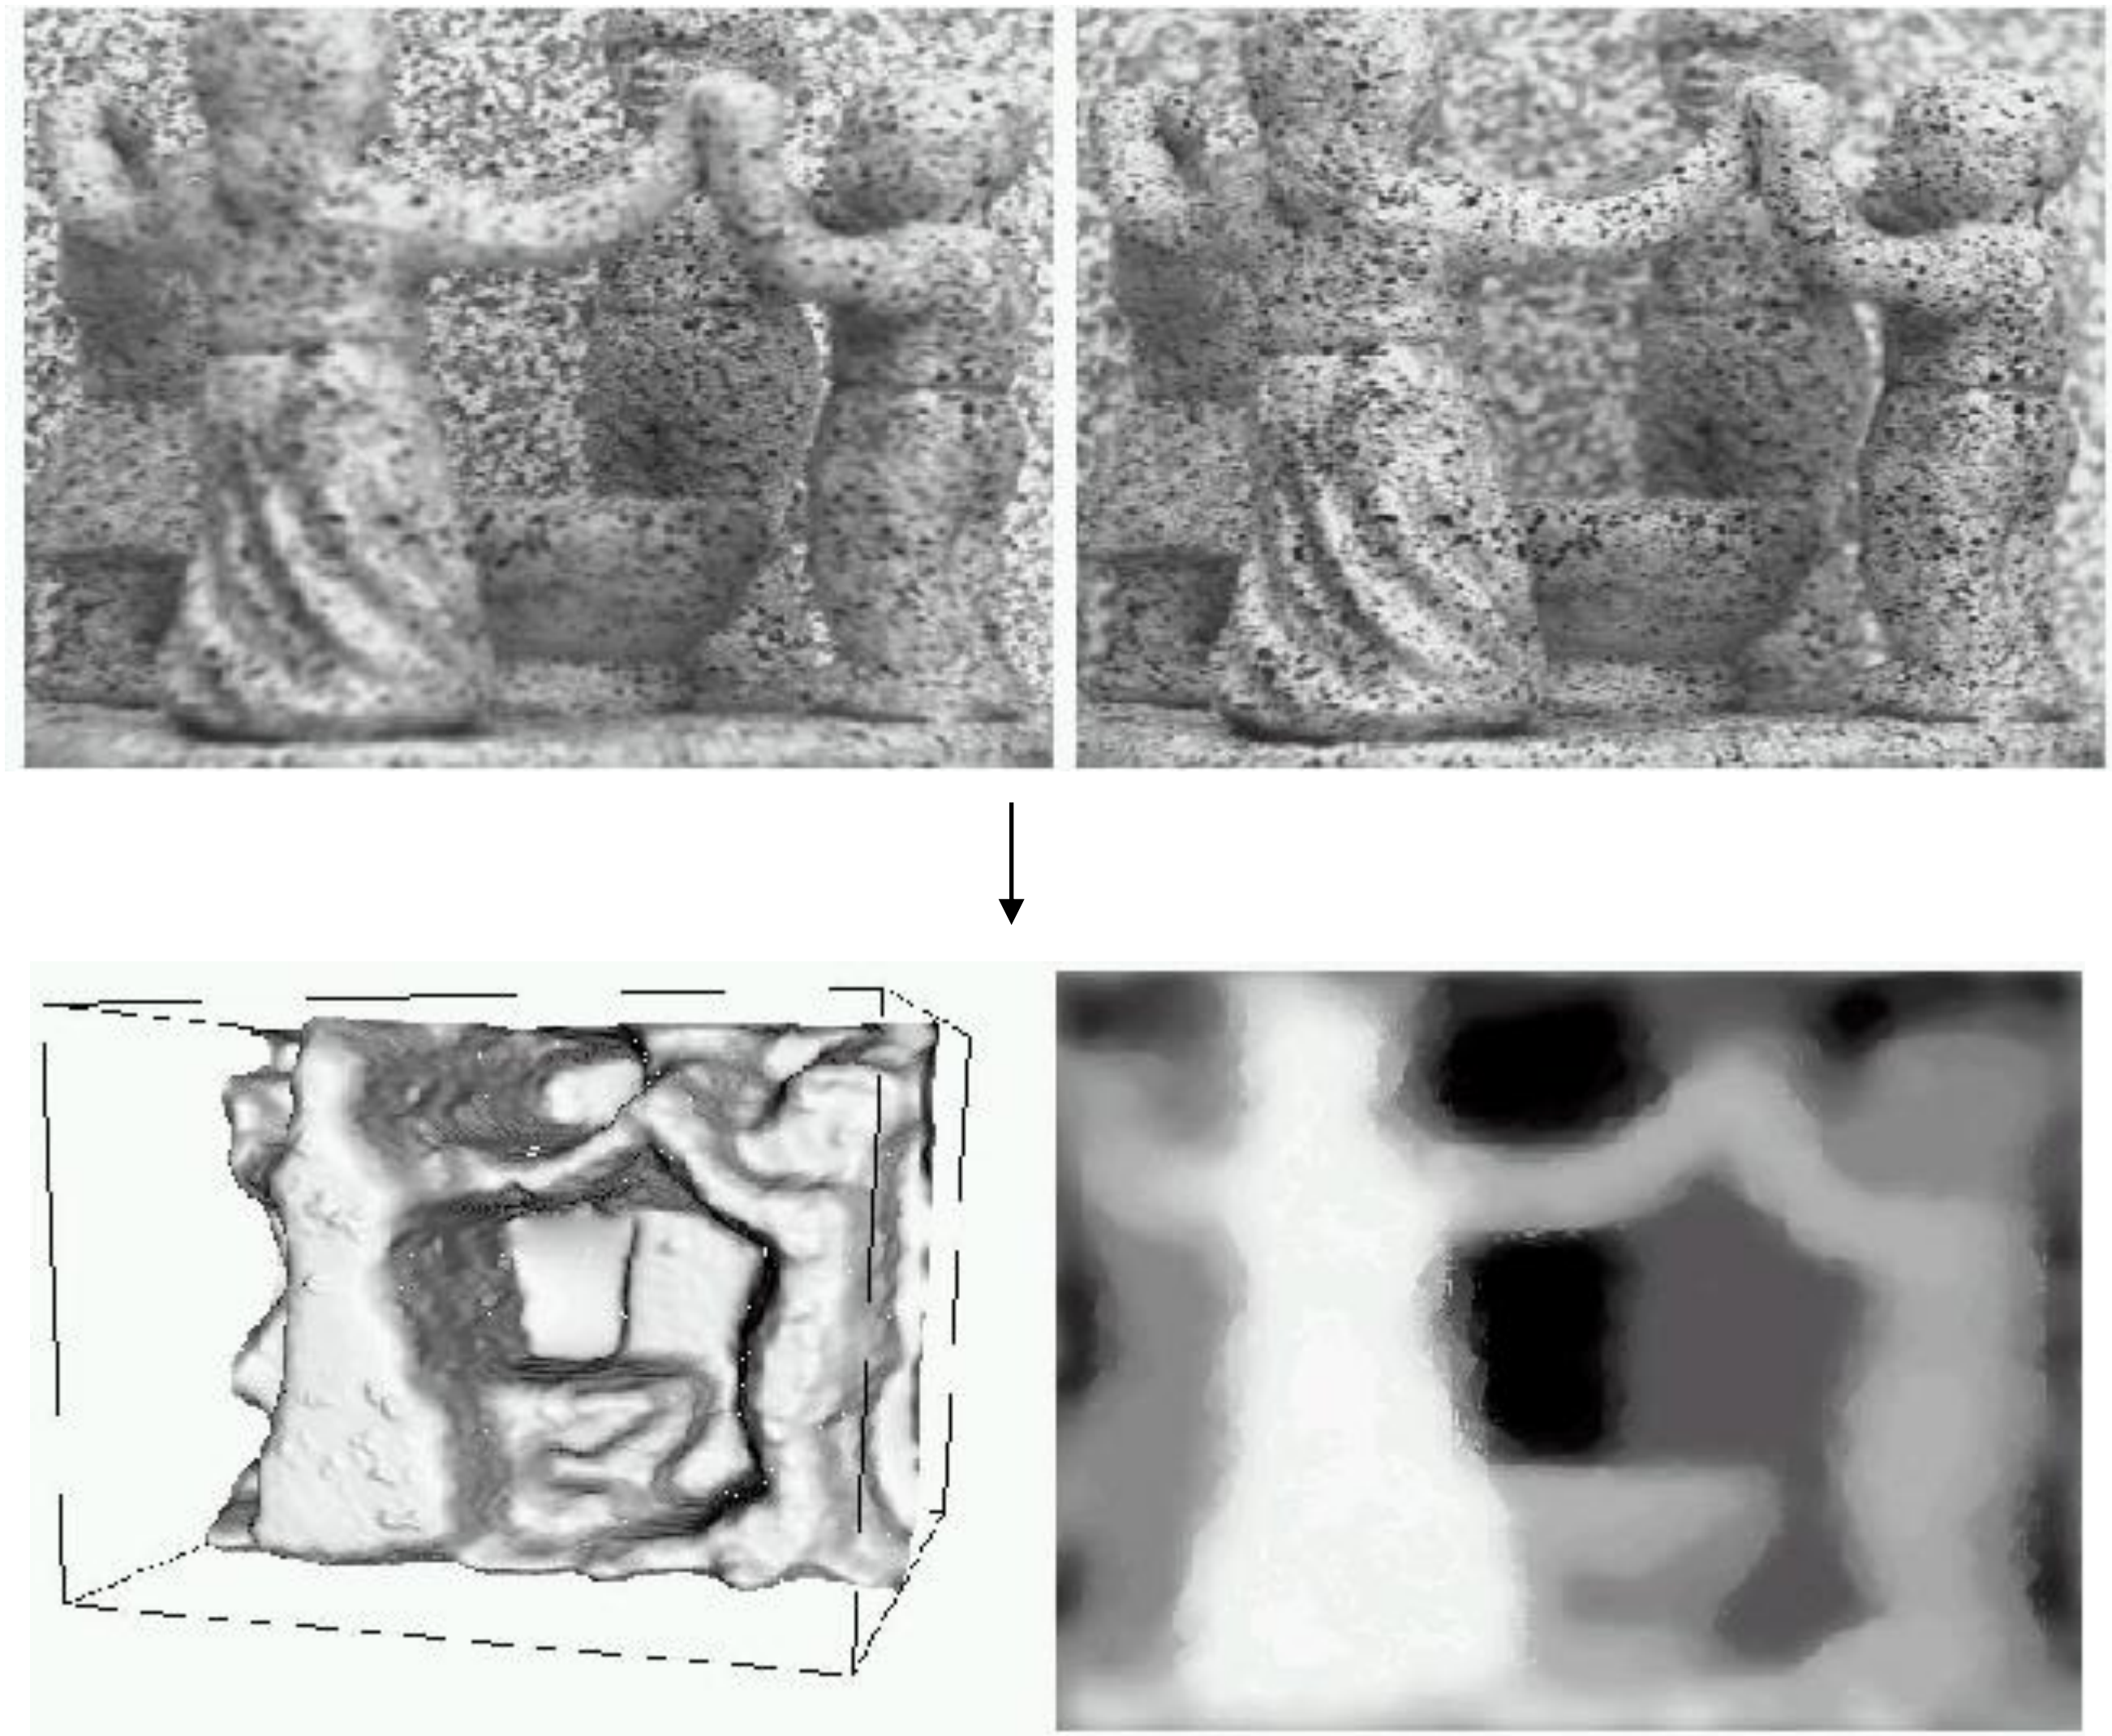

Images from same point of view, different camera parameters

3d shape / depth estimates

[figs from H. Jin and P. Favaro, 2002]

Texture

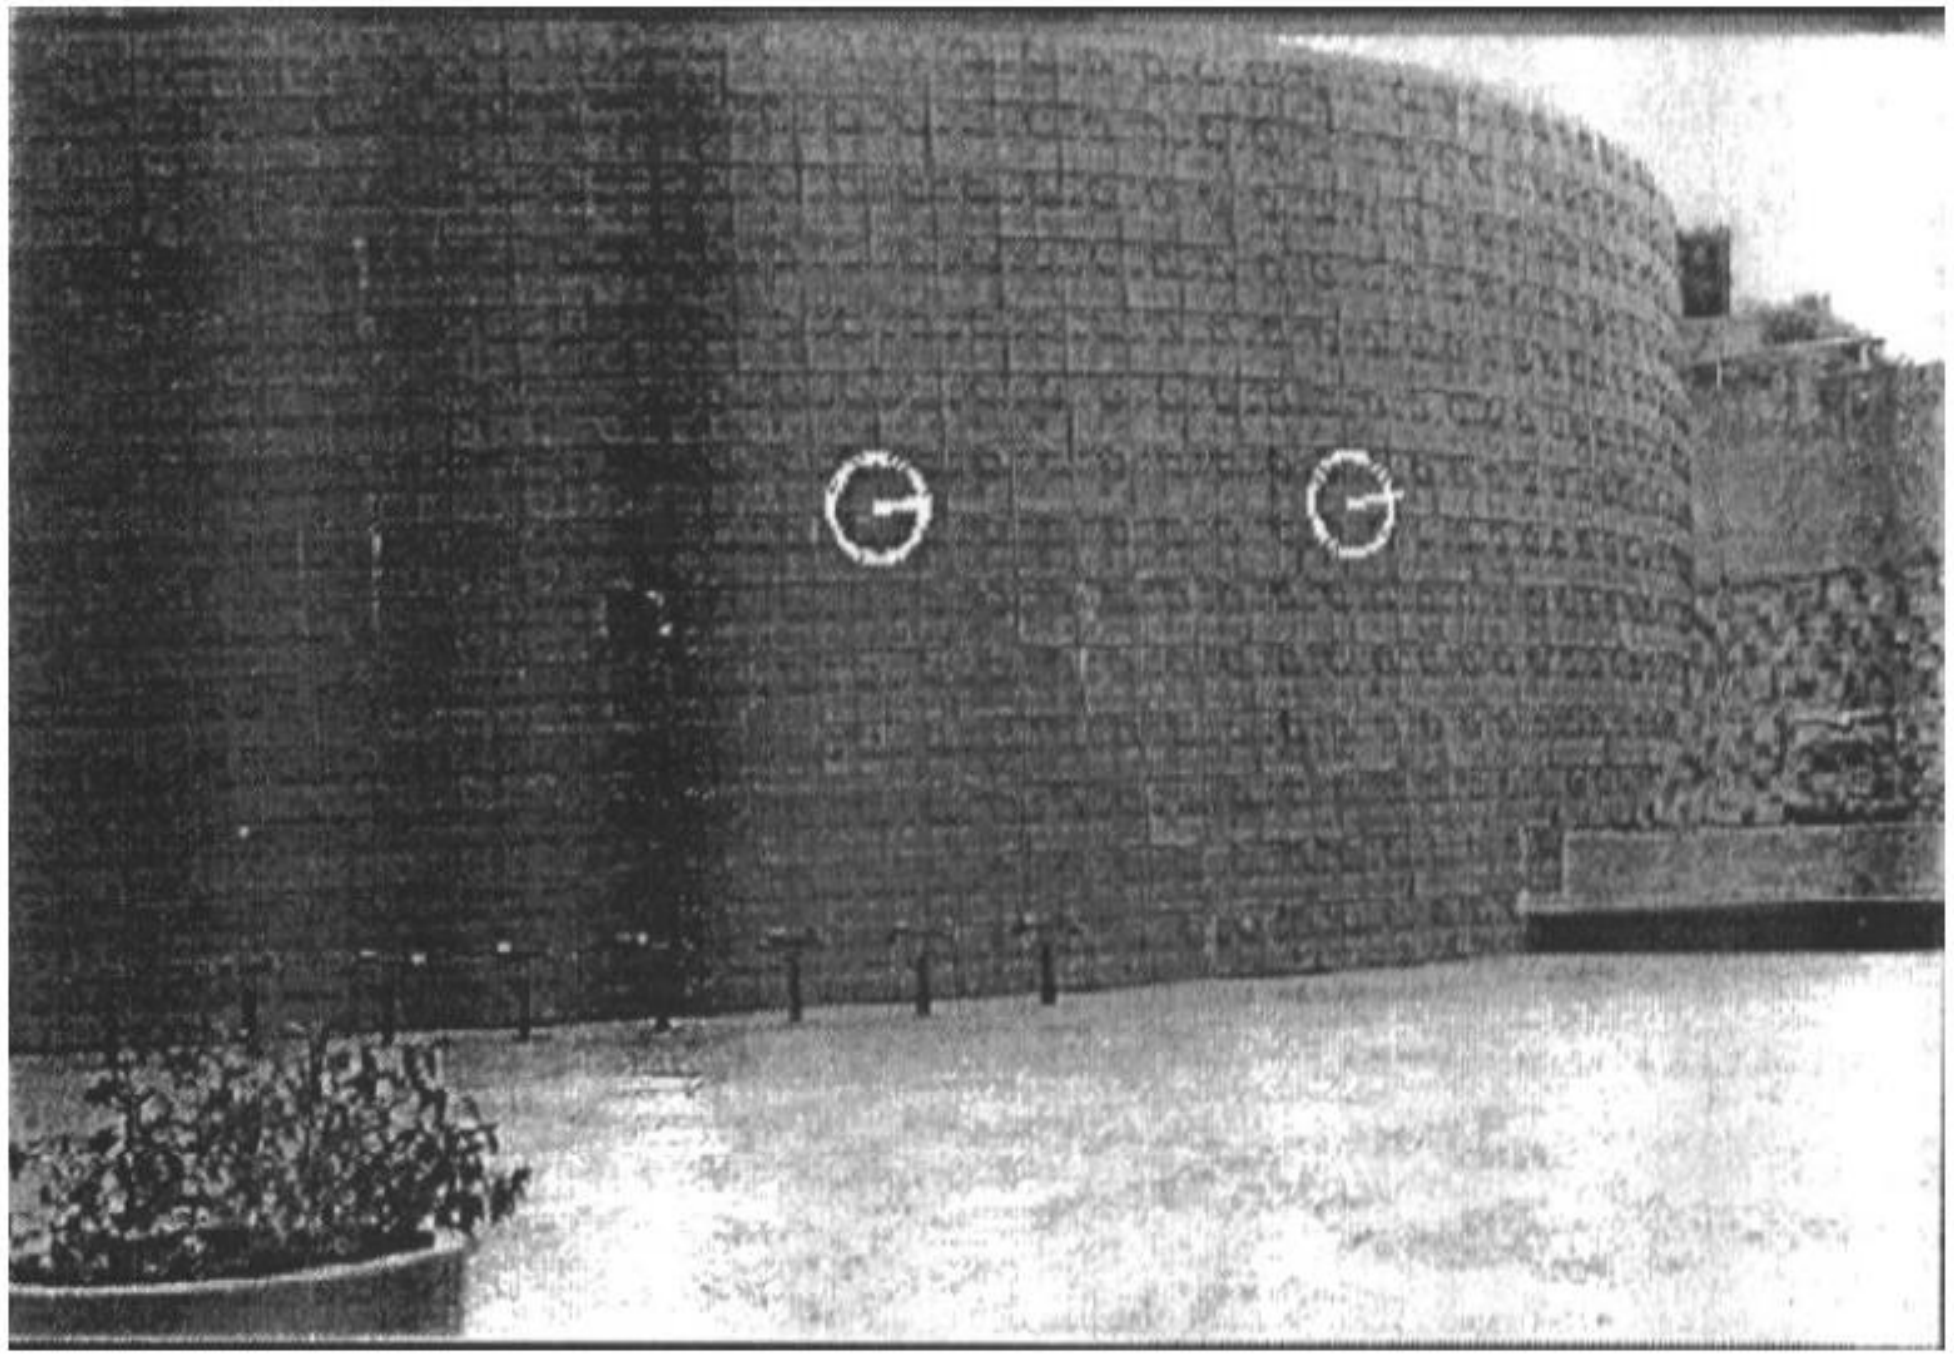

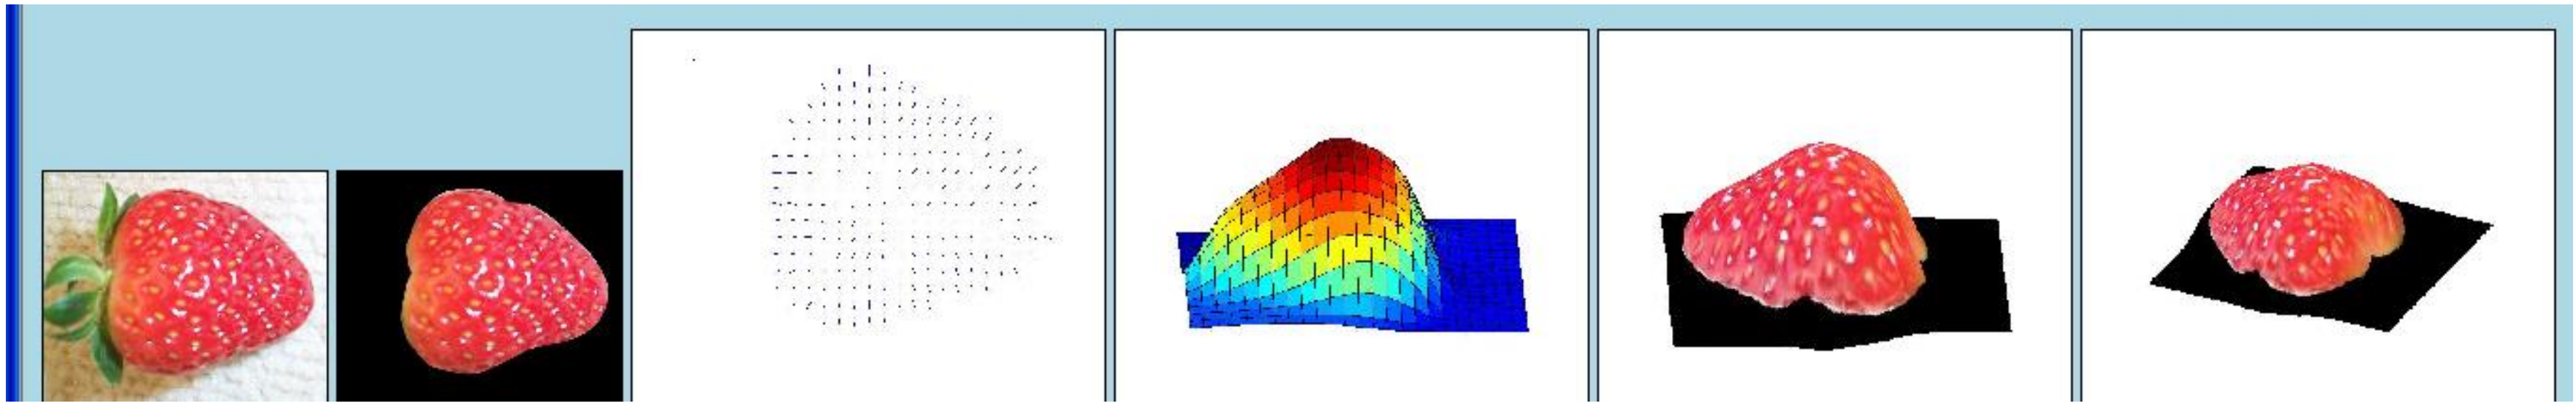

[From A.M. Loh. The recovery of 3-D structure using visual texture patterns. PhD thesis]

Perspective effects

Image credit: S. Seitz

Motion



Figures from L. Zhang

http://www.brainconnection.com/teasers/?main=illusion/motion-shape

Occlusion

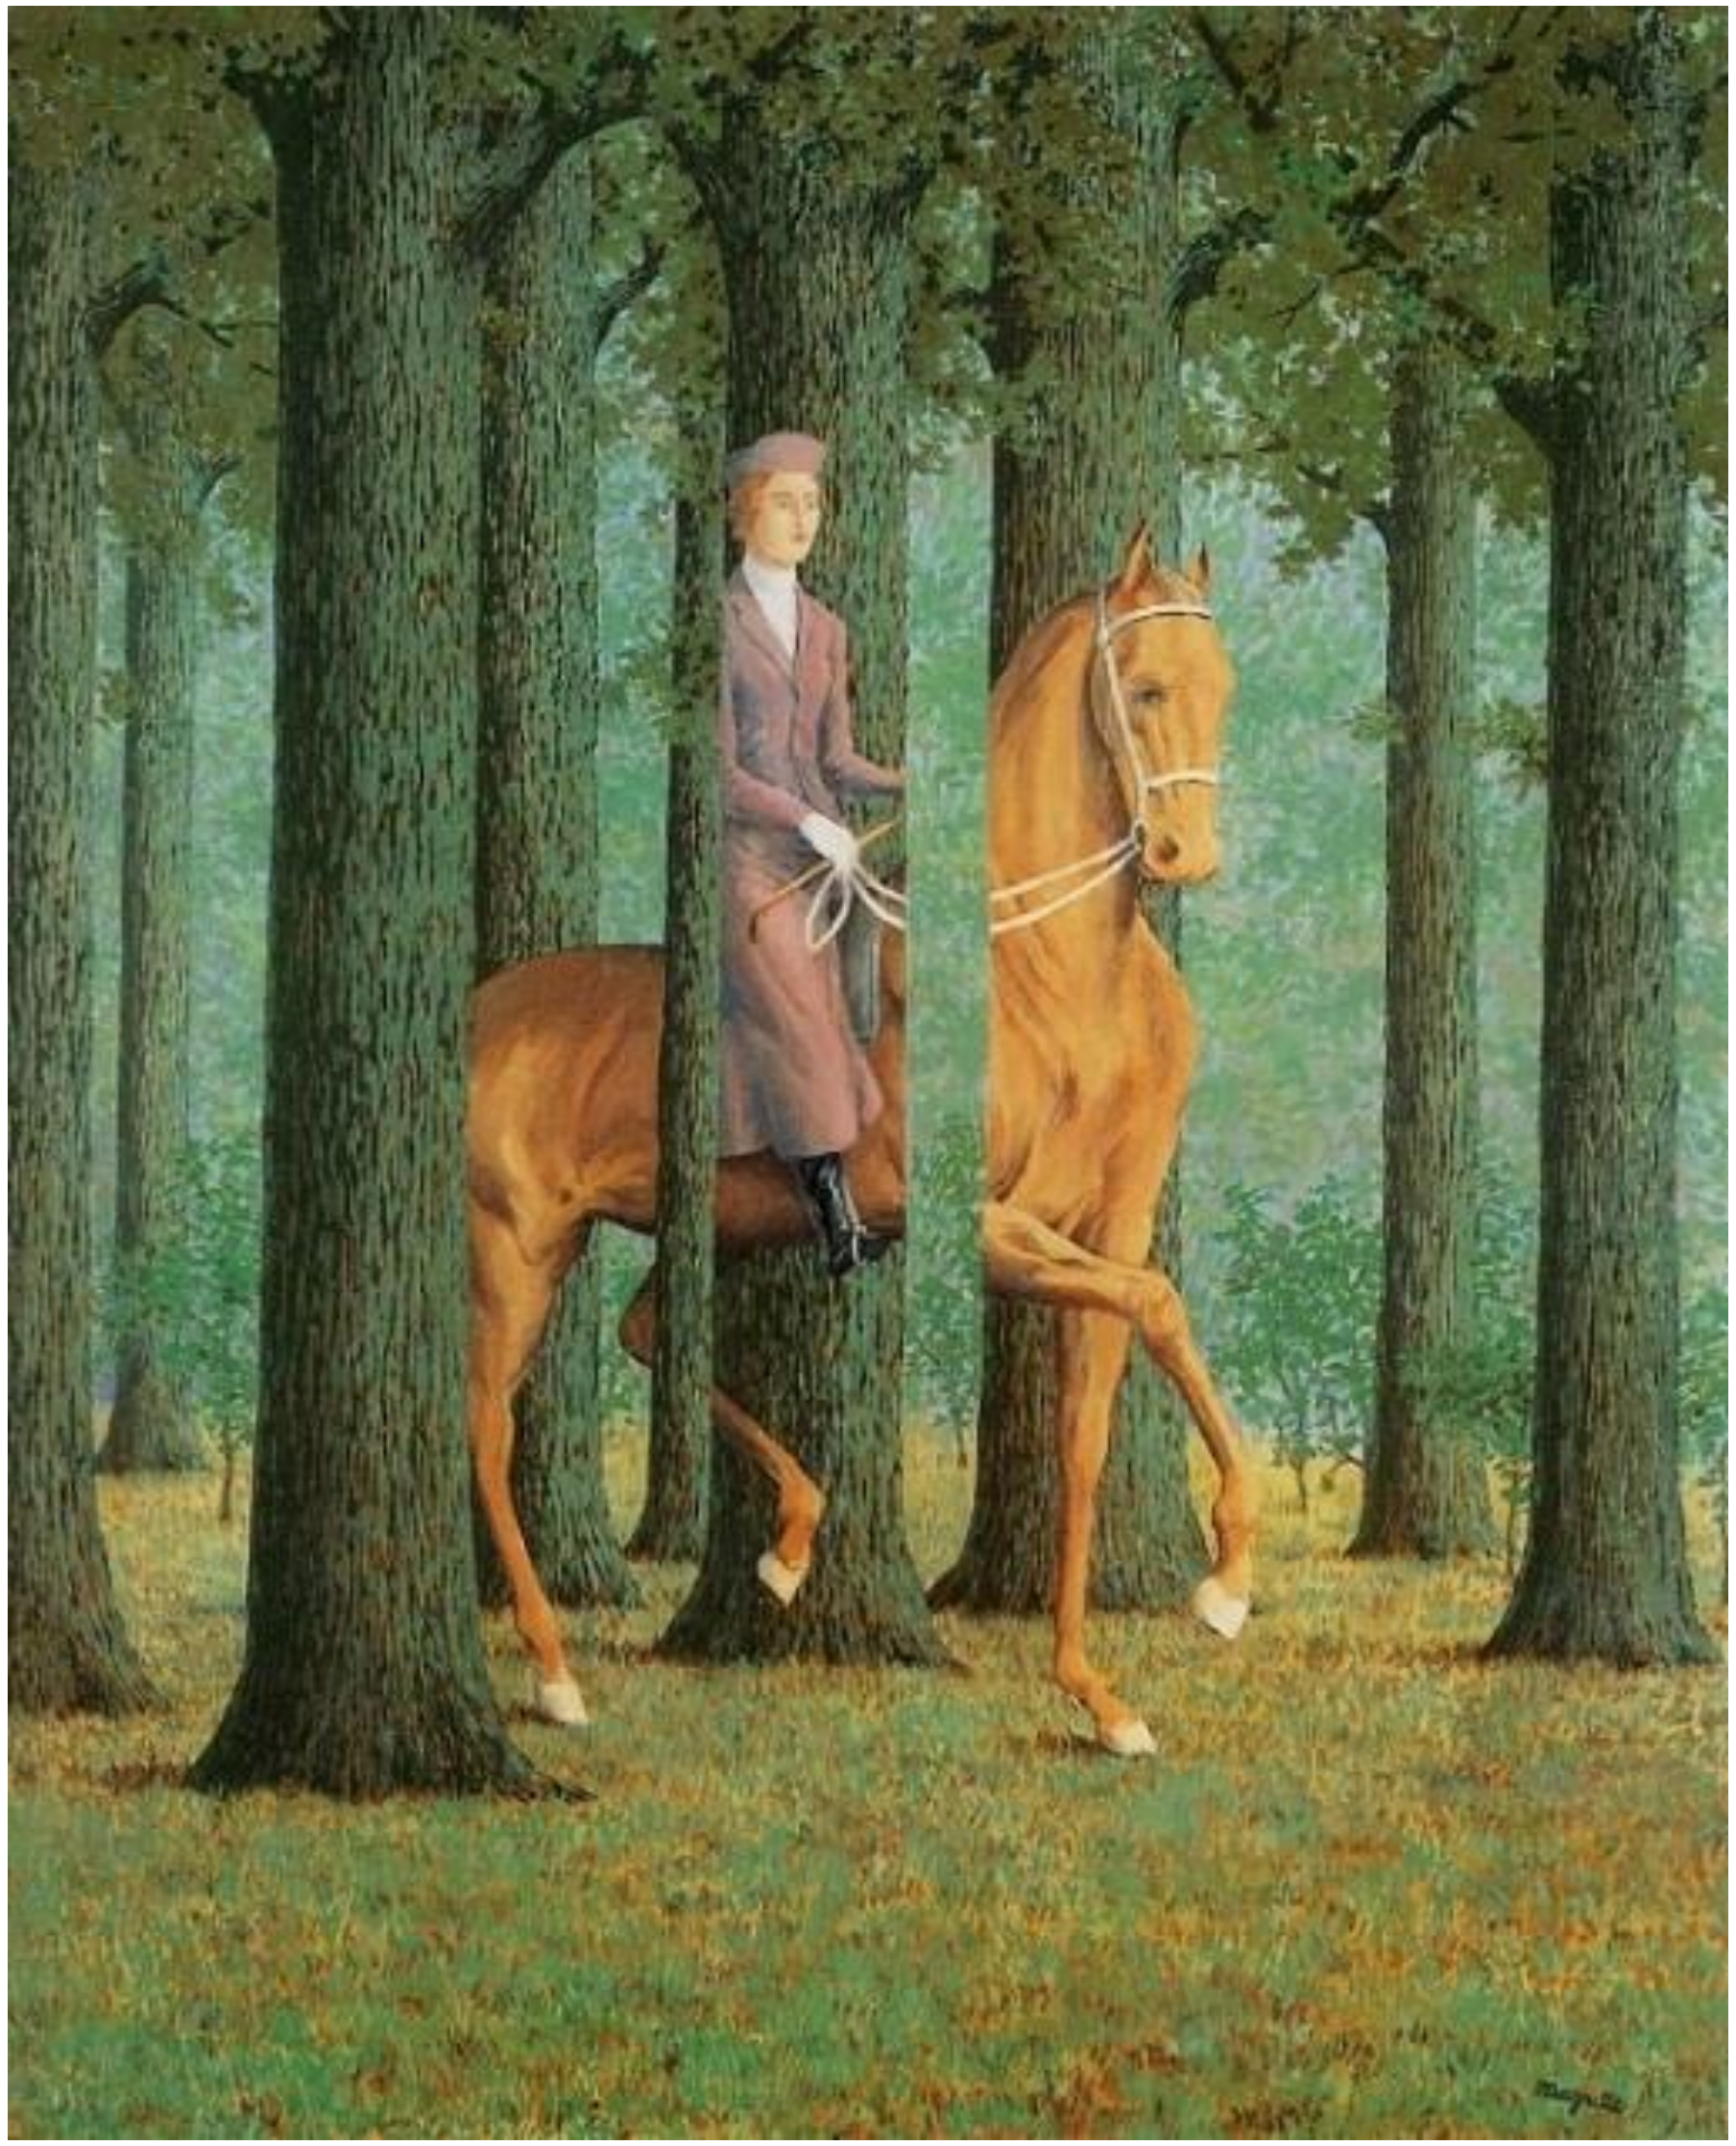

Rene Magritt'e famous painting *Le Blanc-Seing* (literal translation: "The Blank Signature") roughly translates as "free hand“. 1965

If stereo were critical for depth perception, navigation, recognition, etc., then this would be a problem

Multi-view geometry problems

- **Structure:** Given projections of the same 3D point in two or more images, compute the 3D coordinates of that point

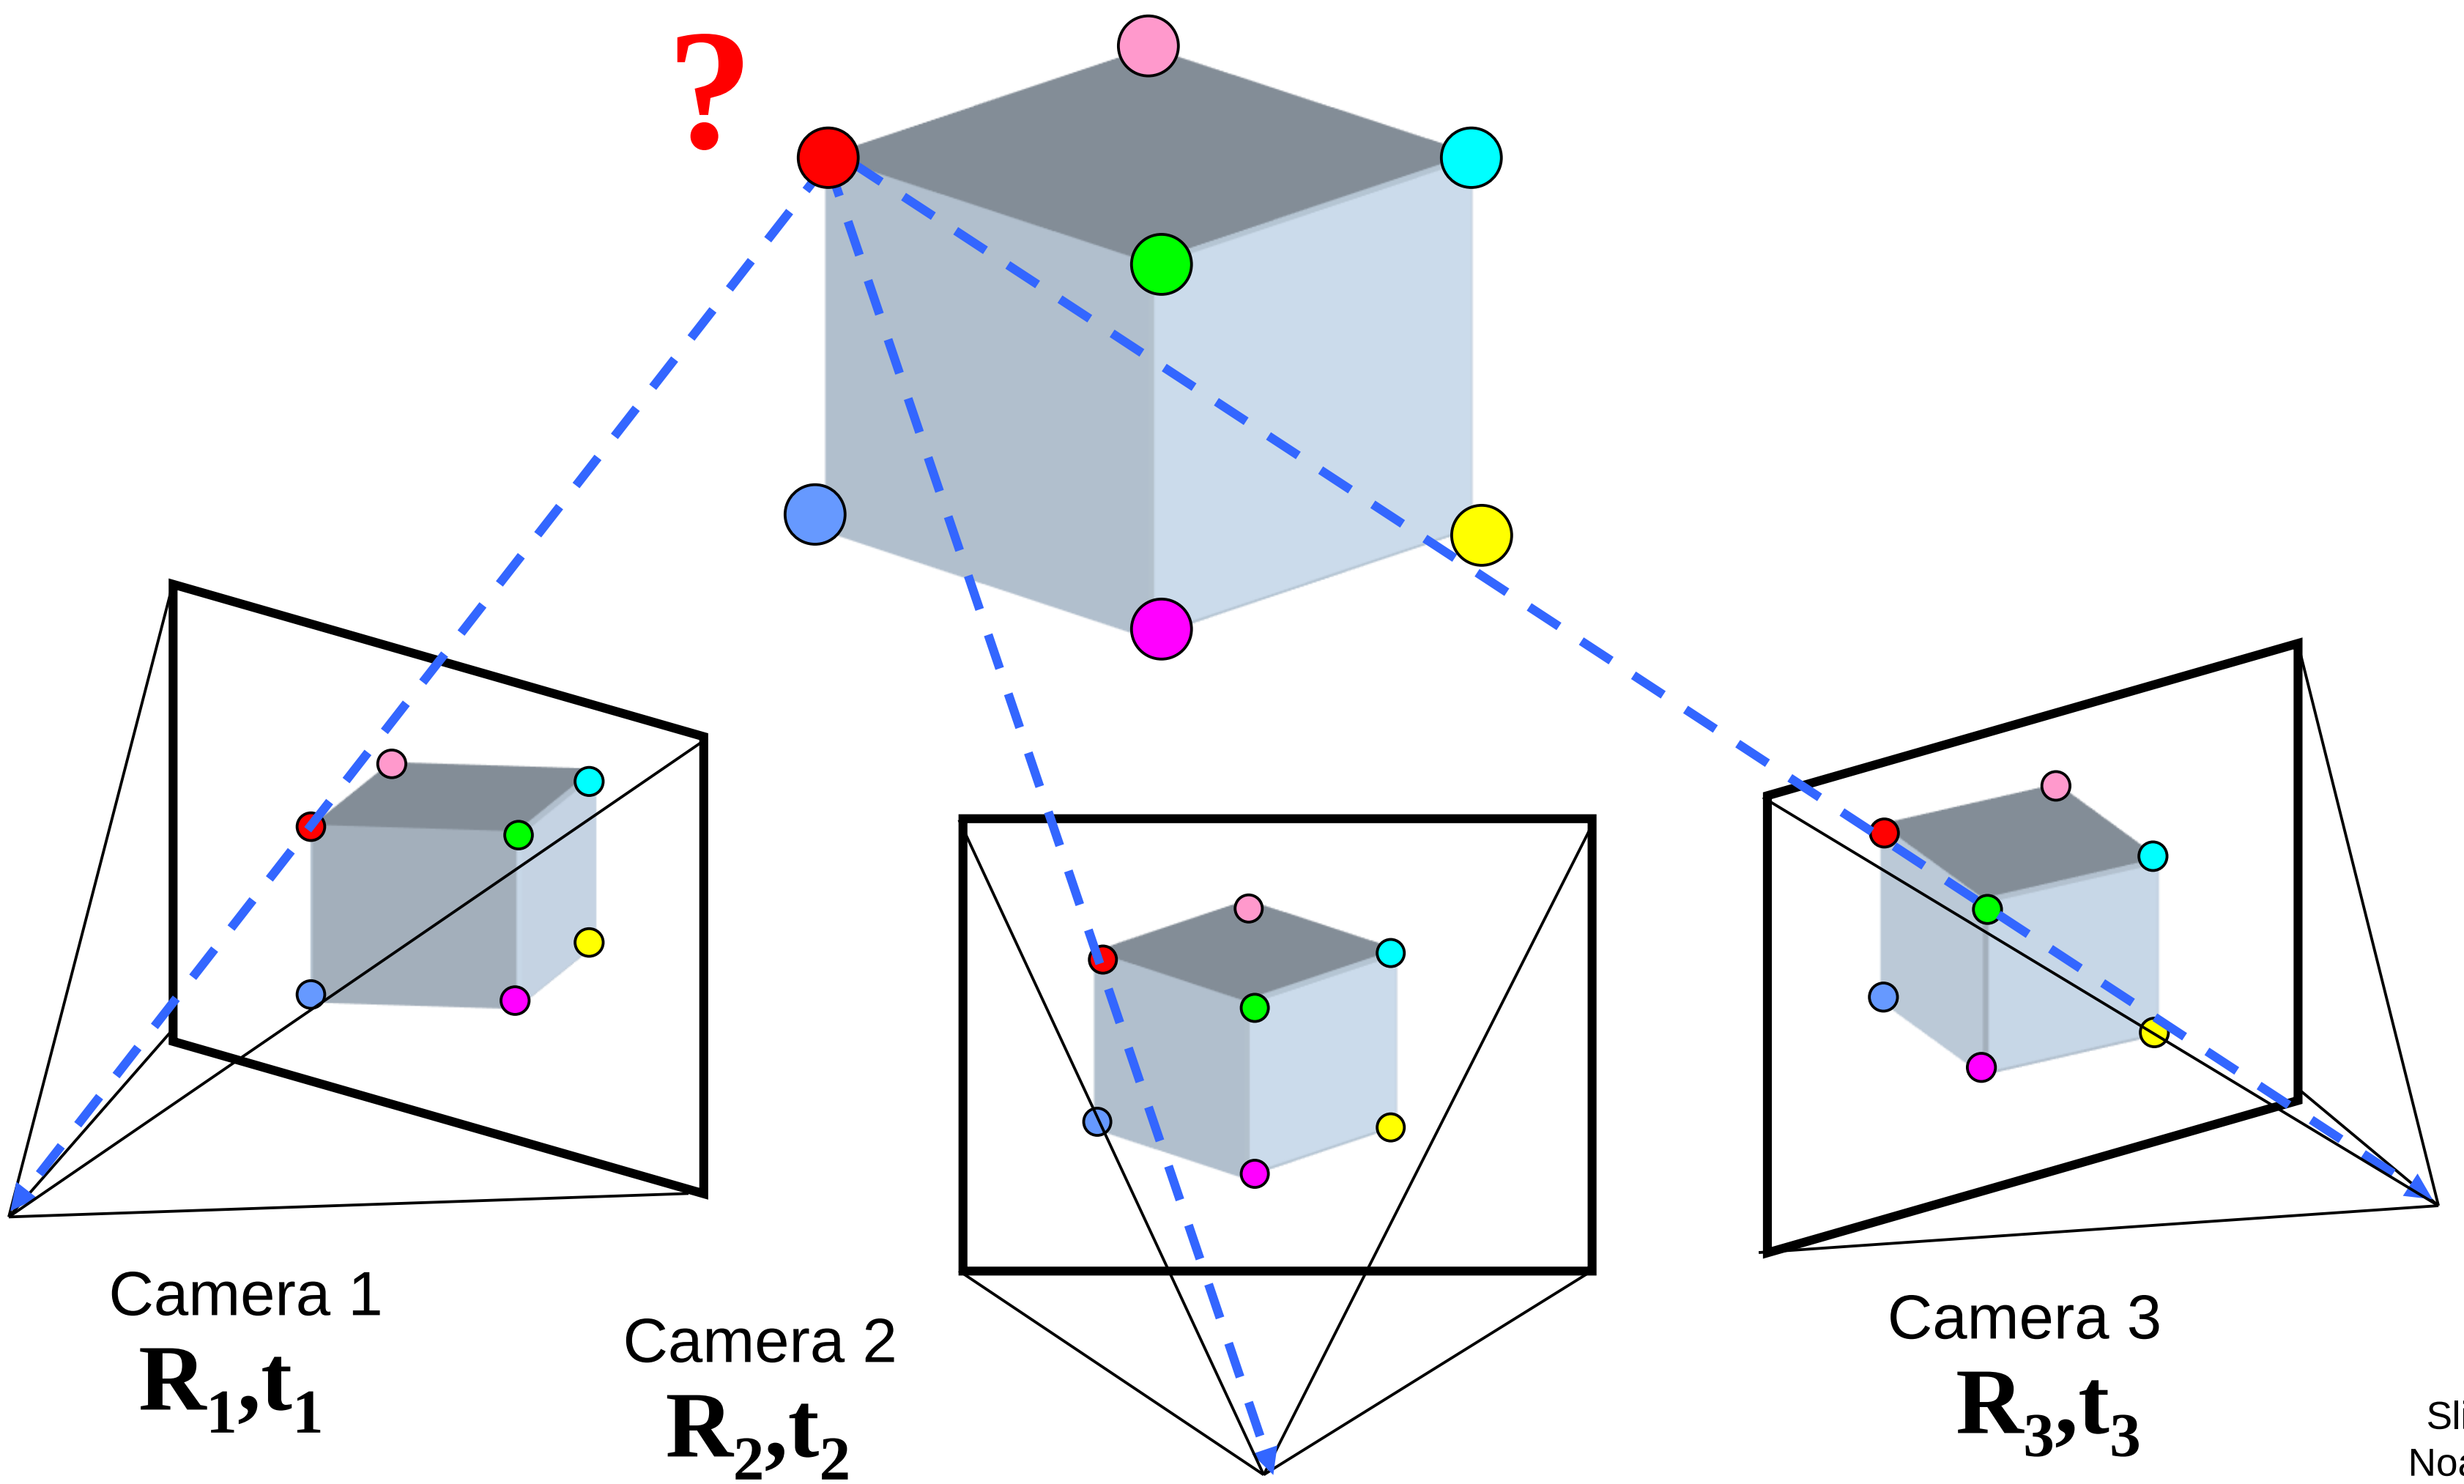

Slide credit: Noah Snavely

Multi-view geometry problems

- **Stereo correspondence:** Given a point in one of the images, where could its corresponding points be in the other images?

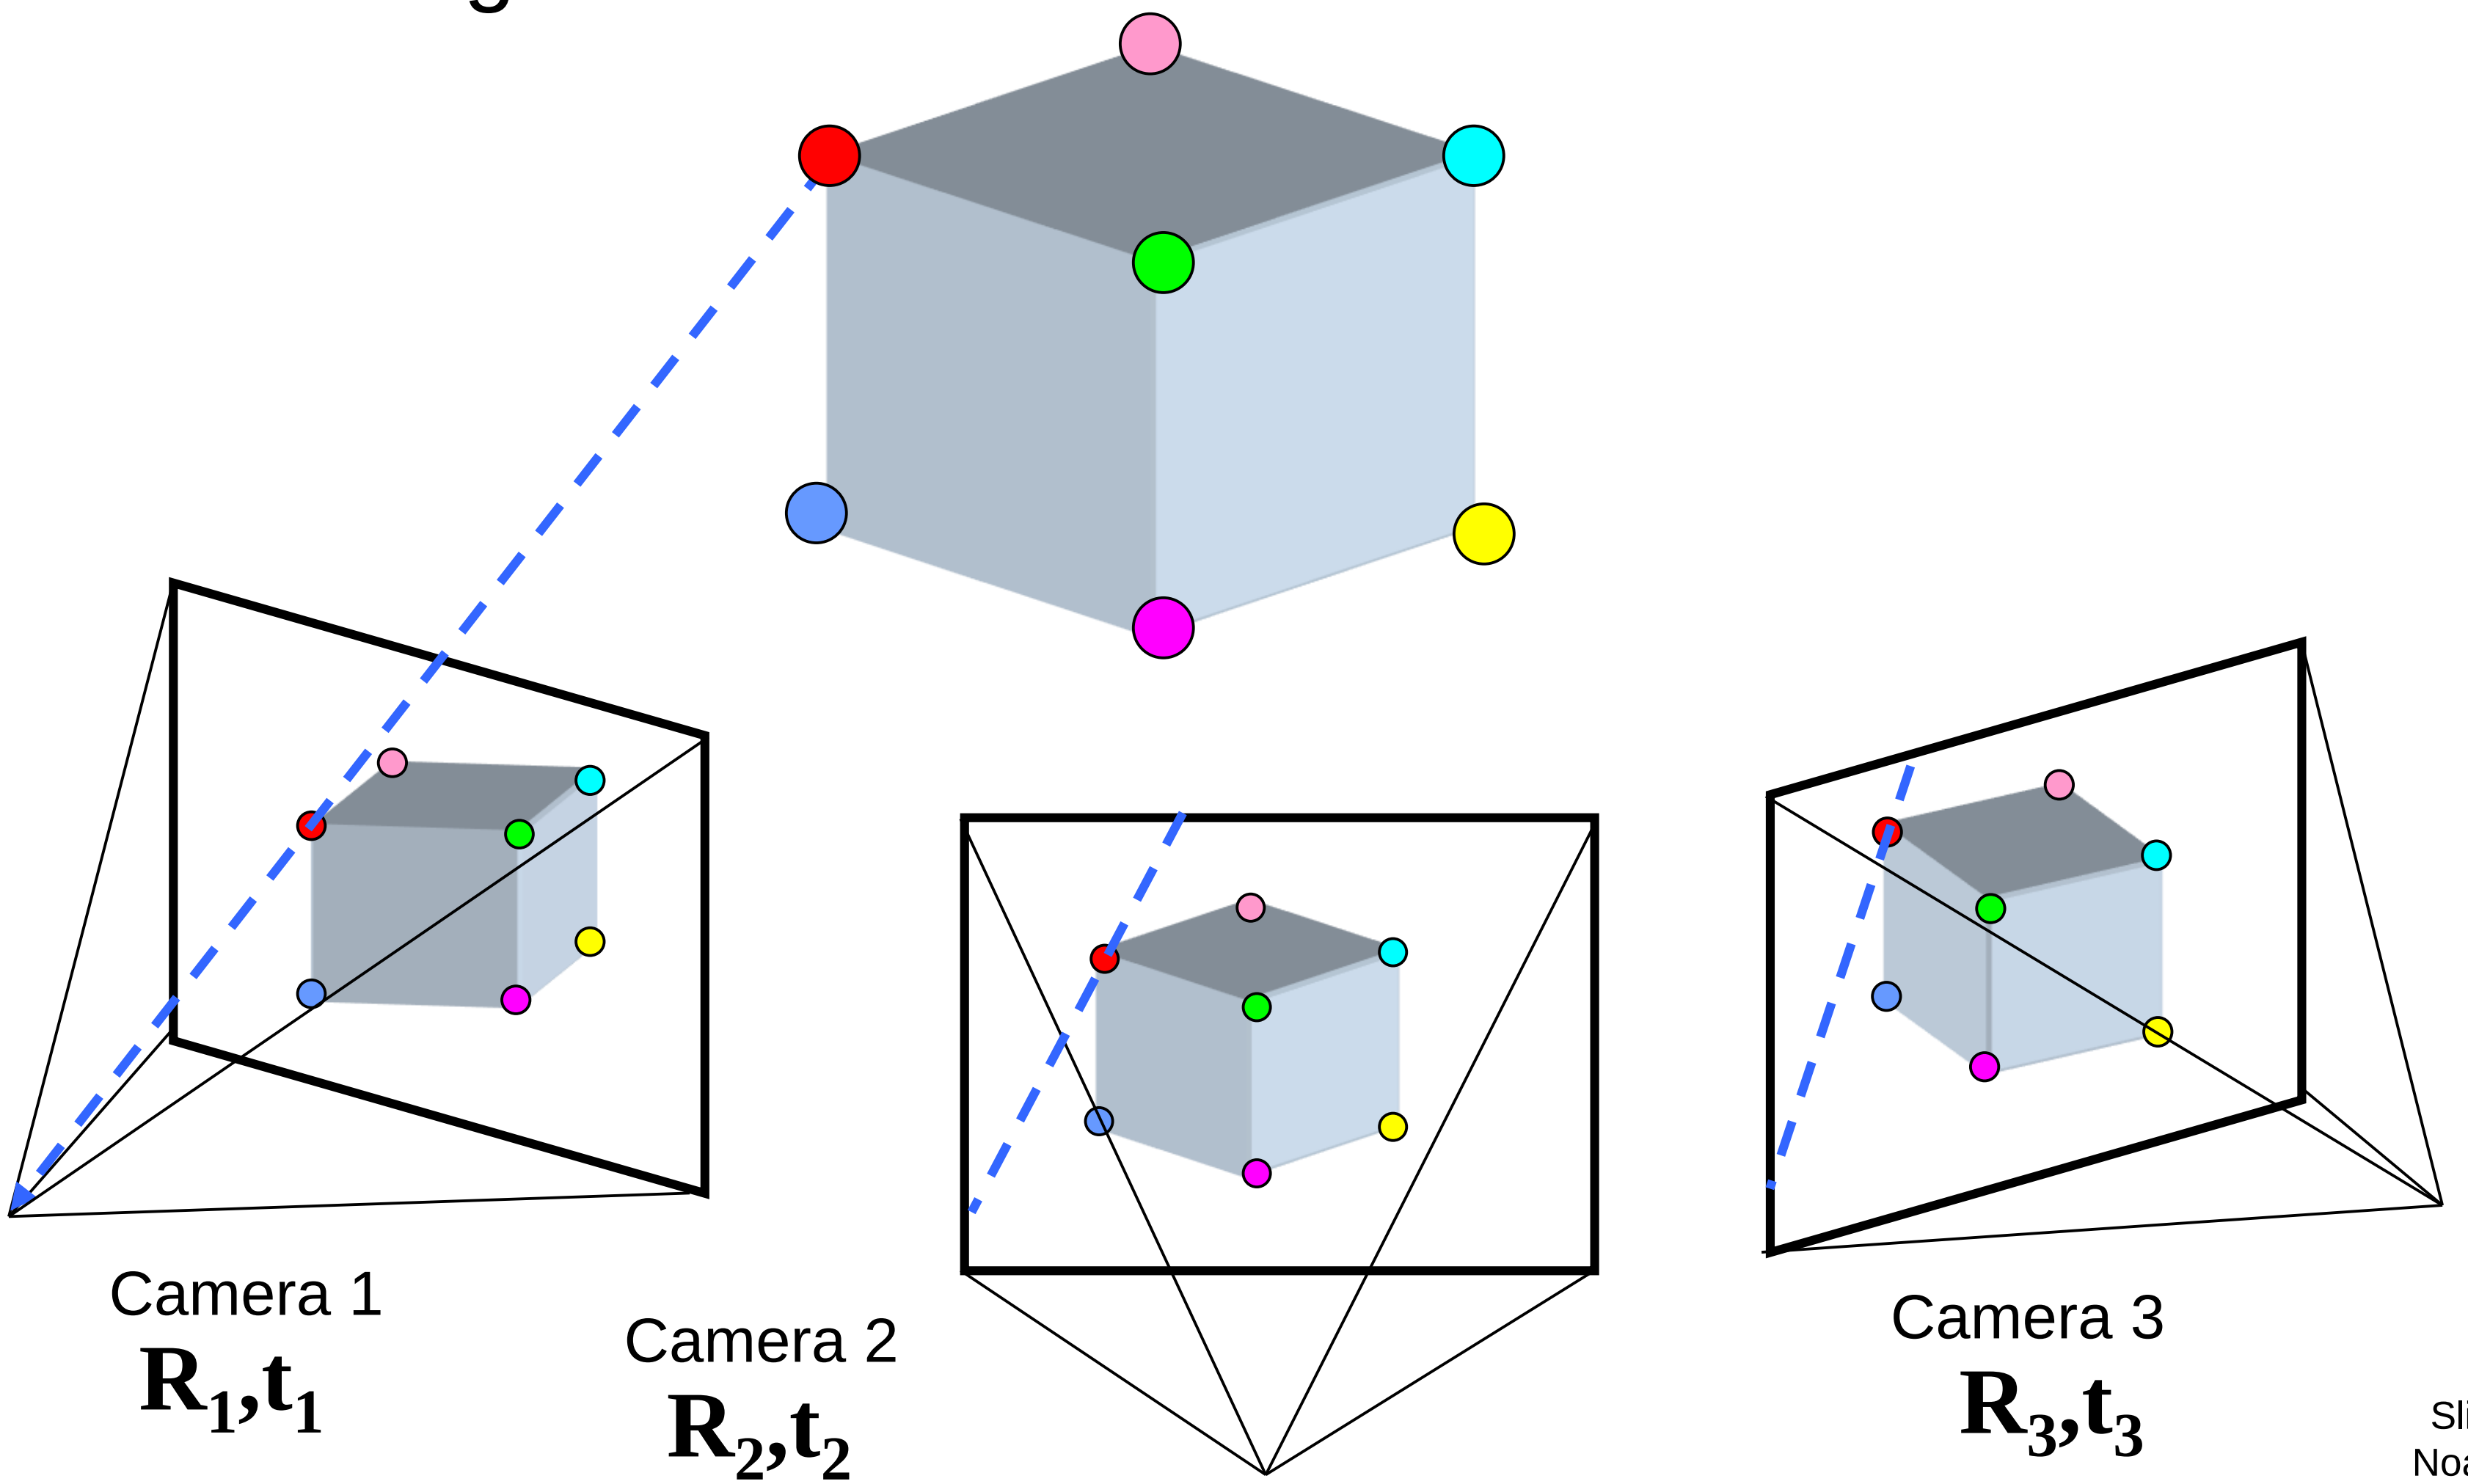

Slide credit: Noah Snavely

Multi-view geometry problems

- **Motion:** Given a set of corresponding points in two or more images, compute the camera parameters

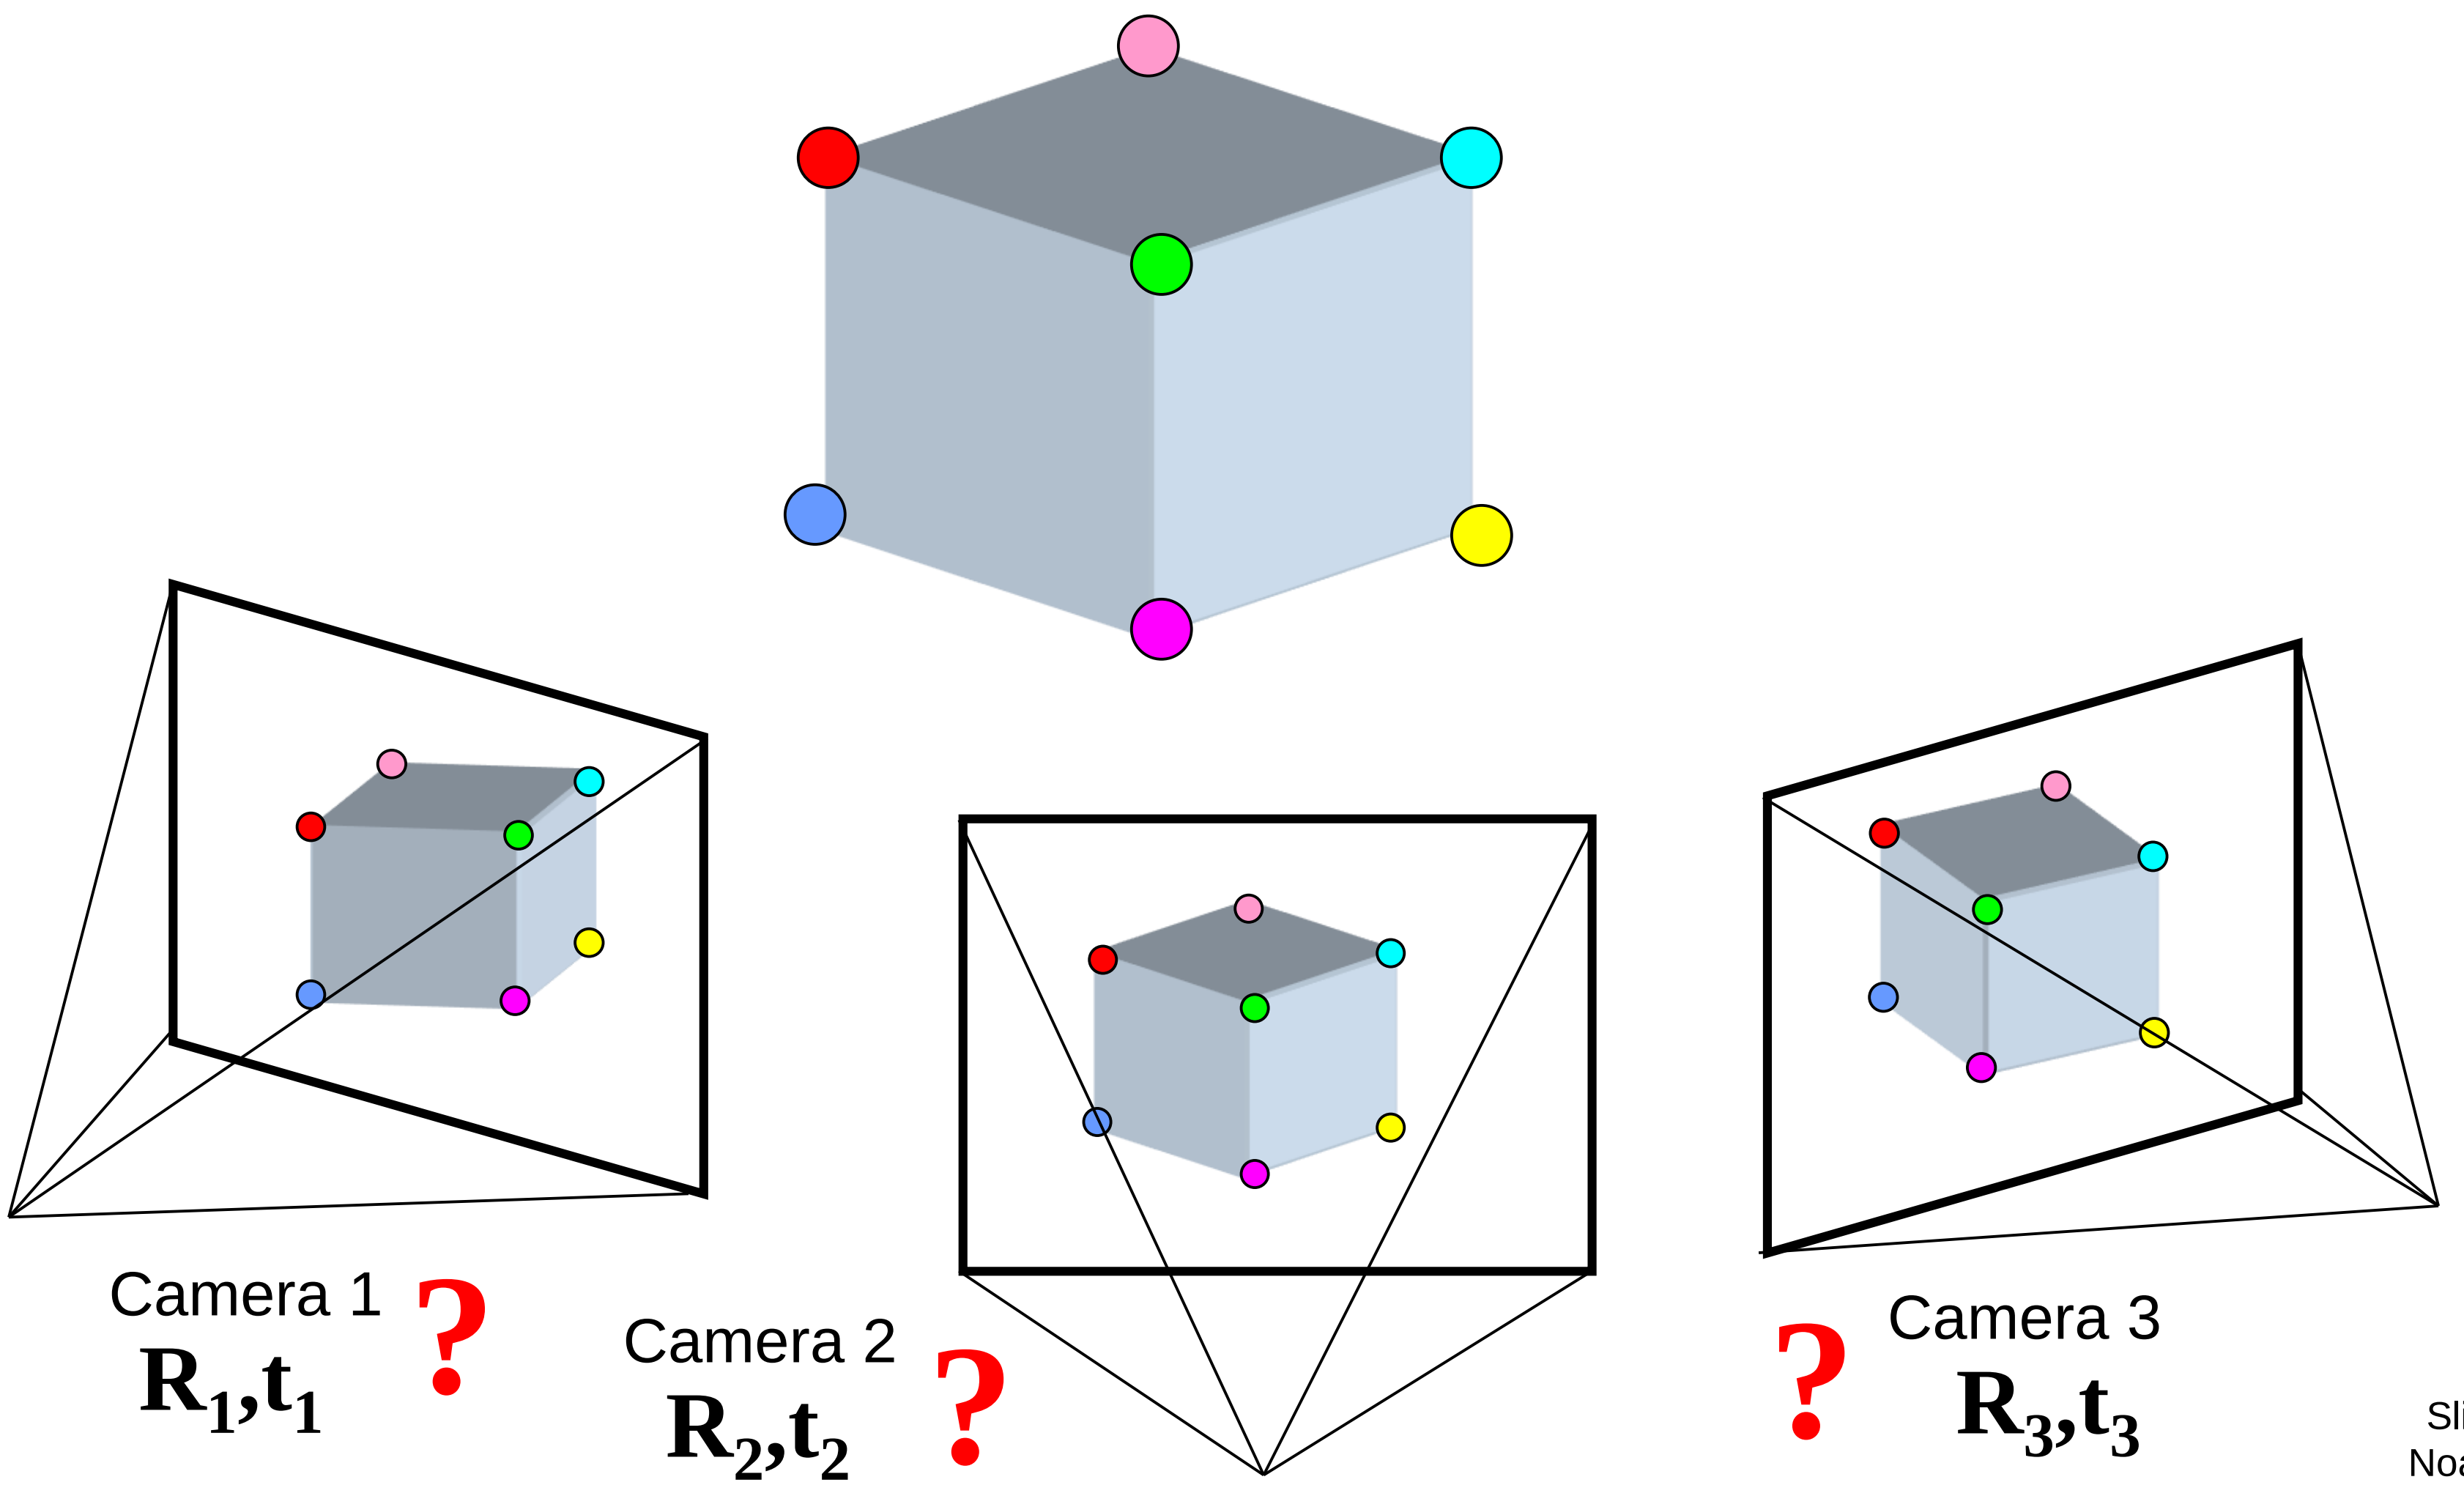

Slide credit: Noah Snavely

Human eye

Rough analogy with human visual system:

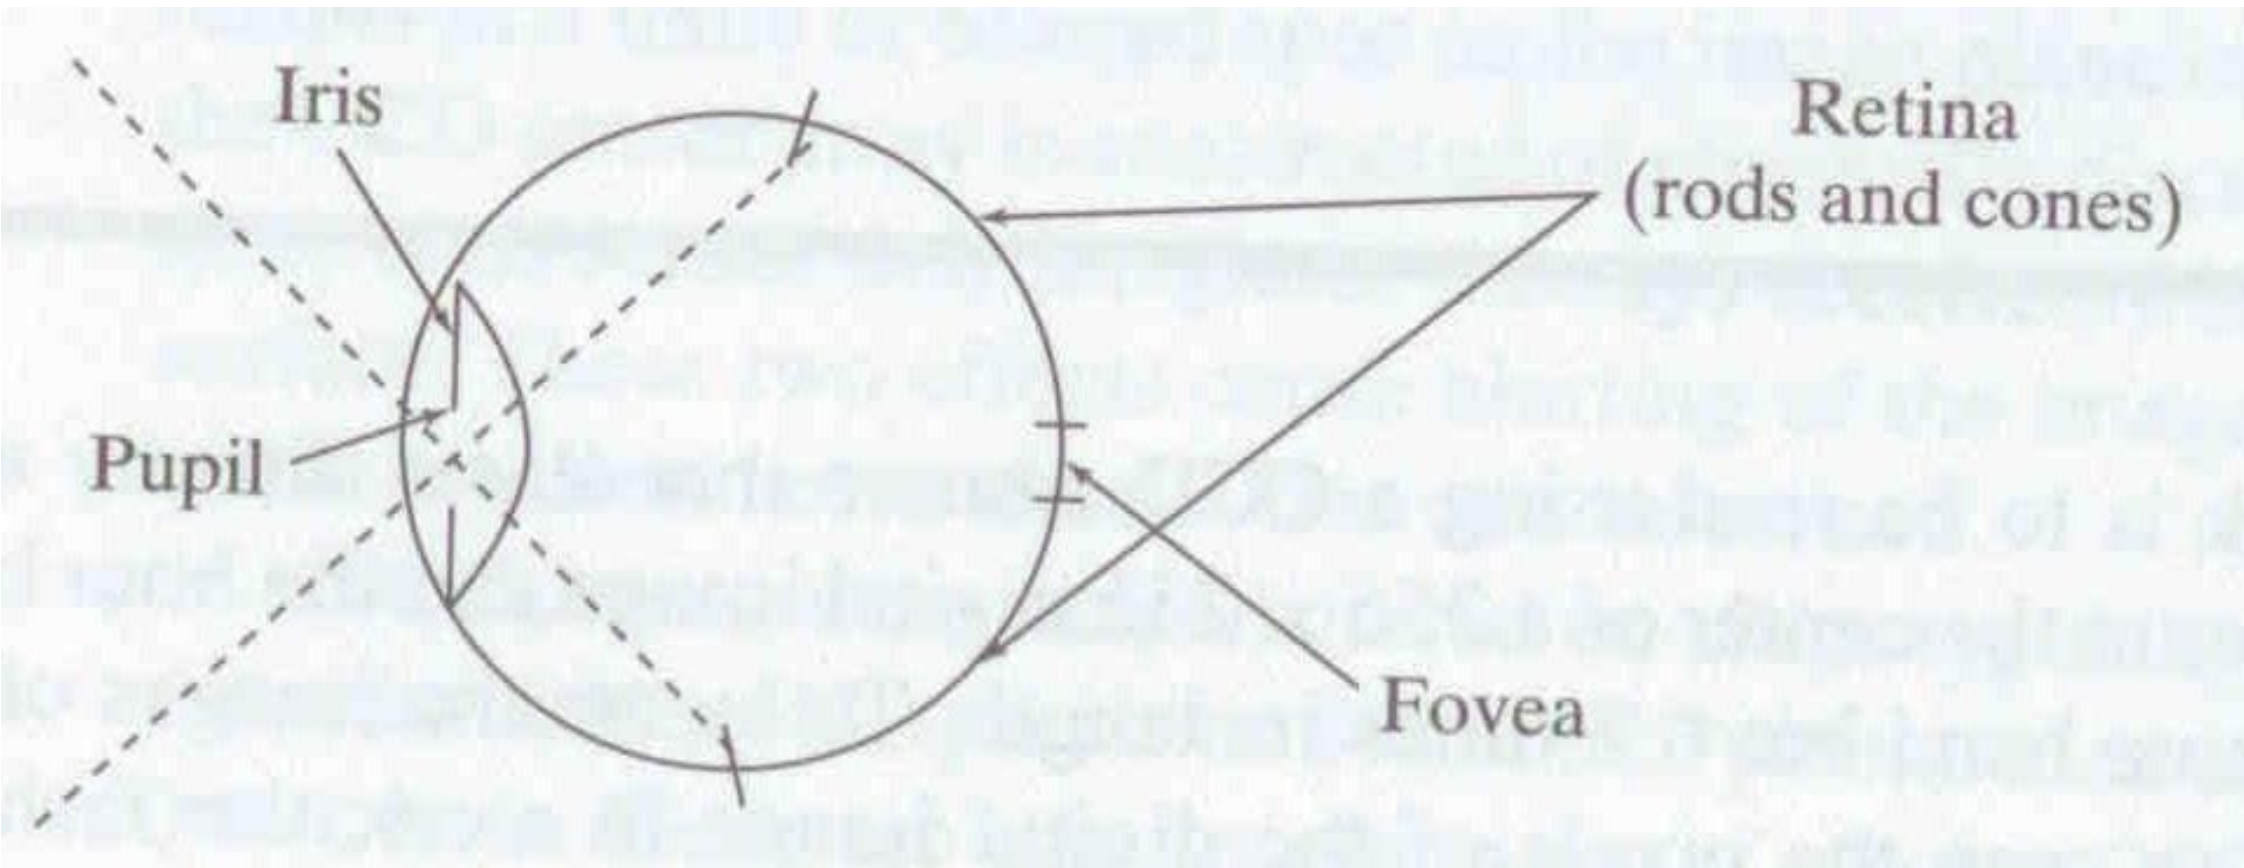

Pupil/Iris – control amount of light passing through lens

Retina - contains sensor cells, where image is formed

Fovea – highest concentration of cones

Fig from Shapiro and Stockman

Human stereopsis: disparity

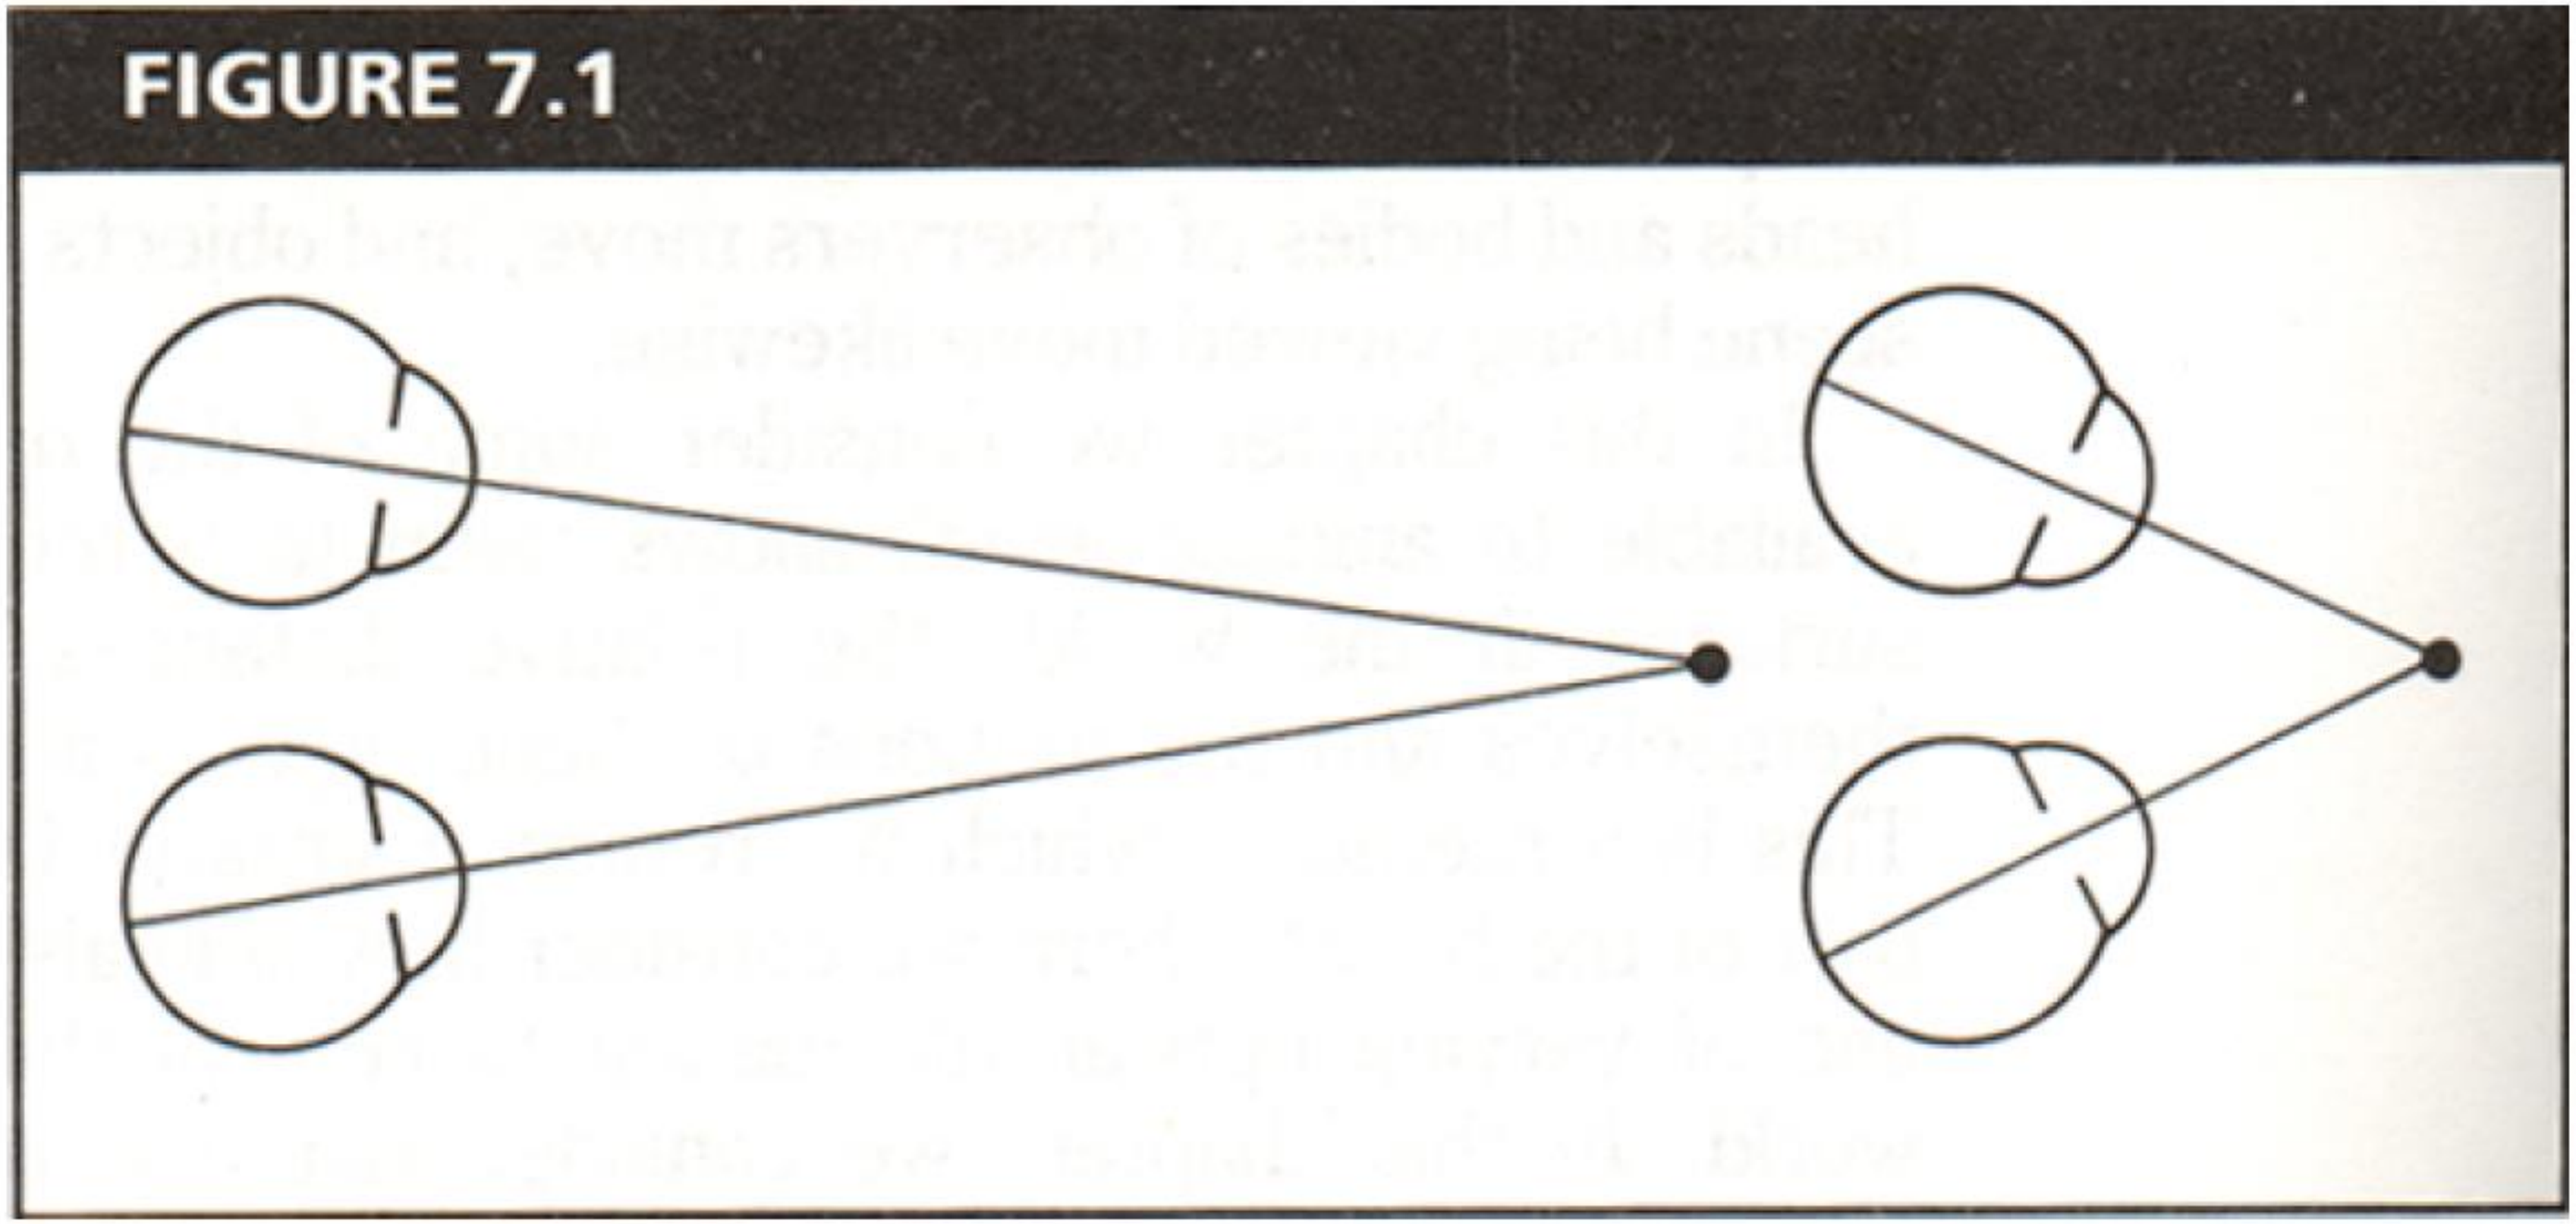

From Bruce and Green, Visual Perception, Physiology, Psychology and Ecology

Human eyes **fixate** on point in space – rotate so that corresponding images form in centers of fovea.

Human stereopsis: disparity

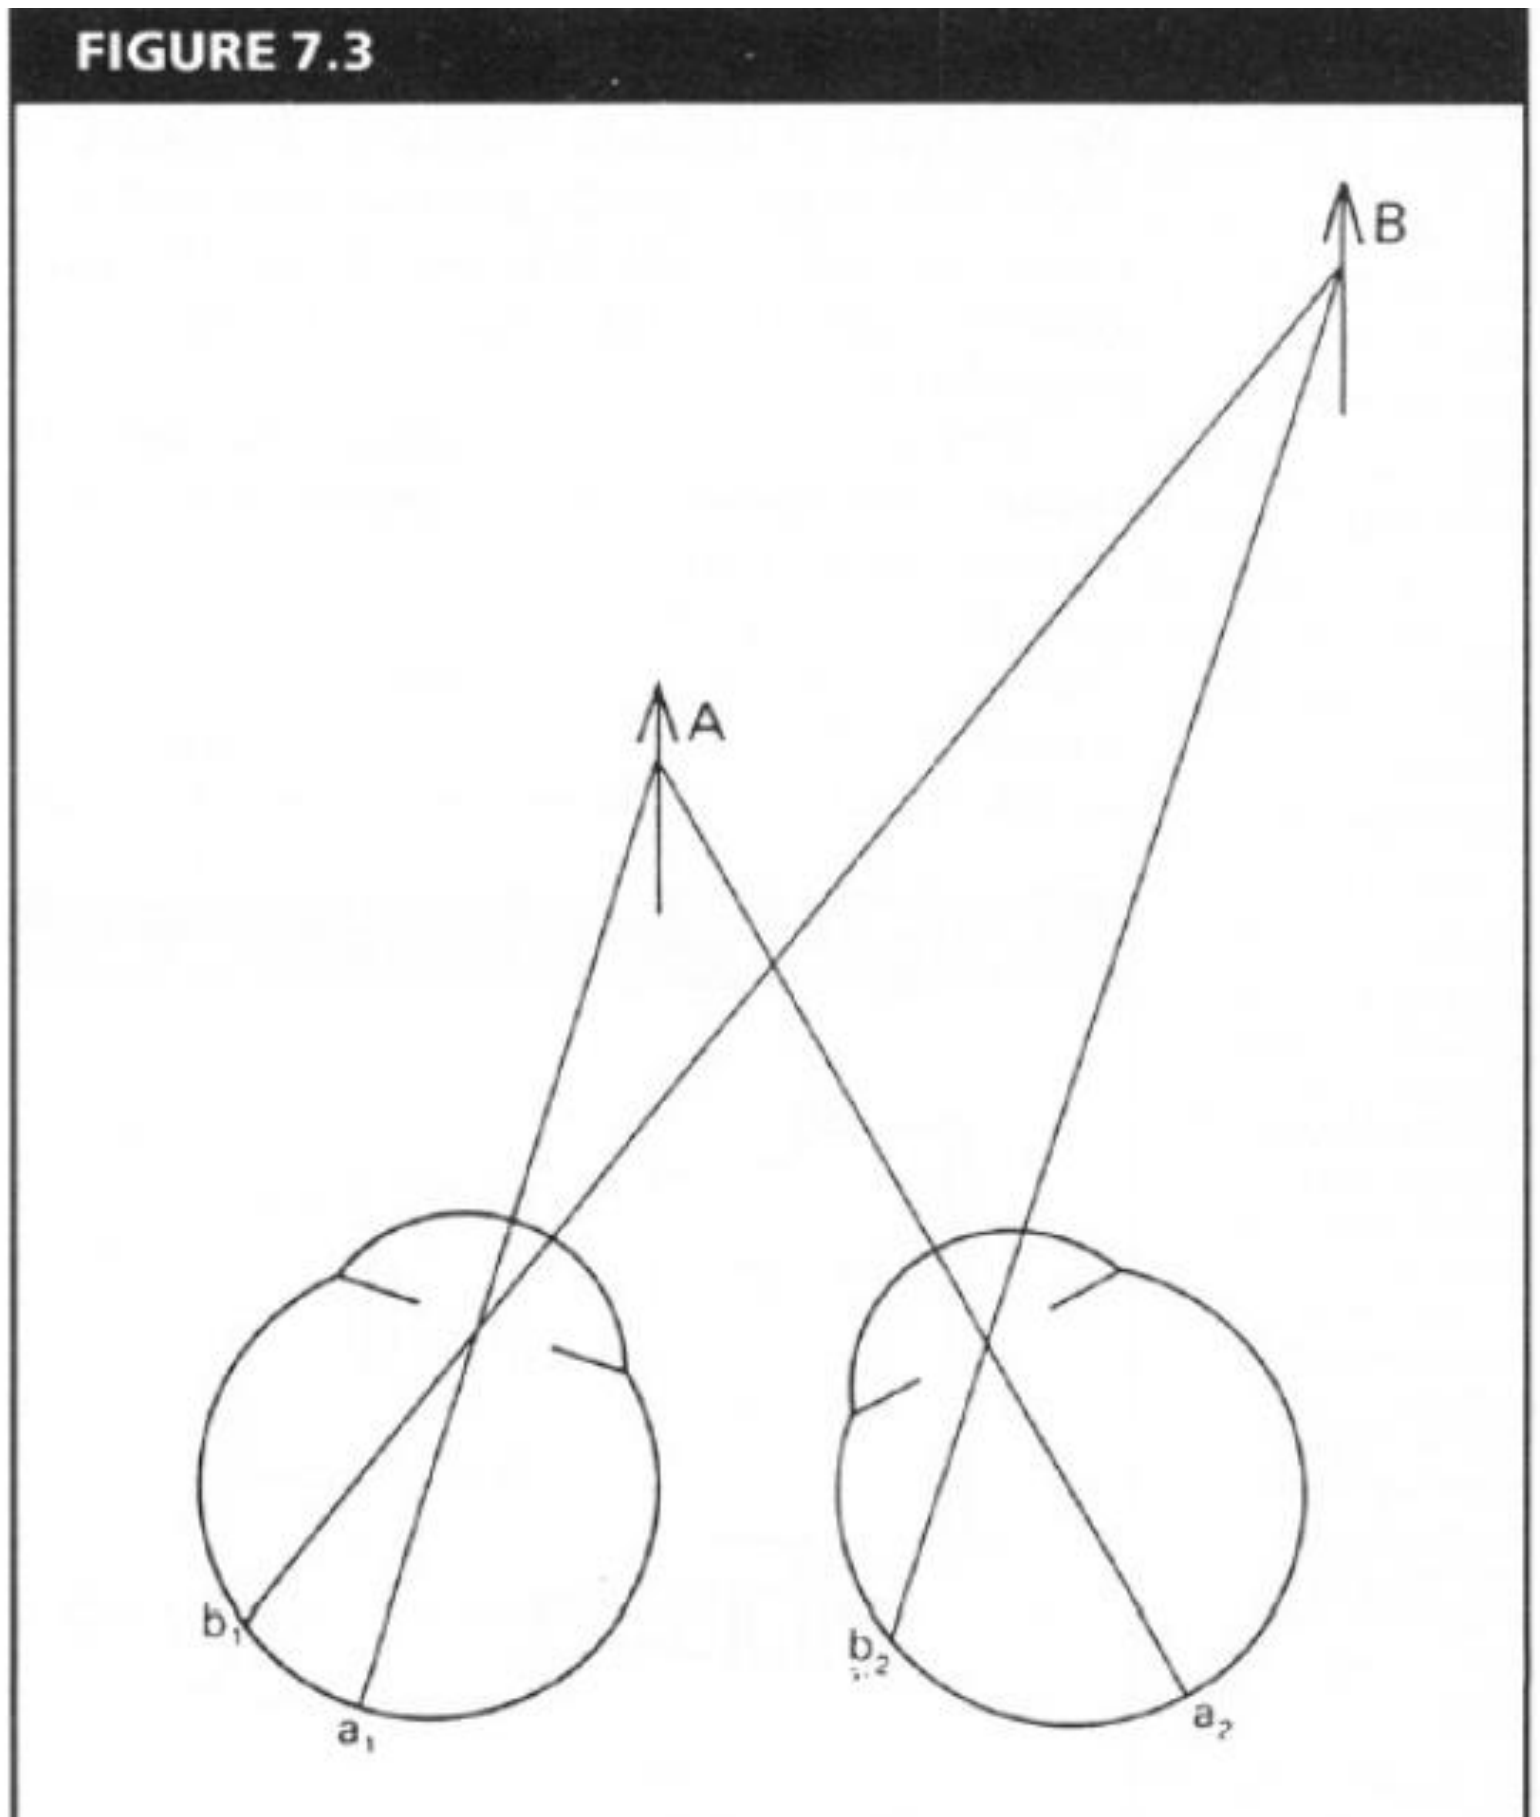

From Bruce and Green, Visual Perception, Physiology, Psychology and Ecology

Disparity occurs when eyes fixate on one object; others appear at different visual angles

Adapted from David Forsyth, UC Berkeley

Stereo photography and stereo viewers

Take two pictures of the same subject from two slightly different viewpoints and display so that each eye sees only one of the images.

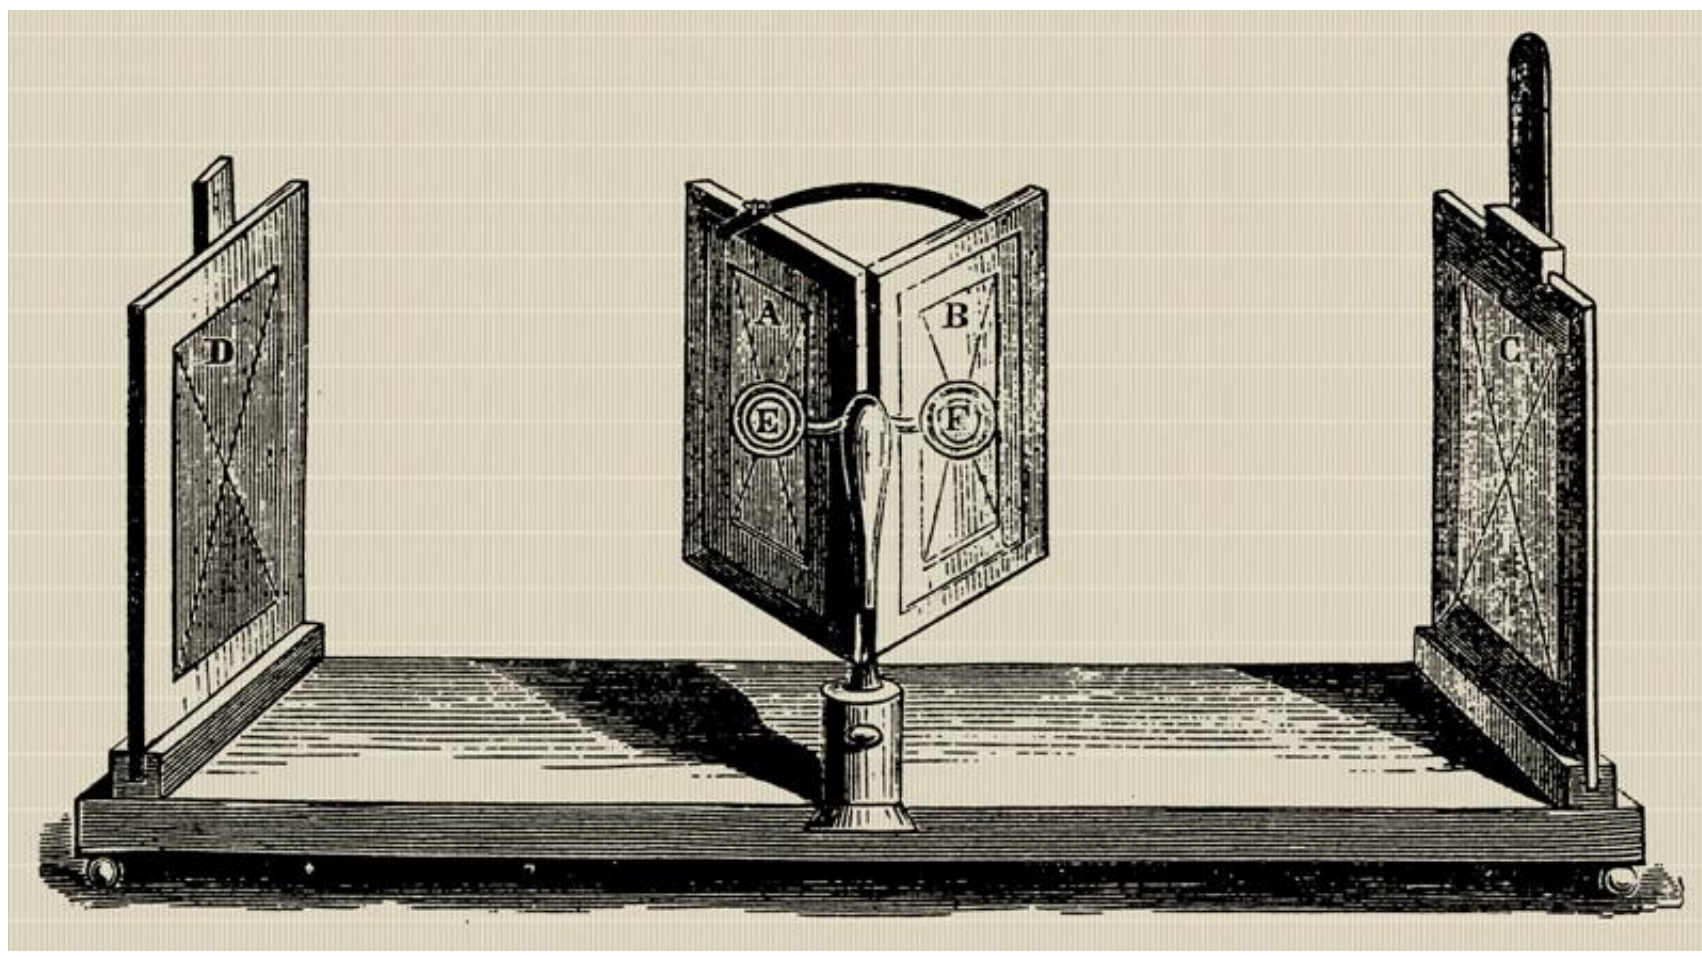

Invented by Sir Charles Wheatstone, 1838

Image from fisher-price.com

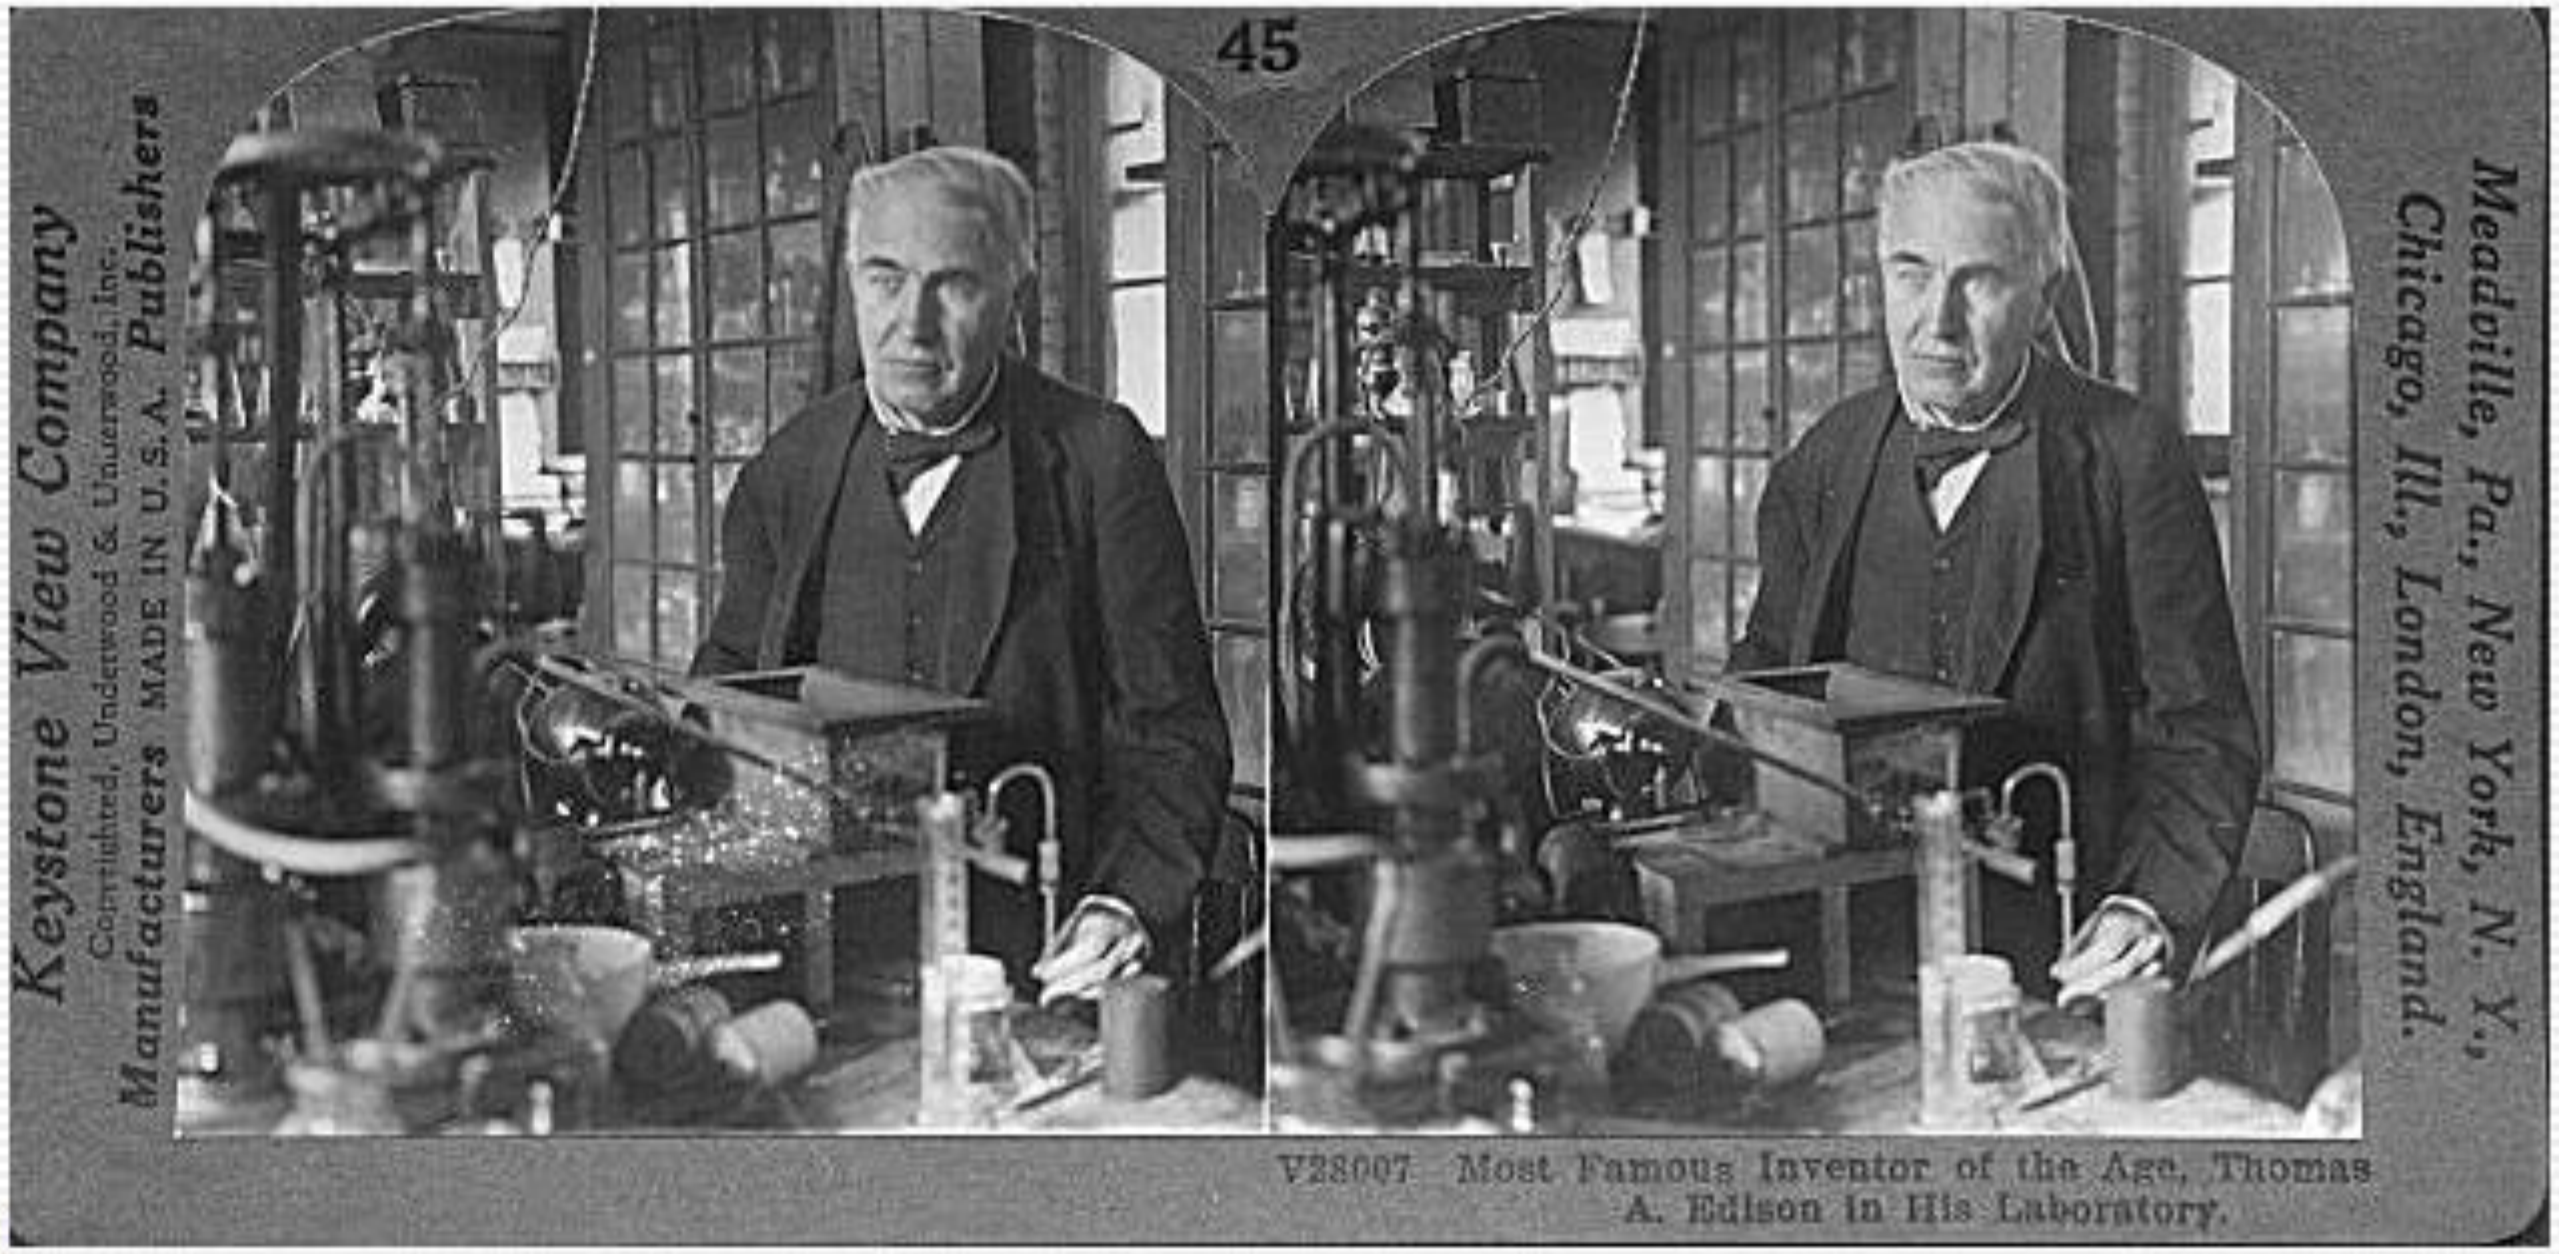

http://www.johnsonshawmuseum.org

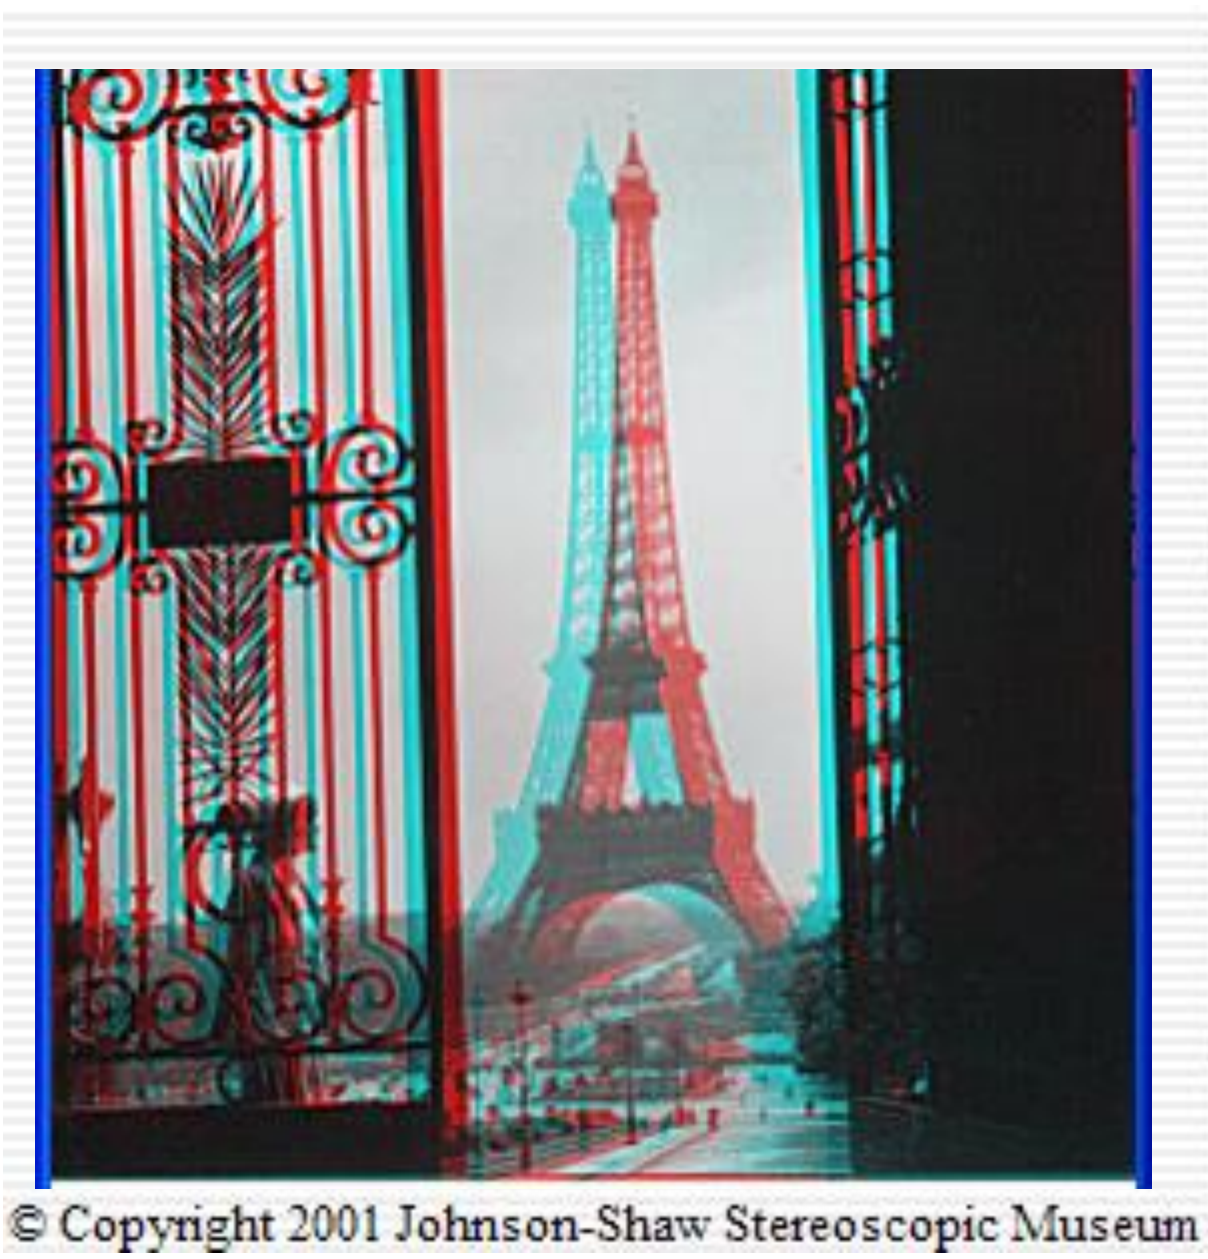

http://www.johnsonshawmuseum.org

Public Library, Stereoscopic Looking Room, Chicago, by Phillips, 1923

http://www.well.com/~jimg/stereo/stereo_list.html

http://www.well.com/~jimg/stereo/stereo_list.html

Autostereograms

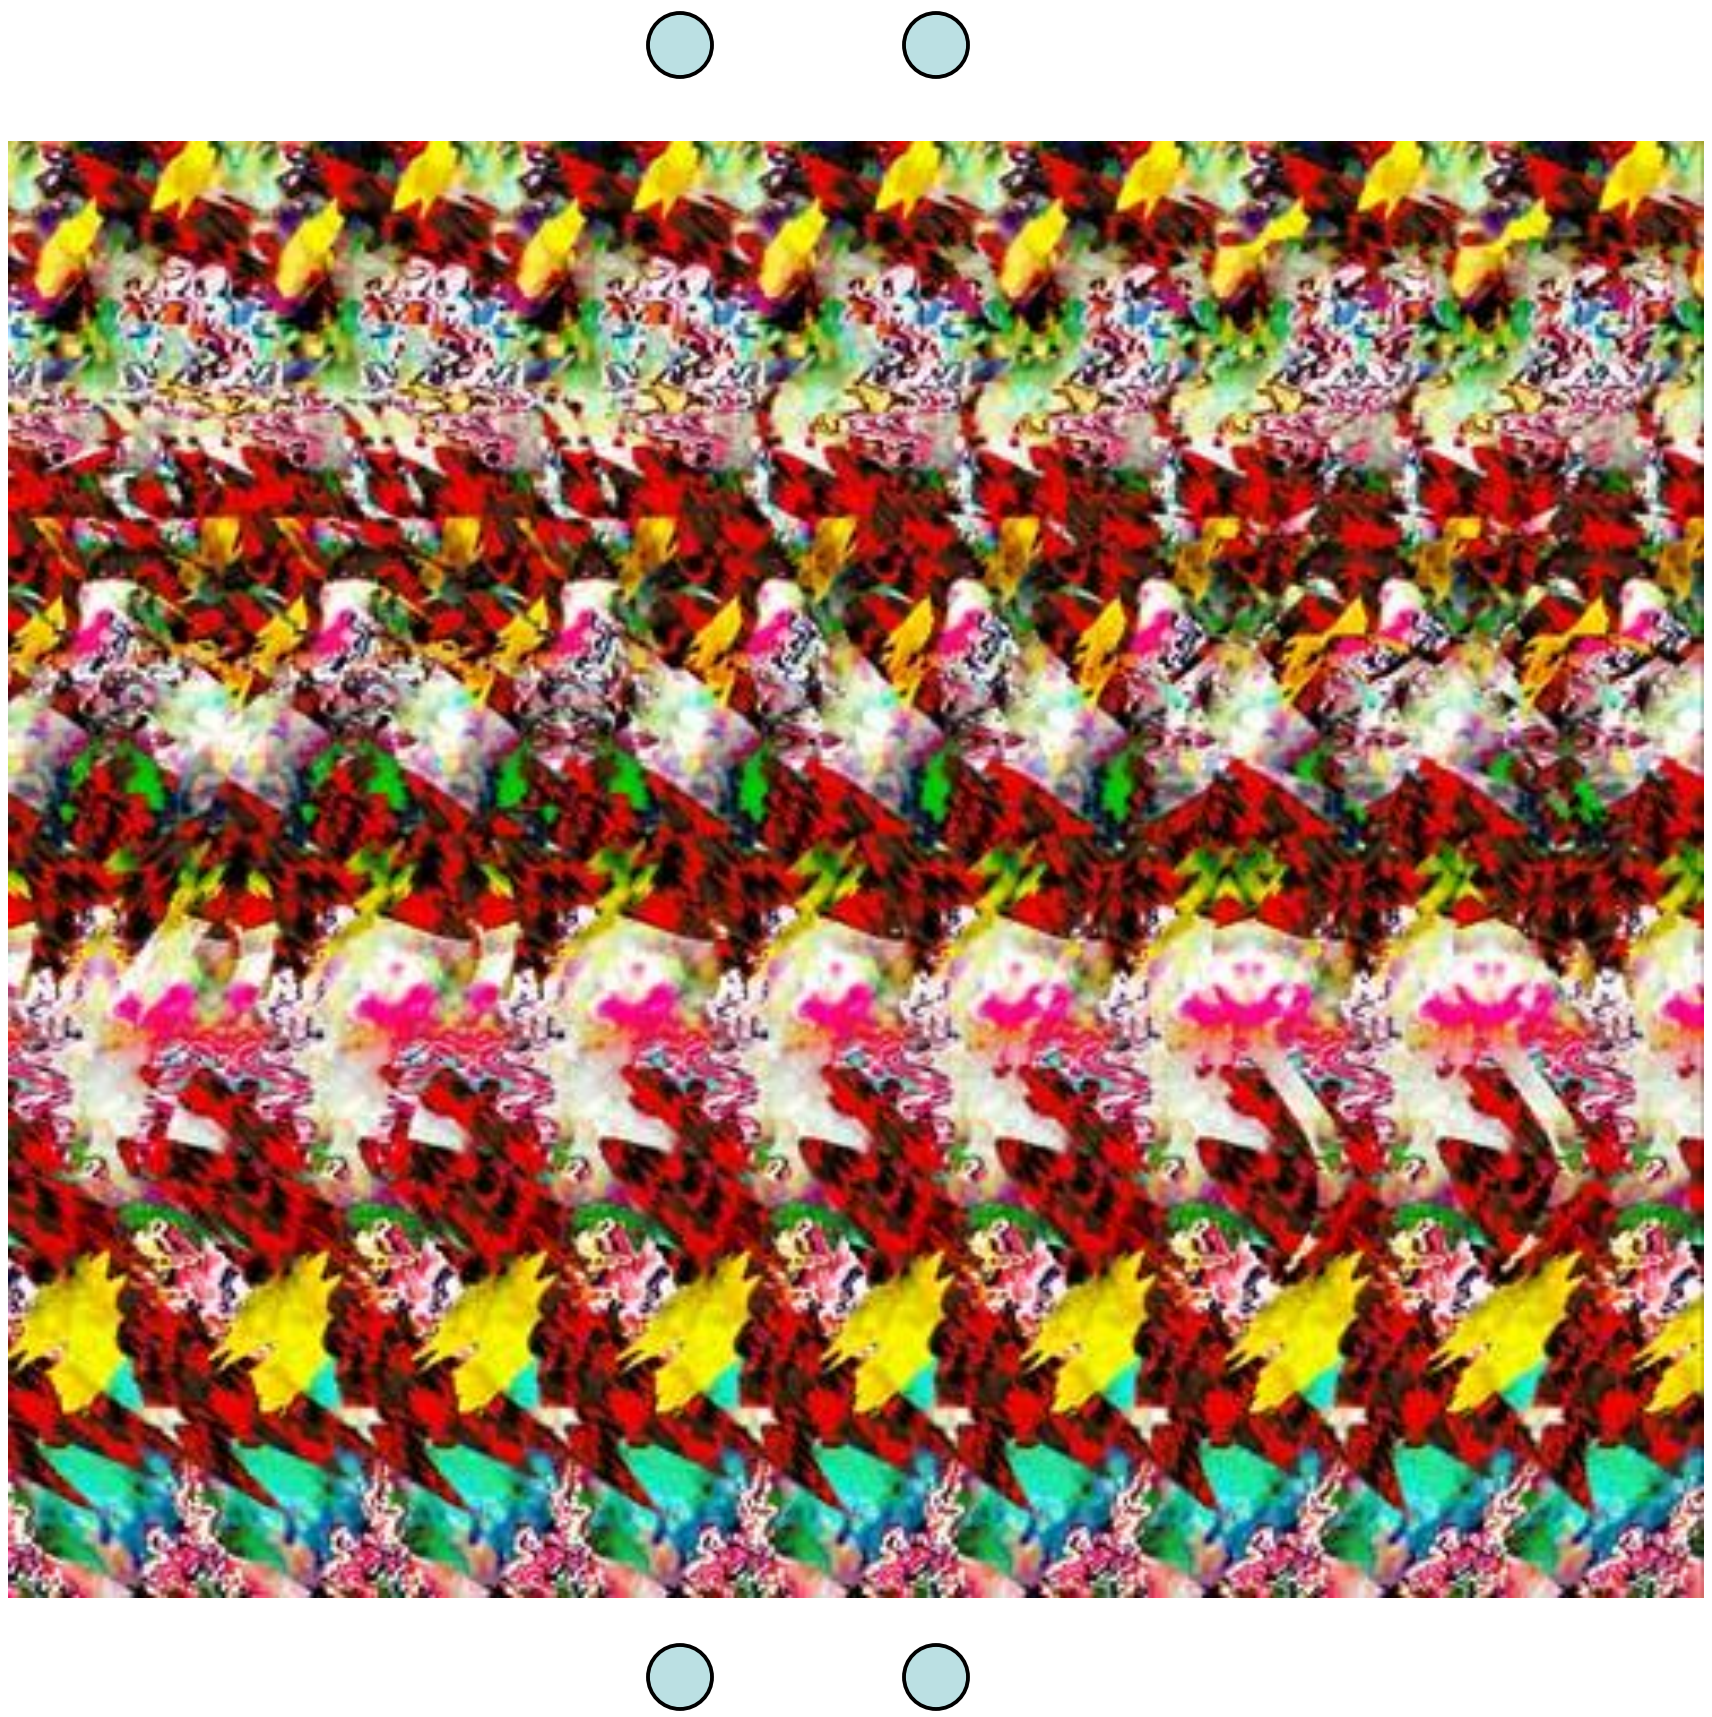

Exploit disparity as depth cue using single image.

(Single image random dot stereogram, Single image stereogram)

Images from magiceye.com

Autostereograms

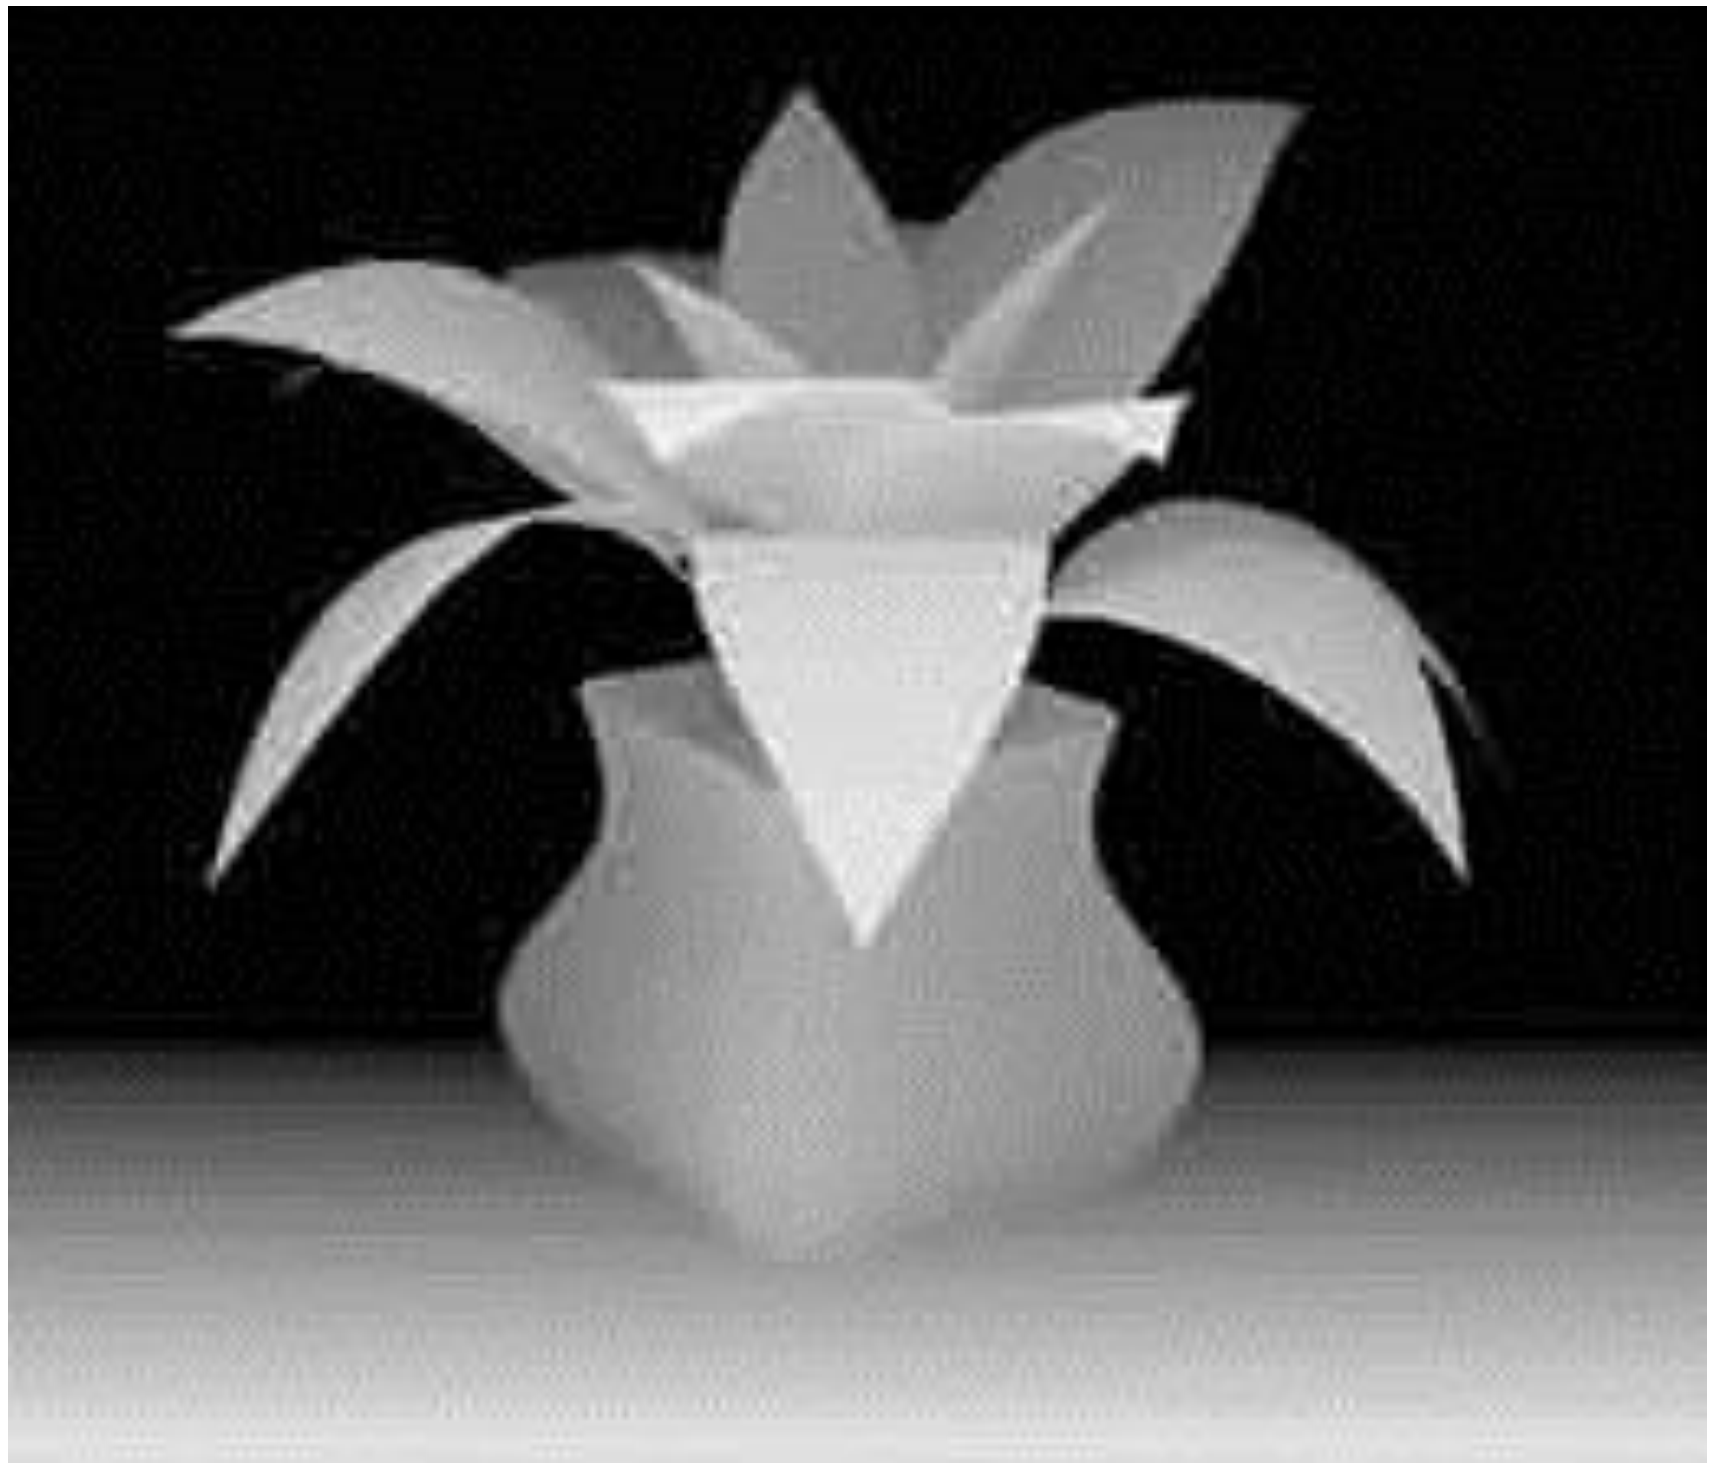

Images from magiceye.com

Estimating depth with stereo

- **Stereo**: shape from "motion" between two views
- We'll need to consider:
  - Info on camera pose ("calibration")
  - Image point correspondences

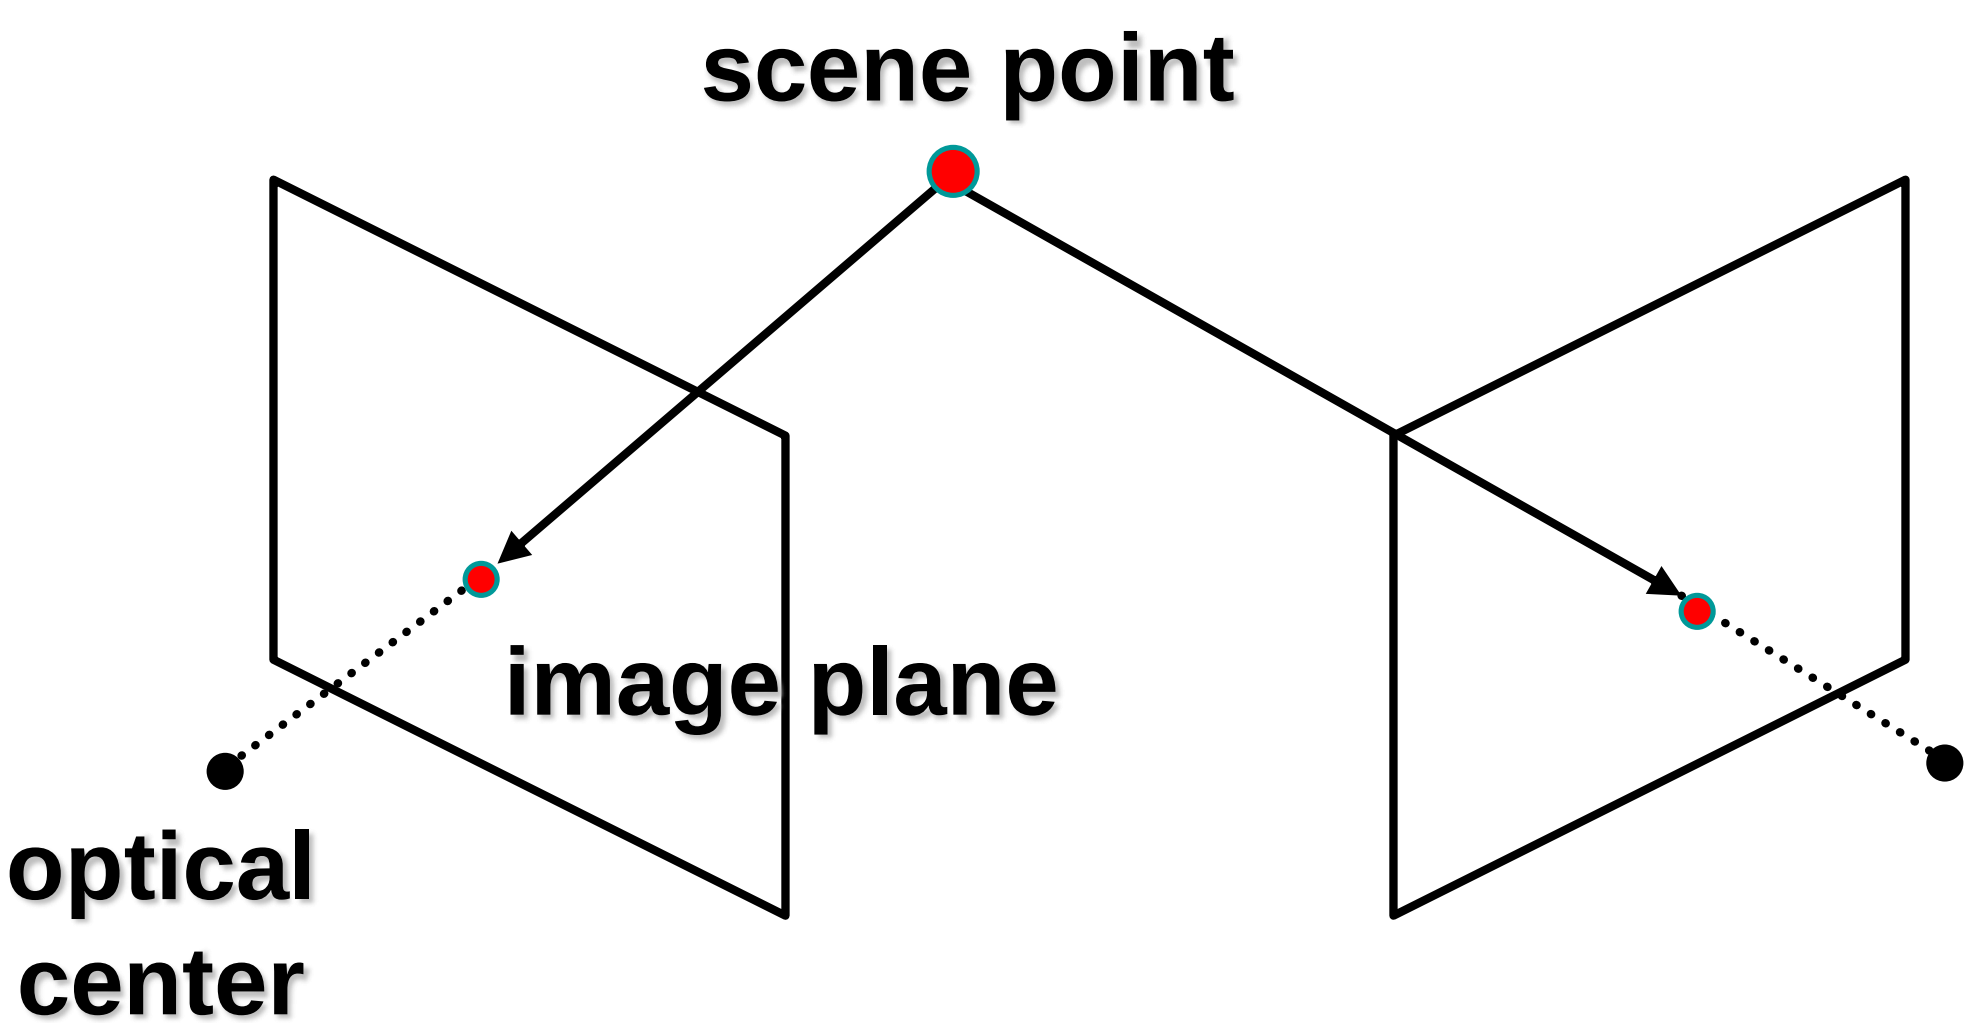

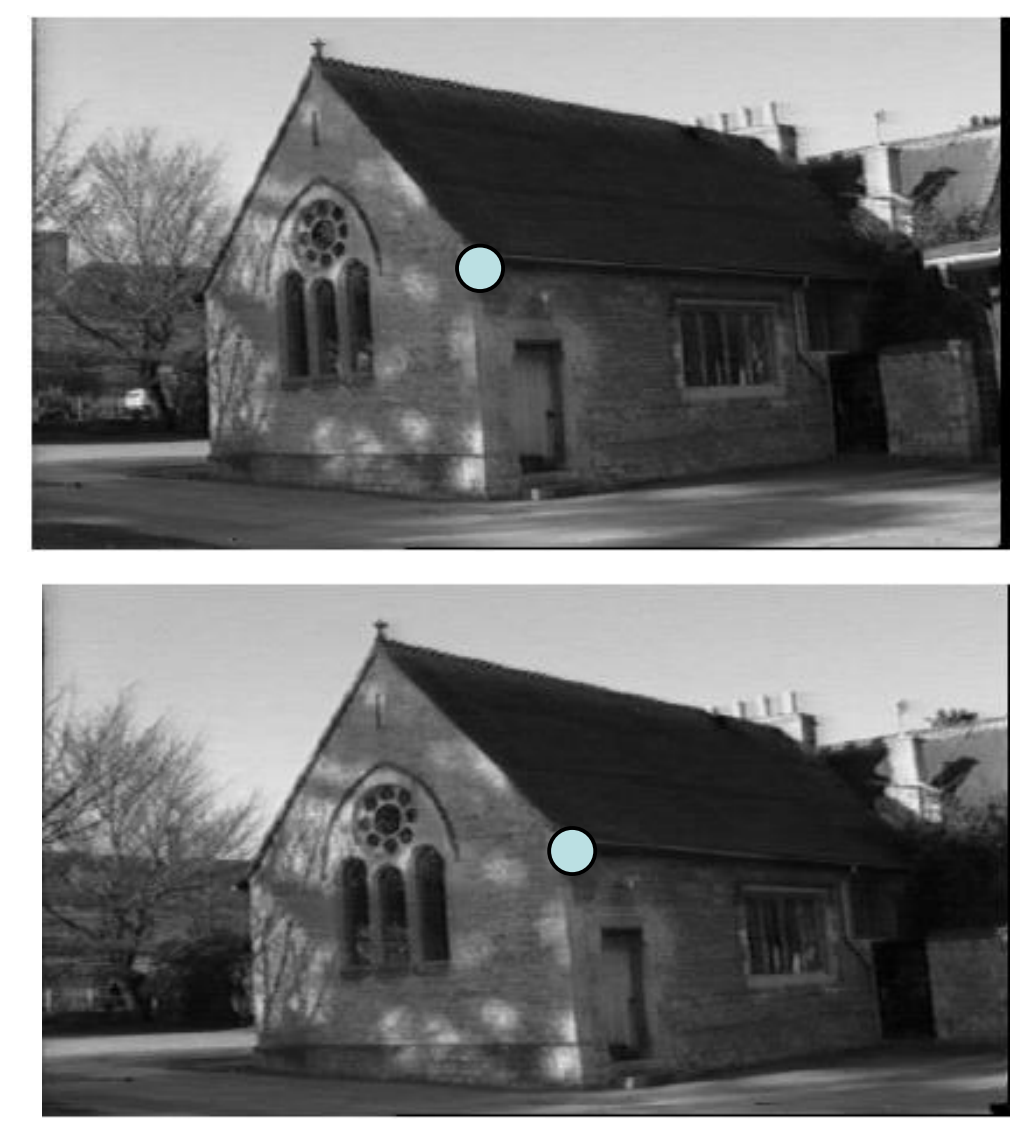

Stereo vision

Two cameras, simultaneous views

Single moving camera and static scene

Camera parameters

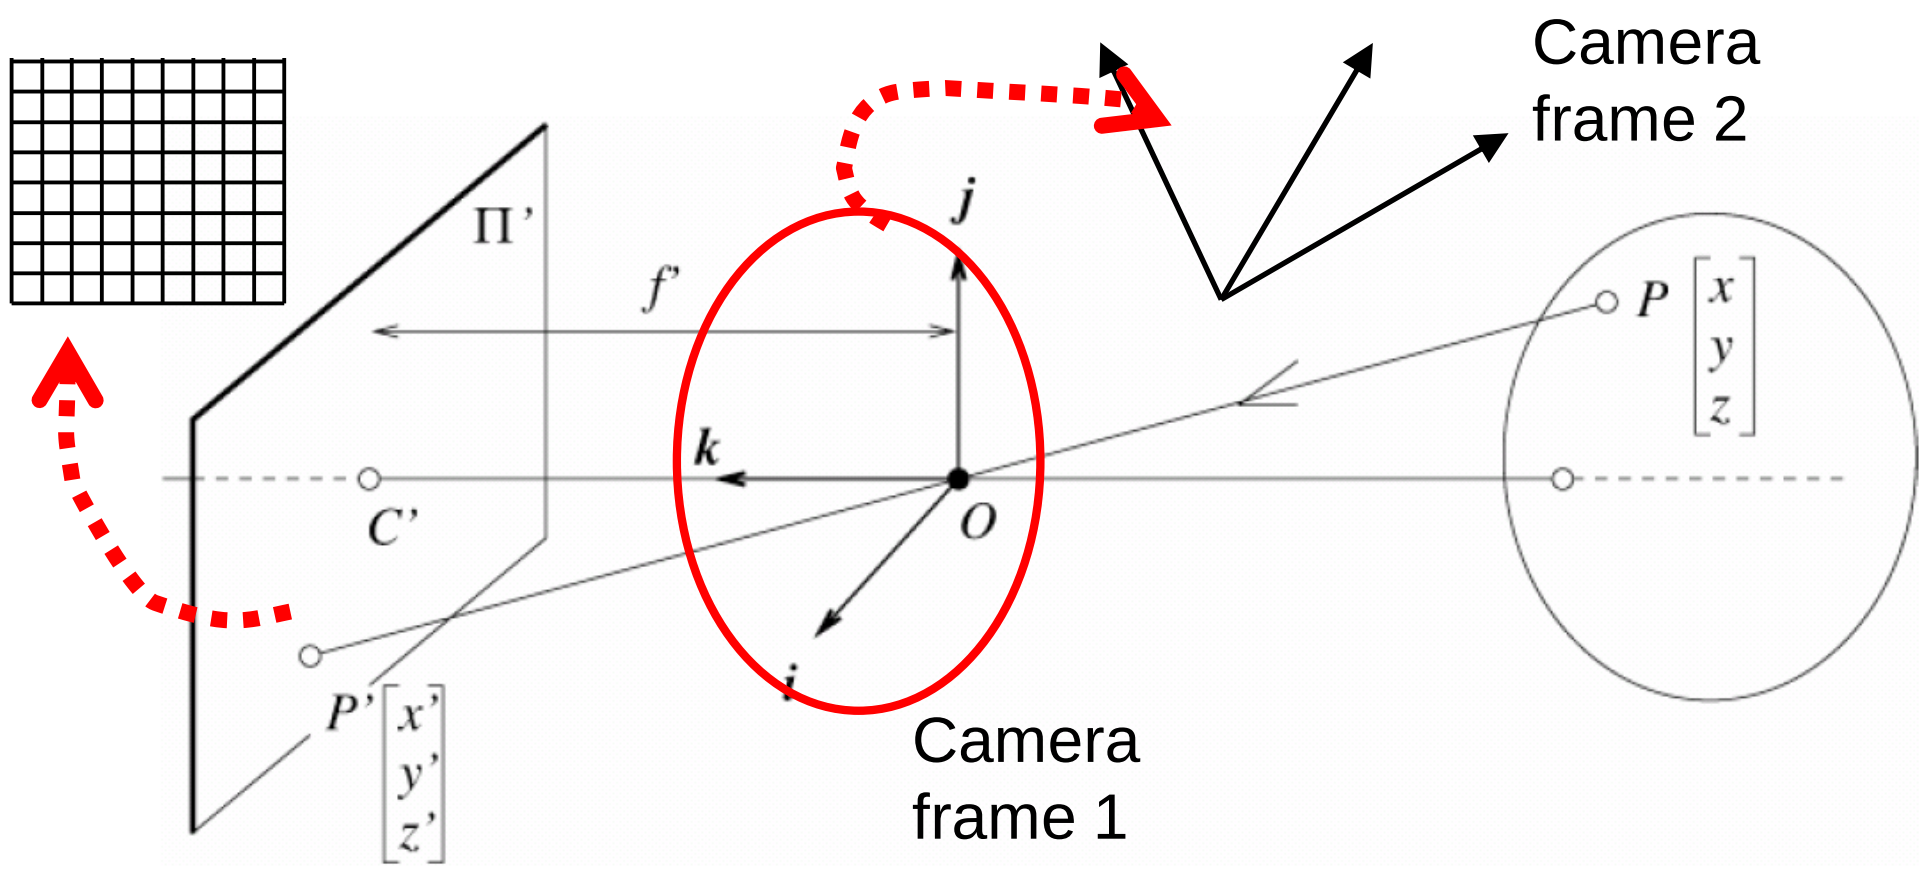

Extrinsic parameters:
Camera frame 1 ←→ Camera frame 2

Intrinsic parameters:
Image coordinates relative to camera ←→ Pixel coordinates

- *Extrinsic* params: rotation matrix and translation vector
- *Intrinsic* params: focal length, pixel sizes (mm), image center point, radial distortion parameters

We'll assume for now that these parameters are given and fixed.

Geometry for a simple stereo system

- First, assuming parallel optical axes, known camera parameters (i.e., calibrated cameras):

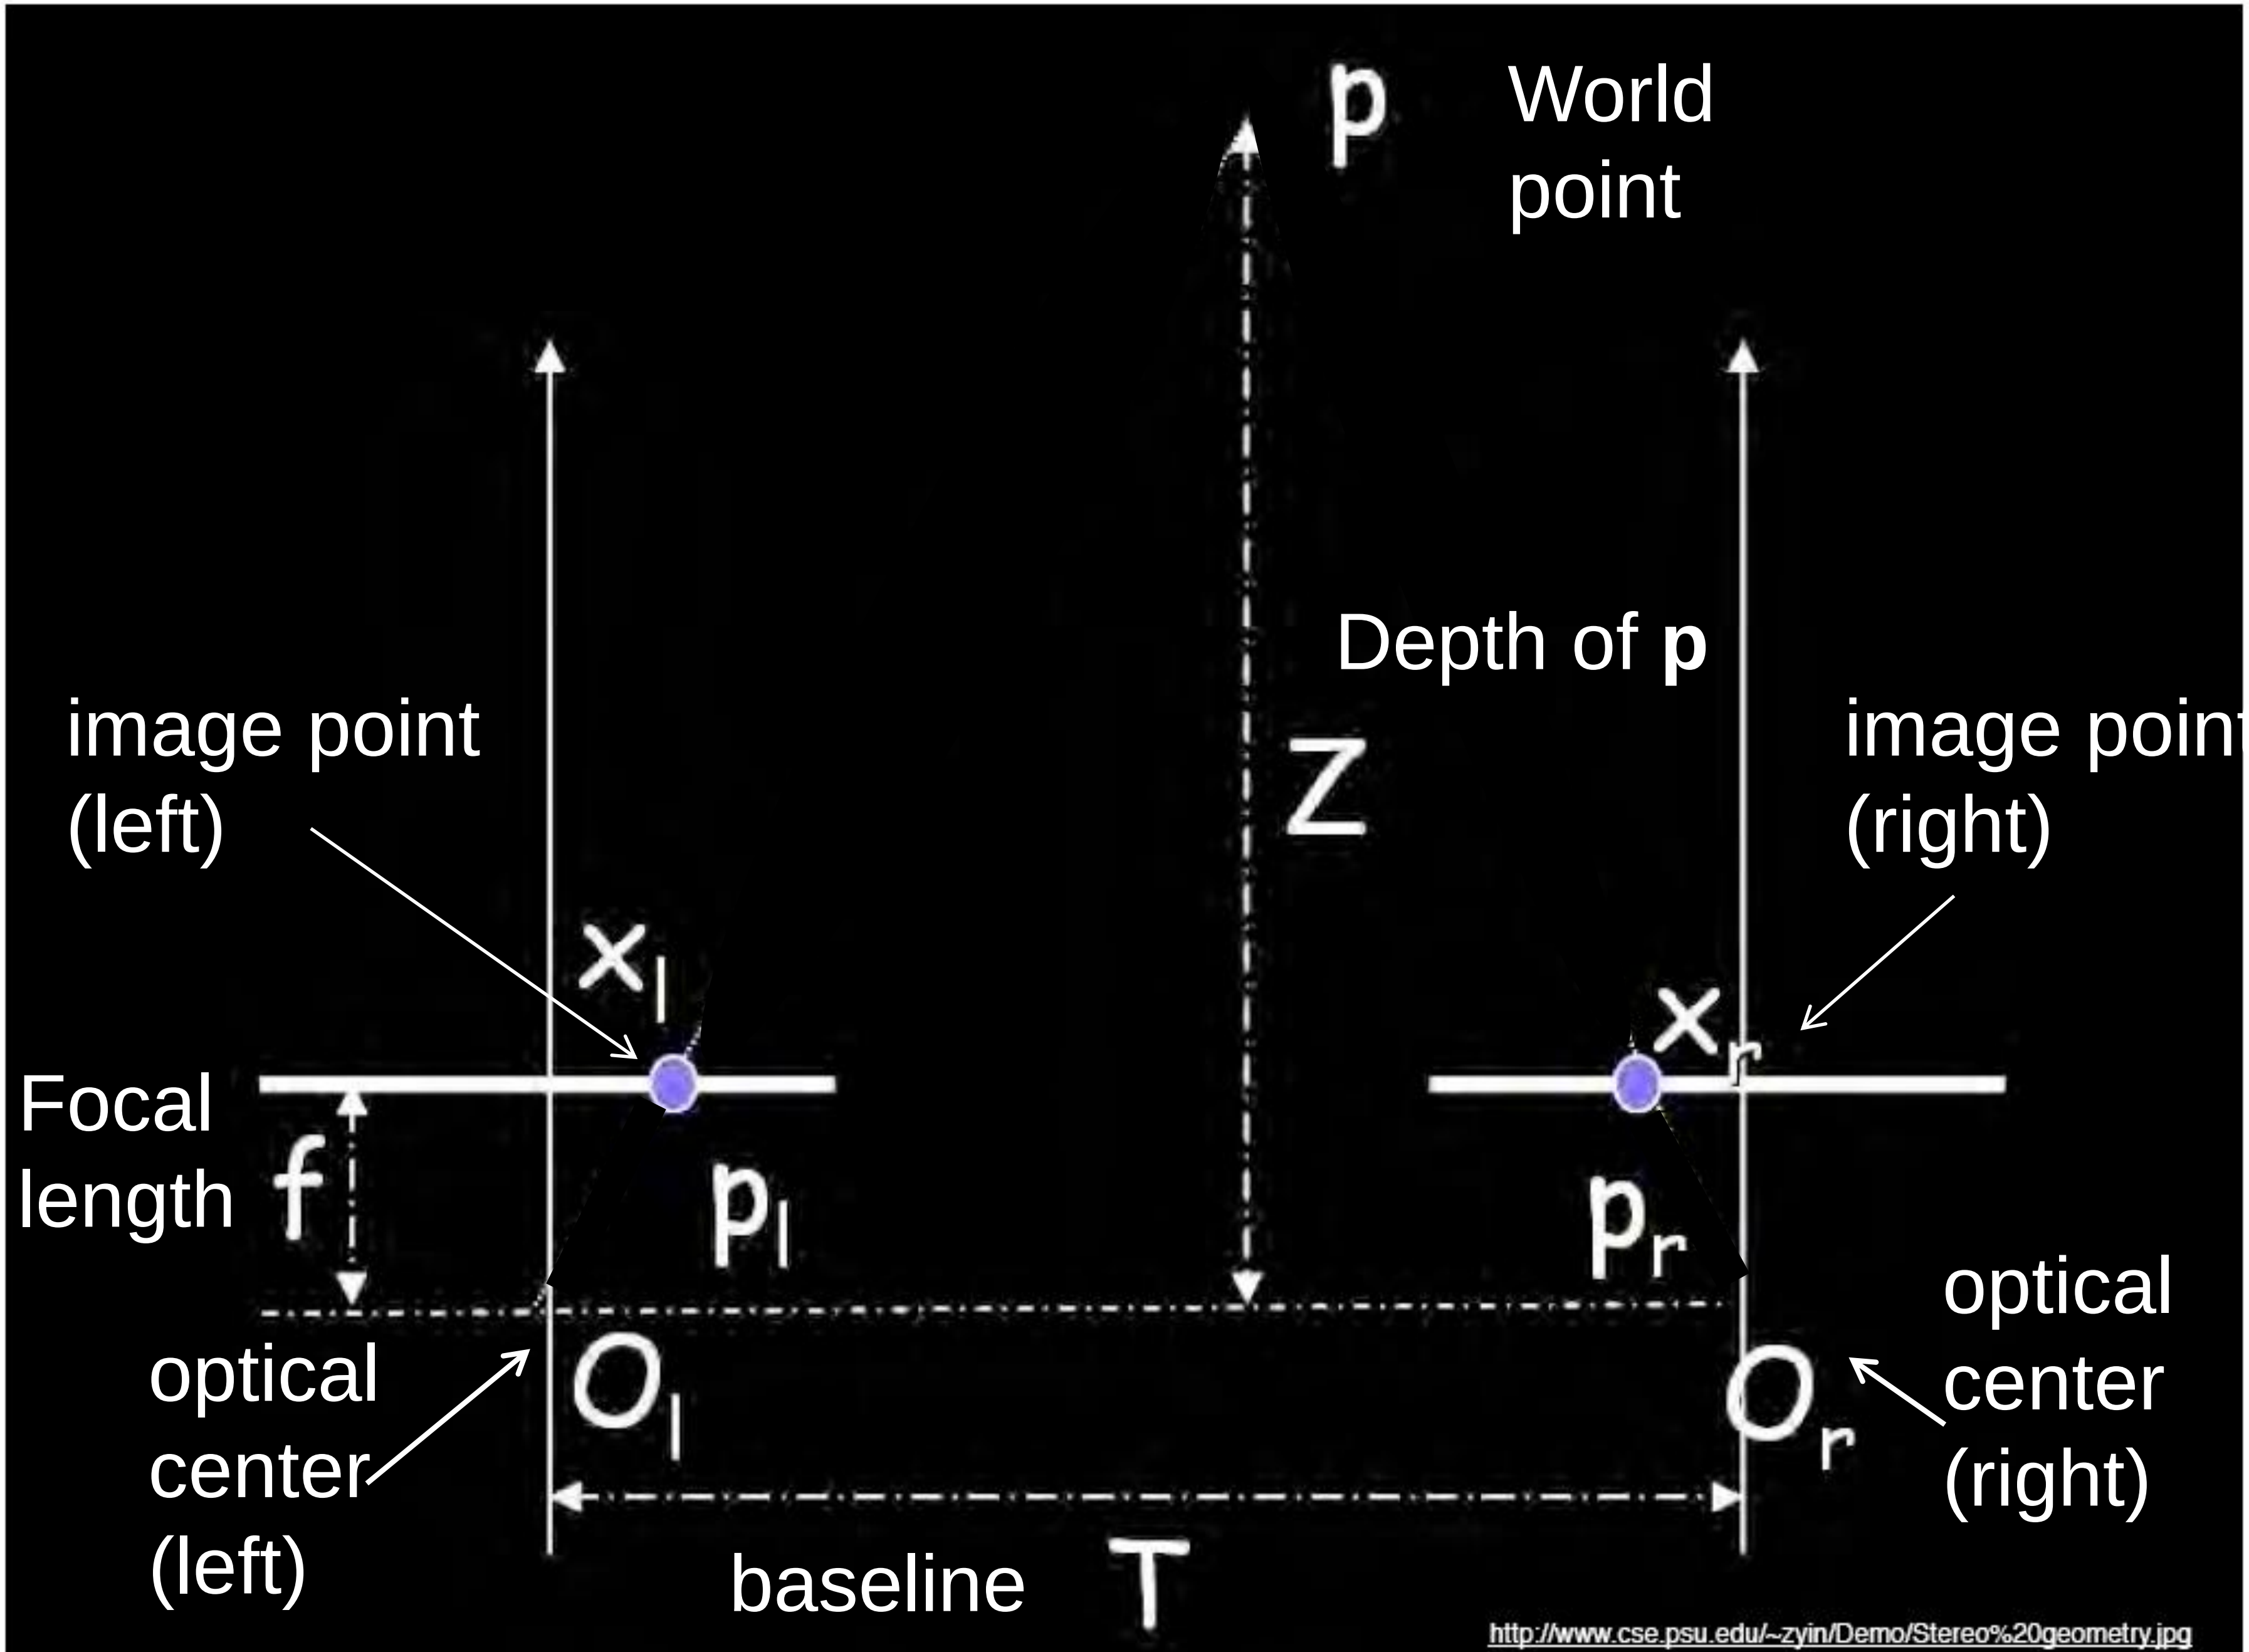

p
World
point
Depth of **p**
Z
image point
(left)
image point
(right)
x_l
x_r
Focal
length
f
p_l
p_r
optical
center
(left)
optical
center
(right)
O_l
O_r
baseline
T
http://www.cse.psu.edu/~zyin/Demo/Stereo%20geometry.jpg

Geometry for a simple stereo system

- Assume parallel optical axes, known camera parameters (i.e., calibrated cameras). **What is expression for Z?**

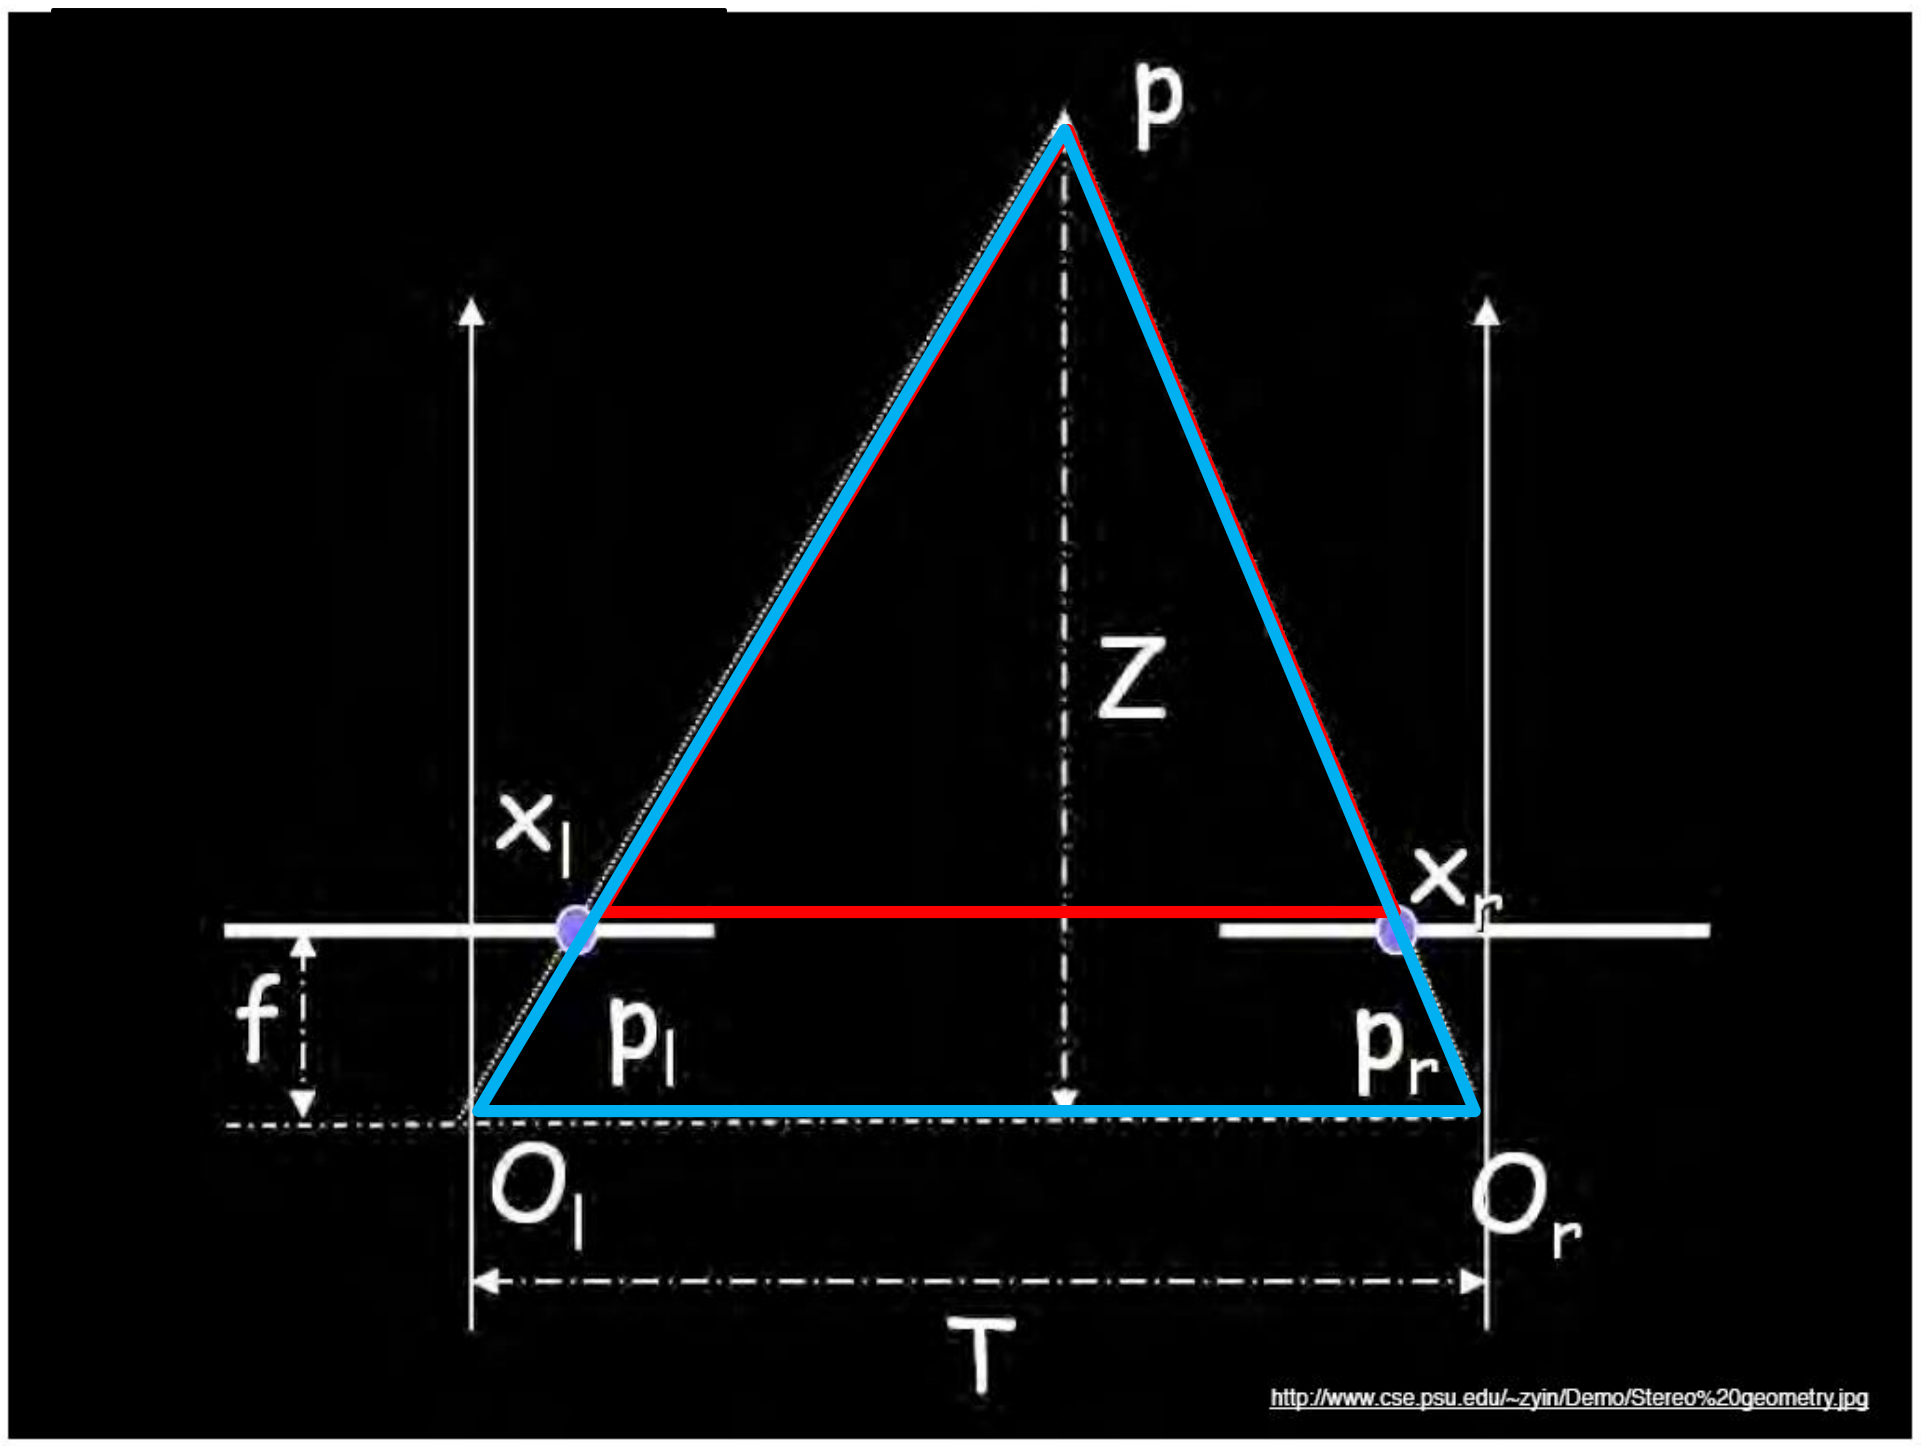

Similar triangles (p_l, P, p_r) and (O_l, P, O_r):

$$\frac{T - x_l + x_r}{Z - f} = \frac{T}{Z}$$

$$Z = f\,\frac{T}{x_l - x_r}$$

disparity

Depth from disparity

image I(x,y)

Disparity map D(x,y)

image I´(x´,y´)

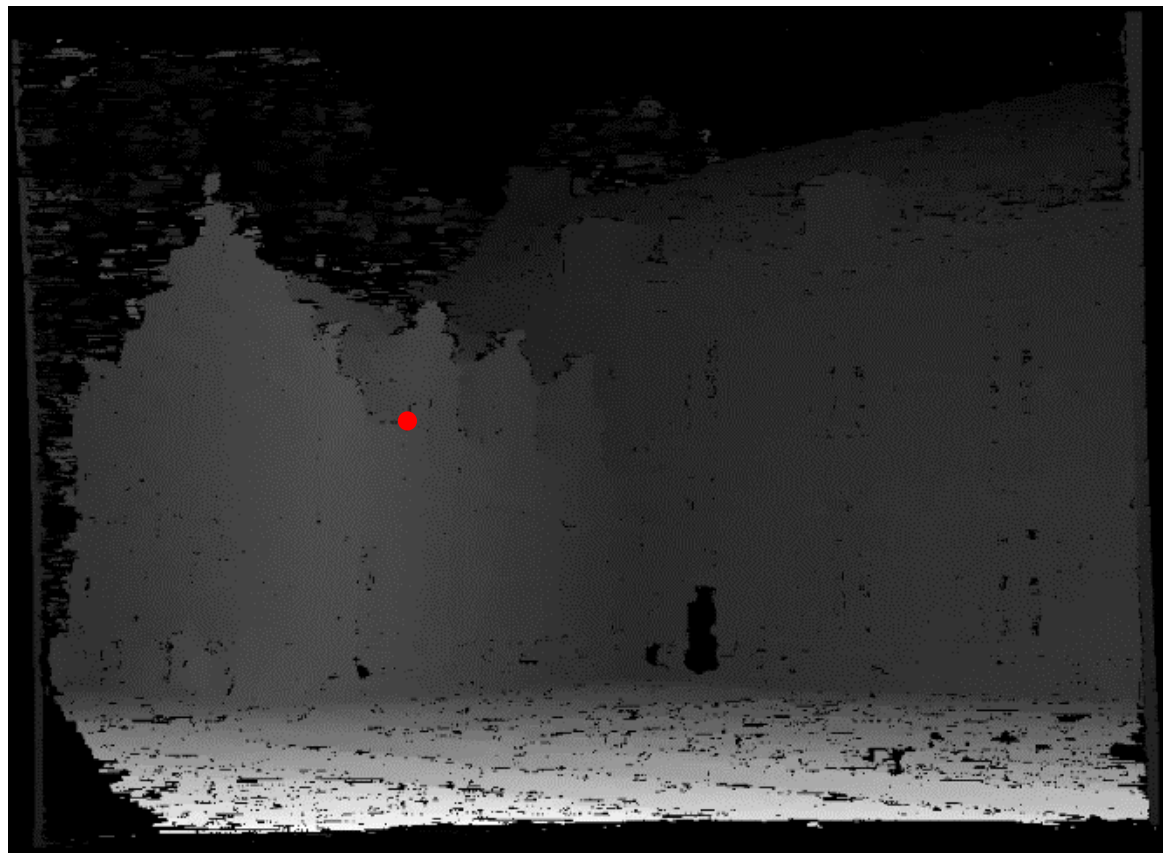

(x´,y´)=(x+D(x,y), y)

So if we could find the **corresponding points** in two images, we could **estimate relative depth**…

Where do we need to search?

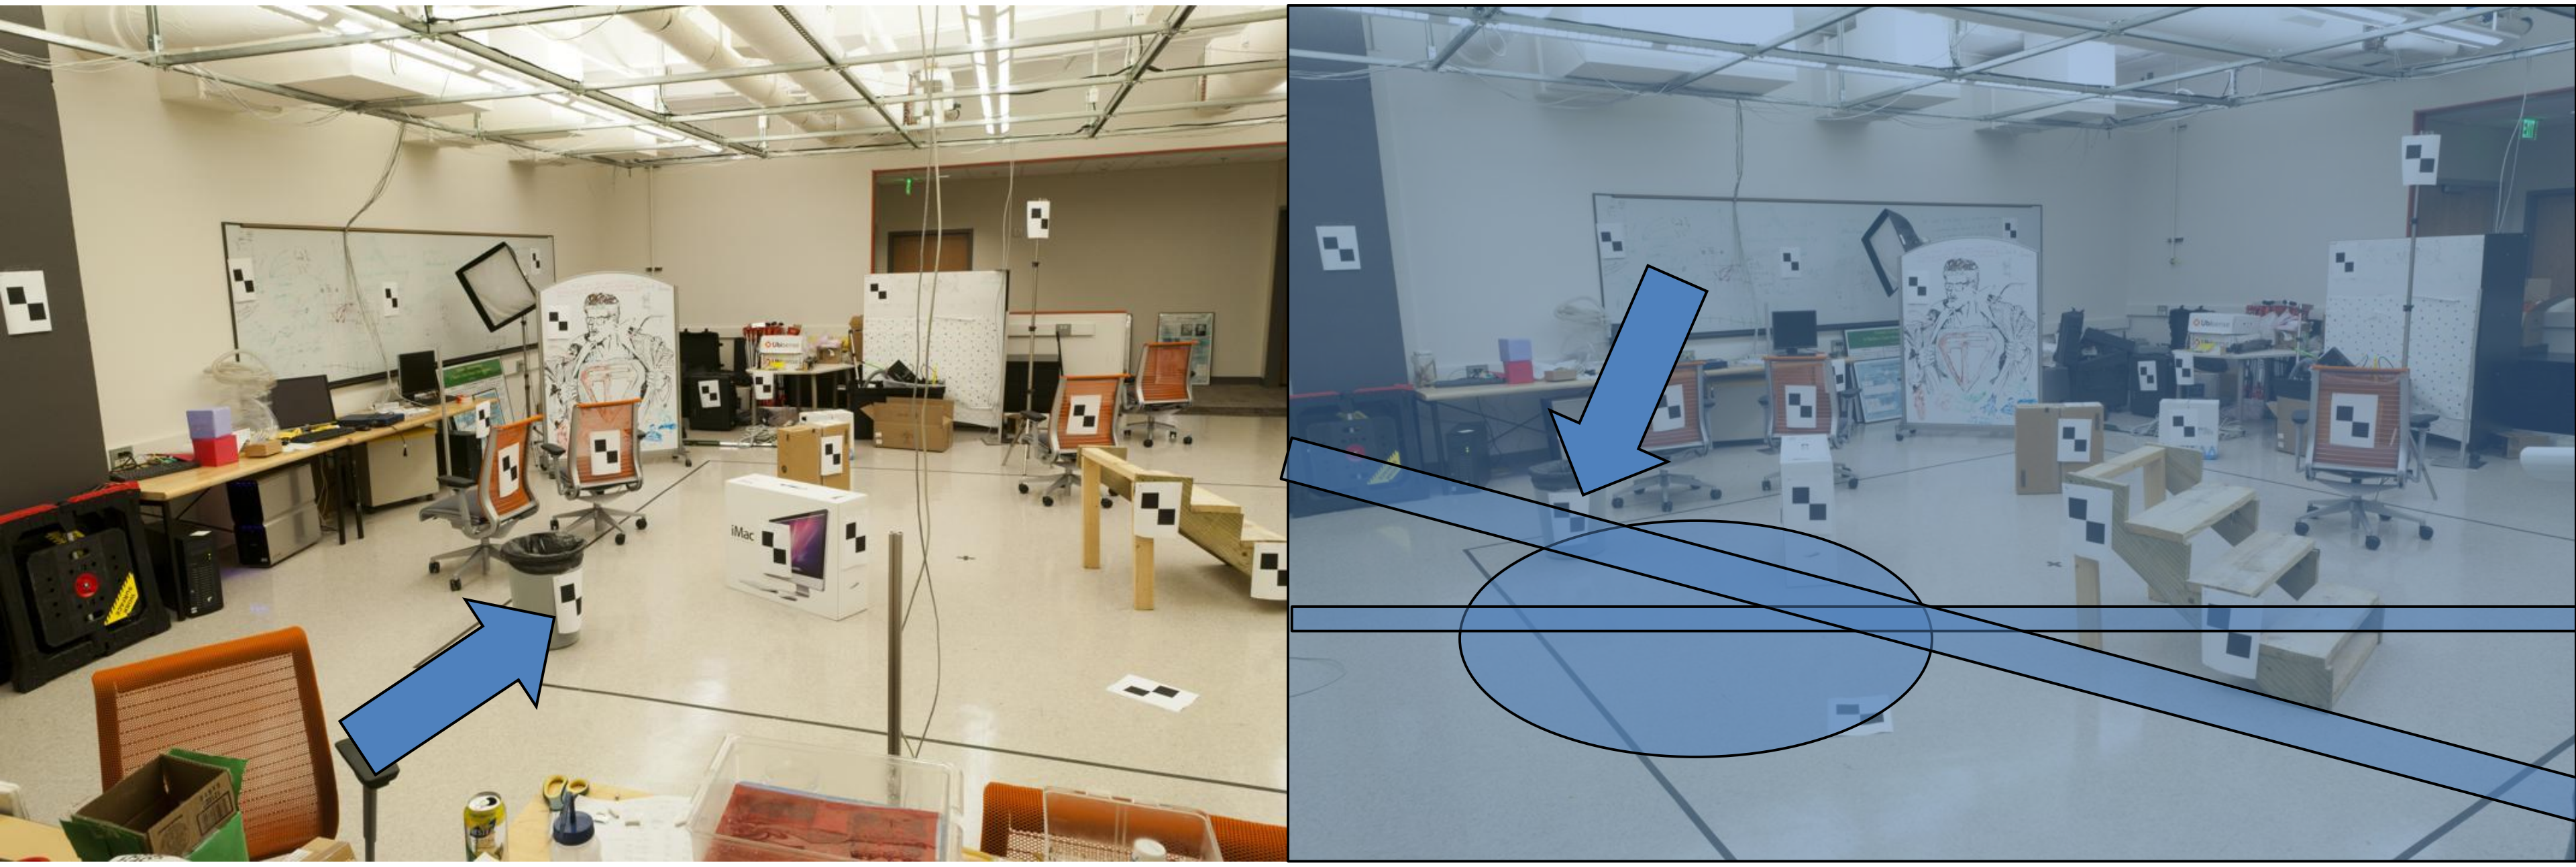

Intermission…

Casual 3D Photography

Peter Hedman
UCL

Suhib Alsisan
Facebook

Rick Szeliski
Facebook

Johannes Kopf
Facebook

This video has an audio narration

Where do we need to search?

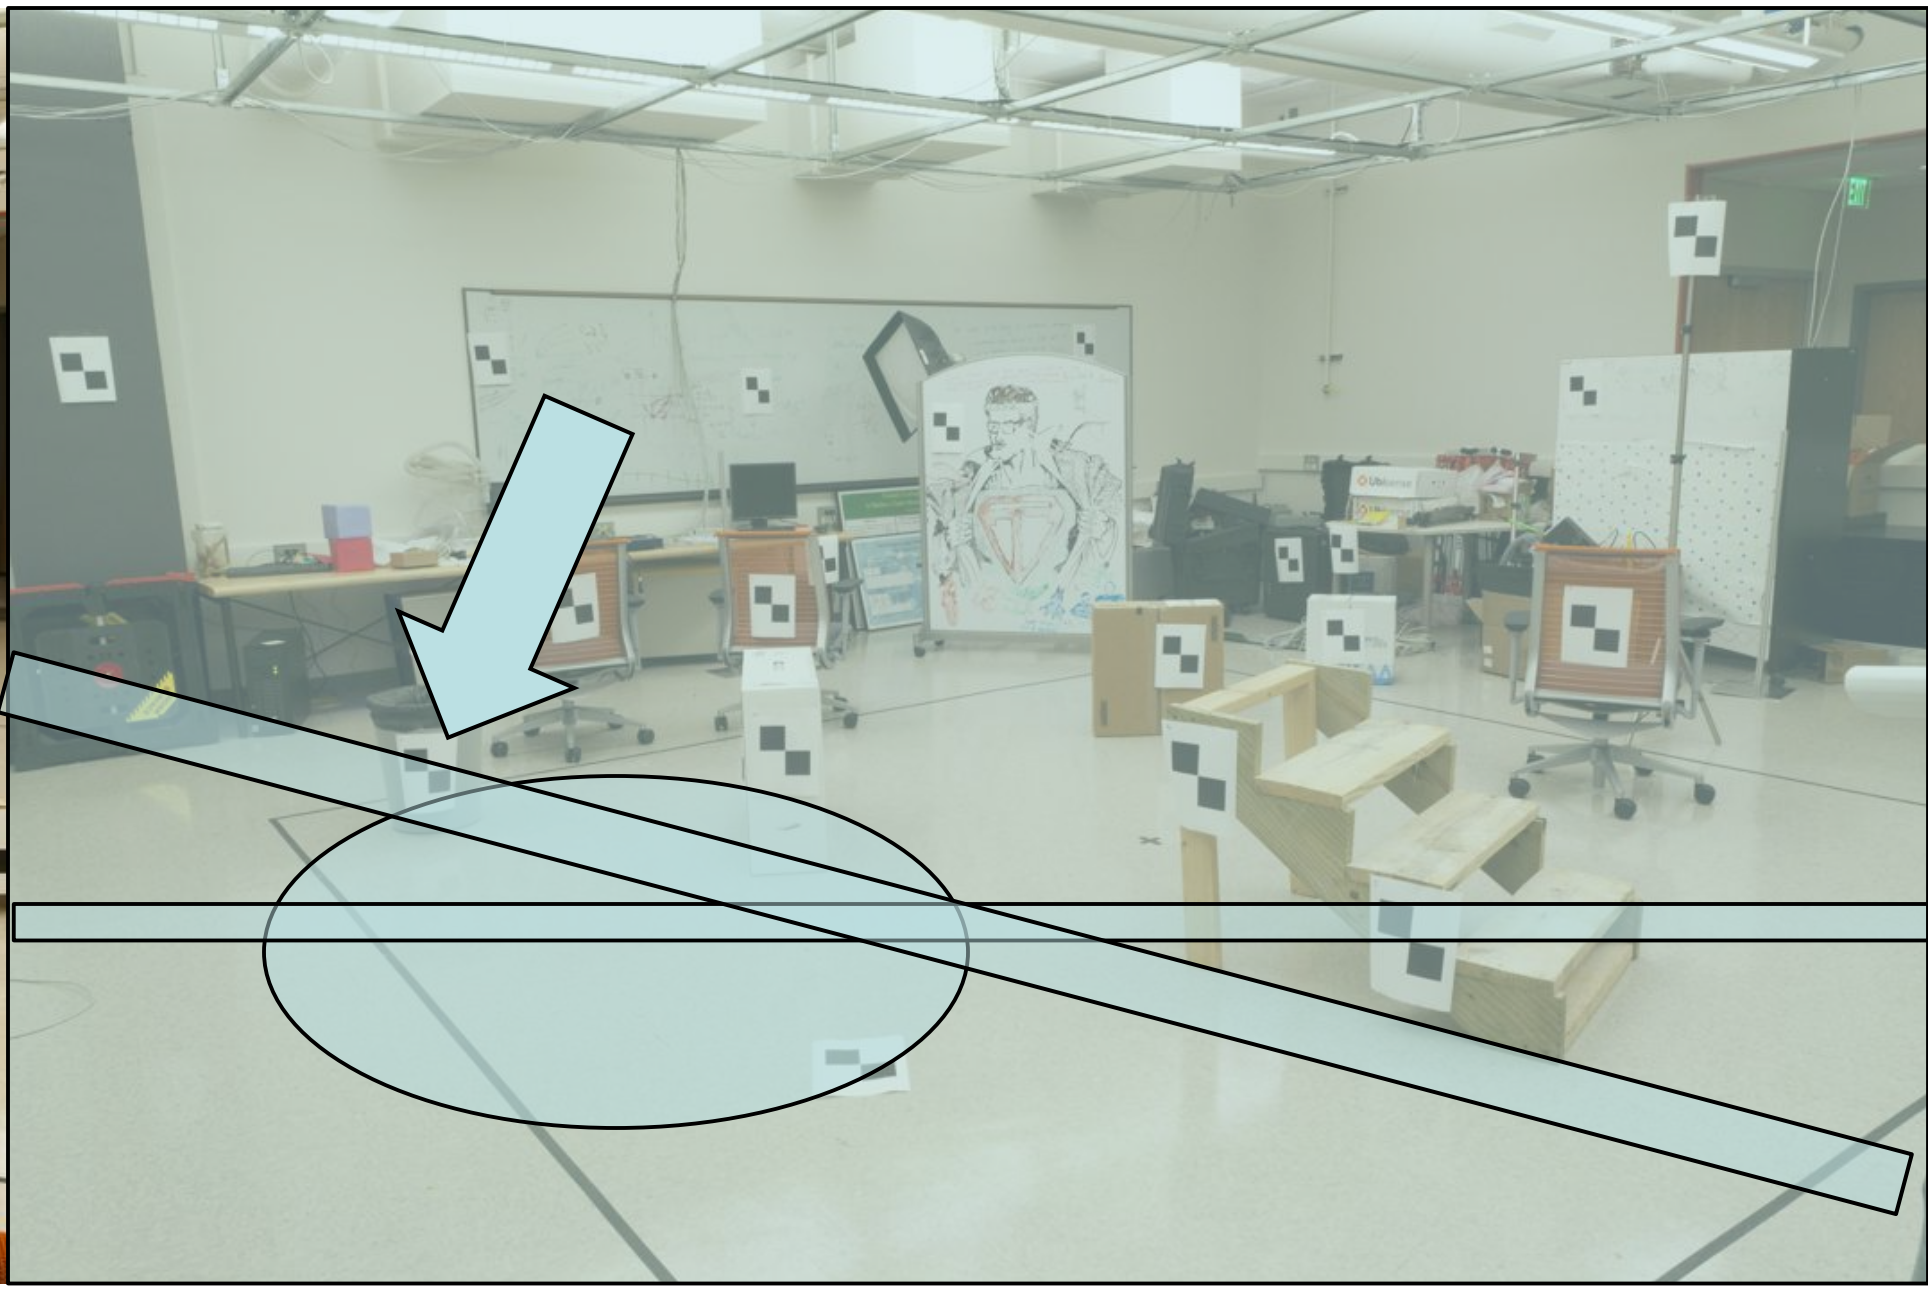

How do we calibrate a camera?

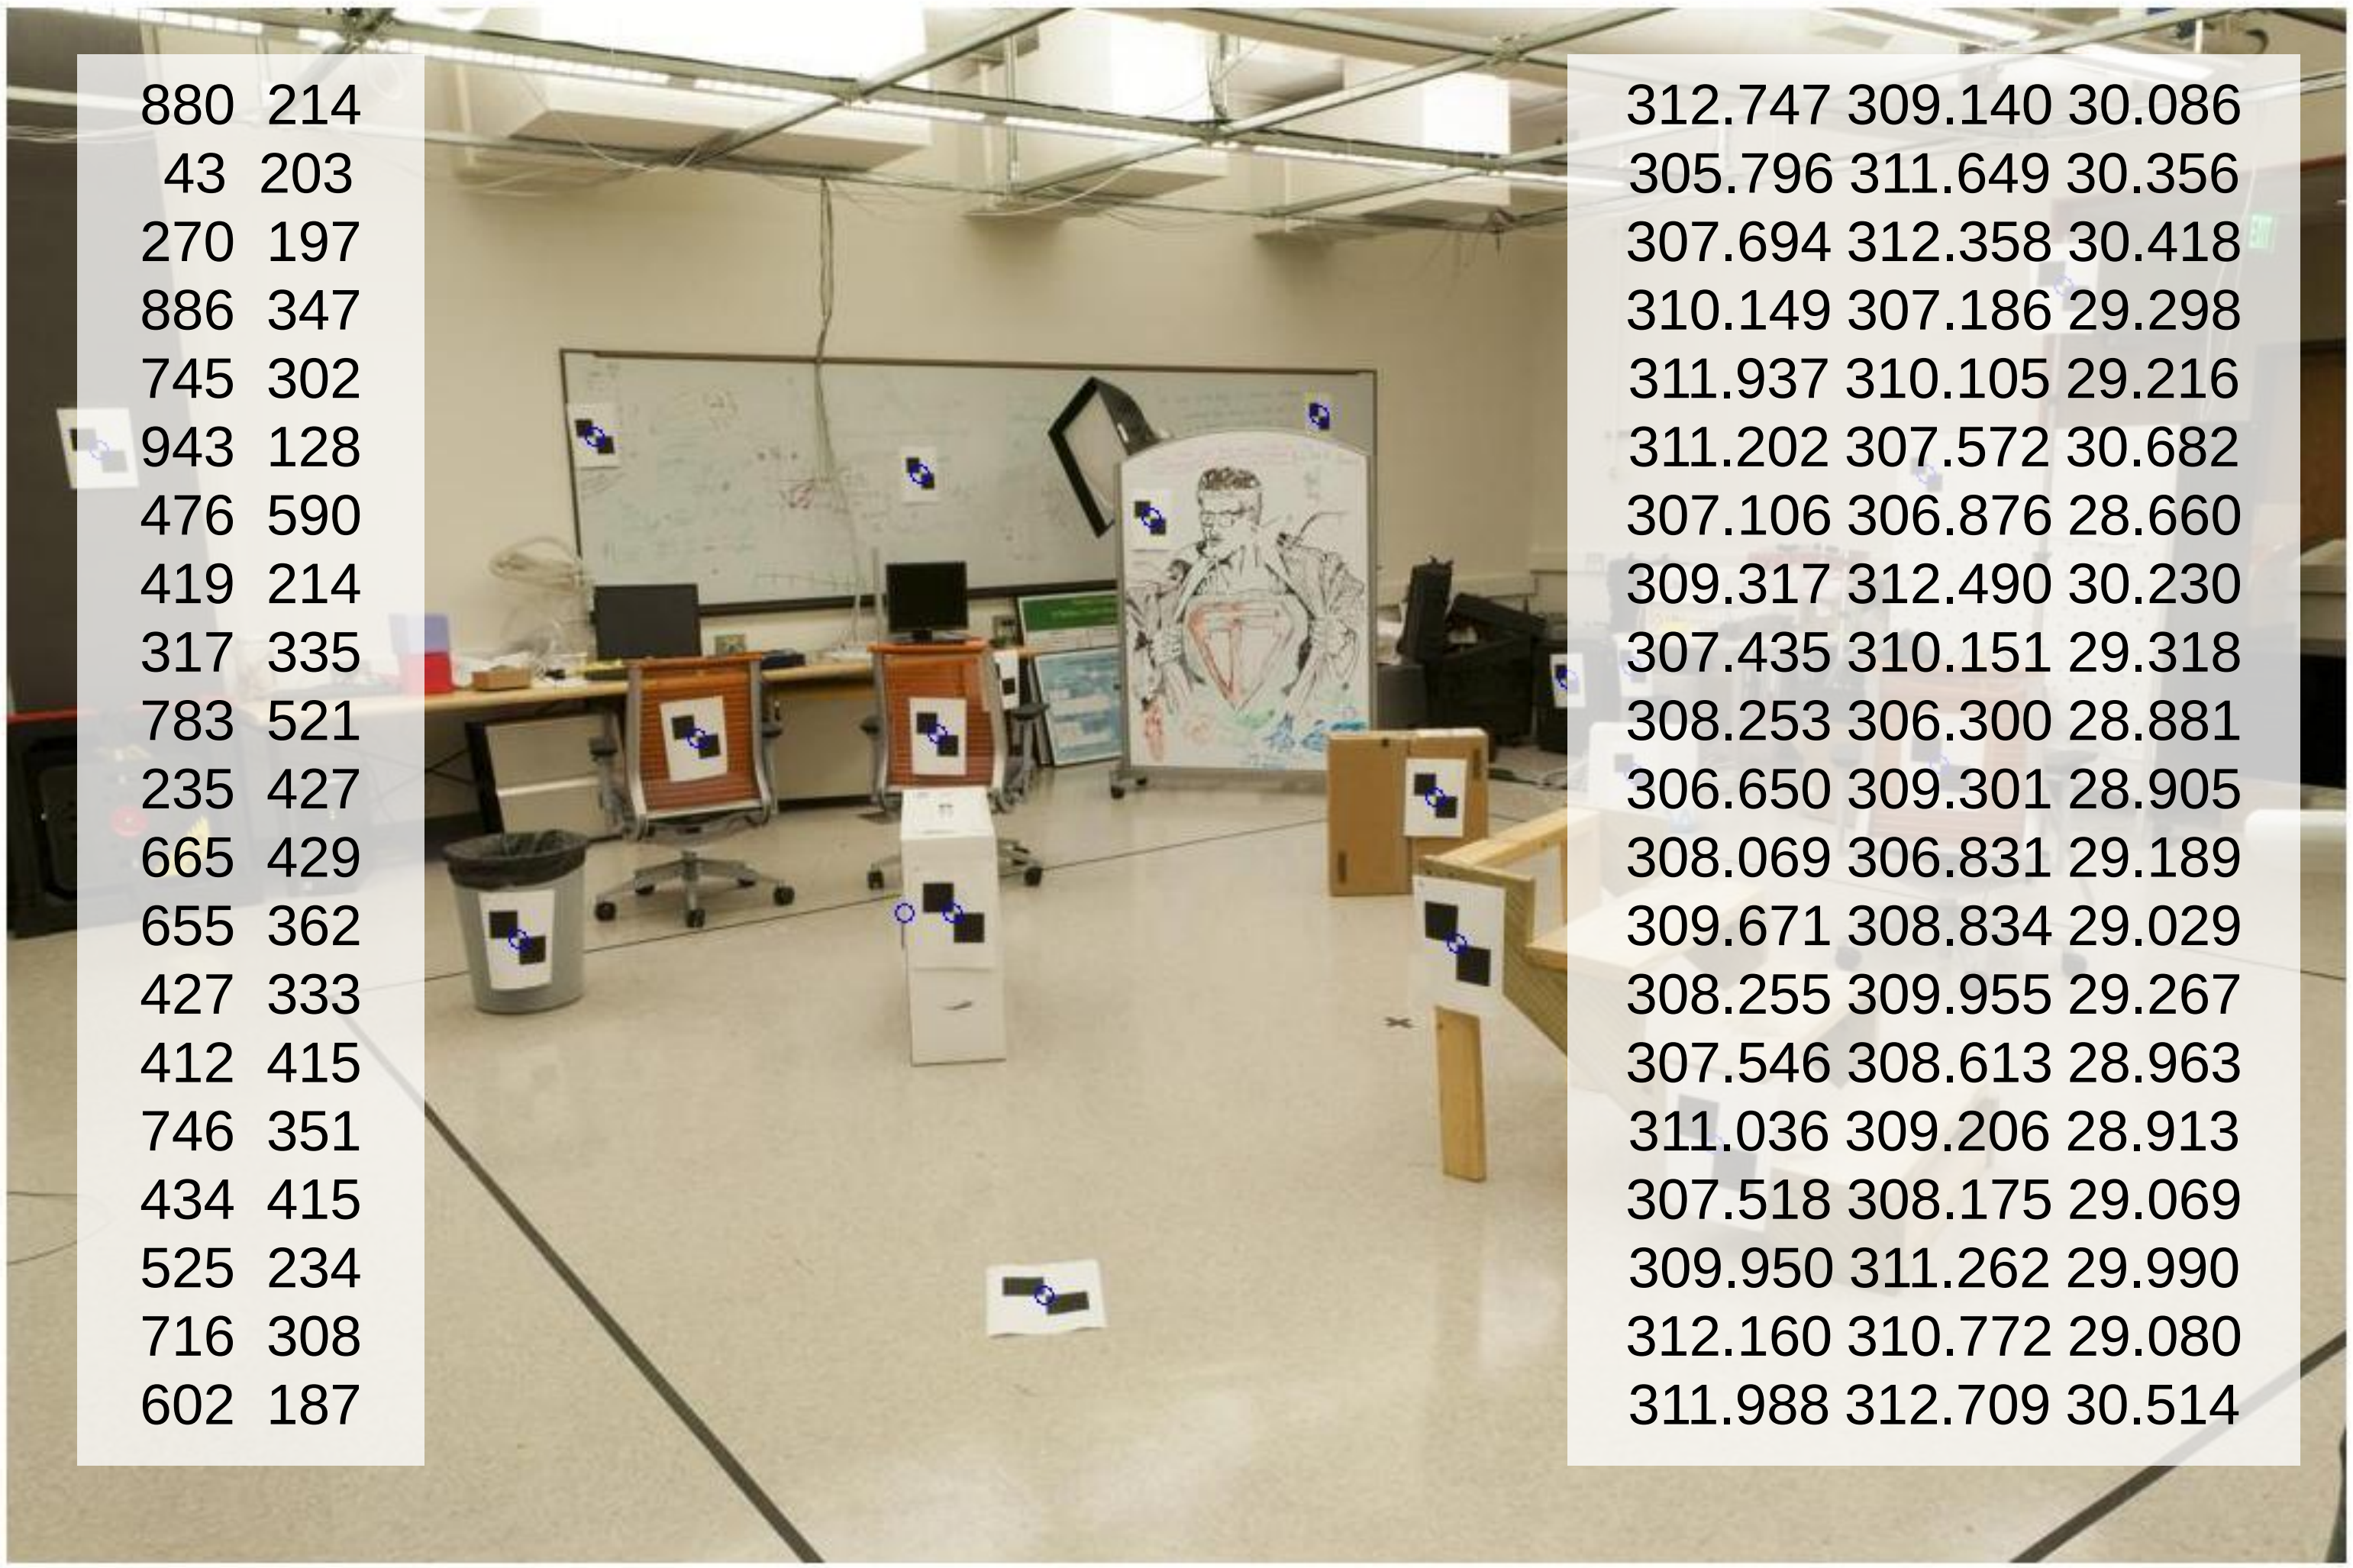

880	214
43	203
270	197
886	347
745	302
943	128
476	590
419	214
317	335
783	521
235	427
665	429
655	362
427	333
412	415
746	351
434	415
525	234
716	308
602	187

312.747	309.140	30.086
305.796	311.649	30.356
307.694	312.358	30.418
310.149	307.186	29.298
311.937	310.105	29.216
311.202	307.572	30.682
307.106	306.876	28.660
309.317	312.490	30.230
307.435	310.151	29.318
308.253	306.300	28.881
306.650	309.301	28.905
308.069	306.831	29.189
309.671	308.834	29.029
308.255	309.955	29.267
307.546	308.613	28.963
311.036	309.206	28.913
307.518	308.175	29.069
309.950	311.262	29.990
312.160	310.772	29.080
311.988	312.709	30.514

World vs Camera coordinates

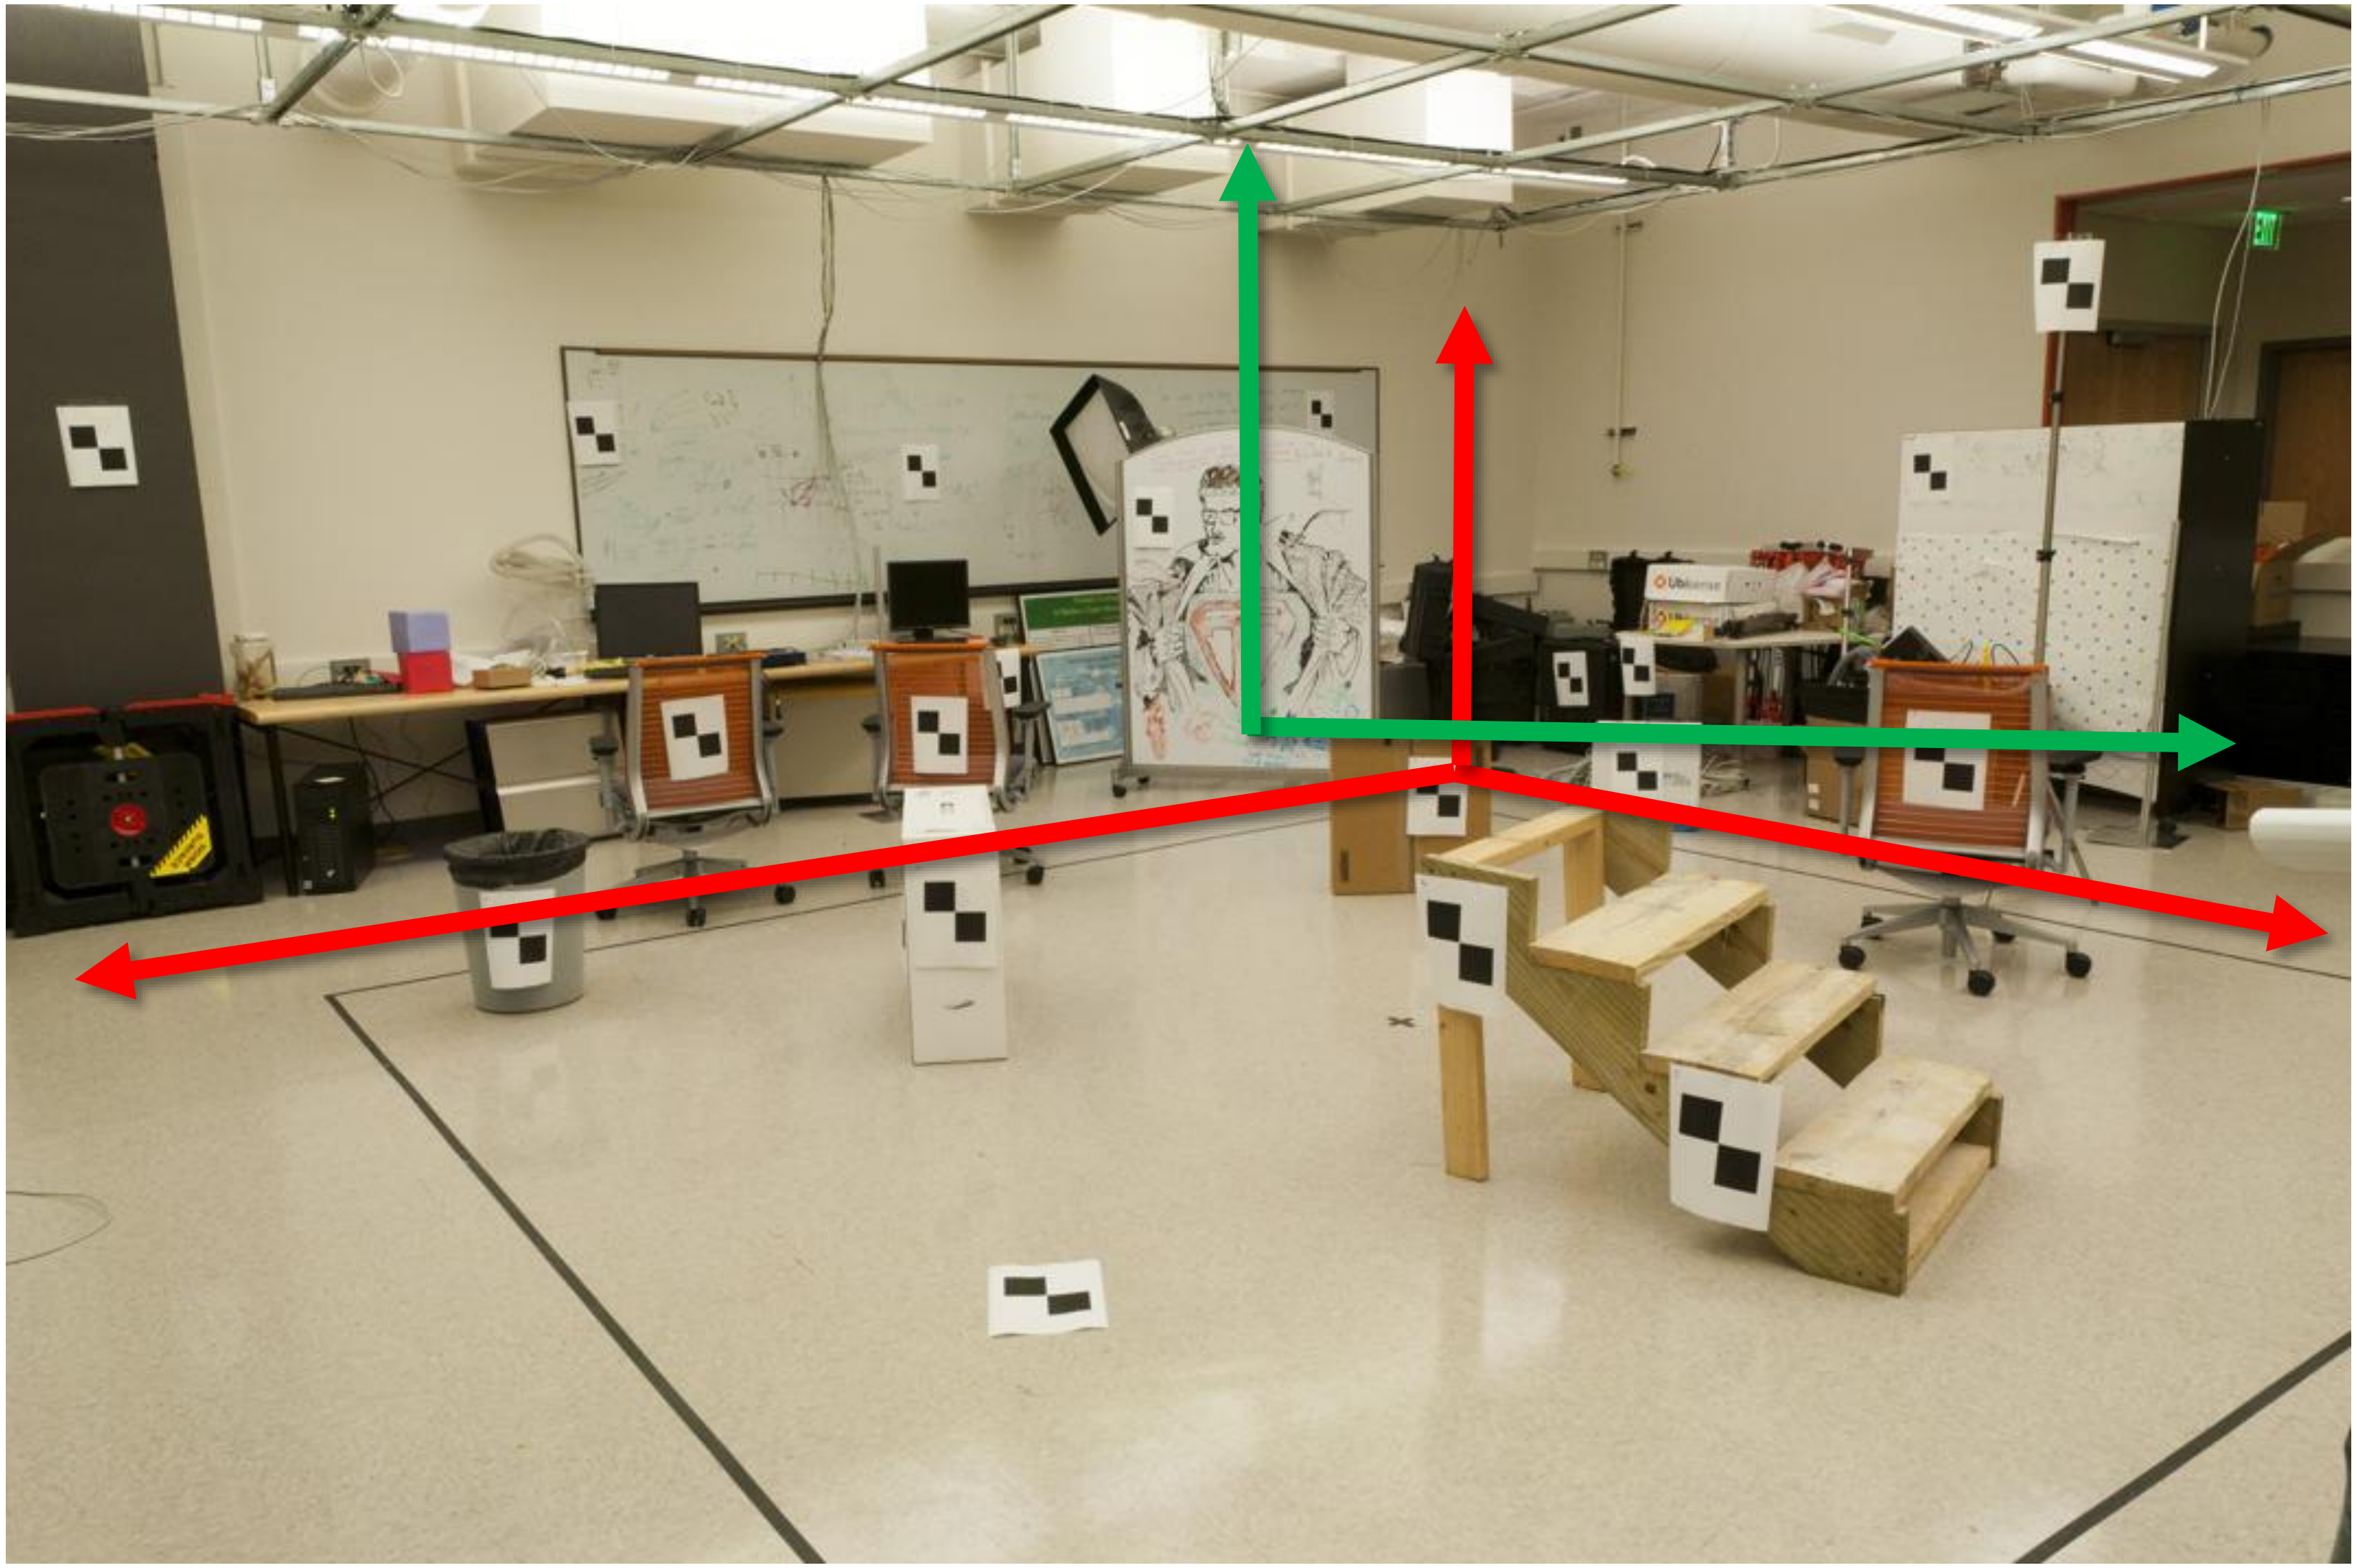

Slide Credit: Saverese

Projection matrix

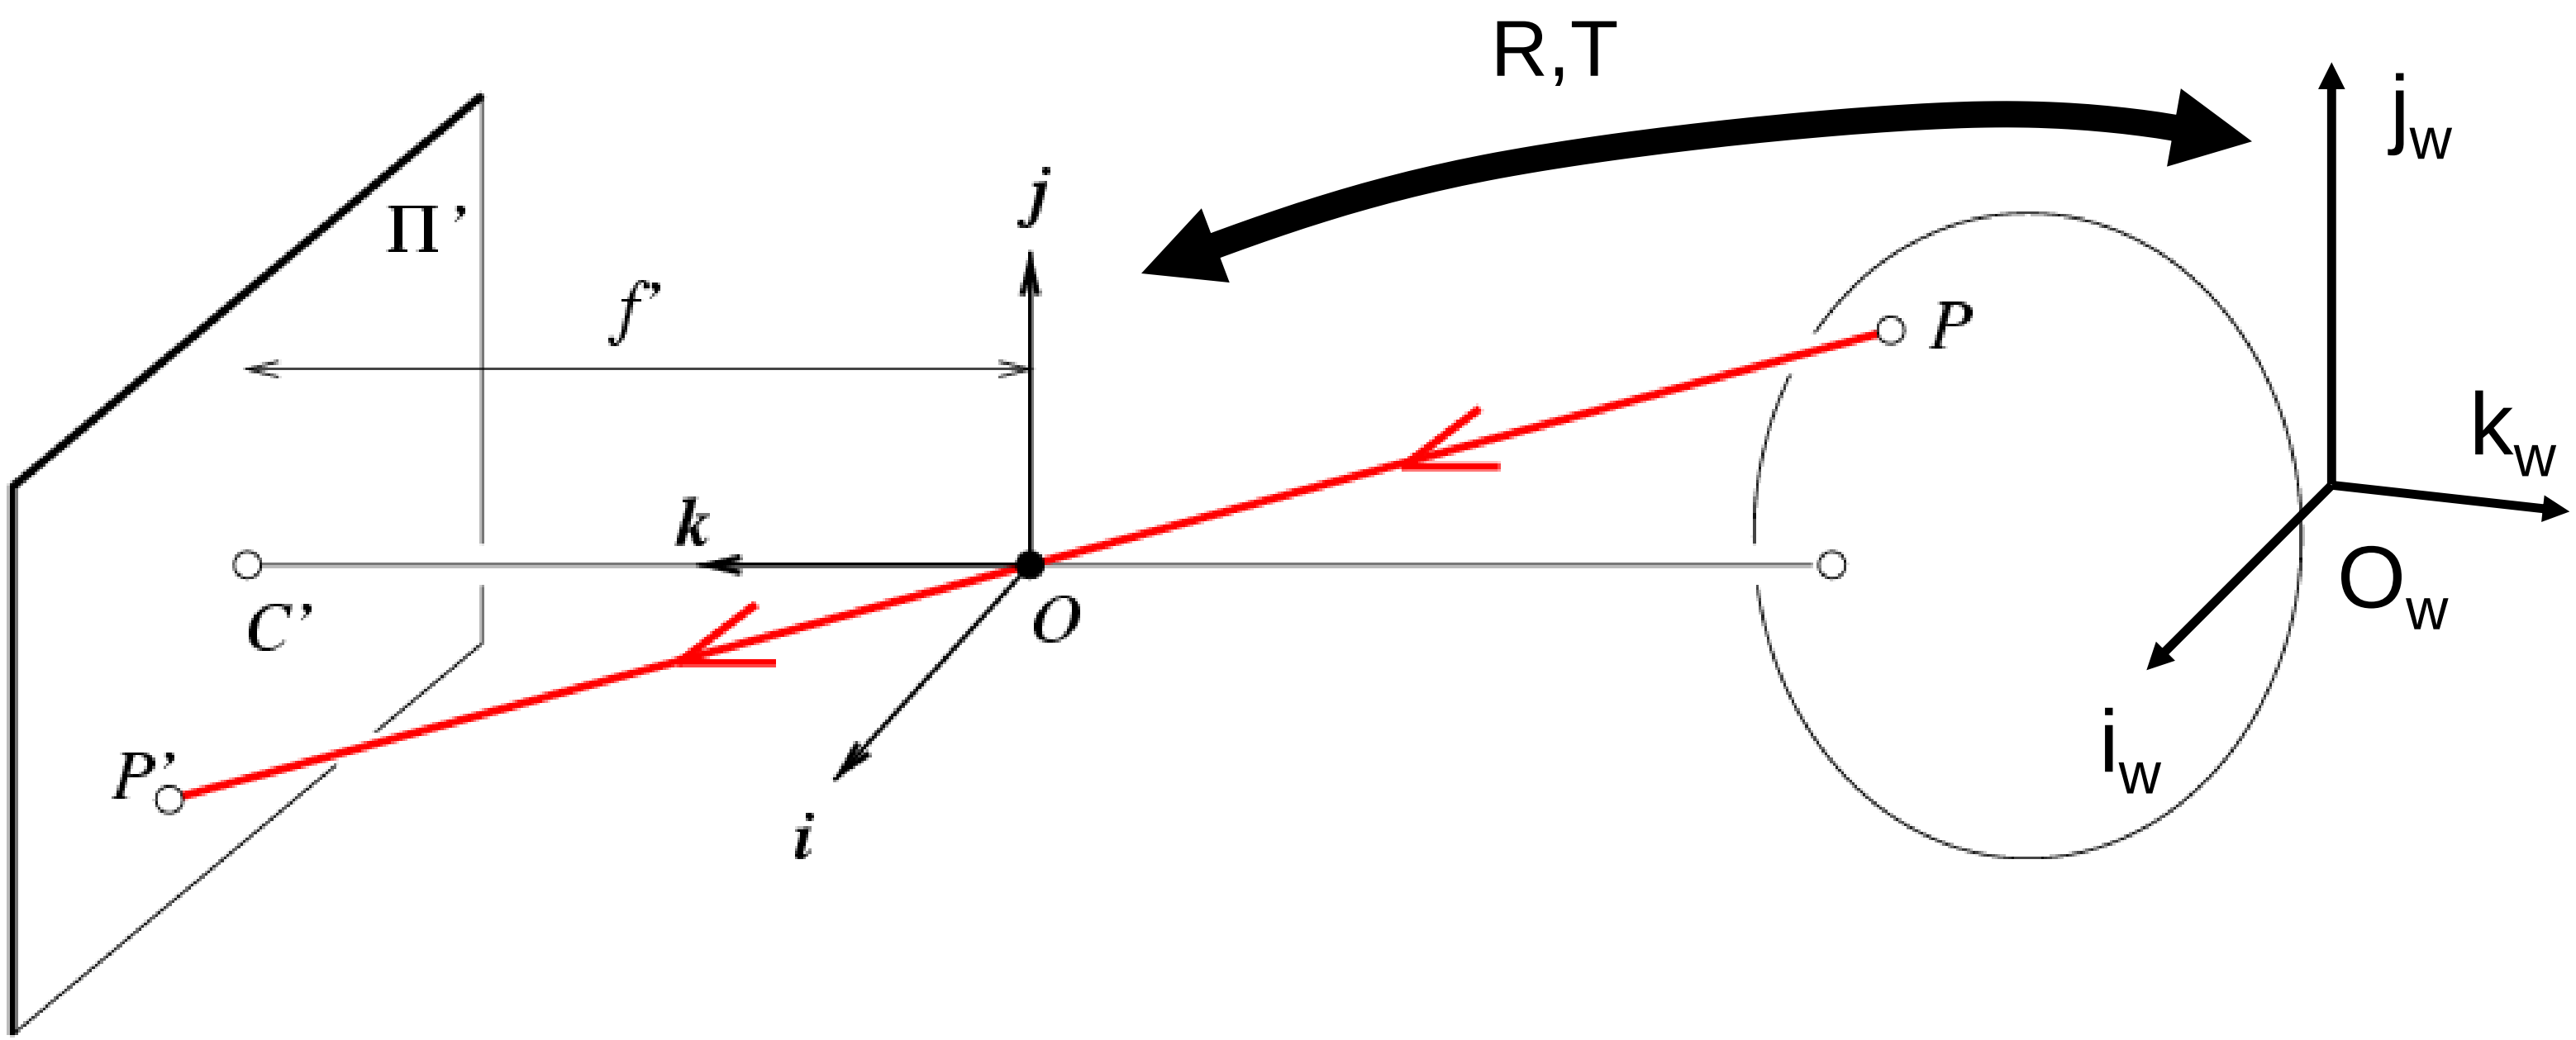

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{R} & \mathbf{t}\end{bmatrix}\mathbf{X}$$

x: Image Coordinates: (u,v,1)
K: Intrinsic Matrix (3x3)
R: Rotation (3x3)
t: Translation (3x1)
X: World Coordinates: (X,Y,Z,1)

Projection matrix

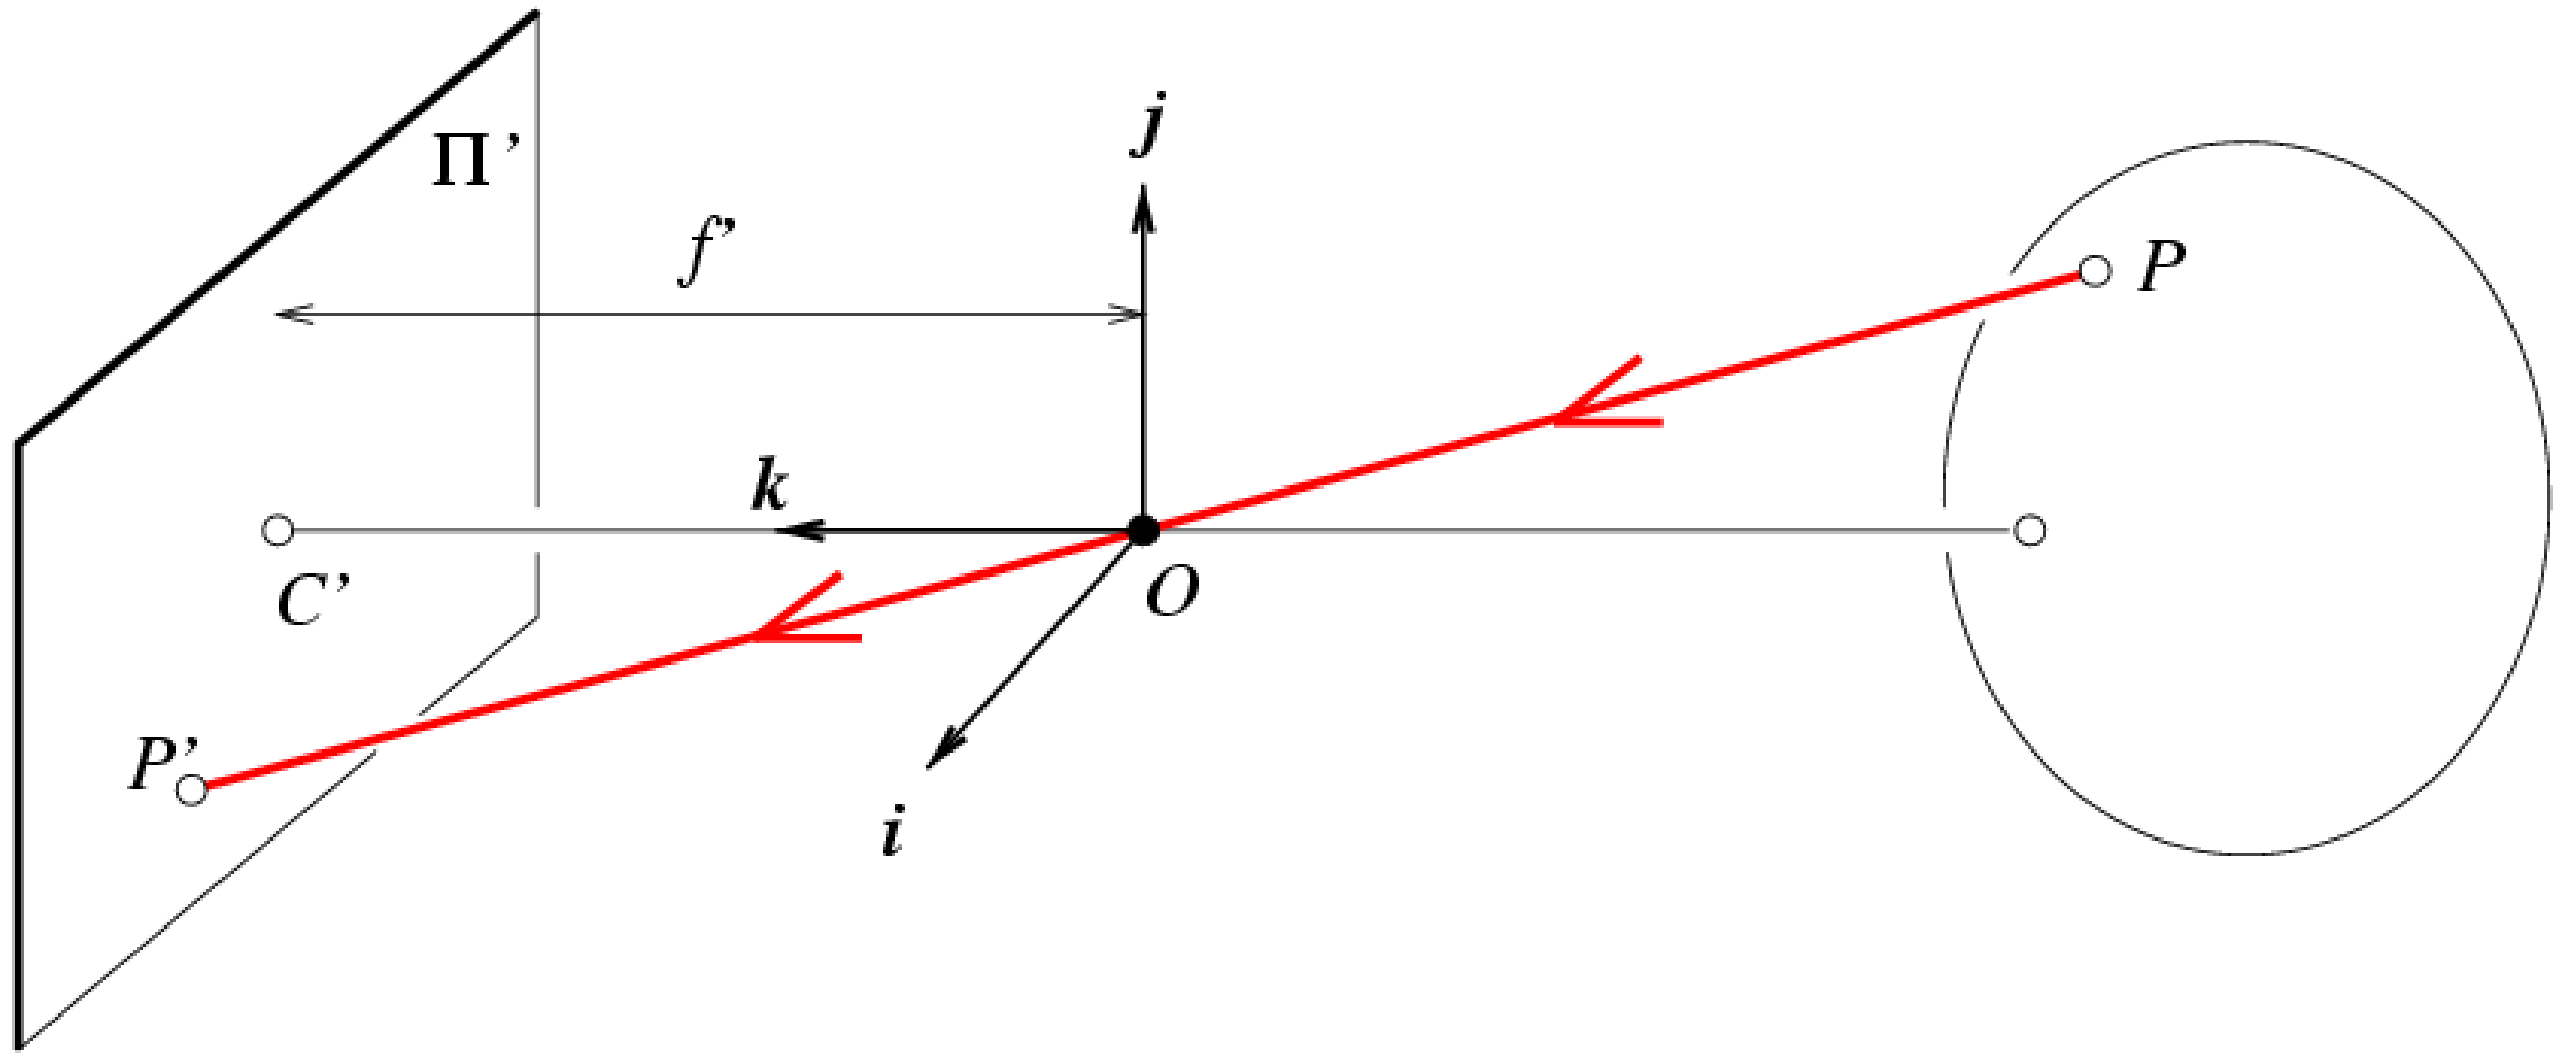

Intrinsic Assumptions

- Unit aspect ratio
- Optical center at (0,0)
- No skew

Extrinsic Assumptions

- No rotation
- Camera at (0,0,0)

K

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{I} & \mathbf{0}\end{bmatrix}\mathbf{X} \Rightarrow w\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} f & 0 & 0 & 0 \\ 0 & f & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}\begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Slide Credit: Saverese

Remove assumption: known optical center

Intrinsic Assumptions

- Unit aspect ratio
- No skew

Extrinsic Assumptions

- No rotation
- Camera at (0,0,0)

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{I} & \mathbf{0}\end{bmatrix}\mathbf{X} \quad \Rightarrow \quad w\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} f & 0 & u_0 & 0 \\ 0 & f & v_0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}\begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Remove assumption: square pixels

Intrinsic Assumptions
- No skew

Extrinsic Assumptions
- No rotation
- Camera at (0,0,0)

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{I} & \mathbf{0}\end{bmatrix}\mathbf{X} \Rightarrow w\begin{bmatrix}u \\ v \\ 1\end{bmatrix} = \begin{bmatrix}\alpha & 0 & u_0 & 0 \\ 0 & \beta & v_0 & 0 \\ 0 & 0 & 1 & 0\end{bmatrix}\begin{bmatrix}x \\ y \\ z \\ 1\end{bmatrix}$$

Remove assumption: non-skewed pixels

Intrinsic Assumptions

Extrinsic Assumptions
- No rotation
- Camera at (0,0,0)

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{I} & \mathbf{0}\end{bmatrix}\mathbf{X} \Rightarrow w\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} \alpha & s & u_0 & 0 \\ 0 & \beta & v_0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}\begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Note: different books use different notation for parameters

Oriented and Translated Camera

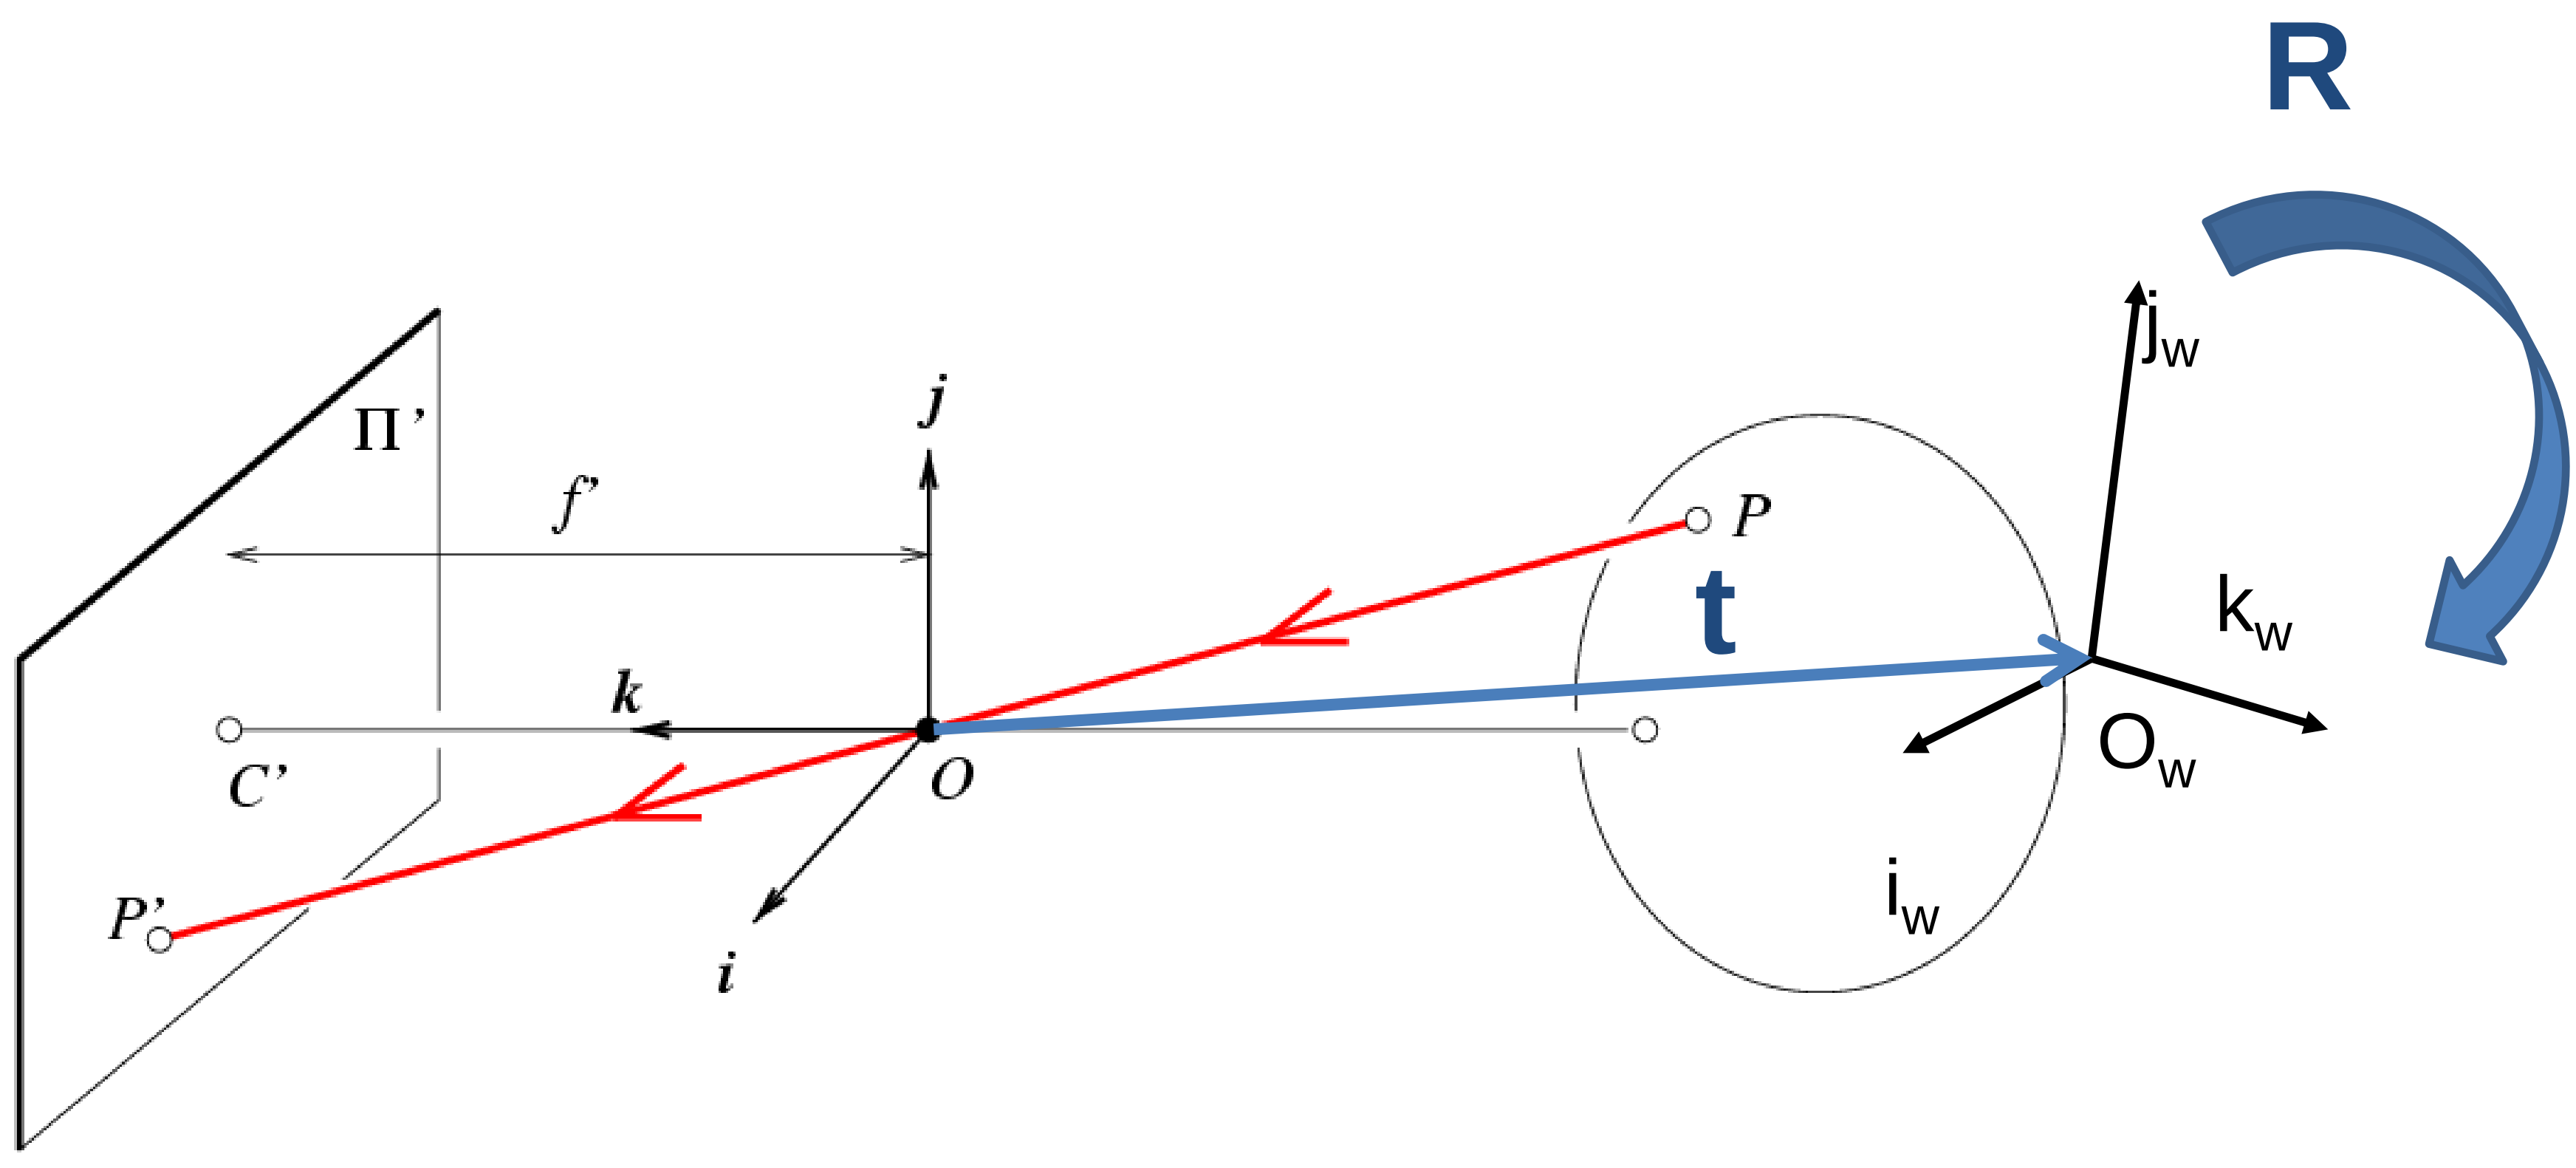

Allow camera translation

Intrinsic Assumptions

Extrinsic Assumptions

- No rotation

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{I} & \mathbf{t}\end{bmatrix}\mathbf{X} \Rightarrow w\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix}\begin{bmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \end{bmatrix}\begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Slide Credit: Saverese

3D Rotation of Points

Rotation around the coordinate axes, counter-clockwise:

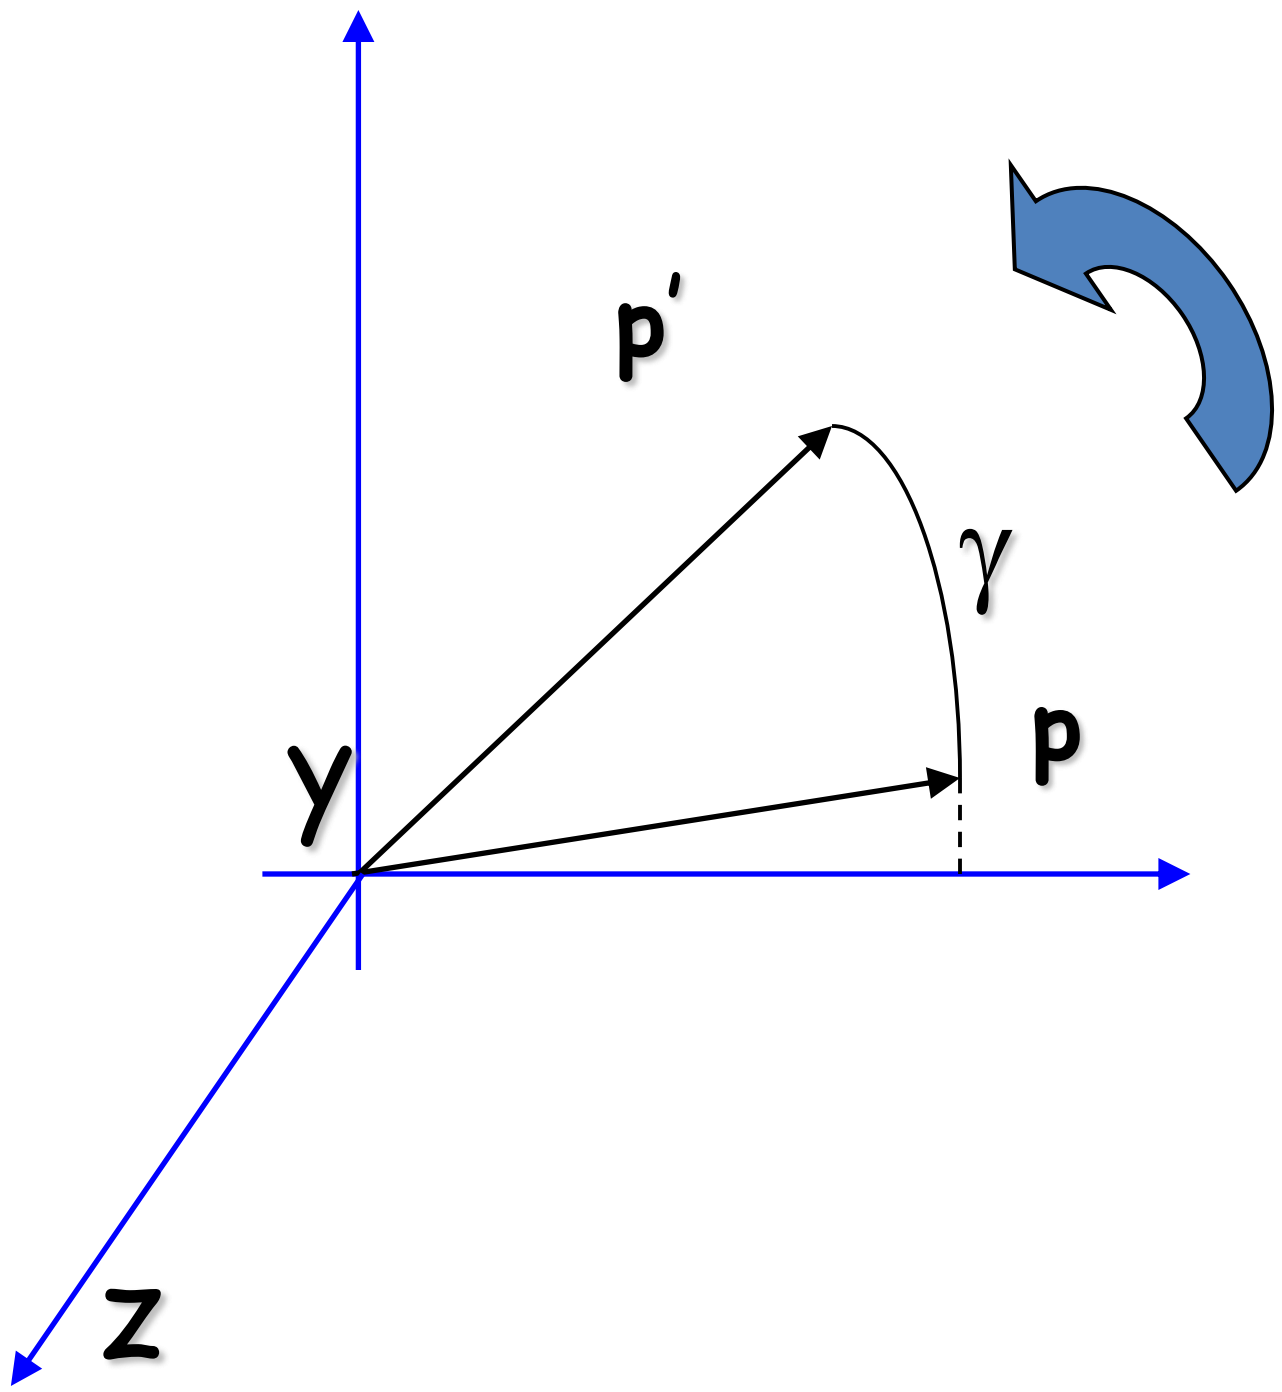

$$R_x(\alpha) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\alpha & -\sin\alpha \\ 0 & \sin\alpha & \cos\alpha \end{bmatrix}$$

$$R_y(\beta) = \begin{bmatrix} \cos\beta & 0 & \sin\beta \\ 0 & 1 & 0 \\ -\sin\beta & 0 & \cos\beta \end{bmatrix}$$

$$R_z(\gamma) = \begin{bmatrix} \cos\gamma & -\sin\gamma & 0 \\ \sin\gamma & \cos\gamma & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Allow camera rotation

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{R} & \mathbf{t}\end{bmatrix}\mathbf{X}$$

$$w\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix}\begin{bmatrix} r_{11} & r_{12} & r_{13} & t_x \\ r_{21} & r_{22} & r_{23} & t_y \\ r_{31} & r_{32} & r_{33} & t_z \end{bmatrix}\begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Degrees of freedom

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{R} & \mathbf{t}\end{bmatrix}\mathbf{X}$$

$$w\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \overset{5}{\begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix}} \overset{6}{\begin{bmatrix} r_{11} & r_{12} & r_{13} & t_x \\ r_{21} & r_{22} & r_{23} & t_y \\ r_{31} & r_{32} & r_{33} & t_z \end{bmatrix}} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Beyond Pinholes: Radial Distortion

- Common in wide-angle lenses or for special applications (e.g., security)
- Creates non-linear terms in projection
- Usually handled by through solving for non-linear terms and then correcting image

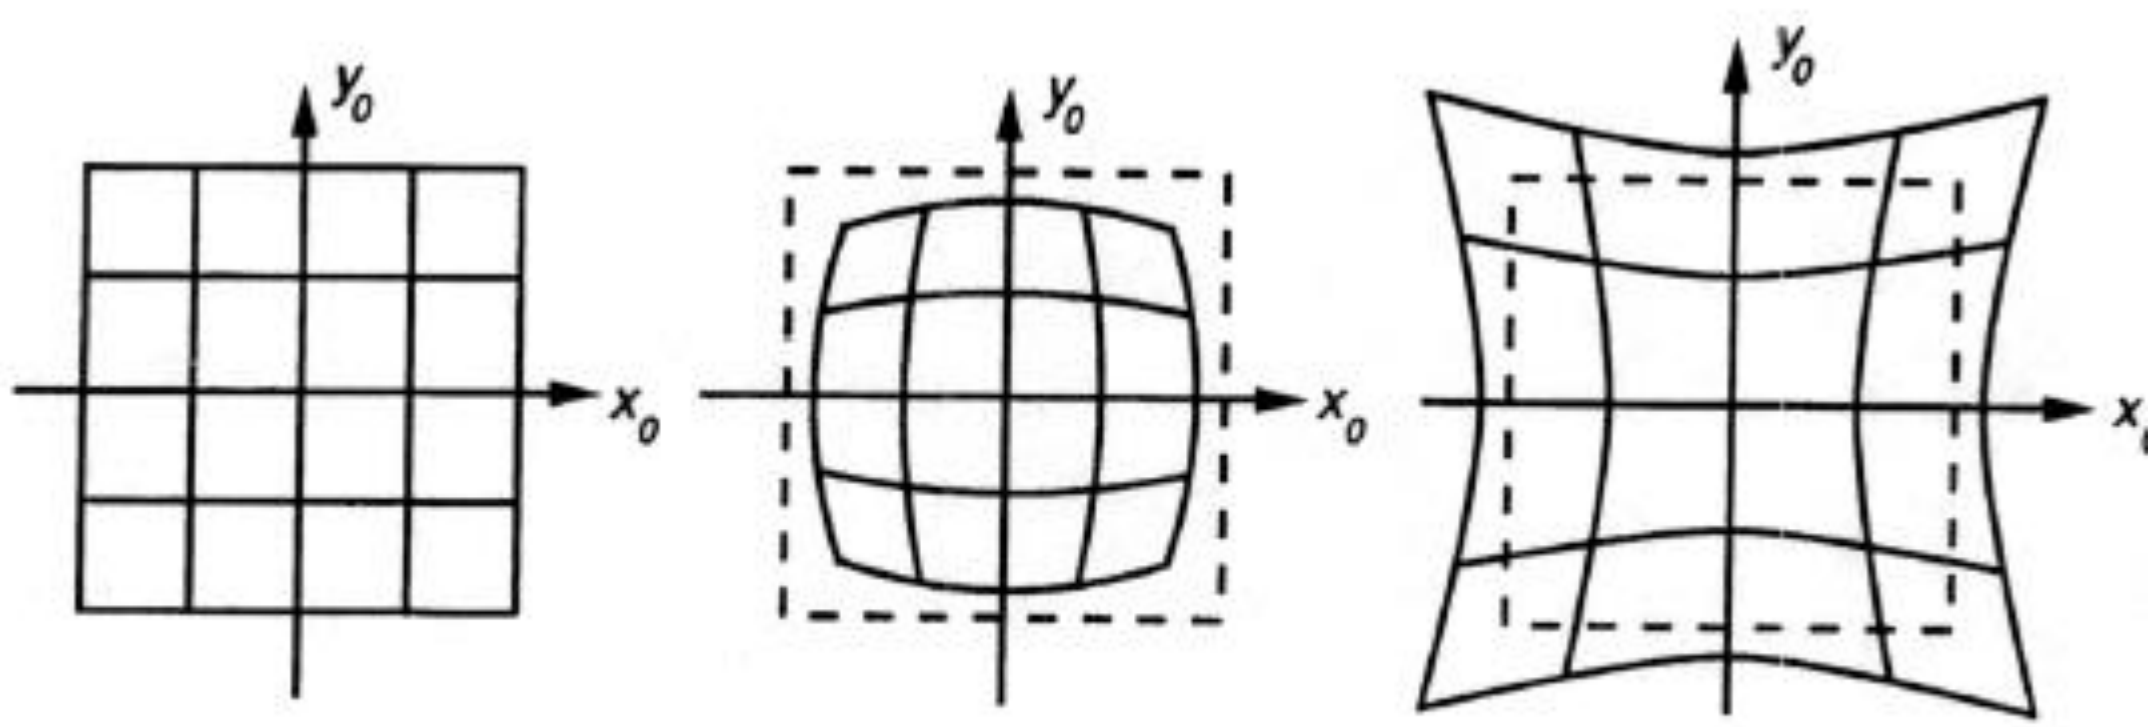

No Distortion | Barrel Distortion | Pincushion Distortion

Corrected Barrel Distortion

Image from Martin Habbecke

How to calibrate the camera?
(also called “camera resectioning”)

$$\mathbf{x} = \mathbf{K}\begin{bmatrix}\mathbf{R} & \mathbf{t}\end{bmatrix}\mathbf{X}$$

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} * & * & * & * \\ * & * & * & * \\ * & * & * & * \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Calibrating the Camera

Use an scene with known geometry

- Correspond image points to 3d points
- Get least squares solution (or non-linear solution)

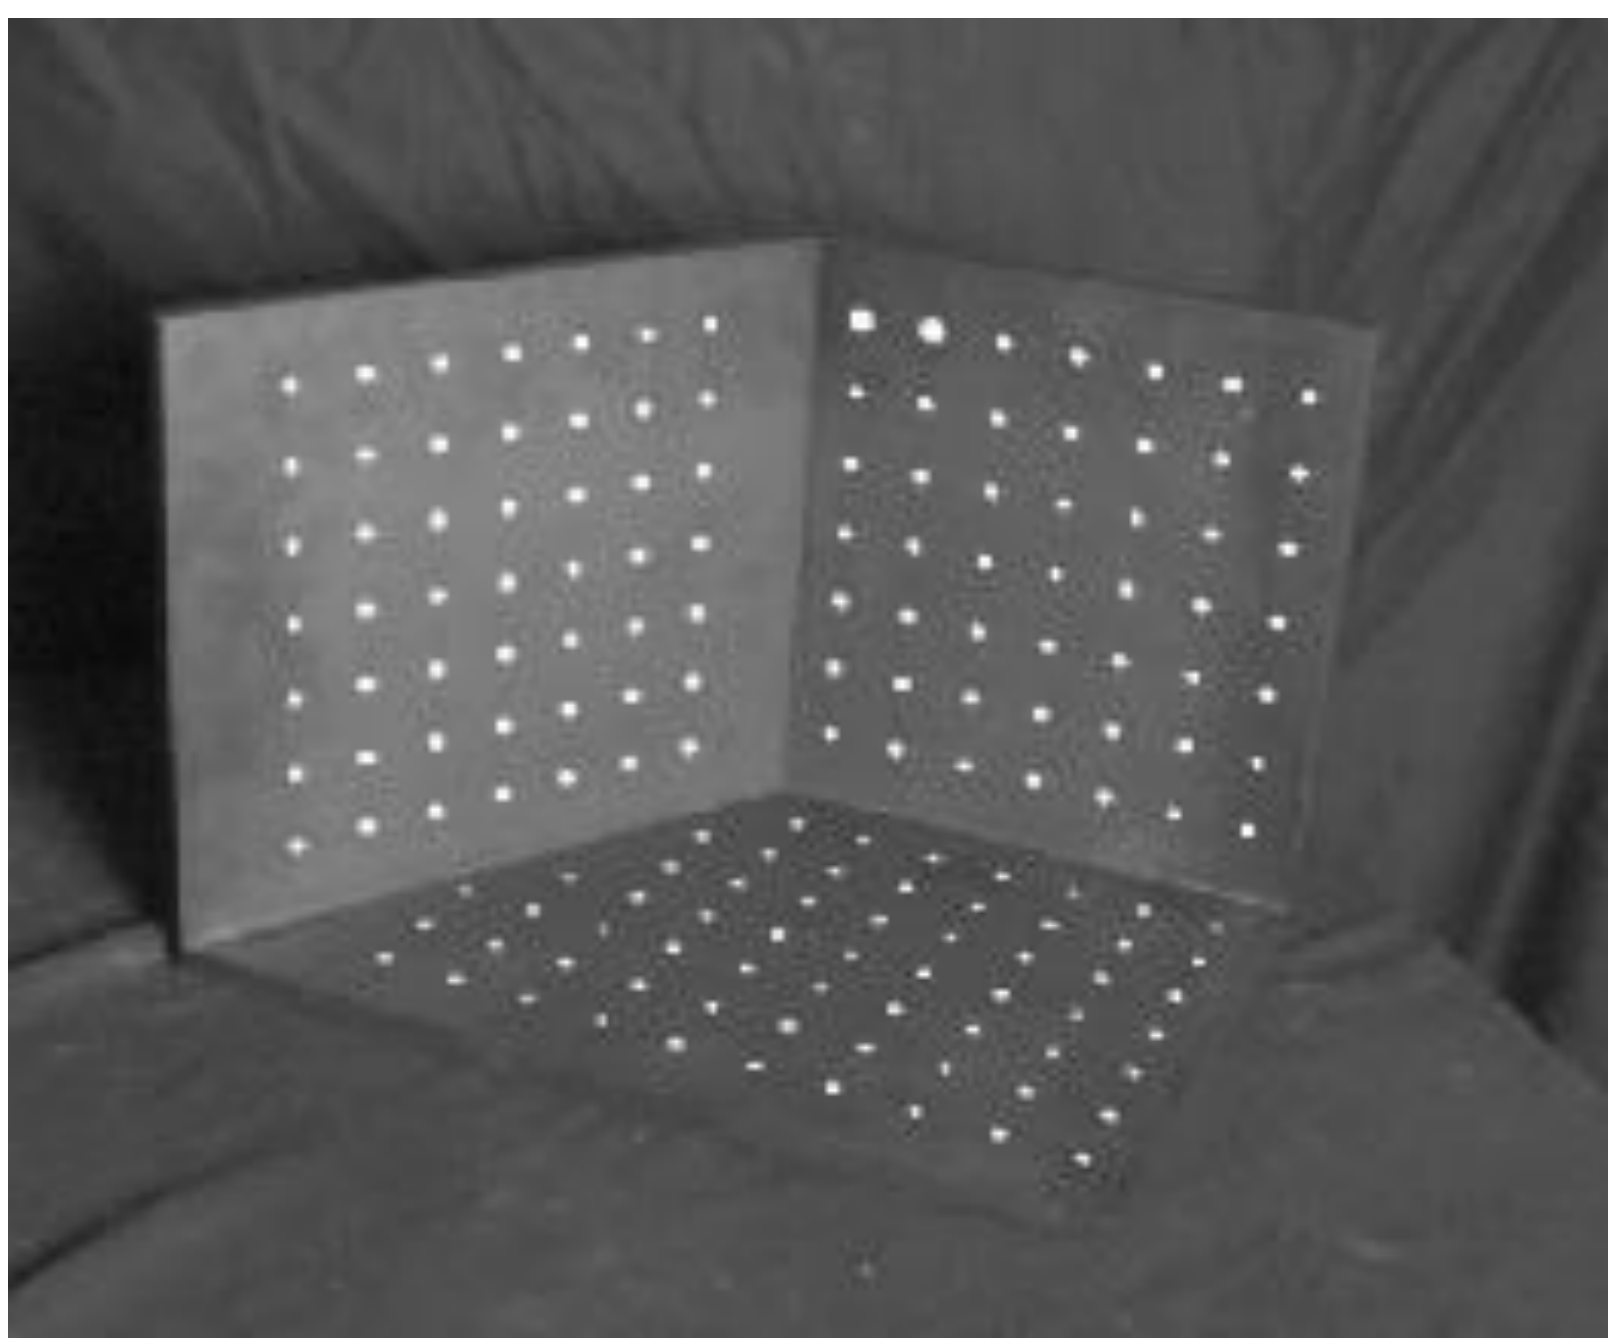

Known 2d image coords

Known 3d locations

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Unknown Camera Parameters

How do we calibrate a camera?

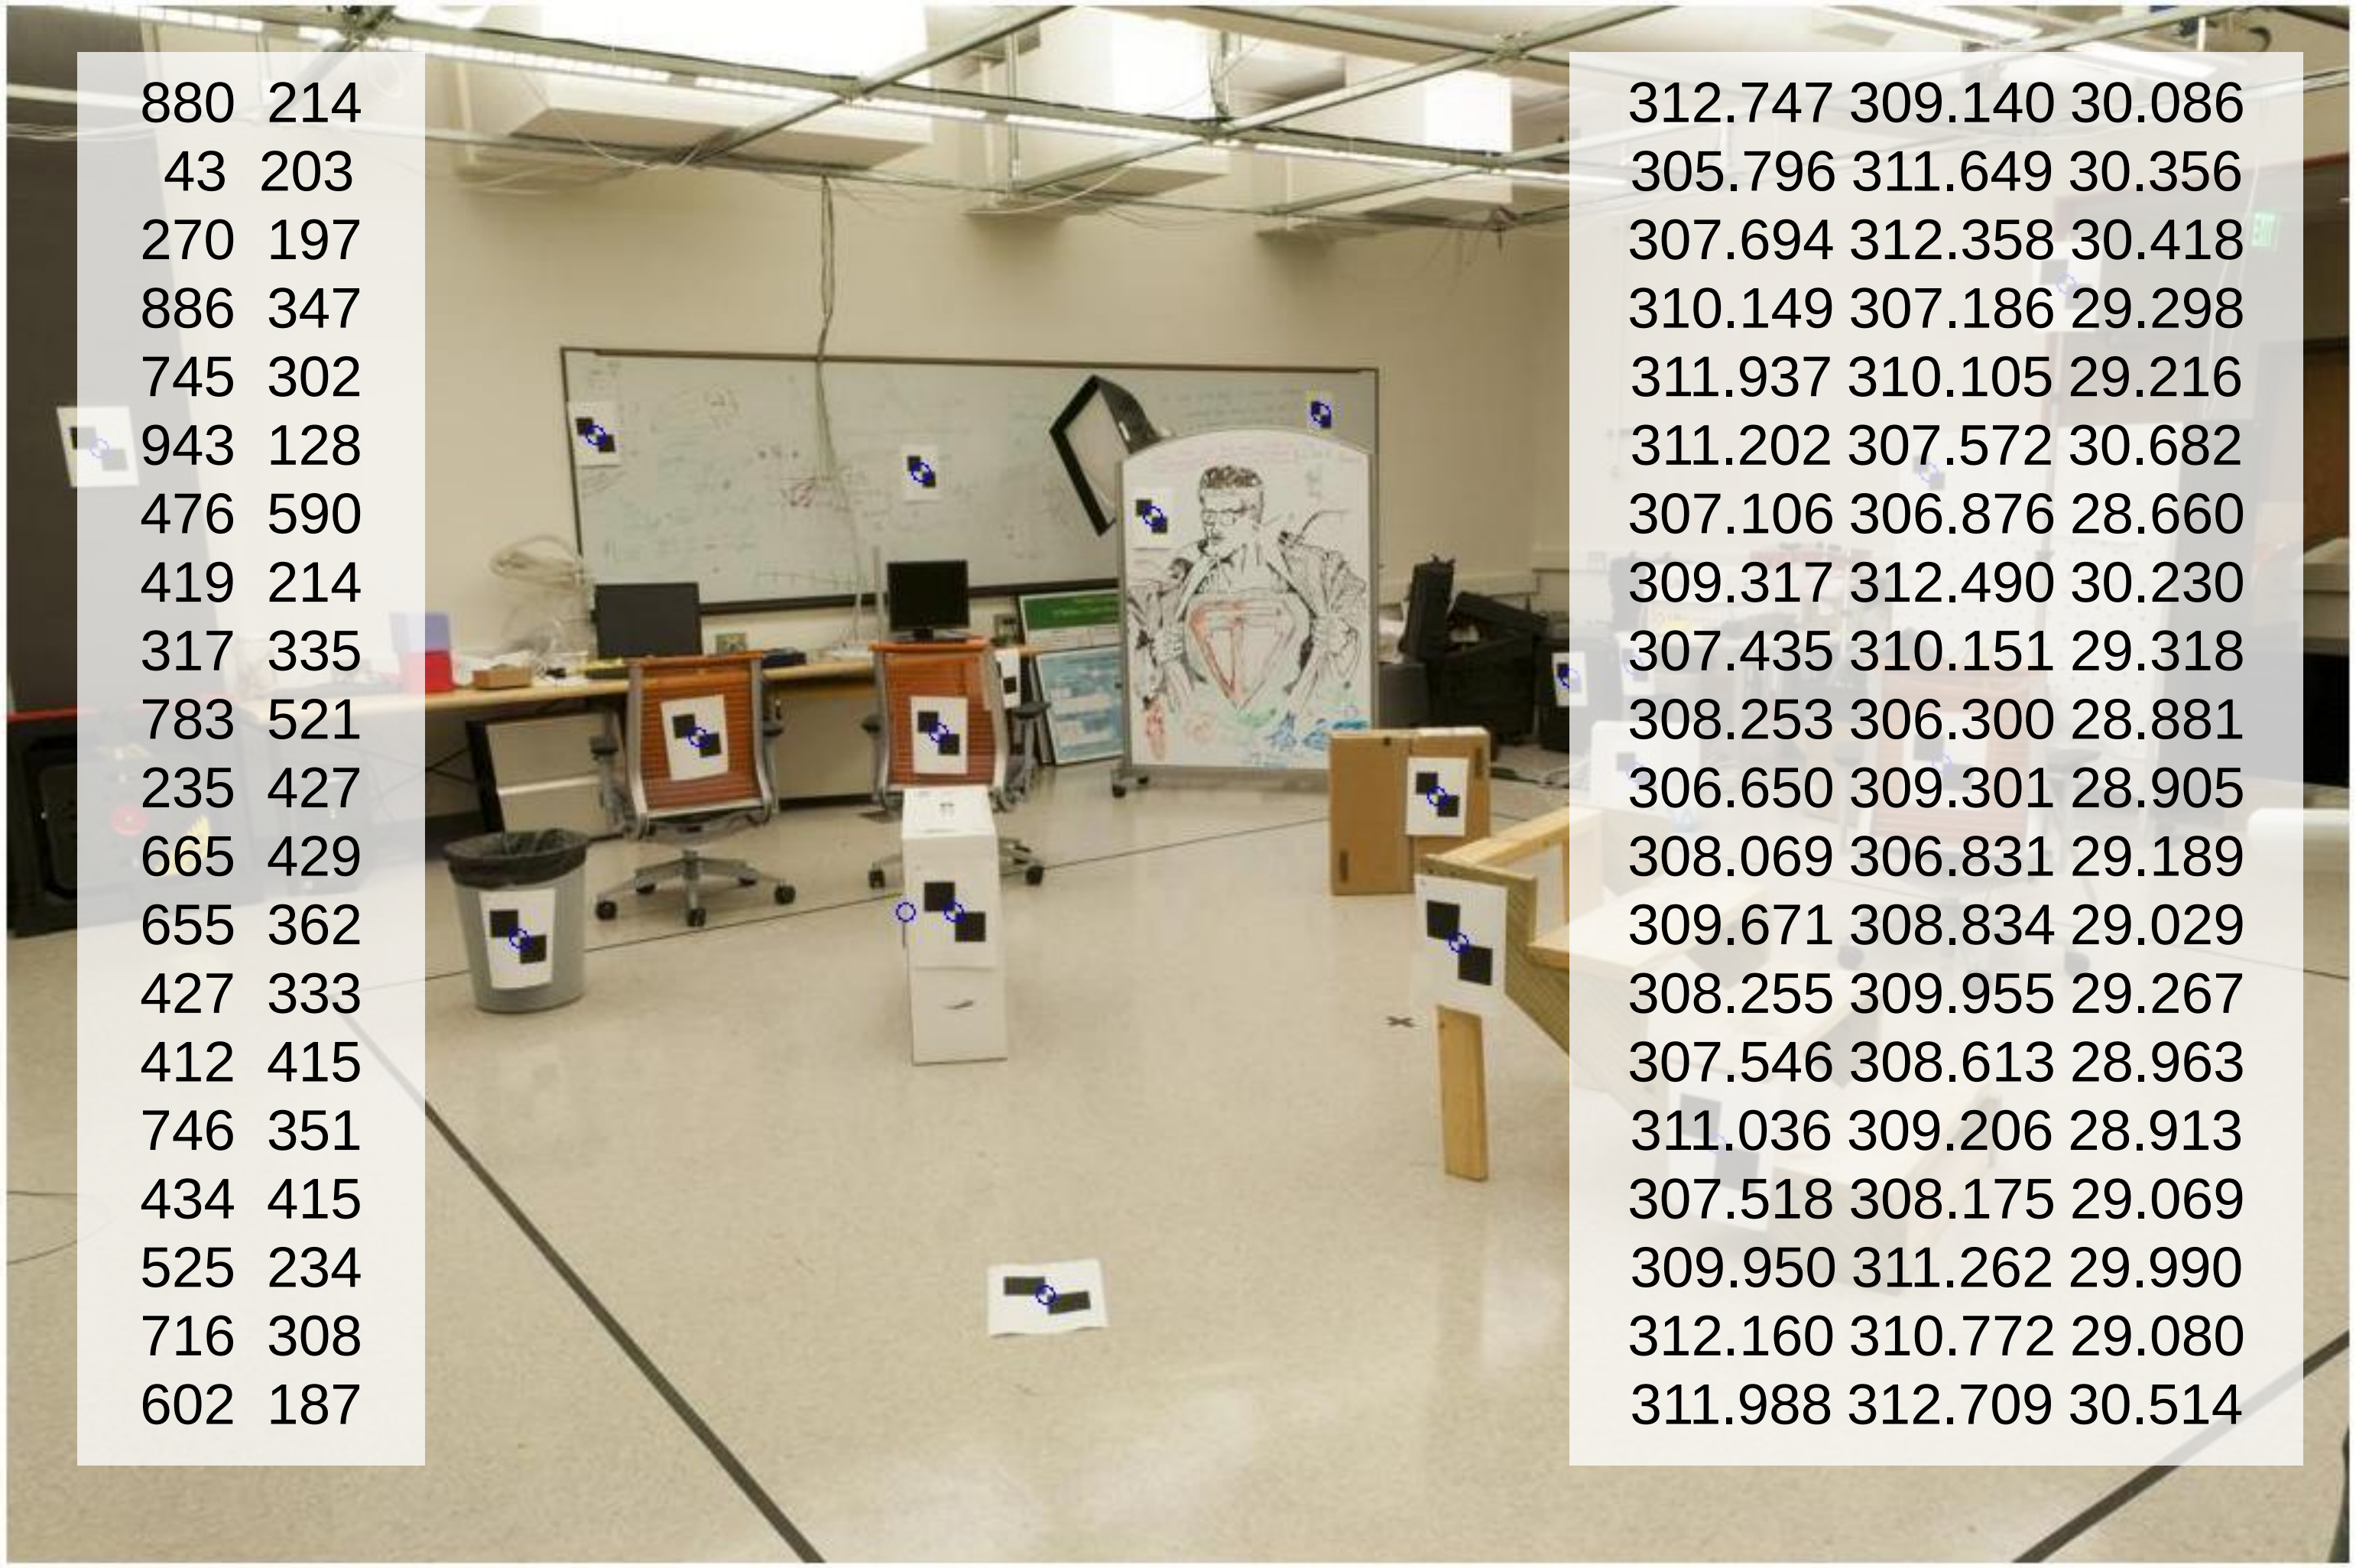

Known 2d image coords

880	214
43	203
270	197
886	347
745	302
943	128
476	590
419	214
317	335
783	521
235	427
665	429
655	362
427	333
412	415
746	351
434	415
525	234
716	308
602	187

Known 3d locations

312.747	309.140	30.086
305.796	311.649	30.356
307.694	312.358	30.418
310.149	307.186	29.298
311.937	310.105	29.216
311.202	307.572	30.682
307.106	306.876	28.660
309.317	312.490	30.230
307.435	310.151	29.318
308.253	306.300	28.881
306.650	309.301	28.905
308.069	306.831	29.189
309.671	308.834	29.029
308.255	309.955	29.267
307.546	308.613	28.963
311.036	309.206	28.913
307.518	308.175	29.069
309.950	311.262	29.990
312.160	310.772	29.080
311.988	312.709	30.514

Estimate of camera center

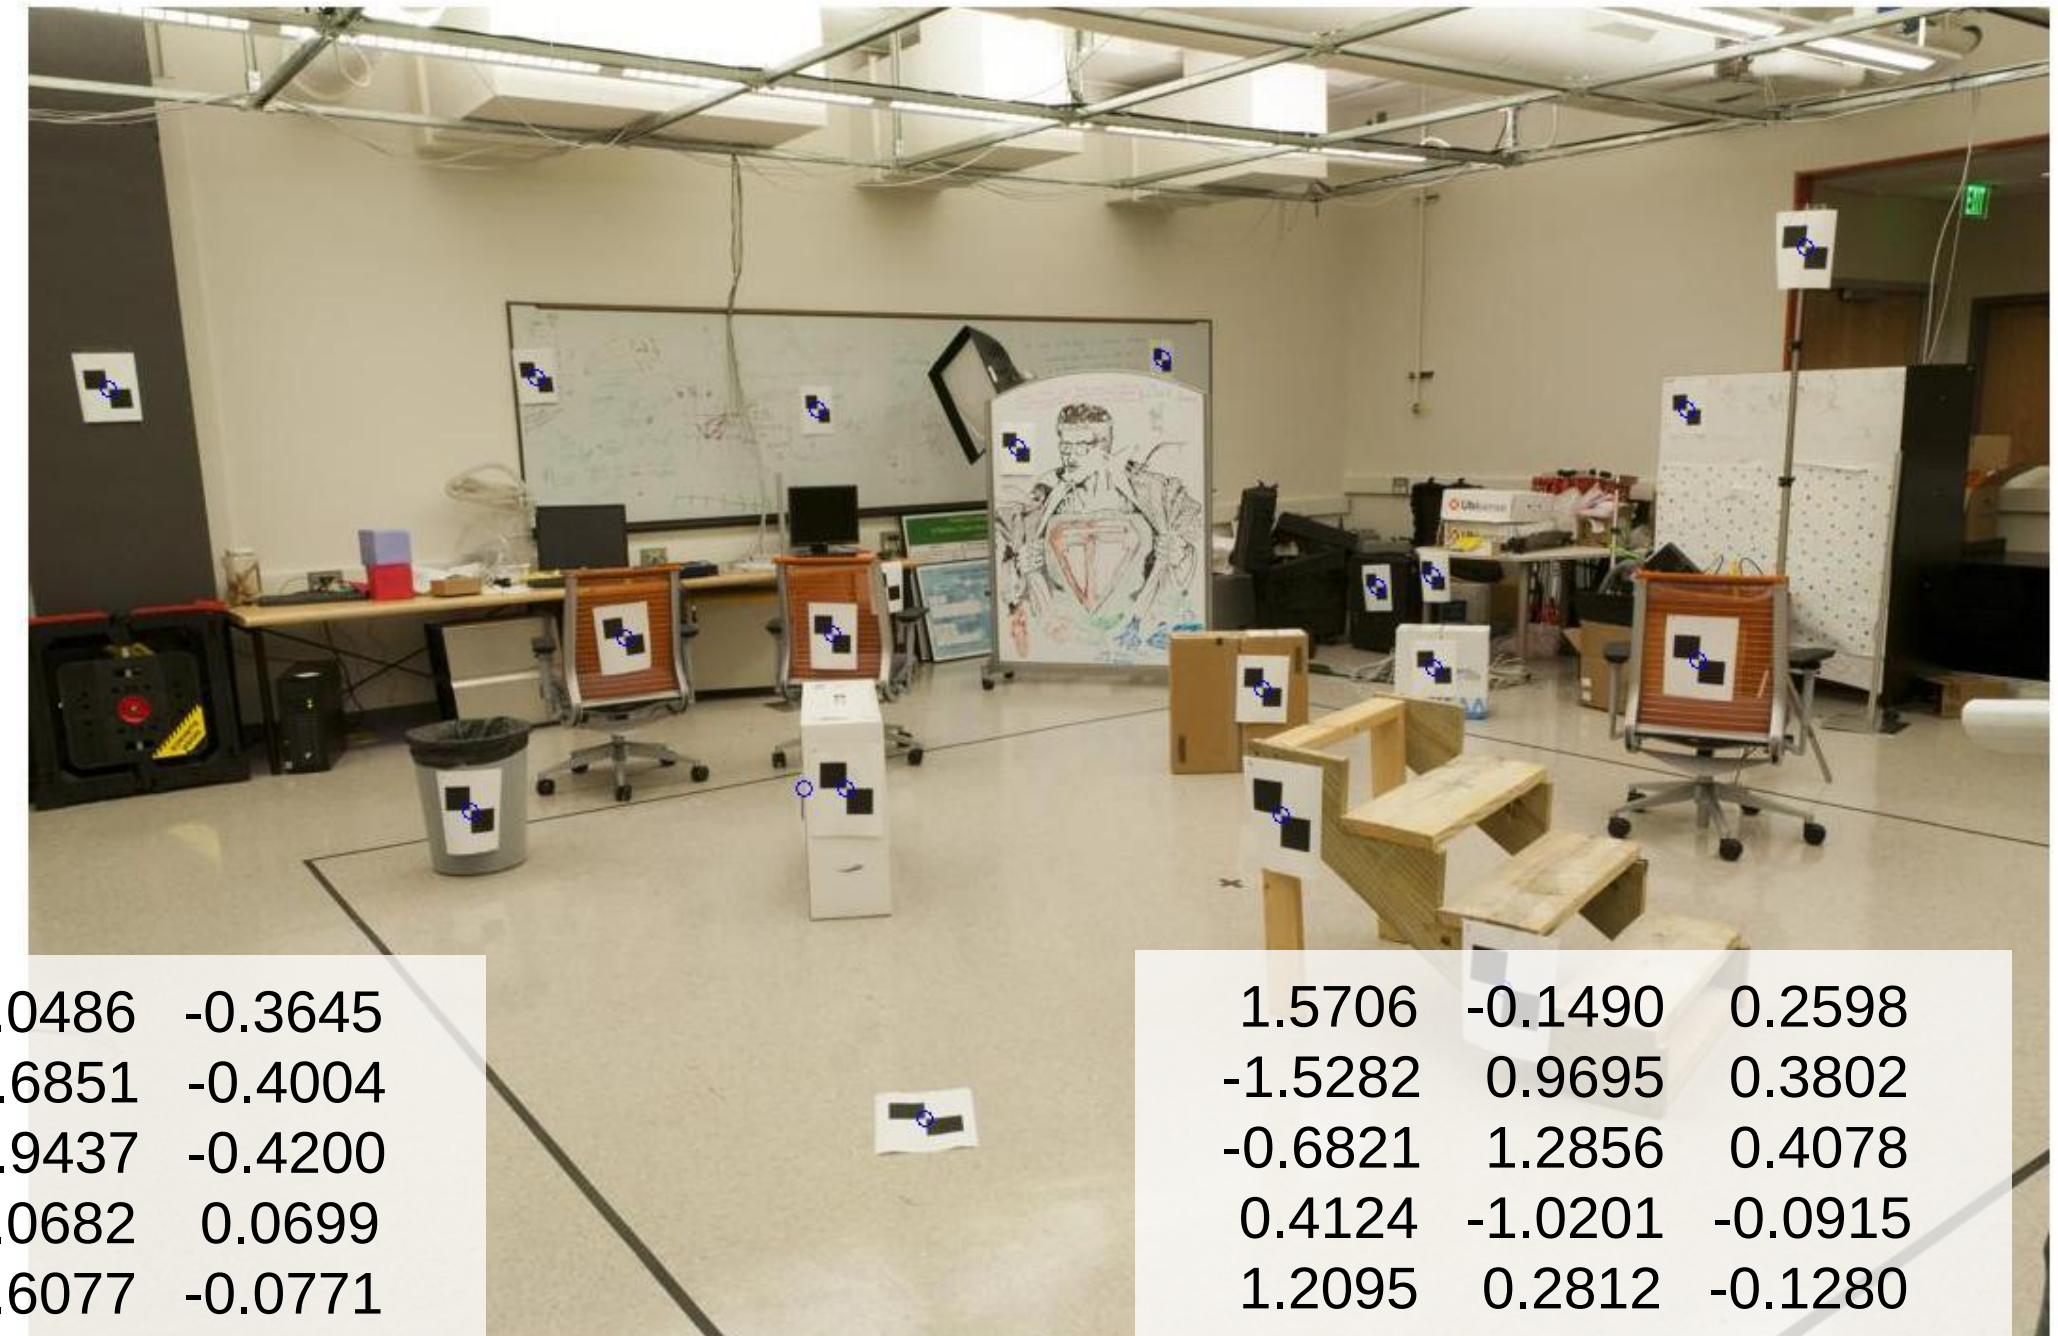

1.0486	-0.3645
-1.6851	-0.4004
-0.9437	-0.4200
1.0682	0.0699
0.6077	-0.0771
1.2543	-0.6454
-0.2709	0.8635
-0.4571	-0.3645
-0.7902	0.0307
0.7318	0.6382
-1.0580	0.3312
0.3464	0.3377
0.3137	0.1189
-0.4310	0.0242
-0.4799	0.2920
0.6109	0.0830
-0.4081	0.2920
-0.1109	-0.2992
0.5129	-0.0575
0.1406	-0.4527

1.5706	-0.1490	0.2598
-1.5282	0.9695	0.3802
-0.6821	1.2856	0.4078
0.4124	-1.0201	-0.0915
1.2095	0.2812	-0.1280
0.8819	-0.8481	0.5255
-0.9442	-1.1583	-0.3759
0.0415	1.3445	0.3240
-0.7975	0.3017	-0.0826
-0.4329	-1.4151	-0.2774
-1.1475	-0.0772	-0.2667
-0.5149	-1.1784	-0.1401
0.1993	-0.2854	-0.2114
-0.4320	0.2143	-0.1053
-0.7481	-0.3840	-0.2408
0.8078	-0.1196	-0.2631
-0.7605	-0.5792	-0.1936
0.3237	0.7970	0.2170
1.3089	0.5786	-0.1887
1.2323	1.4421	0.4506

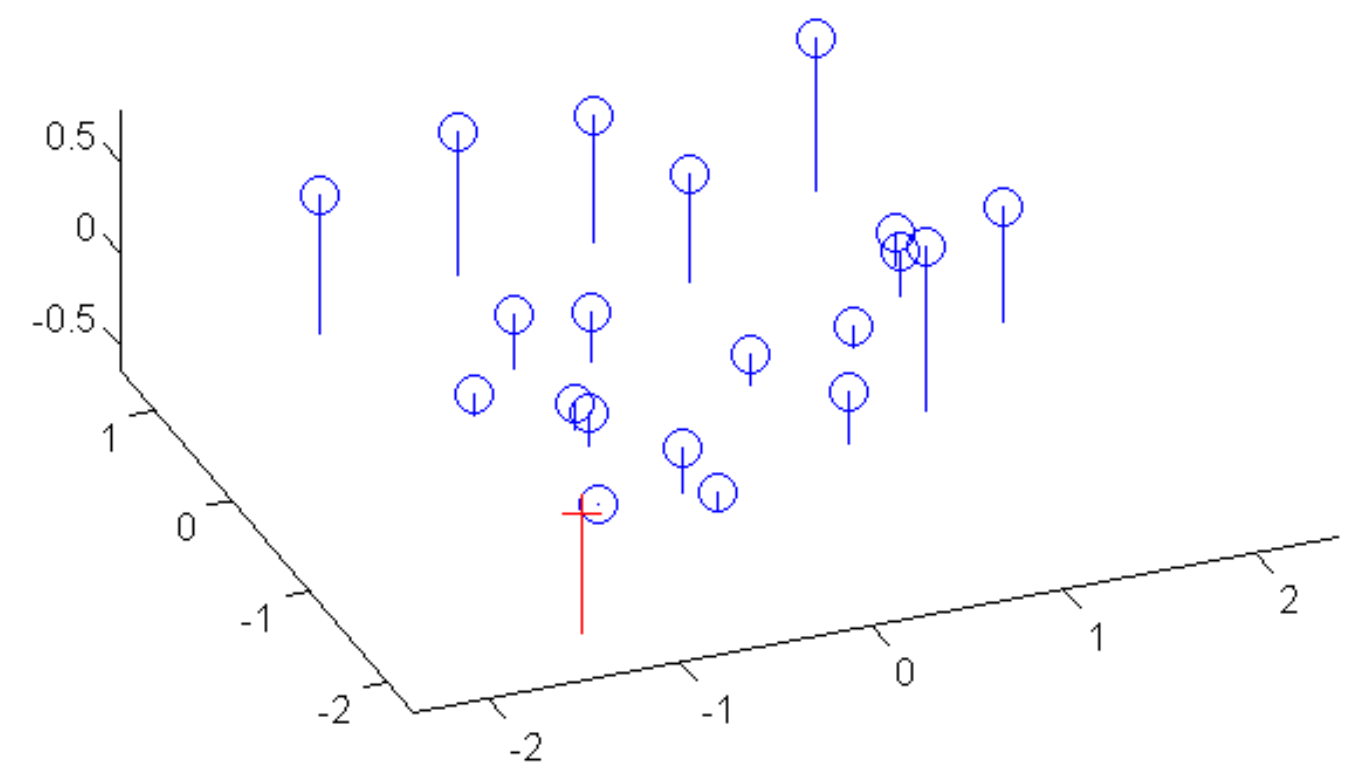

Unknown Camera Parameters

Known 2d image coords

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Known 3d locations

$$su = m_{11}X + m_{12}Y + m_{13}Z + m_{14}$$

$$sv = m_{21}X + m_{22}Y + m_{23}Z + m_{24}$$

$$s = m_{31}X + m_{32}Y + m_{33}Z + m_{34}$$

$$u = \frac{m_{11}X + m_{12}Y + m_{13}Z + m_{14}}{m_{31}X + m_{32}Y + m_{33}Z + m_{34}}$$

$$v = \frac{m_{21}X + m_{22}Y + m_{23}Z + m_{24}}{m_{31}X + m_{32}Y + m_{33}Z + m_{34}}$$

Unknown Camera Parameters

Known 2d image coords

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Known 3d locations

$$u = \frac{m_{11}X + m_{12}Y + m_{13}Z + m_{14}}{m_{31}X + m_{32}Y + m_{33}Z + m_{34}}$$

$$v = \frac{m_{21}X + m_{22}Y + m_{23}Z + m_{24}}{m_{31}X + m_{32}Y + m_{33}Z + m_{34}}$$

$$(m_{31}X + m_{32}Y + m_{33}Z + m_{34})u = m_{11}X + m_{12}Y + m_{13}Z + m_{14}$$

$$(m_{31}X + m_{32}Y + m_{33}Z + m_{34})v = m_{21}X + m_{22}Y + m_{23}Z + m_{24}$$

$$m_{31}uX + m_{32}uY + m_{33}uZ + m_{34}u = m_{11}X + m_{12}Y + m_{13}Z + m_{14}$$

$$m_{31}vX + m_{32}vY + m_{33}vZ + m_{34}v = m_{21}X + m_{22}Y + m_{23}Z + m_{24}$$

Unknown Camera Parameters

Known 2d image coords

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Known 3d locations

$$m_{31}uX + m_{32}uY + m_{33}uZ + m_{34}u = m_{11}X + m_{12}Y + m_{13}Z + m_{14}$$
$$m_{31}vX + m_{32}vY + m_{33}vZ + m_{34}v = m_{21}X + m_{22}Y + m_{23}Z + m_{24}$$

$$0 = m_{11}X + m_{12}Y + m_{13}Z + m_{14} - m_{31}uX - m_{32}uY - m_{33}uZ - m_{34}u$$
$$0 = m_{21}X + m_{22}Y + m_{23}Z + m_{24} - m_{31}vX - m_{32}vY - m_{33}vZ - m_{34}v$$

Unknown Camera Parameters

Known 2d image coords

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Known 3d locations

$$0 = m_{11}X + m_{12}Y + m_{13}Z + m_{14} - m_{31}uX - m_{32}uY - m_{33}uZ - m_{34}u$$

$$0 = m_{21}X + m_{22}Y + m_{23}Z + m_{24} - m_{31}vX - m_{32}vY - m_{33}vZ - m_{34}v$$

- Method 1 – homogeneous linear system. Solve for m's entries using linear least squares

$$\begin{bmatrix} X_1 & Y_1 & Z_1 & 1 & 0 & 0 & 0 & 0 & -u_1X_1 & -u_1Y_1 & -u_1Z_1 & -u_1 \\ 0 & 0 & 0 & 0 & X_1 & Y_1 & Z_1 & 1 & -v_1X_1 & -v_1Y_1 & -v_1Z_1 & -v_1 \\ & & & & & & \vdots & & & & & \\ X_n & Y_n & Z_n & 1 & 0 & 0 & 0 & 0 & -u_nX_n & -u_nY_n & -u_nZ_n & -u_n \\ 0 & 0 & 0 & 0 & X_n & Y_n & Z_n & 1 & -v_nX_n & -v_nY_n & -v_nZ_n & -v_n \end{bmatrix} \begin{bmatrix} m_{11} \\ m_{12} \\ m_{13} \\ m_{14} \\ m_{21} \\ m_{22} \\ m_{23} \\ m_{24} \\ m_{31} \\ m_{32} \\ m_{33} \\ m_{34} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ 0 \end{bmatrix}$$

```
[U, S, V] = svd(A);
M = V(:,end);
M = reshape(M,[],3)';
```

For python, see numpy.linalg.svd

Unknown Camera Parameters

Known 2d image coords

$$\begin{bmatrix} su \\ sv \\ s \end{bmatrix} = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

Known 3d locations

- Method 2 – nonhomogeneous linear system. Solve for m's entries using linear least squares

Ax=b form

$$\begin{bmatrix} X_1 & Y_1 & Z_1 & 1 & 0 & 0 & 0 & 0 & -u_1X_1 & -u_1Y_1 & -u_1Z_1 \\ 0 & 0 & 0 & 0 & X_1 & Y_1 & Z_1 & 1 & -v_1X_1 & -v_1Y_1 & -v_1Z_1 \\ & & & & & & \vdots & & & & \\ X_n & Y_n & Z_n & 1 & 0 & 0 & 0 & 0 & -u_nX_n & -u_nY_n & -u_nZ_n \\ 0 & 0 & 0 & 0 & X_n & Y_n & Z_n & 1 & -v_nX_n & -v_nY_n & -v_nZ_n \end{bmatrix} \begin{bmatrix} m_{11} \\ m_{12} \\ m_{13} \\ m_{14} \\ m_{21} \\ m_{22} \\ m_{23} \\ m_{24} \\ m_{31} \\ m_{32} \\ m_{33} \end{bmatrix} = \begin{bmatrix} u_1 \\ v_1 \\ \vdots \\ u_n \\ v_n \end{bmatrix}$$

```
M = A\Y;
M = [M;1];
M = reshape(M,[],3)';
```

For python, see numpy.linalg.solve

Calibration with linear method

- Advantages
  - Easy to formulate and solve
  - Provides initialization for non-linear methods

- Disadvantages
  - Doesn’t directly give you camera parameters
  - Doesn’t model radial distortion
  - Can’t impose constraints, such as known focal length

- Non-linear methods are preferred
  - Define error as difference between projected points and measured points
  - Minimize error using Newton’s method or other non-linear optimization