



MIG/MAW



Direct Current  
Output



50/60Hz Input  
Power Source




Forced  
Air Cooling



Energy Saving  
And Environment  
Friendly

## Features

- Full bridge IGBT inverter technology, high reliability and less energy consumption, over-heat and over current protection.
- MIG and MMA combination enables multiple functions and high cost effectiveness.
- Post-welding wire-end droplet elimination function, high no-load, slow wire feeding, high arc ignition successful rate.
- Unique welding dynamics control circuit; double drive wire feeding configuration to ensure stable arc, less spatter, fine welding bead and high welding efficiency.
- A prompt feedback circuit that provides for stable arc can keep electric arc adjusted responsively as wire stick-out varies.
- High duty circle can withstand long time high load welding.

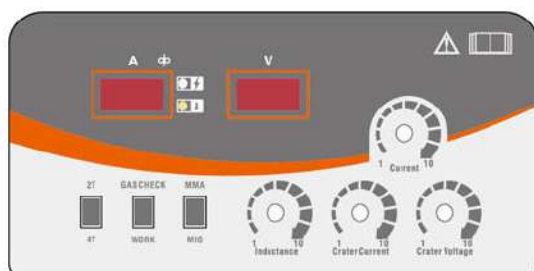

## Applications

Suitable for normal low carbon steel, stainless steel (thickness  $\geq 1\text{mm}$ ), aluminum and its alloys (thickness  $\geq 3\text{mm}$ ); wide application in shipbuilding, steels structure, petroleum chemical industry, automobile, open field construction, etc.





MIG/MAG



MIG350/500

## Specifications

### Standard

- MIG/MAG
- MMA
- Hot start
- O.C. & O.H. protection
- 2T/4T
- Gas check (MIG350)
- Inching
- Slow feeding

### Optional

- 4-roller wire feeder

## Accessories

### Standard

- 1 set wire feeder: WF-23A +5m cable
- 1 pc 3m MB-36 MIG torch
- 1 pc AC36V CO<sub>2</sub> regulator
- 1 set 500A earth clamp +35mm<sup>2</sup>×3m cable +quick plug (MIG350)
- 1 set 500A earth clamp +50mm<sup>2</sup>×3m cable +quick plug (MIG500)

### Optional

- MB 501D (3m) water-cooled torch
- 4L or 6.5L 220VAC water tank
- Wire feeder: Plastic panel P045 or CS-501B
- Trolley



\* Please refer to page 55 (the inside back cover) for accessories pictures.

|                                  | MIG350 N216          | MIG500 N308         |
|----------------------------------|----------------------|---------------------|
| Input power source               | 3~AC380V±15% 50/60Hz |                     |
| Rated input current (A)          | 19.6                 | 36.1                |
| Rated input power capacity (KVA) | 13.9                 | 25.6                |
| Power factor (cosφ)              | 0.9                  | 0.9                 |
| No-load voltage (V)              | 60                   | 66                  |
| Rated output (A/V)               | 350/34               | 500/40              |
| Welding voltage (V)              | 15.5-38              | 15.5-50             |
| Welding current (A)              | 50-350               | 50-500              |
| Wire speed (m/min)               | 1.5-18               | 1.5-18              |
| Output characteristics           | MMA: CC MIG/MAG: CV  | MMA: CC MIG/MAG: CV |
| Rated duty cycle (%) @40℃        | 50                   | 60                  |
| Efficiency (%)                   | 85                   | 85                  |
| Protection class                 | IP21S                | IP21S               |
| Insulation class                 | F                    | F                   |
| Dimensions (mm)                  | 680×415×560          | 715×420×725         |
| Weight (Kg)                      | 35                   | 57                  |