



MIG/GMAW



Direct Current
Output



50/60Hz Input
Power Source




Forced
Air Cooling



Energy Saving
And Environment
Friendly

Features

- Full bridge IGBT inverter technology, high reliability and less energy consumption, over-heat and over current protection.
- MIG and MMA combination enables multiple functions and high cost effectiveness.
- Post-welding wire-end droplet elimination function, high no-load, slow wire feeding, high arc ignition successful rate.
- Unique welding dynamics control circuit; double drive wire feeding configuration to ensure stable arc, less spatter, fine welding bead and high welding efficiency.
- A prompt feedback circuit that provides for stable arc can keep electric arc adjusted responsively as wire stick-out varies.
- High duty circle can withstand long time high load welding.

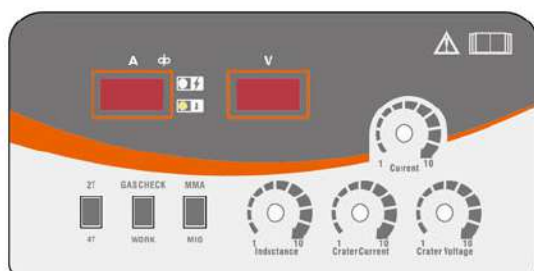

Applications

Suitable for normal low carbon steel, stainless steel (thickness $\geq 1\text{mm}$), aluminum and its alloys (thickness $\geq 3\text{mm}$); wide application in shipbuilding, steels structure, petroleum chemical industry, automobile, open field construction, etc.





MIG/MAG



MIG350/500

Specifications

Standard

- MIG/MAG
- MMA
- Hot start
- O.C. & O.H. protection
- 2T/4T
- Gas check (MIG350)
- Inching
- Slow feeding

Optional

- 4-roller wire feeder

Accessories

Standard

- 1 set wire feeder: WF-23A +5m cable
- 1 pc 3m MB-36 MIG torch
- 1 pc AC36V CO₂ regulator
- 1 set 500A earth clamp +35mm²×3m cable +quick plug (MIG350)
- 1 set 500A earth clamp +50mm²×3m cable +quick plug (MIG500)

Optional

- MB 501D (3m) water-cooled torch
- 4L or 6.5L 220VAC water tank
- Wire feeder: Plastic panel P045 or CS-501B
- Trolley



* Please refer to page 55 (the inside back cover) for accessories pictures.

	MIG350 N216	MIG500 N308
Input power source	3~AC380V±15% 50/60Hz	
Rated input current (A)	19.6	36.1
Rated input power capacity (KVA)	13.9	25.6
Power factor (cosφ)	0.9	0.9
No-load voltage (V)	60	66
Rated output (A/V)	350/34	500/40
Welding voltage (V)	15.5-38	15.5-50
Welding current (A)	50-350	50-500
Wire speed (m/min)	1.5-18	1.5-18
Output characteristics	MMA: CC MIG/MAG: CV	MMA: CC MIG/MAG: CV
Rated duty cycle (%) @40℃	50	60
Efficiency (%)	85	85
Protection class	IP21S	IP21S
Insulation class	F	F
Dimensions (mm)	680×415×560	715×420×725
Weight (Kg)	35	57