


Unrestricted by work piece type, efficient cleaning with high precision and uniformity



Commonly used in...

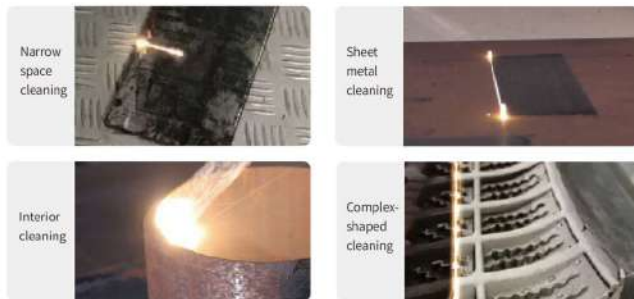

Product Specifications

Model	LS-15000F (G4J801)	LS-20000F single wire (G4J901)/LS-20000F double wire
Input power supply	AC220V (±10%) 50Hz	AC220V (±10%) 50Hz
Input power	5.8 kW	7.8 kW
Center wave length	1080±10 nm	1080±10 nm
Electro-optical conversion efficiency	≥ 40%	≥ 40%
Laser power	1500 W	2000 W
Fiber cable length	12 m	12 m
Cooling method	Water cool	Water cool
Material	Stainless steel/ carbon steel	Stainless steel/ carbon steel
Scan width	0-6 mm	0-6 mm
Penetration	0.5-3 mm	0.5-4.5 mm
Welding thickness	0.5-5 mm	0.5-6 mm
Welding wire diameter	0.8 & 1.0 & 1.2 & 1.6 mm	0.8 & 1.0 & 1.2 & 1.6 mm
Shielding gas	Argon/nitrogen(≥ 3bar)	Argon/nitrogen(≥ 3bar)
Welding gap range	≤ Welding wire diameter	≤ Welding wire diameter
Material	Stainless steel/ carbon steel	Stainless steel/ carbon steel
Scan width	0-6 mm	0-6 mm
Penetration	0.5-3 mm	0.5-4.5 mm
Welding thickness	0.5-5 mm	0.5-6 mm
Welding wire diameter	0.8 & 1.0 & 1.2 & 1.6 mm	0.8 & 1.0 & 1.2 & 1.6 mm
Shielding gas	Argon/nitrogen(≥ 3bar)	Argon/nitrogen(≥ 3bar)
Welding gap range	≤ Welding wire diameter	≤ Welding wire diameter
Recommended cutting thickness	≤ 3 mm	≤ 5 mm
Max cutting thickness	5 mm	6 mm
Shielding gas	Argon/nitrogen (4 bar ≤ gas pressure ≤ 7 bar)	Argon/nitrogen (4 bar ≤ gas pressure ≤ 7 bar)
Cleaning speed	50 mm/s	50 mm/s
Standoff distance	15 cm (F150 focusing lens for BW101-GS) 60 cm (F600 focusing lens for BW101-GS) 15 cm (F150 focusing lens for SUP23T) 40 cm (F400 focusing lens for SUP23T) 80 cm (F800 focusing lens for SUP23T)	15 cm (F150 focusing lens for BW101-GS) 60 cm (F600 focusing lens for BW101-GS) 15 cm (F150 focusing lens for SUP23T) 40 cm (F400 focusing lens for SUP23T) 80 cm (F800 focusing lens for SUP23T)
Max. cleaning width	0-10 mm (F150 focusing lens for BW101-GS) 0-80 mm (F600 focusing lens for BW101-GS) 0-30 mm (F150 focusing lens for SUP23T) 0-60 mm (F400 focusing lens for SUP23T) 0-120 mm (F800 focusing lens for SUP23T)	0-10 mm (F150 focusing lens for BW101-GS) 0-80 mm (F600 focusing lens for BW101-GS) 0-30 mm (F150 focusing lens for SUP23T) 0-60 mm (F400 focusing lens for SUP23T) 0-120 mm (F800 focusing lens for SUP23T)
Shielding gas	Use oil-free and moisture-free gas; gas pressure ≥ 3 bar; other inert gases	Use oil-free and moisture-free gas; gas pressure ≥ 3 bar; other inert gases
Water tank capacity	8 L	8 L
Operating temperature	-10°C ~40°C ; ≤ 7°C, need to use antifreeze	-10°C ~40°C ; ≤ 7°C, need to use antifreeze
Operating humidity	≤ 70% at 40°C ; ≤ 90% at 20°C	≤ 70% at 40°C ; ≤ 90% at 20°C
Power source weight	85 kg	92 kg
Package weight	103 kg	110 kg
Power source dimensions	773*410*737 mm	773*410*737 mm
Package dimensions	865*475*1035 mm	865*475*1035 mm
Wire feeder weight	11.5 kg	11.5 kg(single wire) 30 kg(double wire)
Wire feeder package weight	17.3 kg	17.3 kg(single wire) 33 kg(double wire)
Wire feeder dimensions	628*240*340 mm	628*240*340 mm(single wire) 575*296*832.5 mm(double wire)
Wire feeder package dimensions	890*320*430 mm	890*320*430 mm(single wire) 665*335*980 mm(double wire)

*: The cleaning parameters of the two guns, BW101-GS and SUP23T, are different.