

CUT series

 **JASIC®**



Products' components and functions may be subject to change.



Excellent Cutting Results With Limited Dross And Smooth Cutting Surface

- CUT 125 (L312II) with quality cut thickness of 30mm and max. cut thickness of 50mm
- CUT 160 (L316II) with quality cut thickness of 40mm and max. cut thickness of 60mm



Auto-detection For Cut Starts

Higher cut accuracy with edge starts and pierce cuts auto-detection, significantly extending consumables' lifespan




High Voltage Pulse Arc Ignition

- Cutting with high voltage pulse arc ignition can significantly reduce the interference of arc ignition on CNC equipment




Products'components and functions may be subject to change.

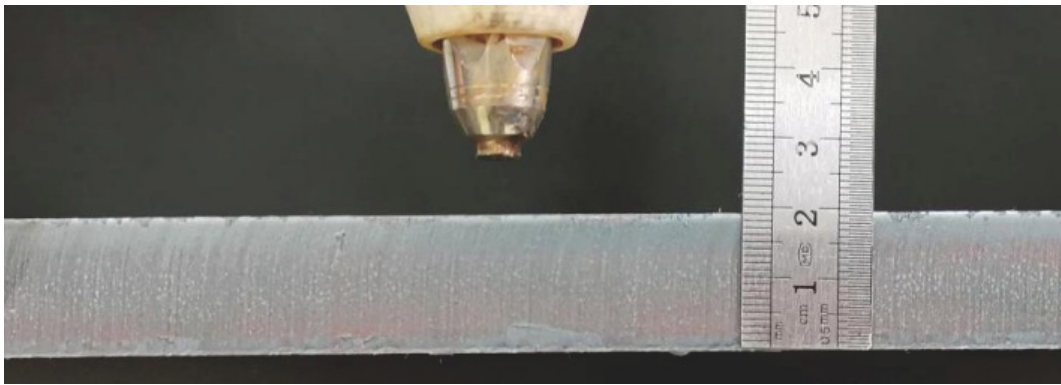


Carbon Steel Plate 20mm

CUT 125(L312II): 125A - 800mm/min - 0.5MPa

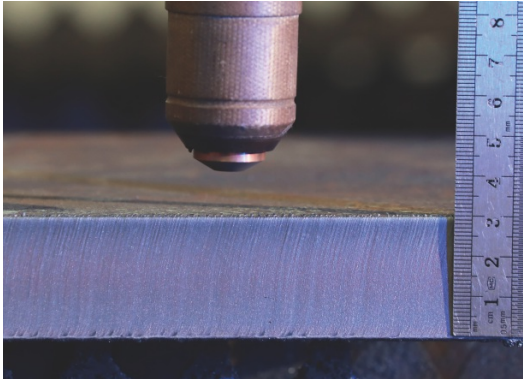


Carbon Steel Plate 30mm

CUT 160(L316II): 160A - 500mm/min - 0.5MPa

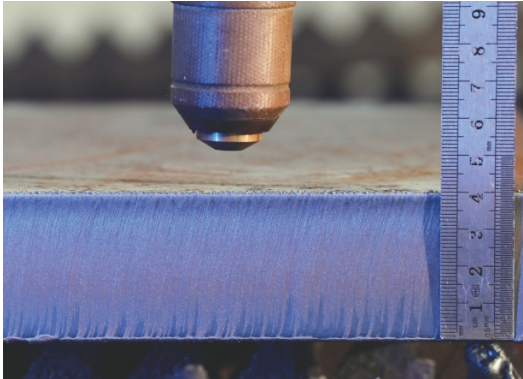

Carbon Steel Plate 40mm

CUT 160(L316II): 160A - 350mm/min - 0.5MPa

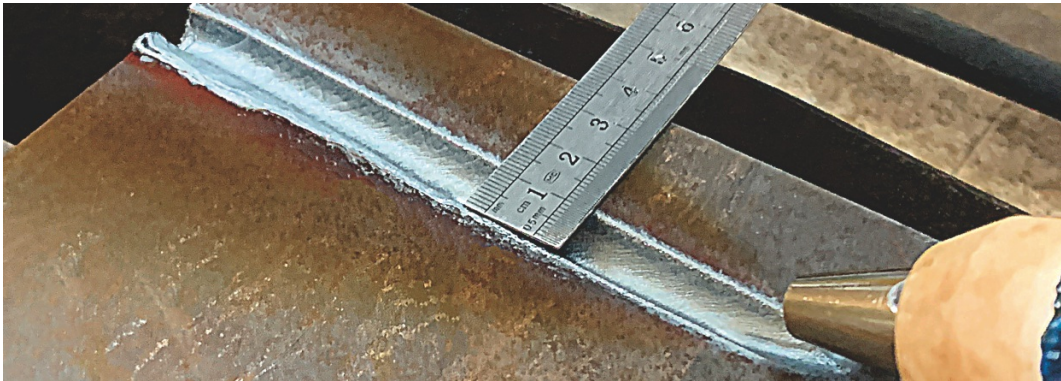

Plasma Arc Gouging By CUT125 With Automatic Carriage

Gouging carriage: GCD400-3 gouging&beveling function Gouging torch: P80P-100A-8M
Gouging current: 100A Nozzle diameter: 2.5mm Travel speed: 250mm/min
Working pressure: 0.4MPa Bevel angle: 30 ° Bevel width: 11~12mm Bevel depth: 6~7mm

MIG

CUT

SAW



CUT 125 L312II
CUT 160 L316II



Products'components and functions may be subject to change.

Excellent Cutting Performance

- Excellent cutting results with limited dross and smooth cutting surface
- Continuous cutting, mesh cutting, and plasma arc gouging functions
- Auto-detection for edge starts and pierce starts
- Stable output, remains functional even with input voltage low to AC300V
- Can be used with CNC machines
- Two types of arc ignition methods: high frequency(HF) and high voltage pulse(HV).
Arc ignition by high voltage pulse can significantly reduce the interference of arc ignition on CNC equipment.

- Dust-Free sealed air passage
- On-demand fan
- Hi-Def digital display

Standard Accessories

- 35-50 quick plug x1
- 2-pin aviation plug x1
- 4-pin aviation plug x1
- 6m cutting torch x1



		CUT 125 L312II	CUT 160 L316II
Input	Rated input voltage(V)	3ph AC380V±15% 50Hz	3ph AC380V ±15%50Hz
	Rated input power capacity (kVA)	23	29.2
	Power factor	0.9	0.9
Output	Rated no-load voltage(V)	350	320
	Cutting current voltage(A)	30~125	30~160
	Rated output voltage(V)	130	144
	Quality cut thickness (mm) @speed : 350mm/min	30 (Carbon steel)	40 (Carbon steel)
	Sever cut thickness (mm)	50 (Carbon steel)	60 (Carbon steel)
Others		Pilot arc ignition	Pilot arc ignition
	Arc start	100%	60%
	Rated duty cycle @40°C	H	H
	Insulation class	IP23	IP21S
	Protection class	51	54
	Weight(kg)	690*349*635	690*349*635
	Dimensions(mm)		