



Direct Current
Output



50/60Hz Input
Power Source



Forced
Air Cooling



Energy Saving
And Environment
Friendly




TIG/GTAW



TIG200P PFC

Features

- PFC technology: AC95-265V input voltage, power factor higher than 0.99, energy saving.
- Digital control, MCU technology, automatic parameter saving.
- Good arc stiffness and concentrated heat.
- Stable arc, good shaping and less deformation.
- Excellent performance with Pulse TIG, special for thin material welding.
- Suitable for welding materials such as steel, stainless steel, titanium, copper, nickel and their alloys.
- Applicable in vessel, bike, decoration, outdoor advertising, etc.

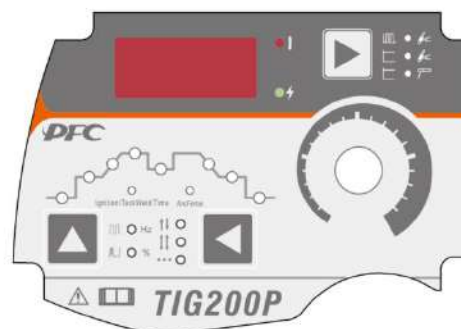

Specifications

Standard

- HF
- DC Pulse TIG
- Anti-stick
- Built-in hot start
- Built-in arc force
- 2T/4T/Spot
- O.H. indicator
- Digital display meter
- Automatic saving parameter

Optional

- Remote control



* Please refer to page 55 (the inside back cover) for accessories pictures.

Accessories

Standard

- 1pc 4m WP-26K-E TIG torch
- 1pc 300A earth clamp+16mm²×3m cable+quick plug 300A
- 1pc φ6.5 gas quick socket
- 1pc quick plug

TIG200P PFC W218		
Input power source	1~AC230V (95-265V) 50/60Hz	
	AC115V	AC230V
Rated input current (A)	27.8	18.7
Rated input power Capacity(KVA)	3.2	4.3
TIG output current range (A)	10-160	10-200
MMA output current range (A)	10-120	10-180
Pre/Post-flow time (S)	0-15	
Up/Down slope (S)	0-10	
Arc starting	HF	
No-load voltage (V)	65	
Rated duty cycle (%) @40°C	35	30
Efficiency (%)	85	85
Power factor (cosφ)	0.99	0.99
Protection class	IP21S	
Insulation class	F	
Dimensions (mm)	420×135×235	
Weight (Kg)	7.5	

