Introduction to QActors and QRobots (2017)

Antonio Natali

Alma Mater Studiorum – University of Bologna
via Sacchi 3,47023 Cesena, Italy,
Viale Risorgimento 2,40136 Bologna, Italy
antonio.natali@studio.unibo.it

Table of Contents

1 Introduction to QActors

QActor is the name given to ta custom meta-model inspired to the actor model (as can be found in the `Akka` library). The `qa` language is a custom language that can allow us to express in a concise way the structure, the interaction and also the behaviour of (distributed) software systems composed of a set of *QActor*.

The leading *Q/q* means 'quasi' since the *QActor* meta-model and the `qa` language do introduce (with respect to Akka) their own peculiarities, including reactive actions and even-driven programming concepts.

This work is an introduction to the main concepts of the *QActor* meta-model and to a 'core' set of constructs of the `qa` language. Let us start with some example.

1.1 Example: the 'hello world'

The first example of a **qa** specification is obviously the classical 'hello world':

```
/*
 * hello.qa
 */
System helloSystem
Context ctxHello ip [ host="localhost" port=8010 ]

QActor qahello context ctxHello {
   Plan init normal
       actions[
          println("Hello world" )
       ]
}
```

Listing 1.1. `hello.qa`

The example shows that each *QActor* works within a `Context` that models a computational node associated with a network `IP` (`host`) and a communication `port` (see Subsection **??**).

A *QActor* must define at least one `Plan`, qualified as '`normal`' to state that it represents the starting work of the actor. Each *Plan* of a *QActor* represents the state of a Moore finite state machine (see also Subsection **??**), whose `actions` are defined in a proper section of a *Plan*, enclosed within the 'brackets' `actions[ ... ]`[1].

A *QActor* is intended to be a software component that can perform application *Tasks* by interacting with other *QActor*s by means of `messages` (see Subsection **??**) or `events` (see Subsection **??**). Thus, state transitions can be performed with no-input moves or when a *message* is or an *event* is available. Some simple example will be given in the following sections.

1.2 Example: no-input transitions

The next example defines the behaviour of a *QActor* that performs a `no-input` transition:

```
/*
 * noinputTansition.qa
 */
System noinputTansition
Context ctxNoinputTansition ip [ host="localhost" port=8079 ]

QActor qahellonoinputtrans context ctxNoinputTansition{
   Plan init normal
       [  println("Hello world" ) ]
       switchTo playMusic
```

[1] The key word `actions` can be omitted

```
11      Plan playMusic
12          [   println( playSomeMusic );
13              sound time(1500) file('./audio/tada2.wav')
14          ]
15  }
16  /*
17  OUTPUT
18  ----------------------------
19  "Hello world"
20  playSomeMusic
21  */
```

Listing 1.2. `noinputTansition.qa`

The *QActor* performs a state-switch from its `init` state to the `playMusic` state with a no-input transition `switchTo`. The behaviour of the actor can be represented by a state diagram like that shown in the following picture:

This state diagram is automatically generated, among many other things, by the *QActor* software factory.

1.3 The *QActor* software factory

The *QActor* language/metamodel is associated to a *software factory* that automatically generates the proper system run-time support (including system configuration code) so to allow Application designers to focus on application logic. The `qa`software factory is implemented as a set of Eclipse plug-ins, built by using the `XText` framework.

For each *Context*, the *QActor* software factory generates an Akka actor-system and a `SystemCreationActor` that work as the 'father' of all the other actors in that *Context*. More specifically, this actor creates:

- a Akka actor of class `EventLoopActor`
- a Akka actor of class `CtxServerAgent`
- a Akka actor for each *QActor* defined in the context

The `CtxServerAgent` allows messages exchanged among *QActor* working on different contexts to flow throw the context ports (using the `TCP/IP` protocol) and to deliver the message in the message-queue of the destination *QActor*.

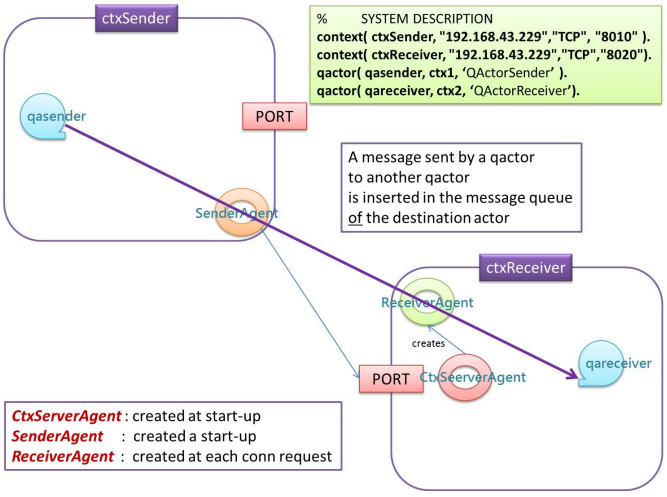

For each connection, an Akka actor of class `ReceiverAgent` is created. This actor handles the message sent on that connection, by sending a `message` to the destination actor and an `event` to the `EventLoopActor`.

1.4 The *QActor* knowledge-base

For each actor and for each *Context*, the *QActor* software factory generates (Java) code in the directories `scr-gen` and `src`. Moreover, a `gradle` build file is also generated; for the example, it is named `build_ctxHello.gradle`.

Each actor requires a set of configuration files, each storing a description written in tuProlog syntax. The picture hereunder shows the set of tuProlog theories associated with each actor:

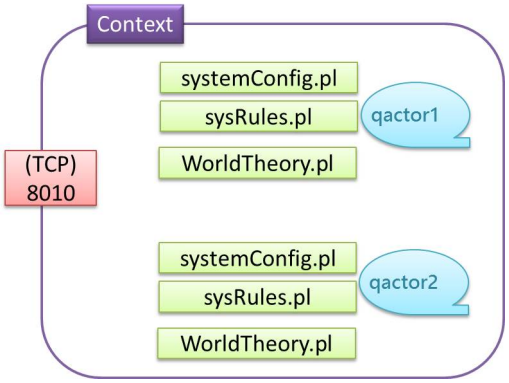

- The theory `systemConfig.pl` (the name can be different from system to system) describes the configuration of the system.
- The theory `sysRules.pl` describes a set of rules used at system configuration time.
- The theory `WorldTheory.pl` describes a set of rules and facts that give a symbolic representation of the "world" in which a *QActor* is working.

In the case of the example of Subsection 1.1:

- The file that describes the system configuration (named `hellosystem.pl`) is generated in the directory `srcMore/it/unibo/ctxHello`.
- The file `sysRules.pl` it generated in the directory `srcMore/it/unibo/ctxHello`.
- The `WorldTheory.pl` is generated in the directory `srcMore/it/unibo/qahello`.
- The state diagram (named `qahell.gv`) is generated in the directory `srcMore/it/unibo/qahello`.

1.5 Facts about the state

The `WorldTheory` includes facts about the state of the actor and of the world. For example:

`actorobj/1`	memorizes a reference to the Java/Akka object that implements the actor (see Subsection ??)
`actorOpDone/2`	memorizes the result of the last `actorOp` executed (see Subsection 2.10)
`goalResult/1`	memorizes the result of the last goal given to a `demo` operation (see Subsection 1.6)

Facts like `actorOpDone/1`, `goalResult/1`, etc. are `'singleton facts'`. i.e. there is always one clause for each of them, related to the last action executed.

The facts and rules stored in the `WorldTheory.pl` file of a *QActor* can be used to specify conditional execution of actions, by prefixing an action with a guard of the form `[GUARD]` where `GUARD` is written as a tuProlog Term (see Subsection 2.5).

1.6 Example: the demo operator

A *QActor* can use the built-in `demo` operator to execute actions implemented in tuProlog within the actor's *WorldTheory*. For example, any *QActor* is 'natively' able to compute the `n-th` Fibonacci's number in two ways: in a *fast* way (`fib/2` Prolog rule) and in a *slow* way (`fibo/2` Prolog rule).

The result of the `demo` operator is memorized in the singleton fact `goalResult/1` that can be inspected by using a guard (see Subsection 2.5).

```
/*
 * demoExample.qa
 */
System demoExample
Context ctxDemoExample ip [ host="localhost" port=8079 ]
QActor qademoexample context ctxDemoExample{
    Plan init normal
        [   println("qademoexample STARTS" ) ;
            demo fibo(6,X);
            [ ?? goalResult(R) ] println(R) ;
            demo fibo(6,8);
            [ ?? goalResult(R) ] println(R) ;
            demo fibo(X,8);   //fails since it fibo/2 is not invertible
            [ ?? goalResult(R) ] println(R) ;
            println("qademoexample ENDS" )
        ]
 }
/*
OUTPUT
----------------------------
"qademoexample STARTS"
fibo(6,8)
fibo(6,8)
failure
"qademoexample ENDS"
*/
```

Listing 1.3. `demoExample.qa`

1.7 Example: repeat/resume plans

The next example defines the behaviour of a *QActor* that implements the state machine shown in the following state diagram:




```
/*
 * basic.qa
 */
System basic
Context ctxBasic ip [ host="localhost" port=8079 ]

QActor player context ctxBasic{
    Plan init normal
        [   println("player STARTS" ) ;
            println("player ENDS" )
        ]
        switchTo playMusic
//      finally repeatPlan 1  //(1)

    Plan playMusic resumeLastPlan
```

```
16        [  println( playSomeMusic );
17           sound time(1500) file('./audio/tada2.wav') ;
18           delay 500
19        ]
20        finally repeatPlan 1
21  }
22  /*
23  OUTPUT
24  ----------------------------
25  "player STARTS"
26  "player ENDS"
27  playSomeMusic
28  playSomeMusic
29  */
```

Listing 1.4. `basic.qa`

The *QActor* performs a state-switch from its initial state to the `playMusic` state with a no-input transition `switchTo`. The `playMusic` state repeats its actions two times (because of `repeatPlan 1`) and then makes a no-input transition to its previous ('calling') state (`player`).

From the output, we note that all the actions of a plan are execute before the transition. This can be better explained by introducing the main rules that define the behaviour of a *Plan* (i.e. its operational semantics).

1.8 How a Plan works

When a *QActor* enters in a Plan, it works as follows:

1. the *QActor* executes, in sequential way, all the actions specified in the *Plan*. Each action must be defined as an `algorithm`, i.e. it must terminate;
2. if the *Plan* specification ends with the sentence `finally repeatPlan N` (`N` natural number `N>=1`), the state actions are repeated `N` times. If `N` is omitted, the *Plan* is repeated forever. The key word `finally` highlights the fact that the repetition a sentence must always written at the end of a Plan specification;
3. when the state actions are terminated (and before any repetition), the *QActor* can enter in a `transition phase` in order to perform a switch to another state (let us call it '*nextState*' and '*oldState*' the original one). For the details, see Subsection 2.3;
4. when a state has terminated its work (i.e. its actions, transition and repetition), it can resume the execution of its *oldState*. This happens if the `resumeLastPlan` keyword is inserted after the state name. Otherwise, the state is considered a `termination state` and the *QActor* does not perform any other work.

Thus, if we remove the comment `(1)` from the example of Subsection 1.2, the output will be:

```
1  "player STARTS"
2  "player ENDS"
3  playSomeMusic
4  playSomeMusic
5  "player STARTS"
6  "player ENDS"
7  playSomeMusic
8  playSomeMusic
```

If we remove the `resumeLastPlan` specification from `playMusic`, the control does not return to `player` and the output is the same as Subsection 1.2.

2 The qa language/metamodel.

The qa language is a custom language[2] built by exploiting the XText technology; thus, it is also a metamodel. Technically we can say that qa is a 'brother' of UML, since it is based on EMOF.

The qa language aims at overcoming the abstraction gap between the needs of distributed proactive/reactive systems and the conventional (object-based) programming language (mainly Java, C#, C, etc) normally used for the implementation of software systems. In fact, a qa specification aims at capturing main architectural aspects of the system by providing a support for rapid software prototyping and a graceful transition from object-oriented programming to message-based and event-based computations.

The syntax of the qa language has the following form :

```
QActorSystem:
   "System" spec=QActorSystemSpec
;
QActorSystemSpec:
   name=ID
   ( message  += Message )*
   ( context  += Context )*
   ( actor    += QActor  )*
;
```

The declaration of messages and events (if any) must immediately follow the System sentence, since they represent system-wide information. For example:

```
System basicProdCons
Dispatch info : info(X)
Context ctxBasicProdCons ip [ host="localhost" port=8019 ]
```

Listing 1.5. Message declaration

The syntax for *message* and *event* declarations is:

```
Message :         OutOnlyMessage | OutInMessage ;
OutOnlyMessage :  Dispatch | Event | Signal | Token ;
OutInMessage:     Request | Invitation ;

Event:     "Event"     name=ID ":" msg = PHead ;
Signal:    "Signal"    name=ID ":" msg = PHead ;
Token:     "Token"     name=ID ":" msg = PHead ;
Dispatch:  "Dispatch"  name=ID ":" msg = PHead ;
Request:   "Request"   name=ID ":" msg = PHead ;
Invitation: "Invitation" name=ID ":" msg = PHead ;
```

PHead: The PHead rule defines a subset of Prolog syntax:

```
   PHead : PAtom | PStruct ;
   PAtom : PAtomString | Variable | PAtomNum | PAtomic ;
   PStruct : name = ID "(" (msgArg += PTerm)? ("," msgArg += PTerm)* ")";
   PTerm  : PAtom | PStruct ...
```

At the moment, only dispatch, request and event are implemented.

2.1 Messages

In the *QActor* metamodel, a message is defined as information sent in asynchronous way by some source to some specific destination. For *asynchronous* transmission we intend that the messages can be '**buffered**' by the infrastructure, while the '**unbuffered**' transmission is said to be synchronous.

A message does not force the execution of code: a message m sent from an actor sender to an actor *receiver* can trigger a state transition (see Subsection 2.3) in the receiver. If the receiver is not 'waiting' fro

[2] The qa language/metamodel is defined in the project *it.unibo.xtext.qactor*.

a transition including `m`, the message is enqueued in the `receiver` queue. Thus we talk of massage-based behaviour, by excluding massage-driven behaviour (the default behaviour in Akka).

Messages are syntactically represented as follows:

```
msg( MSGID, MSGTYPE, SENDER, RECEIVER, CONTENT, SEQNUM )
```

where:

MSGID	Message identifier
MSGTYPE	Message type (e.g.: dispatch,request,event)
SENDER	Identifier of the sender
RECEIVER	Identifier of the receiver
CONTENT	Message payload
SEQNUM	Unique natural number associated to the message

The msg/6 pattern can be used to express guards (see Subsection 2.5) to allow conditional evaluation of *PlanActions*.

2.2 Events

In the *QActor* metamodel, an event is defined as information emitted by some source without any explicit destination. Events can be *emitted* by the *QActors* that compose a *actor-system* or by sources external to the system.

The occurrence of an event can put in execution some code devoted to the management of that event. We qualify this kind of behaviour as event-driven behaviour, since the event 'forces' the execution of code (see Subsection 4.2).

An event can also trigger state transitions in components, usually working as finite state machines. We qualify this kind of behaviour as event-based behaviour, since the event is 'lost' if no actor is in a state waiting for it.

Events are represented as messages (see Subsection ??) with no destination (`RECEIVER=none`):

```
msg( MSGID, event, EMITTER, none, CONTENT, SEQNUM )
```

2.3 State transitions

A transition from a state (*oldState*) to another state (*nextState*) can be specified in three different ways, according to the following syntax:

PlanTransition

```
PlanTransition : SwitchTransition | MsgTransition  | ReactiveAction ;
```

Thus, a state transition sentence can start:

1. with the keyword switchTo: in this case the automaton performs a SwitchTransition (no-input switch, see Subsection 1.2).

```
SwitchTransition: "switchTo" nextplantrans = NextPlanTransition ;
NextPlanTransition: (guard = Guard)? nextplan=[Plan] ;
```

2. with the keyword reactive: in this case the automaton performs a ReactiveAction that can lead to another state. This case is discussed in Subsection ??.

```
ReactiveAction: "reactive" (guard = Guard)? action=RAction ...
```

3. with the keyword `transition`: in this case the automaton performs a `MsgTransition` that can be triggered by a message or by an event.

```
MsgTransition: "transition" duration=Duration (msgswitch+=StateTransSwitch )?("," msgswitch+=StateTransSwitch)* ;
Duration : (guard = Guard)? "whenTime" (msec=INT | var=Variable) "->" move=[Plan] ;
StateTransSwitch : MsgTransSwitch | EventTransSwitch ;

MsgTransSwitch: "whenMsg" (guard = Guard)? message=[Message] next=TransSwitch ;
EventTransSwitch: "whenEvent" (guard = Guard)? message=[Event] next=TransSwitch ;
```

Thus, a typical state transition involving messages and/or events takes the following form:

A transition specification

```
transition
   whenTime  <timeOut>  ->  <nextState1>
   whenEvent <eventId>  ->  <nextState2>,
   whenMsg   <msgId>    ->  <nextState3>
```

The meaning is:

> the automaton must switch to `<nextState1>` after `<timeOut>` milliseconds. In the mean time, it shall switch to `<nextState2>` if the event named `<eventId>` occurs or to `<nextState3>` if the message named `<msgId>` is sent to the *QActor*.

2.3.1 Switch part. A `TransSwitch` can specify either an explicit new *Plan* to reach or an action to be executed as part of an `implicit Plan` that 'returns' to its caller at the end of its work.

TransSwitch

```
TransSwitch: PlanSwitch | ActionSwitch ;
PlanSwitch:     "->" move = [Plan]  ;
ActionSwitch:  ":" msg = PHead "do" action = StateMoveNormal ;
StateMoveNormal: StateActionMove | OutMessageMove |  ActionDelay | ExtensionMove |
                    BasicMove | StatePlanMove | GuardMove | BasicRobotMove ;
```

For an example, see Section 4

2.4 Plan Actions

A *QActor Plan* specifies a sequence of predefined or user-defined `actions` that must always terminate. The `effects` of actions can be perceived in one of the following ways:

1. as changes in the state of the actor (the actor's `'mind'` , see Subsection ??);
2. as changes in the actor's working environment.

The first kind of actions are referred here as `logical actions` since they do not affect the physical world. The ***actor-mind*** is represented by the *WorldTheory* associated with the actor (see Subsection 1.4)). Actions that change the actor's physical state or the actor's working environment are called `physical actions`.

`Logical action`	usually is a 'pure' computation defined in some general programming language. Actually we use Java, Prolog and JavaScript.
`Physical action`	can be implemented by using low-cost devices such as `RaspberryPi` and `Arduino`
`Timed action`	always terminates within a prefixed time interval. An example is the built-in `sound` action introduced in Subsection 1.2
`Application action`	defined by the application designer according to the constraints imposed by its logical architecture. More on this in Section ??.

Each *QActor* is able to execute a set of built-in actions, defined by the `qa` language, implemented in Java. An example is the `println` action.

The application designer can define new actions either in Java or in tuProlog.

- an action can be defined in tuProlog by introducing a rule in the `Rules` specification (see Subsection 2.7 and Subsection 2.9) or by loading a `user-defined theory` (see Subsection 2.11). This kind of action can be invoked within an actor model by means of the `demo` operator (see Subsection 1.6).
- an action can be defined in Java by writing a `public` method in the actor class generated within the `src` directory. This kind of action can be invoked within an actor model by means of the `actorOp` operator (see Subsection 2.10).

2.4.1 The syntax of a Plan.

From the syntax rules, we can see that each action of a *Plan* can be prefixed by a *guard* (see Subsection 2.5) and that there are three types of actions: `StateMoveNormal`, `EventSwitch` and `MsgSwitch`.

```
1 Plan : "Plan" name=ID ( normal ?= "normal" )? ( resume ?= "resumeLastPlan" )?
2       ("actions")? "["
3        action += PlanTerminatingAction (";" action += PlanTerminatingAction)*
4        "]"
5       ( transition     = PlanTransition )?
6       ( "finally" repeat = AgainPlan )?
7 ;
8 PlanTerminatingAction: (guard = Guard)? move = StateMove ( "else" elsemove=StateMove) ? ;
9 StateMove: StateMoveNormal | EventSwitch | MsgSwitch ;
```

`StateMoveNormal` actions have been introduced in Subsection 2.3.1 and are the conventional actions that one expects in a computational system. The action `EventSwitch` and `MsgSwitch` are introduced to facilitate the handling of received messages and will be introduced in Section 3.

2.5 Guarded actions

The facts and rules stored in the `WorldTheory.pl` file of a *QActor* can be used to specify conditional execution of actions, by prefixing an action with a guard of the form `[GUARD]` where `GUARD` is written as a tuProlog `Phead` (see Section 2).

Actions prefixed by a [GUARD] are executed only when the GUARD is evaluated true. The GUARD can include *unbound variables*[3], possibly bound during the guard evaluation phase. Moreover:

- the prefix !? before the guard condition means that the knowledge (a fact or a rule) that makes the guard true is not removed form the actor's *WorldTheory*;
- the prefix ?? means that the fact or rule that makes the guard true is removed from the actor's *WorldTheory*.

Let us consider the following example;

```
System guardedActions
Context ctxGuardedAction ip [ host="localhost" port=8037 ]
QActor qaguarded context ctxGuardedAction {
   Plan init normal
   [
       [ !? divisible( 10, 2 )] println( isdivisible(10,2) ) ;
       [ !? divisible( 10, 3 )] println( isdivisible(10,3) )
                                else println( notdivisible(10,3) ) ;
       demo fibo(10,R) ;
       [ !? goalResult( fibo(10,R) )] println( result( fibo(10,R) ) ) ;
       [ ?? goalResult( fibo(10,55) )]
         println( fibo(10,55,correct) ) else println( fibo(10,55,wrong) ) ;
       [ ?? goalResult( fibo(10,58) )]
         println( fibo(10,58,correct) ) else println( fibo(10,58,wrong) )
   ]}
```

Listing 1.6. guardedActions.qa

The term divisible/2 is the head of a built-in rule defined in the actor *WorldTheory* (see Subsection 2.8). The output is:

```
/*
OUTPUT
----------------------------
isdivisible(10,2)
notdivisible(10,3)
result(fibo(10,55))
fibo(10,55,correct)
fibo(10,58,wrong)
*/
```

Listing 1.7. guardedActions.qa

2.6 Guarded transitions

Also transitions can be prefixed by a [GUARD]; in this case the transition 'fires' only if the GUARD is evaluated true. Let us show a very simple example:

```
System guardedTransitions
Context ctxGuardedTransitions ip [ host="localhost" port=8037 ]
QActor qaguardedtrans context ctxGuardedTransitions {
   Plan init normal
       [  println("qaguardedtrans STARTS" ) ]
       switchTo [ !? divisible(10,5) ] on
   Plan on
       [  println( on )  ]
       switchTo [ !? divisible(10,2) ] off
   Plan off
       [  println( off )    ]
       switchTo [ !? divisible(10,3) ] init //possible loop!
}
```

[3] We recall that a Prolog variable is syntactically expressed as an identifier starting with an upcase letter.

```
/*
OUTPUT
----------------------------
"qaguardedtrans STARTS"
on
off
*/
```

Listing 1.8. `guardedTransitions.qa`

The generated state diagram is:



More interesting examples will be given in the following.

2.7 Rules at model level

Sometimes can be useful to express tuProlog facts and rules directly in the model specification, especially for configuration or action-selection purposes. The `Rules` option within a *QActor* allows us to define facts and rules by using a `subset` of the tuProlog syntax[4]

For example, let us define the model of a system that plays some music file by consulting its 'sound knowledge-base' defined in the `Rules` section:

```
/*
 * rulesInModel.qa
 */
System rulesInModel
Context ctxRulesInModel ip [ host="localhost" port=8059 ]
QActor rulebasedactor context ctxRulesInModel {
   Rules{
       music(1, './audio/tada2.wav',2000).
       music(2,'./audio/any_commander3.wav',3000).
       music(3,'./audio/computer_complex3.wav',3000).
       music(4,'./audio/illogical_most2.wav',2000).
       music(5,'./audio/computer_process_info4.wav',4000).
       music(6,'./audio/music_interlude20.wav',3000).
       music(7,'./audio/music_dramatic20.wav',3000).
   }
   Plan init normal
   [
       [ ?? music(N,F,T) ] sound time(T) file(F) else endPlan "bye"
   ]
   finally repeatPlan
}
```

Listing 1.9. `rulesInModel.qa`

2.8 Built-in rules

The *WorldTheory* can also define computational rules written in tuProlog. For example:

[4] The extension of this option with full Prolog syntax is a work to do.

actorPrintln(T)	prints the given term T (see Subsection 2) in the actor standard output;
actorOp(M	puts in execution the given Java method M written by the application designer (see Subsection 2.10)
assign(K,V)	associates the given K the the given value V, by removing nay previous association (if any)
getVal(K,V)	unifies the term V with the given key K
inc(I,K,N)	inc(I,K,N) :- value(I,V), N is V + K, assign(I,N)
addRule(R)	adds the given rule R in the *WorldTheory*
removeRule(R)	removes the given rule R from the *WorldTheory*
replaceRule(R,R1)	replace the given rule R with the other rule R1 of the same 'signature'
eval(plus,V1,V2,R)	unifies R with the result of V1+V2. Also available: minus, times, div
eval(lt,X,Y)	true if X<Y. Also available: gt
divisible(V1,V2)	true if V1 is divisible for V2

2.9 Example: using built-in tuProlog rules

The following example shows different ways of using buil-in and user-defined rules.

```
/*
 * builtinExample.qa
 */
System basic
Context ctxBuiltInExample ip [ host="localhost" port=8079 ]

QActor qabuiltinexample context ctxBuiltInExample{
   Rules{
       r1 :- assign(x,10),getVal(x,V1),eval(plus,V1,3,RV),actorPrintln(r1(RV)).
       r2 :- distance(X),actorPrintln(r2(X) ).
       r3 :- assert( distance(200) ).
   }
   Plan init normal
       [   println("execute built-in rules" ) ;
           demo assign(x,30) ;
           demo getVal(x,V) ;
           [ ?? goalResult(getVal(x,V))] println( valueOfx(V) ) ;
           println("execute a user-defined rule r1 (in Rules)" ) ;
           demo r1 ;
           println("add a distance/1 fact" ) ;
           addRule distance(100);
           println("execute a user-defined rule r2 that refers to distance/1" ) ;
           demo r2 ;
           println("execute a user-defined rule r3 that adds another distance/1" ) ;
           demo r3 ;
           println("conditional execution using distance/1 facts as guards" ) ;
           [ ?? distance(D)] println( distance(D) ) else println( nodistance );
           [ ?? distance(D)] println( distance(D) ) else println( nodistance );
           [ ?? distance(D)] println( distance(D) ) else println( nodistance );
           println("remove the rule r1" ) ;
           removeRule r1 ;
           println("attempt to run the removed rule r1" ) ;
           demo r1 ;
           println("END" )
       ]
}
```

Listing 1.10. `builtinExample.qa`

The code should be self-explaining. The output is:

```
/*
OUTPUT
----------------------------
"execute built-in rules"
valueOfx(30)
"execute a user-defined rule r1 (in Rules)"
r1(13)
"add a distance/1 fact"
"execute a user-defined rule r2 that refers to distance/1"
r2(100)
"execute a user-defined rule r3 that adds another distance/1"
"conditional execution using distance/1 facts as guards"
distance(100)
distance(200)
nodistance
"remove the rule r1"
"attempt to run the removed rule r1"
"END"
*/
```

Listing 1.11. `builtinExample.qa`

2.10 The operator `actorOp`

The qa operator `actorOp` allows us to put in execution a Java method written by the application designer as an application-specific part.

Here is an example (project *it.unibo.qactors2017.tests*) that shows how to execute methods that return primitive data and methods that return objects:

```
System actorOpExample
Context ctxActorOpExample ip [ host="localhost" port=8037 ]
QActor qaactoropexample context ctxActorOpExample {
   Plan init normal
       [ println("qaactoropexample STARTS " ) ]
       switchTo testReturnPrimitiveData

   Plan testReturnPrimitiveData
       [
          println("-------------- testReturnPrimitiveData START " ) ;
          actorOp getHello ;
          [ ?? actorOpDone( OP,R ) ] println( done(OP,R) ) ;
          actorOp intToVoid(5) ;
          [ ?? actorOpDone( OP,R ) ] println( done(OP,R) ) ;
          actorOp intToString(5) ;
          [ ?? actorOpDone( OP,R ) ] println( done(OP,R) ) ;
          actorOp intToInt(5) ;
          [ ?? actorOpDone( OP,R ) ] println( done(OP,R) ) ;
          actorOp intToFloat(5) ; //qa floats not yet implemented
          [ ?? actorOpDone( OP,R ) ] println( done(OP,R) ) ;
          println("-------------- testReturnPrimitiveData END " )
       ]
       switchTo testReturnPojo

   Plan testReturnPojo
   [
       println("-------------- testReturnPojo START" ) ;
       actorOp getDate ;
       [ ?? actorOpDone( OP,R ) ] println( done(OP,R) ) ;
       println("-------------- testReturnPojo END " )
   ]
}
/*
OUTPUT
----------------------------
```

```
"qaactoropexample STARTS "
"-------------- testReturnPrimitiveData "
        Java getHello
done(getHello,'hello world')
        Java intToVoid 5
done(intToVoid(5),null)
        Java intTostring 5
done(intToString(5),'51')
        Java intToInt 5
done(intToInt(5),6)
        Java iniToFloat 5
done(intToFloat(5),2.0)
"-------------- testReturnPojo "
        Java getDate
done(getDate,'Tue Sep 26 09:04:19 CEST 2017') */
```

Listing 1.12. `actorOpExample.qa`

The code written by the application designer is:

```
/* Generated by AN DISI Unibo */
/*
This code is generated only ONCE
*/
package it.unibo.qaactoropexample;
import java.util.Calendar;
import java.util.Date;
import it.unibo.is.interfaces.IOutputEnvView;
import it.unibo.qactors.QActorContext;

public class Qaactoropexample extends AbstractQaactoropexample {
    public Qaactoropexample(String actorId, QActorContext myCtx, IOutputEnvView outEnvView ) throws Exception{
        super(actorId, myCtx, outEnvView);
    }
/*
 * Introduced by the Application Designer
 */
    public String getHello(){
        println( "     Java getHello " );
        return "hello world";
    }
    public void intToVoid( int n ){
        println( "     Java intToVoid " + n );
    }
    public int intToInt( int n ) {
        println( "     Java intToInt " + n );
        return n+1;
    }
    public String intToString( int n ) {
        println( "     Java intTostring " + n );
        return ""+n+1;
    }
    public float intToFloat( int n ) {
        println( "     Java iniToFloat " + n );
        return n/2;
    }

    public Date getDate( ) {
        println( "     Java getDate " );
        Calendar rightNow = Calendar.getInstance();
        Date d = rightNow.getTime();
        return d;
    }
}
```

Listing 1.13. `Qaactorop.java`

2.11 Loading and using a user-defined theory

The *WorldTheory* of an actor can be extended by the application designer by using the directive[5] `consult`.

For example, the following system loads a user-defined theory and then works with sensor data, for two times in the same way (plan `accessdata`) :

```
/*
 * atheoryUsage.qa
  */
System atheoryUsage
Context ctxTheoryUsage ip [ host="localhost" port=8049 ]

QActor qatheoryuser context ctxTheoryUsage{
    Plan init normal
    [    println( "qatheoryuser STARTS" ) ;
 /*0*/  demo consult("./src/it/unibo/qatheoryuser/aTheory.pl")
    ]
    switchTo accessdata

    Plan accessdata resumeLastPlan
    [   println( "-----------------------------------" ) ;
/*1*/  [ !? data(S,N,V) ] println( data(S,N,V) ) ;
/*2*/  [ !? validDistance(N,V) ] println( validDistance(N,V) ) ;
/*3*/  demo nearDistance(N,V) ;
/*4*/  [ !? goalResult(nearDistance(N,V)) ] println( warning(N,V) ) ;
/*5*/  demo nears(D) ;
/*6*/  [ !? goalResult(G) ] println( list(G) )
    ]
    finally repeatPlan 1
 }
```

Listing 1.14. `aTheoryUsage.qa`

The theory stored in `aTheory.pl` includes data (facts) and rules to compute relevant data:

```
/* ============================================================
aTheory.pl
============================================================ */
 data(sonar, 1, 10).
 data(sonar, 2, 20).
 data(sonar, 3, 30).
 data(sonar, 4, 40).

 validDistance( N,V ) :- data(sonar, N, V), V>10, V<50.
 nearDistance( N,X ) :- validDistance( N,X ), X < 40.
 nears( D ) :- findall( d( N,V ), nearDistance(N,V), D).

aTheoryInit :- output("initializing the aTheory ...").
:- initialization(aTheoryInit).
```

Listing 1.15. `aTheory.pl`

2.11.1 The initialization directive.

The following directive:

```
:- initialization(goal).
```

sets a starting goal to be executed just after the theory has been consulted.

Thus, the output of the `theoryusage` actor is:

[5] A tuProlog directive is a query immediately executed at the theory load time.

```
/*
OUTPUT
---------------------------
"qatheoryuser STARTS"
initializing the aTheory ...
"-------------------------------------"
data(sonar,1,10)
validDistance(2,20)
warning(2,20)
list(nears([d(2,20),d(3,30)]))
"-------------------------------------"
data(sonar,1,10)
validDistance(2,20)
warning(2,20)
list(nears([d(2,20),d(3,30)]))
*/
```

Listing 1.16. `aTheoryUsage.qa`

2.11.2 On backtracking. The output shows that the rules `validDistance and nearDistance` exploit *backtracking* in order to return the first valid instance (2), while the repetition of the plan *accessdata* returns always the same data[6]. In fact, *backtracking* is a peculiarity of Prolog and is not included in the computational model of *QActor*. However, an actor could access to different data at each plan iteration, by performing a proper query in which the second argument of `data/3` is used as an index (for an example, see Subsection ??).

[6] Remember from Subsection 1.5 that the fact goalResult/1 is a 'singleton'.

3 Message-based behaviour

The *QActor* language defines built-in action that allow software designer to send messages and that facilitate the handling of received messages.

For example, the `SendDispatch` rule defines how to write the `forward` of a *dispatch*:

```
SendDispatch: name="forward" dest=VarOrQactor "-m" msgref=[Message] ":" val = PHead ;
VarOrQactor : var=Variable | dest=[QActor] ;
```

Once a message has been received, the `onMsg` action allows us to select a message and execute actions according to the specific structure of that message.

```
MsgSwitch:  "onMsg" message=[Message] ":" msg = PHead "->" move = StateMoveNormal ;
```

3.1 Example: a producer-consumer system

As an example of a message-based transition, let us introduce a very simple producer-consumer system, in which the producer sends two times a *dispatch* (see Subsection 2.1) to the consumer:

```
/*
 * basicProdCons.qa
 */
System basicProdCons
Dispatch info : info(X)
Context ctxBasicProdCons ip [ host="localhost" port=8019 ]
QActor producer context ctxBasicProdCons{
    Plan init normal
        [   println( "producer sends info(1)" ) ;
            forward consumer -m info : info(1) ;
            delay 500;
            println( "producer sends info(2)" ) ;
            forward consumer -m info : info(2)
        ]
 }
 QActor consumer context ctxBasicProdCons{
    Plan init normal
        [ println( consumer(waiting) ) ]
        transition whenTime 2000 -> handleTout
                   whenMsg info -> handleMsg
        finally repeatPlan
    Plan handleMsg resumeLastPlan
        [ printCurrentMessage ;
          onMsg info : info(X) -> println( msgcontent(X) )
        ]
    Plan handleTout
        [ println( consumerTout ) ]
```

Listing 1.17. `basicProdCons.qa`

The state diagram generated by the *QActor* software factory for the consumer is:

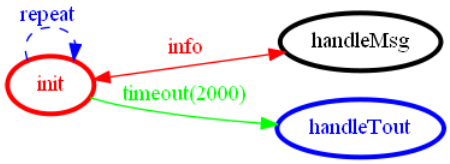

The output is:

```
 }
 /*
 OUTPUT
 ---------------------------------------
consumer(waiting)
"producer sends info(1)"
-------------------------------------------------------------------------------------------
consumer_ctrl currentMessage=msg(info,dispatch,producer_ctrl,consumer,info(1),1)
-------------------------------------------------------------------------------------------
msgcontent(1)
consumer(waiting)
"producer sends info(2)"
-------------------------------------------------------------------------------------------
consumer_ctrl currentMessage=msg(info,dispatch,producer_ctrl,consumer,info(2),2)
-------------------------------------------------------------------------------------------
msgcontent(2)
consumer(waiting)
consumerTout
*/
```

Listing 1.18. `basicProdCons.qa`

4 Event-based and event-driven behaviour

The *QActor* language defines built-in action that allow software designer to emit events and that facilitate the handling of perceived events.

The `RaiseEvent` rule defines how to `emit` and event:

```
RaiseEvent : name="emit" ev=[Event] ":" content=PHead ;
```

Once an event has triggered a state transition, the `onEvent` action allows us to execute actions according to the specific structure of that event.

```
EventSwitch: "onEvent" event=[Event] ":" msg = PHead "->" move = StateMoveNormal ;
```

4.1 Example: event-based behavior

As an example of a event-based transition, let us introduce a very simple system, in which an actor works as event-emitter and another actor that handles the emitted events:

```
/*
 * basicEvents.qa
 */
System basicEvents
Event usercmd : usercmd(X)
Event alarm  : alarm(X)

Context ctxBasicEvents ip [ host="localhost" port=8037 ]

QActor qaeventemitter context ctxBasicEvents {
   Plan init normal
   [  println("qaeventemitter STARTS ") ;
       delay 500 ;   //(1)
       println("qaeventemitter emits alarm(fire)") ;
       emit alarm : alarm(fire) ;
       delay 500 ;   //(2)
       println("qaeventemitter emits usercmd(hello)") ;
       emit usercmd : usercmd(hello) ;
       println( "qaeventemitter ENDS" )
   ]
}
QActor qaeventperceptor context ctxBasicEvents {
   Plan init normal
       [  println("qaeventperceptor STARTS ") ]
       transition whenTime 1000 -> endOfWork
           whenEvent alarm -> handleEvent,
           whenEvent usercmd -> handleEvent
       finally repeatPlan

   Plan handleEvent resumeLastPlan
       [  println("ex4_perceptor handleEvent " ) ;
          printCurrentEvent ;
          onEvent alarm  : alarm(X)  -> println( handling(alarm(X)) ) ;
          onEvent usercmd : usercmd(X) -> println( handling(usercmd(X)) )
       ]
   Plan endOfWork
       [  println("qaeventperceptor ENDS (tout) ") ]
}
```

Listing 1.19. `basicEvents.qa`

The state diagram generated by the *QActor* software factory for the consumer is:

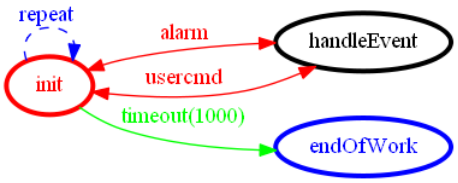

The output is

```
/*
OUTPUT
----------------------------
"qaeventemitter STARTS "
"qaeventperceptor STARTS "
"qaeventemitter emits alarm(fire)"
"ex4_perceptor handleEvent "
-------------------------------------------------------------------------------------------
qaeventperceptor_ctrl currentEvent=msg(alarm,event,qaeventemitter_ctrl,none,alarm(fire),3)
-------------------------------------------------------------------------------------------
handling(alarm(fire))
"qaeventperceptor STARTS "
"ex4_alarmemitter emits usercmd(hello)"
"ex4_perceptor handleEvent "
-------------------------------------------------------------------------------------------
qaeventperceptor_ctrl currentEvent=msg(usercmd,event,qaeventemitter_ctrl,none,usercmd(hello),7)
-------------------------------------------------------------------------------------------
handling(usercmd(hello))
"qaeventperceptor STARTS "
"qaeventemitter ENDS"
"qaeventperceptor ENDS (tout)
*/
```

Listing 1.20. `basicEvents.qa`

Note that if we comment the `delay (1)` and `(2)`, the emitted events are `not perceived` by the `qaeventperceptor`, since it has no time to enter its `transition` phase before the event emission.

4.2 Event handlers and event-driven behaviour

The occurrence of an event activates, in `event-driven` way, all the ***EventHandlers*** declared in actor *Context*) for that event with the following syntax:

```
EventHandler :
    "EventHandler" name=ID ( "for" events += [Event] ( "," events += [Event] )* )?
    ( print ?= "-print") ?
    ( "{" body = EventHandlerBody "}" )?
    ";"
EventHandlerBody: op += EventHandlerOperation (";" op += EventHandlerOperation)* ;
```

The syntax shows that, in a `qa` model, we can express only a limited set of actions within an EventHandler[7]:

```
EventHandlerOperation: MemoOperation | SolveOperation | RaiseOtherEvent | SendEventAsDispatch ;

MemoOperation: doMemo=MemoCurrentEvent "for" actor=[QActor] ;
MemoCurrentEvent : "memoCurrentEvent" (lastonly?="-lastonly")? ;

SolveOperation: "demo" goal=PTerm "for" actor=[QActor] ;

RaiseOtherEvent: "emit" ev=[Event] ("fromContent" content = PHead "to" newcontent=PHead )? ;

SendEventAsDispatch: "forwardEvent" actor=[QActor] "-m" msgref=[Message] ;
```

[7] Of course, other actions can be defined directly in `Java` by the Application designer.

- `MemoOperation`: memorize and event into the *WorldThery* of a specific *QActor*
- `SolveOperation`: 'tell' to a specific *QActor* to solve a goal
- `RaiseOtherEvent`: emit another event
- `SendEventAsDispatch`: forward a dispatch with the content of the event

The `SolveOperation` rule sends an 'internal system message' to the specific *QActor* and does not force any immediate execution within that *QActor*.

In the example that follows, the system reacts to all the events by storing them in the knowledge base (*WorldTheory*) related to a event tracer actor, that periodically shows the events available.

```
/*
 * eventTracer.qa
 */
System eventTracer
Event usercmd   : usercmd(X)
Event alarm     : alarm(X)

Context ctxEventTracer ip [ host="localhost" port=8027 ]
EventHandler evh for usercmd,alarm -print { memoCurrentEvent for qaevtracer };
//WARNING: any change in the model modifies the EventHandlers
QActor qaevtracer context ctxEventTracer {
   Plan init normal
   [   println("qaevtracer starts") ;
       [ ?? msg(E,'event',S,none,M,N) ] println(qaevtracer(E,S,M)) else println("noevent") ;
       delay 300
   ]
   finally repeatPlan 5
}
QActor qatraceremitter context ctxEventTracer {
   Plan init normal
   [   println("qatraceremitter STARTS ") ;
       delay 500 ;   //(1)
       println("qatraceremitter emits alarm(fire)") ;
       emit alarm : alarm(fire) ;
       delay 500 ;   //(2)
       println("qatraceremitter emits usercmd(hello)") ;
       emit usercmd : usercmd(hello) ;
       println( "qaeventemitter ENDS" )
   ]
}
```

Listing 1.21. `eventTracer.qa`

The output is:

```
"qatraceremitter STARTS "
"qaevtracer starts"
"noevent"
"qaevtracer starts"
"noevent"
"qatraceremitter emits alarm(fire)"
>>> evh          (defaultState, TG=01:00:00)          || msg(alarm,event,qatraceremitter_ctrl,none,alarm(fire),5)
"qaevtracer starts"
qaevtracer(alarm,qatraceremitter_ctrl,alarm(fire))
"qaevtracer starts"
"noevent"
"qatraceremitter emits usercmd(hello)"
>>> evh          (defaultState, TG=01:00:00)          || msg(usercmd,event,qatraceremitter_ctrl,none,usercmd(hello),7)
"qaeventemitter ENDS"
"qaevtracer starts"
qaevtracer(usercmd,qatraceremitter_ctrl,usercmd(hello))
"qaevtracer starts"
"noevent"
```

Listing 1.22. `eventTracer.qa`

5 Asynchronous actions

In Subsection 2.4 we said that an ***action*** is an activity that must always terminate. Let us consider here an action that computes the `n-th` number of Fibonacci (slow, recursive version):

```
1    protected long fibonacci( int n ){
2        if( n<0 || n==0 || n == 1 ) return 1;
3        else return fibonacci(n-1) + fibonacci(n-2);
4    }
```

Usually an action expressed in this way is executed as a procedure that keeps the control until the action is terminated. Since this is a 'pure computational action', its effects can be perceived (as a result of type `long`) when the action returns the control to the caller.

The growing demand for asynchronous, event-driven, parallel and scalable systems, lead us to introduce the idea of an action that can be activated in **asynchronous way** and that, when it terminates, sends a **termination message** to its activator actor.

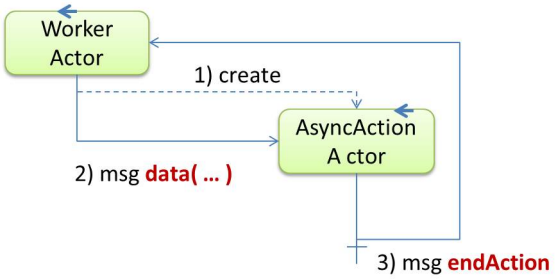

Let us introduce here a possible implementation of asynchronous actions.

5.0.1 A base-actor for asynchronous action implementation .

The following abstract class defines the behaviour of an Akka actor generic with respect to the result type `T`, that delegates to the application designer the task to define the operations `execTheAction` and `endOfAction`.

```
1  public abstract class ActionObservableGenericActor<T> extends UntypedAbstractActor{
2      protected String name = "noname";
3      protected IOutputEnvView outEnvView = null;
4      protected String terminationEvId = "endAction";
5      protected long tStart = 0;
6      protected long durationMillis = -1;
7      protected QActorContext ctx = null;
8      protected T result;
9      protected QActor myactor = null;
10
11     public ActionObservableGenericActor(String name, QActor qa, IOutputEnvView outEnvView) {
12         this.name          = name.trim();
13         this.myactor       = qa;
14         this.ctx           = (qa != null) ? qa.getQActorContext() : null;
15         this.outEnvView    = outEnvView;
16     }
17     /*
18      * TO BE DEFINED BY THE APPLICATION DESIGNER
19      */
20     protected abstract void execTheAction(Struct actionInput) throws Exception;
21     protected abstract T endOfAction() throws Exception;
```

Listing 1.23. `ActionObservableGenericActor<T>`

The `execTheAction` operation is called when the actor receives a string of the form `data(X)`, while `endOfAction` is executed after the termination of the action, according to the following pattern:

5.0.2 onReceive .

```
    public void onReceive(Object msg) { // msg=startAction
//      System.out.println("  %%% ActionObservableGenericActor onReceive: " + msg + " from " + getSender().path() );
        try{
            Struct msgt = (Struct) Term.createTerm(msg.toString()); //check syntax data( ... )
            tStart = Calendar.getInstance().getTimeInMillis();
            execTheAction( msgt );
            result = endActionInternal();
        }catch(Exception e){
            System.out.println("  %%% ActionObservableGenericActor onReceive ERROR " + e.getMessage());
            //stop the actor. we could propagate to the parent (SystemCreationActor)
            getContext().stop( getSelf() ); //LOCAL RECOVERY POLICY
        }
    }
```

Listing 1.24. `onReceive<T>`

The operation `endActionInternal` evaluates the duration of the action and prepares (by calling the `endOfAction`) the result to be sent as a *dispatch* to the actor that activated the action:

5.0.3 endActionInternal .

```
    protected T endActionInternal() throws Exception{
        evalDuration();
        T res = endOfAction();
        String payload = terminationEvId+"(ANAME,RES)".replace("ANAME", name).replace("RES", res.toString() );
        //System.out.println(" %%% ActionObservableGenericActor SEND msg:" + terminationEvId + " to " +
             myactor.getName().replace("_ctrl", ""));
        myactor.sendMsg(terminationEvId, myactor.getName().replace("_ctrl", ""), "dispatch", payload );
        return res;
    }
```

Listing 1.25. `endActionInternal`

The application designer must introduce a specialization of the class `ActionObservableGenericActor<T>`. Let us show different possible ways to execute a computation in asynchronous way.

5.1 Asynchronous actions: an example

.

In the following model, we activate the asynchronous computation of a Fibonacci number in three ways:

- by calling an application-specific operation `fibonacciAsynch` implementd by the application designer (see Subsection 2.10) as an asynchronous operation;
- by calling a conventional application-specific operation `fibonacciNormal` by specifying an asynchronous execution (flag `-asynch`) of the operator `actorOp` (see Subsection 2.10);
- by solving a tuProlog rule `fibo/2` vy calling the operator `demo` (see Subsection 1.6) in asynchronous way (flag `-asynch`).

```
System asyncActionsFibo
Dispatch endAction  : endAction(A,R)
Dispatch endActorOp : endActorOp(A,R)

Context ctxAsynchFibo ip[ host="localhost" port=8018 ] //-g cyan

QActor asynchworkerfibo context ctxAsynchFibo{
    Plan init normal[
        actorOp fibonacciAsynch( "actionFiboAsych", 37 ) ;
```

```
        actorOp fibonacciNormal( 23 ) -asynch;
        demo fibo(23,V) -asynch; //fibo(N,V) is defined ain the WorldTheory
        println("asynchworkerfibo END")
    ]
    switchTo handleActionEnd

    Plan handleActionEnd [ println("WAIT FOR ASYNCH ACTION TERMINATION") ]
    transition stopAfter 3000
        whenMsg endAction -> useActionResult,
        whenMsg endActorOp : endActorOp(A,R) do println( endActorOpMs(A,R) )
        finally repeatPlan

    Plan useActionResult resumeLastPlan[
        onMsg endAction : endAction(actionFiboAsych,V) -> println( V ) ;
        onMsg endAction : endAction(A,V) -> println( endAction(A,V) )
    ]
}
```

Listing 1.26. asyncActionsFibo

5.1.1 ActionActorFibonacci .

The code written by the application designer as an extension of the model is:

```
public class Asynchworkerfibo extends AbstractAsynchworkerfibo {
    public Asynchworkerfibo(String actorId, QActorContext myCtx, IOutputEnvView outEnvView ) throws Exception{
        super(actorId, myCtx, outEnvView);
    }
/*
 * ADDED BY THE APPLICATION DESIGNER
 */
    public void fibonacciAsynch(String actionName, int n){
        ActorRef actionActorRef =
             myCtx.getCreatorAkkaContext().actorOf( //son of the SystemCreationActor instance
               Props.create(ActionActorFibonacci.class, //action implementation class
                           actionName, this, outEnvView), //constructor arguments
                           actionName );
        actionActorRef.tell("data("+n+")", getSelf() );
    }
```

Listing 1.27. fibonacciAsynch

The class ActionActorFibonacci is a specialized version of ActionObservableGenericActor<String>, also written by the application designer:

```
package it.unibo.asynchworkerfibo;
import alice.tuprolog.Struct;
import it.unibo.is.interfaces.IOutputEnvView;
import it.unibo.qactors.action.ActionObservableGenericActor;
import it.unibo.qactors.akka.QActor;

public class ActionActorFibonacci extends ActionObservableGenericActor<String> {
private long myresult = 0;
private int n       = 0;
    public ActionActorFibonacci(String name, QActor actor, IOutputEnvView outEnvView) {
        super(name, actor, outEnvView);
    }
    @Override
    public void execTheAction(Struct actionInput) throws Exception {
      //actionInput : data( n )
      n = Integer.parseInt( actionInput.getArg(0).toString() );
      myresult = fibonacci( n );
//    throw new Exception("simulateFault");  //(1)
    }
    protected long fibonacci( int n ){
        if(  n == 1 || n == 2 ) return 1;
        else return fibonacci(n-1) + fibonacci(n-2);
    }
```

```
24      @Override
25      protected String endOfAction() throws Exception {
26          return "fibo("+n+","+this.myresult+",timemsec("+durationMillis+")"+")";
27      }
28  }
```

Listing 1.28. `ActionActorFibonacci`

5.1.2 fibonacciNormal .

The application designer writes in the actor class the usual code:

```
1       public long fibonacciNormal( int n ){
2           if(  n == 1 || n == 2 ) return 1;
3           else return fibonacci(n-1) + fibonacci(n-2);
4       }
```

Listing 1.29. `fibonacciNormal`

6 Application-specific actions

A *QActor* model aims at capturing main architectural aspects of a software system, by allowing a graceful transition from object-oriented programming to message-based and event-based computations. Moreover, a *QActor* model provides a support for rapid software prototyping, since the *QActor* software factory (Subsection 1.3) creates in automatic way the software layer that 'adapts' the application layer to the infrastructure layer ('schematic part' in the picture):

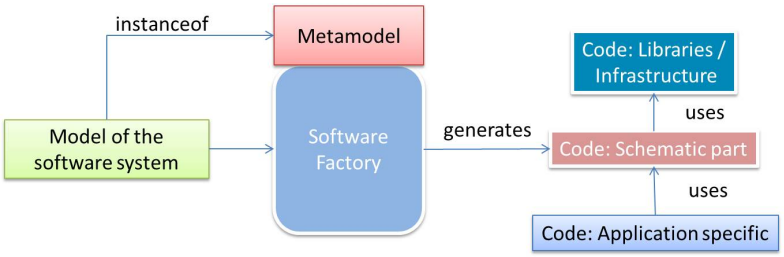

The *QActor* infrastructure is mainly provided by the library qa18Akka.jar (project it.unibo.qactors) that is in its turn based on other custom libraries, including the following ones:

uniboInterfaces.jar	includes a set of interfaces. Defined by the project *it.unibo.interfaces*.
uniboEnvBaseAwt.jar	provides a framework for building basic (graphical) user interfaces. Defined by the project *it.unibo.envBaseAwt*.
unibonoawtsupports.jar	provides a support for communications base on connection-based protocols such as TCP, UDP, ... Defined by the project *it.unibo.noawtsupports*.

The Subsection 2.10 has shown how application-specific Java code can be put in execution from a *QActor* model by means of the actorOp operator. The Java code must be written by the application designer as a public method in the proper actor class generated within the src directory.

In this section we give some other example of how Java libraries can be exploited to enrich the model with non-trivial application-specific parts. The code is available in the project it.unibo.lss17.

6.1 A Custom GUI

In this example, we want to create an application-specific GUI for a *QActor*. Thus, we delegate the task to an application-specific operation (buildCustomGui):

```
1  System customGui
2
3  Context ctxCustomGui ip[ host="localhost" port=8038 ] //-g cyan
4
5   QActor qawithcustomgui context ctxCustomGui //-g cyan
6   {
7      Plan init normal[
8          actorOp buildCustomGui("customGUI") ;
9          delay 30000 ;  //to avoid immediate termintion
10         println("qawithcustomgui END")
11     ]
12  }
```

Listing 1.30. customGui.qa

The application-specific Java code can be written as follows (by exploiting the uniboEnvBaseAwt.jar library):

```java
/* Generated by AN DISI Unibo */
/*
This code is generated only ONCE
*/
package it.unibo.qawithcustomgui;
import java.awt.Color;

import alice.tuprolog.SolveInfo;
import it.unibo.baseEnv.basicFrame.EnvFrame;
import it.unibo.is.interfaces.IBasicEnvAwt;
import it.unibo.is.interfaces.IOutputEnvView;
import it.unibo.qactors.QActorContext;

public class Qawithcustomgui extends AbstractQawithcustomgui {
    public Qawithcustomgui(String actorId, QActorContext myCtx, IOutputEnvView outEnvView ) throws Exception{
        super(actorId, myCtx, outEnvView);
    }
/*
 * ============================================================
 * ADDED BY THE APPLICATION DESIGNER
 * ============================================================
 */
    /*
     * OVERRIDE in order to NOT insert built-in panels if the actor has a local gui
     */
    protected void addInputPanel(int size){ }
    protected void addCmdPanels(){ }
    /*
     * If the actor ha no local GUI, create a new Frame,
     * otherwise, just set the given logo
     */
    public void buildCustomGui(String logo){
        IBasicEnvAwt env = outEnvView.getEnv();
        if( env == null){
            env = new EnvFrame( logo, Color.yellow, Color.black );
            env.init();
            ((EnvFrame)env).setSize(800,430);
        }
        env.writeOnStatusBar(logo + " | working ... ",14);
        new it.unibo.customGui.CustomGuiSupport( env );
    }
}
```

Listing 1.31. `Qawithcustomgui.java`

Most of the work is further delegated to an utility object of class `it.unibo.customGui.CustomGuiSupport` that defines the desired aspect of the `GUI`. The result is:

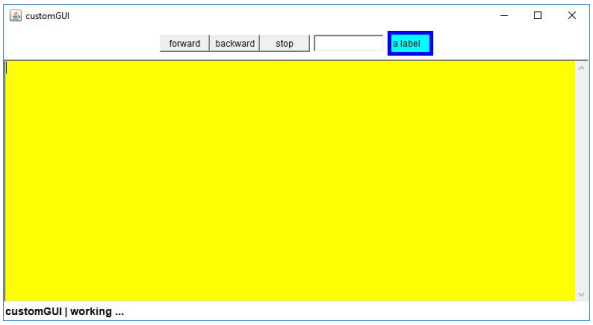

6.1.1 Using the `uniboEnvBaseAwt` framework .

To create the application-specific `GUI`, the application designer defines an utility class `it.unibo.customGui.CustomGuiSupport` that, in its turn, exploits the `uniboEnvBaseAwt` framework:

```java
public class CustomGuiSupport extends SituatedPlainObject{
private IActivityBase cmdHandler ;
private IBasicEnvAwt envAwt;
    public CustomGuiSupport(IBasicEnvAwt env) {
       super(env);
       //env is declared of type IBasicUniboEnv in SituatedPlainObject
       //that does not provide any addPanel method. Thus, we memorize it
       envAwt = env;
       init();
   }
   protected void init(){
       cmdHandler = new CmdHandler(envAwt);
       setCommandUI();
       setInputUI();
       addCustomPanel();
   }
```

Listing 1.32. `CustomGuiSupport.java`

The `init` operation first creates some input panel and then adds a new custom panel to the `GUI`. All these operations are supported by the `uniboEnvBaseAwt` framework that makes these actions quite simple (see Subsection 6.1.5,Subsection 6.1.6).

The class `SituatedPlainObject` has been defined in the project *it.unibo.noawtsupports* as an observable entity that extends `java.util.Observable` and implements the interface `it.unibo.is.interfaces.IObservable`.

Let us recall other basic 'contracts' defined by the framework.

6.1.2 Observable POJO objects .

```java
package it.unibo.is.interfaces;

public interface IObservable {
    public void addObserver(IObserver arg0); //modifier
}
```

Listing 1.33. `IObservable`

```java
package it.unibo.is.interfaces;
import java.util.Observer;

public interface IObserver extends Observer {
//  public void update(Observable source, Object state); //inherited modifier
}
```

Listing 1.34. `IObserver`

6.1.3 Environment interfaces .

Any `uniboEnvBaseAwt` environment must always provide the following operations, that do not require any `GUI`:

```java
package it.unibo.is.interfaces;

public interface IBasicUniboEnv {
    public void init();
    public String readln( );
    public IOutputView getOutputView();
    public void println( String msg );
    public void close( );
 }
```

Listing 1.35. `IBasicUniboEnv`

An environment based on a GUI should provide also:

```
package it.unibo.is.interfaces;
import java.awt.Component;
import java.awt.Panel;

public interface IBasicEnvAwt extends IBasicUniboEnv{
    public void initNoFrame();
    public IOutputEnvView getOutputEnvView();
    /**
     *  Write on the status bar
     */
    public void writeOnStatusBar( String s, int size);
    /**
     * @return true in case of a standalone application
     */
    public boolean isStandAlone();
    /**
    *   Add a panel in the environment.
    */
    public void addInputPanel( int size );
    public void addInputPanel( String msg );
    public void addPanel( Panel p );
    public void addPanel( Component p );
```

Listing 1.36. `IBasicEnvAwt (partial)`

Our custom GUI works in an environment that implements IBasicEnvAwt. Note that on other platforms (e.g. *Android*, *Raspberry*) the reference environment should support a IBasicUniboEnv only, in order to avoid any dependency on graphical libraries.

6.1.4 Command interfaces .

Since a user interface is usually a means to send commands to an application, the application software must define entities able to execute actions given a command String. These entities must support the following interface:

```
package it.unibo.is.interfaces;
/*
 * Interface of any entity that can execute an action
 */
public interface IActivityBase {
    public void execAction( String cmd );
}
```

Listing 1.37. `IActivityBase`

For example, the CmdHandler introduced in Subsection 6.1.1 can be defined as follows:

```
package it.unibo.customGui;
import it.unibo.is.interfaces.IActivityBase;
import it.unibo.is.interfaces.IBasicEnvAwt;
import it.unibo.system.SituatedPlainObject;

public class CmdHandler extends SituatedPlainObject implements IActivityBase{
    public CmdHandler(IBasicEnvAwt env) {
        super(env);
    }
    @Override
    public void execAction(String cmd) {
        String input = env.readln();
        println("CmdHandler -> " + cmd + " input= " + input);
    }
}
```

Listing 1.38. `CmdHandler.java`

6.1.5 Adding a command panel .

The operation that adds a command user interface can be performed by simply calling the `addCmdPanel` operation with proper arguments:

```
1  protected void setCommandUI(){
2      envAwt.addCmdPanel("commandPanel",
3              new String[]{"forward" ,"backward" ,"stop" },
4              cmdHandler );
5  }
```

Listing 1.39. `CustomGuiSupport.java`

In this case, we handle each command button with the same handler, introduced in Subsection 6.1.4 that simply prints the command on the standard output.

6.1.6 Adding an input panel .

Quite simple too:

```
1  protected void setInputUI(){
2      envAwt.addInputPanel( 10 );
3  }
```

Listing 1.40. `CustomGuiSupport.java`

6.1.7 Adding a new panel .

Let us add a new panel we a label inside:

```
1  protected void addCustomPanel(){
2      Panel p = new Panel( );
3      p.setBackground(Color.blue);
4      Label l = new Label("a label");
5      l.setBackground(Color.cyan);
6      p.add( l );
7      envAwt.addPanel( p );
8  }
```

Listing 1.41. `CustomGuiSupport.java`

6.1.8 Built-in GUI .

The `qa` meta-model allows the insertion of a `-g` flag (e.g. `-g cyan`) after the declaration of an actor. In this case the factory generates a `GUI` interface like that shown in the picture:

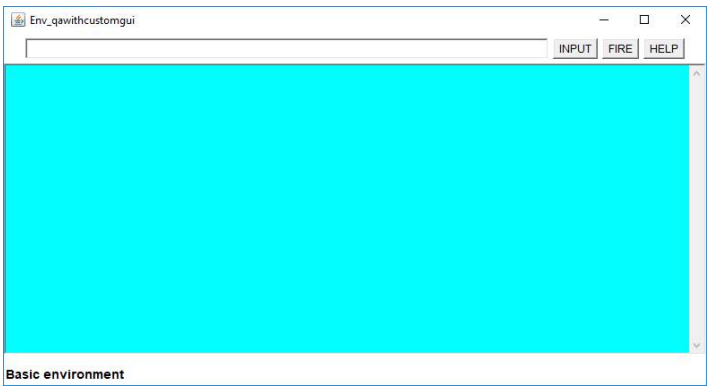

The application designer can decide to 'specialize' in some way such a built-in interface as done in Subsection 6.1. The output is the same as before, with the background color specified in the `-g` declaration (in fact, the application code does not change it).

6.1.9 Built-in commands .

With reference to the built-in `GUI` of an actor:

- the `FIRE` button generates the event `local_alarm : alarm(fire)`;
- The `INPUT` button generates the event `local_inputcmd : usercmd(executeInput(CMD))` where `CMD` is the content of the input field on the left.

The name of events generated by the `GUI` buttons is prefixed by the string `local_` in order to state that these events are local to the current computational node and must not be propagated to other nodes (more on this in Section ??).

By clicking the button `HELP` we can visualize the syntax of a possible `CMD`. For example:

```
 GOAL
[ GUARD ], ACTION
[ GUARD ], ACTION, DURATION
[ GUARD ], ACTION, DURATION, ENDEVENT
[ GUARD ], ACTION, DURATION, EVENTS, PLANS
```

With reference to the current implementation of the built-in `GUI` of an actor, let us see what happens when we insert in the `Input` field one of the previous command strings:

`COMMAND`	event `local_inputcmd : usercmd(executeInput(CMD))`
`eval(gt,5,2)`	usercmd(`executeInput(eval(gt,5,2))`)
`[eval(gt,5,2)],nears(D)`	usercmd(`executeInput(do([eval(gt,5,2)],nears(D))`)
`[eval(gt,5,2)],nears(D),2000`	usercmd(`executeInput(do([eval(gt,5,2)],nears(D),2000))`)

6.2 A Command interpreter

Let us define here a simple interpreter of user commands expressed as strings of the form:

```
 GOAL
[ GUARD ], ACTION
```

The logic architecture of the interpreter can be defined as an actor with a built-in `GUI`:

```
1  /*
2   * cmdExecutor.qa
3   */
4  System cmdExecutor
5  Event local_inputcmd : usercmd(X) //generated by cmd actor gui-interface
6  Event alarm        : alarm(X)    //generated by HTTP cmd user-interface
7
8  Context ctxCmdExecutor ip [ host="localhost" port=8039 ]
9
10 QActor qacmdexecutor context ctxCmdExecutor -g cyan {
```

Listing 1.42. `cmdExecutor.qa`

The actor does introduce also a set of rules, to be used in a demo:

```
Rules{
data(sonar, 1, 10).
data(sonar, 2, 20).
data(sonar, 3, 30).
data(sonar, 4, 40).
validDistance( N,V ) :- data(sonar, N, V), eval(gt,V,10), eval(lt,V,50) .
nearDistance( N,X ) :- validDistance( N,X ), eval(lt,X,40) .
nears( D ) :- findall( d( N,V ), nearDistance(N,V), D ).
}
```

Listing 1.43. cmdExecutor.qa

At its start-up, the actor loads the application tuProlog theory `./src/cmdInterpreterSimple.pl` that defines the interpretation rules of the user commands:

```
    Plan init normal[
        println("==================================================" ) ;
        println("An actor that executes user commands " ) ;
        println("==================================================" ) ;
        demo consult("./src/cmdInterpreterSimple.pl")
    ]
    switchTo handleInput
```

Listing 1.44. cmdExecutor.qa

Afterwards, the actor waits for input events (`local_inputcmd` and `alarm`).

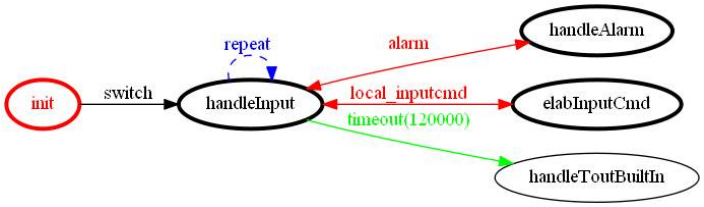


```
    Plan handleInput [ println("WAIT ...") ]
        transition stopAfter 120000
        whenEvent local_inputcmd -> elabInputCmd,
        whenEvent alarm -> handleAlarm
        finally repeatPlan
    Plan elabInputCmd resumeLastPlan[
      printCurrentEvent;
      onEvent local_inputcmd : usercmd(executeInput(CMD)) -> demo executeInput(CMD) ; //INTERPRET
      [ ?? goalResult(R)] println( cmdResult(R))
    ]
    Plan handleAlarm resumeLastPlan [
      sound time(1500) file("./audio/tada2.wav") -asynch;
      printCurrentEvent
    ]
 }
```

Listing 1.45. cmdExecutor.qa

The actor handles the `alarm` event by playing a short sound, while the `local_inputcmd` event is handled by calling a tuProlog rule `executeInput(CMD)` with `CMD` set as reported in Subsection 6.1.9.

The command interpretation theory `./src/cmdInterpreterSimple.pl` can be defined as follows:

```
/*
============================================================
cmdInterpreterSimple.pl
============================================================
*/
```

```
6  executeInput( do( [ true ], MOVE ) ):- !,
7      %% output( executeInputGuardedTrue(MOVE)),
8      execMove( MOVE ).
9  executeInput( do( [ GUARD ] , MOVE ) ):-
10     %% output( executeInputGuarded(GUARD,MOVE) ),
11     GUARD,
12     %% output( executeInputGuarded(MOVE) ),
13     execMove( MOVE ).
14
15 executeInput( MOVE ) :-
16     %% output( executeInput( MOVE ) ),
17     execMove( MOVE ).
18 execMove( MOVE ) :-
19     %% output( execMove( MOVE ) ),
20     MOVE, !,
21     %% output( done( MOVE) ),
22     setPrologResult(MOVE). %% defined in the WorldTheory
23 %% MOVE is delegated to an operation (if any) written in Java
24 execMove( MOVE ):-
25     actorobj(Actor),
26     Actor <- MOVE.
27
28 initSimple :-
29    actorPrintln(" *** cmdInterpreterSimple loaded *** ").
30 :- initialization(initSimple).
```

Listing 1.46. `cmdInterpreterSimple`

Note that the interpreter first attempts to execute the user command by using the *WorldTheory* (lines 18-22) . If this attempts fails, the interpreter delegates the work to the Java code (lines 23-26) by exploiting the tuProlog features (more on this in Subsection ??).

7 Android

In this section, we want to *write a software system on a conventional PC that receives the data of the accelerometer sensor embedded in an Android device connected via Tethering*[8].

The system model (project *it.unibo.lss17*) simply defines an actor that makes a request of data to the `Android` device and then waits for the answer message.

```
System acceleromFromAndroid

Context ctxAcceleromFromAndroid ip [ host="localhost" port=8143 ]

QActor qaandroidpartner context ctxAcceleromFromAndroid {
Rules{
    addr( usbtethering, otium, "192.168.42.129").
    addr( natspot, otium, "192.168.43.71").
}
    Plan init normal [
        println("qaandroidpartner STARTS" ) ;
        [ !? addr( usbtethering, otium, IP)]
               actorOp initConnWithAndroid("qaandroidpartner",IP, 8123);
        println("qaandroidpartner ENDS" )
    ]
    switchTo getSensorData

    Plan getSensorData[
        delay 500;
        actorOp sendMsgToAndroid( "getData" );
        actorOp receiveMsgFromAndroid;
        [ ?? actorOpDone( OP,R ) ] println( answer(OP,R) )
    ]
    finally repeatPlan 3
}
```

Listing 1.47. `acceleromFromAndroid`

Since `Android` devices does not enter (at the moment) in the implementation scope of the *QActor* metamodel, the application designer fulfils the goal by introducing application-specific operations:

- `initConnWithAndroid(String actorName,String hostName,int port)`: sets a connection via TCP
- `sendMsgToAndroid(String msg)` : sends a message on the connection
- `String receiveMsgFromAndroid()` : receives a message from the connection

The application-specific code is:

```
public class Qaandroidpartner extends AbstractQaandroidpartner {
    public Qaandroidpartner(String actorId, QActorContext myCtx, IOutputEnvView outEnvView ) throws Exception{
        super(actorId, myCtx, outEnvView);
    }
/*
 * ADDED by the APPLICATION DESIGNER
 */
private IConnInteraction conn = null;
    public void initConnWithAndroid(String actorName, String hostName, int port){
        conn = CommsWithOutside.initConnection(actorName,hostName, port);
    }//initConnWithAndroid
    public void sendMsgToAndroid( String msg) {
        try {
            CommsWithOutside.sendMsg(conn, msg);
        } catch (Exception e) {
            e.printStackTrace();
        }
```

[8] Tethering, or phone-as-modem (`PAM`), is the sharing of a mobile device's internet connection with other wirelessly connected computers. Connection of a mobile device with other devices can be done over wireless LAN (`Wi-Fi`), over `Bluetooth` or by physical connection using a cable, for example through `USB`.

```
18      }//sendMsgToAndroid
19      public String receiveMsgFromAndroid( ) {
20          try {
21              String answ = CommsWithOutside.receiveMsg(conn);
22              return answ;
23          } catch (Exception e) {
24              return "msg(sensor,event,android,none,null,0)";
25          }
26      }//receiveMsgFromAndroid
27
28  //  public void requestDataToAndroid(){
```

Listing 1.48. Qaandroidpartner

The operations are implemented by means of an utility class CommsWithOutside.

7.1 The utility class *CommsWithOutside*

```
1   public class CommsWithOutside {
2       public static final String protocol = FactoryProtocol.TCP;
3       public static final int port     = 8123;
4       public static Hashtable<String, IConnInteraction> androConns = new Hashtable<String, IConnInteraction>();
5
6       public static IConnInteraction initConnection(String actorName, String hostName, int port) {
7           System.out.println("initConnection actorName=" + actorName + " hostName=" + hostName);
8           FactoryProtocol factoryP =
9                   new FactoryProtocol(SituatedSysKb.standardOutEnvView, protocol, "androclient");
10          IConnInteraction conn = null;
11          try {
12              conn = factoryP.createClientProtocolSupport(hostName, port);
13              androConns.put(actorName, conn); //memo the connection for the actor
14          } catch (Exception e) {
15              System.out.println("WARNING : no connection possible to Android for " + actorName);
16              //e.printStackTrace();
17          }
18          return conn;
19      }
20      public static void sendMsg( IConnInteraction conn, String msg) throws Exception {
21          if( conn != null ) conn.sendALine( msg );
22          else System.out.println("WARNING : no connection to Android " );
23      }
24      public static void sendMsg( String actorName, String msg) throws Exception {
25          sendMsg( androConns.get(actorName), msg );
26      }
27      public static String receiveMsg( IConnInteraction conn ) throws Exception {
28          if( conn != null ){
29              String msg = conn.receiveALine();
30              return msg;
31          }
32          else{
33              System.out.println("WARNING : no connection to Android for " );
34              return "noconnection_";
35          }
36      }
37      public static String receiveMsg( String actorName ) throws Exception {
38          return receiveMsg( androConns.get(actorName) );
39      }
40  }
```

Listing 1.49. CommsWithOutside

This class makes us of the unibonoawtsupports for communications introduced in Section 6. In particular, we note that the IConnInteraction interface allows us to write code independent of any specific (connection-based) protocol.

7.2 The exchanged messages

The message sent from the application to `Android` is kept as simpler as possible. It has the form:

```
getData
```

The message sent from `Android` to the application has the standard *QActor* form introduced in Subsection 2.1:

```
msg(sensor,event,android,none,sensor(androidaccelerometerdata,V),MSGNUM))
```

In this way the `Android` device can be viewed as an external source of data-events, able to produce information expressed in the *QActor* internal format.

7.3 The code on the Android device

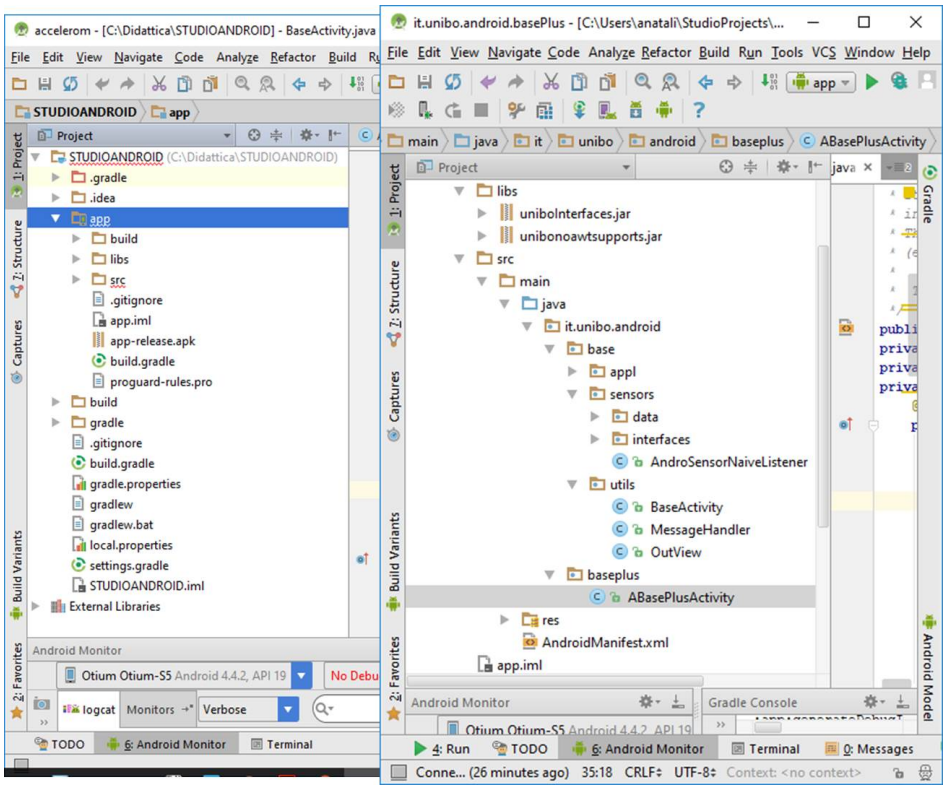

7.3.1 AndroidManifest :

```
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="it.unibo.android.baseplus"
    android:versionCode="1"
    android:versionName="1.0" >

    <uses-sdk
        android:minSdkVersion="8"
        android:targetSdkVersion="26.0.1" />

    <uses-permission android:name="android.permission.INTERNET"/>
```

```
11
12      <application
13          android:allowBackup="true"
14          android:icon="@drawable/ic_launcher"
15          android:label="@string/app_name"
16          android:theme="@style/AppTheme" >
17          <activity
18              android:name=".ABasePlusActivity"
19              android:label="@string/app_name" >
20              <intent-filter>
21                  <action android:name="android.intent.action.MAIN" />
22                  <category android:name="android.intent.category.LAUNCHER" />
23              </intent-filter>
24          </activity>
25      </application>
26
27  </manifest>
```

Listing 1.50. AndroidManifest.xml

7.3.2 BaseActivity :

```
1   public class BaseActivity extends Activity{
2    public MessageHandler myHandler;
3    protected TextView output;
4    protected IOutputView outView = null;
5    protected Bundle myBundle;
6    protected boolean verbose = false;
7
8       protected void onCreate(Bundle savedInstanceState) {
9           super.onCreate(savedInstanceState);
10          myHandler = new MessageHandler(this);
11          myBundle = new Bundle();
12          output   = (TextView) findViewById(R.id.output);
13          outView  = new OutView(this);
14      }
15  /*
16  *  -------------------------------------
17  *   Print Utilities
18  *  -------------------------------------
19  */
20      public void println(String msg) {
21          if (output == null){
22              output = (TextView) findViewById(R.id.output);
23          }
24          output.append(msg+"\n");
25      }
26      public void printMsg(String msg) {
27          if (output == null){
28              output = (TextView) findViewById(R.id.output);
29          }
30          output.setText( msg );
31      }
32      public void showMsg(String msg) {
33          if (outView != null)
34          outView.addOutput(msg);
35      }
36      /*
37       *  -------------------------------------
38       *   Android usage support
39       *  -------------------------------------
40       */
41      protected int notifNum = 0;
42      public void sendNotification( String logo, String msg ) {
43          sendNotification(notifNum++,R.drawable.ic_launcher,logo, msg, null );
44      }
45      public void sendNotification(int id, int iconId, String notifType, String msg,
```

```
                            Class notifyClass) {
        NotificationManager notificationManager =
                (NotificationManager) getSystemService(Context.NOTIFICATION_SERVICE);
        //Create Notification
        Notification notification =
                new Notification(iconId,notifType, System.currentTimeMillis());
        notification.flags |= Notification.FLAG_AUTO_CANCEL;
        Intent intent;
        if( notifyClass != null )
            intent = new Intent(this, notifyClass);
        else intent = new Intent( );
        intent.putExtra(notifType, msg);
        PendingIntent pIntent =
                PendingIntent.getActivity(this, 0, intent,PendingIntent.FLAG_CANCEL_CURRENT);
        notification.setLatestEventInfo(this, notifType, msg, pIntent);
        //Use the Notification Manager
        notificationManager.notify(id, notification);
    }
    protected PendingIntent buildPendingIntent(String actionName, int requestCode){
        Intent myIntent = new Intent(actionName);
        PendingIntent resIntent=
                PendingIntent.getBroadcast(this, requestCode, myIntent, PendingIntent.FLAG_ONE_SHOT);
        return resIntent;
    }
```

Listing 1.51. `BaseActivity`

7.3.3 Layout :

```
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent"
    android:orientation="vertical" >
<ScrollView
    android:id="@+id/a2Scroll"
    android:layout_width="fill_parent"
    android:layout_height="fill_parent" >
    <TextView
        android:id="@+id/output"
        android:layout_width="fill_parent"
        android:layout_height="wrap_content"
        android:background="@drawable/white"
        android:text=""
        android:textColor="@drawable/black"
        android:textSize="6pt"
        android:textStyle="italic" />

</ScrollView>
</LinearLayout>
```

Listing 1.52. `activity_unibo.xml`

7.3.4 An Android implmentation of `IOutputView` :

```
/*
* ======================================================
* By AN DISI University of Bologna
* ======================================================-
*/
package it.unibo.android.base.utils;
import android.os.Bundle;
import android.os.Message;
```

```
import it.unibo.is.interfaces.IOutputView;

public class OutView implements IOutputView {
protected BaseActivity myActivity;
protected int nm = 1;
protected String curVal = "";

    public OutView(BaseActivity myActivity) {
        this.myActivity = myActivity;
    }
    public String getCurVal() {
        return curVal;
    }
    public synchronized void addOutput(String msg) {
        curVal = msg ;
        Message m = myActivity.myHandler.obtainMessage();
        Bundle data = new Bundle();
        data.putString("addOutputMsg", msg);
        m.setData(data);
        myActivity.myHandler.sendMessage(m);
    }
    public synchronized void setOutput(String msg) {
        curVal = msg ;
        Message m = myActivity.myHandler.obtainMessage();
        Bundle data = new Bundle();
        data.putString("setOutputMsg", msg);
        m.setData(data);
        myActivity.myHandler.sendMessage(m);
    }
}
```

Listing 1.53. `OutView`

7.3.5 Main activity :

```
import it.unibo.android.base.appl.SysKb;
import it.unibo.android.base.sensors.AndroSensorNaiveListener;
import it.unibo.android.base.utils.BaseActivity;
import it.unibo.android.baseplus.R;
import it.unibo.system.SituatedSysKb;
import android.content.Context;
import android.hardware.Sensor;
import android.hardware.SensorEventListener;
import android.hardware.SensorManager;
import android.os.Bundle;
import android.widget.Toast;
/*
 * This activity creates a TCP server that can work over a USB connection
 * It creates also a local client that sends to the server a pir of messages
 * including some sensor data (proximity)
 * The server waits for 10 minutes for some other remote client message.
 * (e.g from ClientAndroidBase of project it.unibo.andro.partner)
 *
 *  The application can work also without a USB cable by activating the WIFI
 */
public class ABasePlusActivity extends BaseActivity {
private ServerNoEnv server;
private ClientNoEnv localClient;
private SensorManager sensorManager;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_unibo);
        println("----------------------------------------------------------------");
        println("ABasePlusActivity(extends BaseActivity)");
        println("using unibo Comm, IOutputView, JSON, sensors ");
```

```
32          println("ncores=" + SituatedSysKb.numberOfCores + " port="+ SysKb.port + " mem=" +
                Runtime.getRuntime().maxMemory());
33          sensorManager = (SensorManager) getSystemService(Context.SENSOR_SERVICE);
34          findSensors();
35          println("----------------------------------------------------------------------");
36          configureSensor();
37          startServer();
38          startClient();
39          Toast.makeText(this, "ABasePlusActivity ends creation" , Toast.LENGTH_SHORT).show();
40      }
41      protected void findSensors(){
42          List<Sensor> availableSensors = sensorManager.getSensorList(Sensor.TYPE_ALL);
43          Iterator<Sensor> itsens = availableSensors.iterator();
44          while( itsens.hasNext() ){
45              Sensor sens = itsens.next();
46              println("SENSOR " + sens.getType() + " " + sens.getName());
47          }
```

Listing 1.54. `ABasePlusActivity`

7.4 From `Android` messages to *QActor* events

A message sent from the `Android` device can be easily mapped into an event that can be properly handled by actors:

```
1   System acceleromFromAndroidEvents
2   Event sensor : sensor( SENSORID, data(DATA) )
3   //Dispatch info : info(X)
4
5   Context ctxAcceleromFromAndroidEvents ip [ host="localhost" port=8143 ]
6
7   QActor qaandroidpartnerevents context ctxAcceleromFromAndroidEvents {
8   Rules{
9       addr( usbtethering, otium, "192.168.42.129").
10      addr( natspot, otium, "192.168.43.71").
11  }
12      Plan init normal [
13          println("qaandroidpartnerevents STARTS" ) ;
14          [ !? addr( usbtethering, otium, IP)]
15              actorOp initConnWithAndroid("qaandroidpartnerevents",IP, 8123);
16          println("qaandroidpartnerevents ENDS" )
17      ]
18      switchTo requestSensorData
19
20      Plan requestSensorData[
21          delay 500;
22          actorOp requestDataToAndroid
23      ]
24      finally repeatPlan 5
25  }
26
27  QActor qasensordatahandler context ctxAcceleromFromAndroidEvents {
28      Plan init normal [
29          actorOp noOp
30      ]
31      transition stopAfter 5000
32          whenEvent sensor : sensor(ID,DATA) do println( qasensorhandler(ID,DATA) )
33          finally repeatPlan
34  }
```

Listing 1.55. `acceleromFromAndroidEvents`

The application-specific code now is:

```
1       public void requestDataToAndroid(){
2           try{
```

```
3             CommsWithOutside.sendMsg(conn, "getData");
4             String answer = CommsWithOutside.receiveMsg(conn);
5             Struct ta = (Struct) Term.createTerm(answer); //check
6             this.emit("sensor", ta.getArg(4).toString() );
7         }catch(Exception e){
8             e.printStackTrace();
9         }
10    }
11 }
```

Listing 1.56. Qaandroidpartnerevents

8 (Qa)Models as system integrators

A modern (IOT) software system is composed of several computational nodes (it is a distributed system), each providing one or more (micro)services implemented in their proper language/infrastructure (it is an heterogeneous system).

A *QActor* model aims at describing the architecture of a distributed software system, by focussing the attention on the system components and their interaction. Since a *QActor* model is also executable, it can be used in the early stages of software development to provide working prototypes that help in the interaction with the customer and with the final users. However, when we execute a *QActor* model, we exploit a runtime support implemented in Java based on TCP node interactions, while the application could demand for the usage of different languages and infrastructures.

In this section we explore the possibility to use *QActor* models as a sort of system integrator, that overcomes the previous constraints.

8.1 Using Node.js

A first example of the possibility to use a *QActor* model as an integrator of heterogeneous distributed activities is given hereunder:

```
System jsToQa
Event alarm  : alarm(X)
Dispatch info : info(X)

Context ctxJsToQa ip[ host="localhost" port=8031]
EventHandler evh for alarm -print;
/*
 * This actor activates a NodeJs process that sends messages to the qareceiver
 */
QActor qajaactoivator context ctxJsToQa {
    Plan init normal [
        println("qajaactoivator START") ;
        nodeOp "./nodejsCode/TcpClientToQaNode.js localhost 8031" -o ;
//      actorOp runNodeJs("./nodejsCode/TcpClientToQaNode.js localhost 8031", "true") ;
        //[?? actorOpDone(OP,R)] println( rrr(R) );
        println("qajaactoivator END")
    ]
}

/*
 * This actor handles message sent by the NodeJs process by distinguishing between
 * messages (dispatch info : info(X)) and events (alarm : alarm(X)).
 */
QActor qareceiver context ctxJsToQa {
    Plan init normal [
        println("qareceiver WAITS")
    ]
    transition stopAfter 60000
            whenEvent alarm -> endOfwork ,
            whenMsg info : info(X) do printCurrentMessage
    finally repeatPlan

    Plan endOfwork [
        onEvent alarm : alarm(X) -> println( endOfwork(X) )
    ]

 }
```

Listing 1.57. jsToQa.qa

The system is composed of a NodeJs client that sends messages (and events) to the qareceiver that implements the finite state machine shown in the picture:

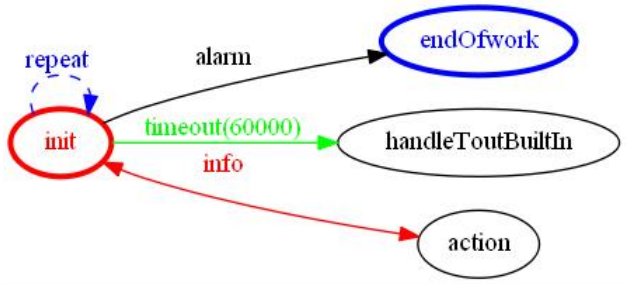

The NodeJs client is activated by the *QActor* system itself by means of the qajaactoivator. Of course, such a client could be activated as an independent activity through a command like:

```
node TcpClientToQaNode.js localhost 8031
```

8.2 Implementation details

The system is available on the GIT https://github.com/anatali/lss0/. A working copy of system is inserted in the directory testOutEclipse. The system is built as a conventional *QActor* project in which the build_ctxJsToQa.gradle has been changed by the application designer:

- by modifying the dependencies on the unibo libraries, since they are now local to the project;
- by adding in the distribution a copy of nodejsCode.

The directory nodejsCode includes the NodeJs code. Recall that:

- the command npm init generates the file package.json that describes the project and declares the dependencies
- the command npm install xxx -save loads a module xxx and automatically adds this dependency to the file package.json.

8.3 The operation runNodeJs

The operation that activates a NodeJs computation should be written by the application designer. For example:

```
1  protected String runNodeJs(String prog, String showOutput){
2      try {
3          String cmd = "node "+ prog;
4          java.lang.Process nodeExecutor = runtimeEnvironment.exec("node "+prog);
5          if( showOutput.equals("false") ) return "";
6          InputStream nodeInputStream = nodeExecutor.getInputStream();
7          return getOutput(prog,nodeInputStream);
8      } catch (Exception e) {
9          println("      " + prog+ " WARNING >"+ e.getMessage() ) ;
10         return "";
11     }
12 }
```

The method getOutput is called when we want to see what the NodeJs computation writes on the console.log.

However, a method with this signature has been defined in the QActor class, to provide a built-in operation to activate a NodeJs computation; the string *** nodjs> denotes its output. In some future release of the *QActor* metamodel, it could could be provided as a *QActor* primitive.

8.4 The NodeJs client

The first activity of the NodeJs client is to establish a connection with a server host whose IP is given (together with a port) as argument at start-up (e.g. `node TcpClientToQaNode.js localhost 8031`):

```
/*
* ====================================
* TcpClientToQaNode.js
* ====================================
*/
var net = require('net');
var host = process.argv[2];
var port = Number(process.argv[3]);  //23 for telnet

console.log('connect to ' + host + ":" + port);
var socket = net.connect({ port: port, host: host });
console.log('connect socket allowHalfOpen= ' + socket.allowHalfOpen );
socket.setEncoding('utf8');

// when receive data back, print to console
socket.on('data',function(data) {
    console.log(data);
});
// when server closed
socket.on('close',function() {
    console.log('connection is closed');
});
socket.on('end',function() {
    console.log('connection is ended');
});
/*
 * TERMINATION
 */
process.on('exit', function(code){
    console.log("Exiting code= " + code );
});
//See https://coderwall.com/p/4yis4w/node-js-uncaught-exceptions
process.on('uncaughtException', function (err) {
cursor.reset().fg.yellow();
    console.error('got uncaught exception:', err.message);
cursor.reset();
    process.exit(1);      //MANDATORY!!!
});
```

Listing 1.58. `TcpClientToQaNode.js: connect`

The NodeJs client provides also some utility function to send messages:

```
/*
============================================================
Interaction
============================================================
*/
function sendMsg( msg ){
    try{
        socket.write(msg+"\n");
    }catch(e){
        console.log(" ------------------ EVENT " + e );
    }
}
function sendMsgAfterTime( msg, time ){
    setTimeout(function(){
        //println("SENDING..." + msg );
        sendMsg( msg ); },
        time);
}
```

Listing 1.59. `TcpClientToQaNode.js: utilities`

Finally, the NodeJs client send some application-level message:

```
/*
============================================================
Application
============================================================
*/
var msgNum=1;
sendMsgAfterTime("msg(info,dispatch,jsSource,qareceiver,info(ok1)," + msgNum++ +")", 200);
sendMsgAfterTime("msg(info,dispatch,jsSource,qareceiver,info(ok2)," + msgNum++ +")", 500);
sendMsgAfterTime("msg(alarm,event,jsSource,none,alarm(obstacle)," + msgNum++ +")", 700);
sendMsgAfterTime("msg(info,dispatch,jsSource,qareceiver,info(ok3)," + msgNum++ +")", 1000);

setTimeout(function(){ console.log("SOCKET END");socket.close(); }, 2500);
```

Listing 1.60. `TcpClientToQaNode.js: application`

8.5 The result

The NodeJs client sends a sequence of 3 messages, but before the last one, it 'emit' an alarm event. Thus, the output of the system is:

```
"qajaactoivator START"
"qareceiver WAITS"
                *** nodjs> connect to localhost:8031
                *** nodjs> connect socket allowHalfOpen= false
    %%% CtxServerAgent ctxjstoqa_Server WORKING on port 8031
-------------------------------------------------------------------------------------------
qareceiver_ctrl currentMessage=msg(info,dispatch,jsSource,qareceiver,info(ok1),1)
-------------------------------------------------------------------------------------------
"qareceiver WAITS"
-------------------------------------------------------------------------------------------
qareceiver_ctrl currentMessage=msg(info,dispatch,jsSource,qareceiver,info(ok2),2)
-------------------------------------------------------------------------------------------
"qareceiver WAITS"
endOfwork(obstacle)
    %%% SystemCreationActor terminates1:qareceiver_ctrl 1/4
    %%% SystemCreationActor terminates1:qareceiver 2/4
>>> evh           (defaultState, TG=01:00:00)          || msg(alarm,event,jsSource,none,alarm(obstacle),3)
...
                *** nodjs> SOCKET END
"qajaactoivator END"
...
```

8.6 File watcher

Let us introduce a NodeJs computation that allows us to write a sentence in file and read its content:

```
/*
* ====================================
* fileWrite.js
* ====================================
*/
//works with reference to the file sharedFiles/cmd.txt
var fs  = require('fs');
var path = require('path');
var args = process.argv.splice(2);
var command       = args.shift();
var inputData     = args.join(' ');
var file          = path.join(process.cwd(), '../sharedFiles/cmd.txt');

switch(command) {
  case 'read':
    readData(file);
```

```
    break;
  case 'write':
     storeData(file, inputData+"\n");
    break;
  default:
    console.log('Usage: ' + process.argv[0] + ' read|write [inputData]');
}

function loadOrInitializeTaskArray(file, cb) {
  fs.exists(file, function(exists) {
    var oldData = [];
    if (exists) {
        fs.readFile(file, 'utf8', function(err, data) {
        if (err) throw err;
        var newdata = data.toString();
        cb(newdata);
      });
    } else {
      cb([]);
    }
  });
}
function readData(file) {
  loadOrInitializeTaskArray(file, function(data) {
      console.log( data );
  });
}
function storeData(file, newData) {
  fs.writeFile(file, newData, 'utf8', function(err) {
    if (err) throw err;
    console.log('Saved: ' + newData);
  });
}
```

Listing 1.61. `fileWrite.js`

Our intent is to generate an event each time the file is changed. To this end, we can define the following Java operation:

```
   public void watchFileInDir(String dirpath) {
       Path myDir = Paths.get(dirpath);
       try {
          WatchService watcher = myDir.getFileSystem().newWatchService();
          myDir.register(watcher, StandardWatchEventKinds.ENTRY_CREATE,
          StandardWatchEventKinds.ENTRY_DELETE, StandardWatchEventKinds.ENTRY_MODIFY);
          System.out.println("WATCHING " + dirpath);
          WatchKey watckKey = watcher.take();
          List<WatchEvent<?>> events = watckKey.pollEvents();
          for (WatchEvent event : events) {
               if (event.kind() == StandardWatchEventKinds.ENTRY_CREATE) {
                   System.out.println("Created: " + event.context().toString());
               }
               if (event.kind() == StandardWatchEventKinds.ENTRY_DELETE) {
                   System.out.println("Delete: " + event.context().toString());
               }
               if (event.kind() == StandardWatchEventKinds.ENTRY_MODIFY) {
                   System.out.println("Modify: " + event.context().toString());
                  emitFileContent( dirpath+"/"+event.context().toString() );
               }
           }
       } catch (Exception e) {
           System.out.println("Error: " + e.toString());
       }
   }
```

This operation is inserted in the `QActor` class, to provide a new built-in operation. In some future release of the *QActor* metamodel, it could be provided as a *QActor* primitive. The operation `emitFileContent` reads the file and generates an event of the form:

```
fileChanged  : fileChanged(FNAME,FCONTENT)
```

Our final step is the definition of a *QActor* system that activates the file watcher and handles the `fileChanged` events:

```
System fileChange
Event fileChanged : fileChanged(F,X) //F filename X current content
Context ctxFileChange ip[ host="localhost" port=8061]
/*
 * This system acts as an OBSERVER for change of files in the directory
 * C:/repoGitHub/it.unibo.qa.integrator/sharedFiles
 * Any change in some file (e.g. cmd.txt) generates the event: fileChanged : fileChanged(F,X)
 */
QActor qafilechange context ctxFileChange {
    Plan init normal[ println("START WATCHING");
        javaOp "watchFileInDir(\"C:/repoGitHub/it.unibo.qa.integrator/sharedFiles\")"
//      actorOp watchFileInDir("C:/repoGitHub/it.unibo.qa.integrator/sharedFiles")
    ]
    finally repeatPlan
}
QActor qafilechangehandler context ctxFileChange {
    Plan init normal[ actorOp noOP ]
    transition stopAfter 30000
    whenEvent fileChanged : fileChanged(F,X) do printCurrentEvent,
    whenEvent fileChanged : fileChanged(F,X) do println(X)
    finally repeatPlan
}
```

Listing 1.62. `fileChange.qa`

9 Towards the Web of Things

The goal of this section is to build the prototype of a software system whose logic architecture is inspired to the HTTP/REST model adopted in the field of the *Web Of Things* (WoT).

The Internet of Things (IoT) can be defined as a system of physical objects that can be discovered, monitored, controlled, or interacted with by electronic devices that communicate over various networking interfaces and eventually can be connected to the wider internet. Since actually there is no unique and universal application protocol for the IoT that can work across the many networking interfaces, the IoT is essentially a growing collection of isolated *Intranets of Things* that can't be connected to each other. We need a single universal application layer protocol (language) for devices and applications to talk to each other, regardless of how they're physically connected.

The WoT relies exclusively on Application-level protocols and tools. Working with such a high level of abstraction, makes it possible to connect data and services from many devices regardless of the actual transport protocols they use. By hiding the complexity and differences between various transport protocols used in the IoT, the Web of Things allows developers to focus on the logic of their applications without having to bother about how this or that protocol or device actually works.

In the WoT, devices and their services are fully integrated in the web because they use the same standards and techniques as traditional websites. We can write applications that interact with embedded devices in exactly the same way as we would interact with any other web service that uses web APIs, in particular, RESTful architectures. Recent embedded web servers with advanced features can be implemented with only 8 KB of memory. Thanks to efficient cross-layer TCP/HTTP optimizations, they can run on tiny embedded systems or even smart cards.

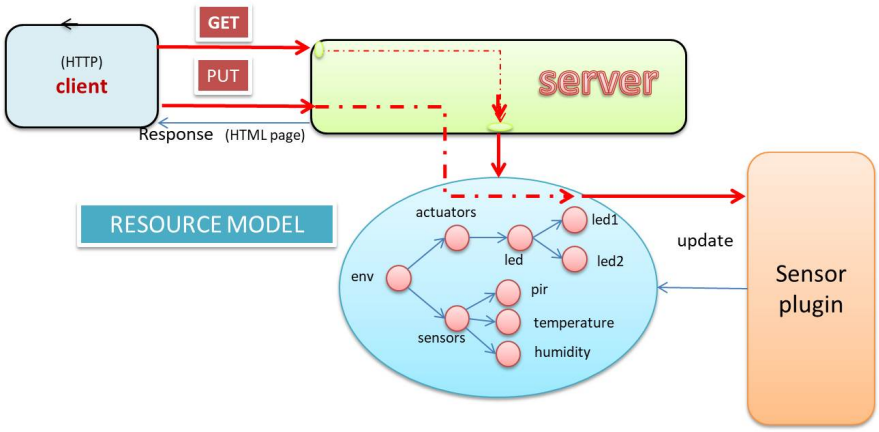

The main aspects that qualify such an architecture are:

- Integration patterns. Things must be integrated to the Internet and the WEB in several ways: using REST (*Representational State Transfer*) on device, by means of Applications Gateways (via specific IoT protocols, like the UDP-based CoAP (*Constrained Application Protocol*)), or by means of remote servers using the Cloud (via publish-subscribe protocols like MQTT).
- Resource (model) design. Each Thing should provide some functionality or service that must be modelled and organized into an hierarchy. Usually, physical resources are currently mapped into REST resources by means of description files written in JSON.
- Representation design. Each resource must be associated with some representation, e.g. JSON, HTML, MessagePack, ect.
- Interface design. Each service can be used by means of a set of commands that must be properly designed. In the REST model, commands are expressed by means of HTTP verbs (GET, PUT, POST, etc.) and often associated with *publish-subscribe* interaction via WebSockets.

– Resource linking design. The different resources must be discovered over the network are often logically linked to each other, for example according to the HATEHOAS (*Hyepermedia as Enigine of Application State*) principle, based on the Web-linking mechanisms: the HTTP header of a response contains the links to related resources.

The world of *Things* is massively dominated by devices running low-level C programs. However, although JavaScript and Node.js are not the optimal solution for every IoT project, their usage is growing in modern IoT and WoT development, since a single language can be used to build the client application, the cloud engine or gateways, and even the code running on the embedded device. In fact, a number of embedded device platforms (most Linux-based platforms indeed) today directly support JavaScript and Node.js to write embedded code.

The following picture (taken from the WoT book[9]) shows the component architecture of a WoT server completely built by using JavaScript and Node.js.

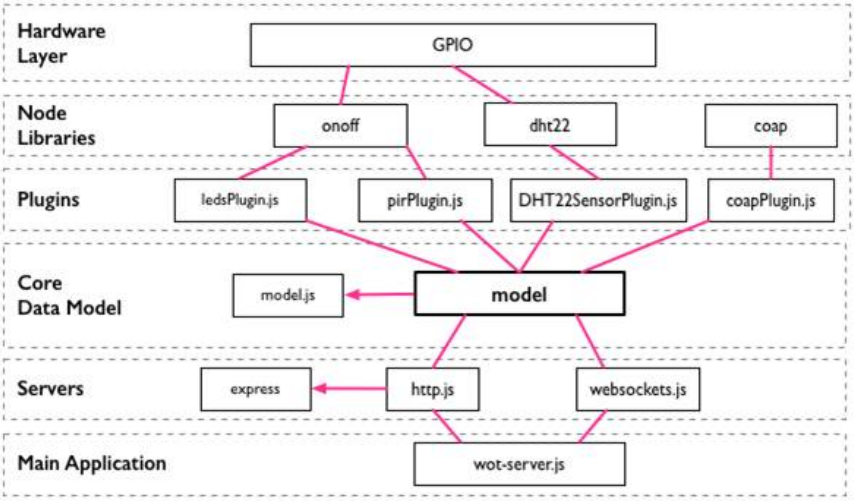

But IoT and WoT application require to build software for distributed systems whose nodes are quite always programmed with a set of different languages and frameworks (i.e they are heterogeneous systems). In this scenario, we can exploit a *QActor* model as an integrator of heterogeneous distributed activities (see Section 8).

[9] Building the Web of Things: With Examples in Node.js and Raspberry Pi. Dominique Guinard, Vlad M. Trifa, Manning 2016, ISBN-10: 1617292680

9.1 A (WoT) logical model

The model shown in the following picture aims at capturing the main components of a `WoT` application, by highlight the key-role of the `wotmodel` (*Resource Model*) in the logical architecture of the system.

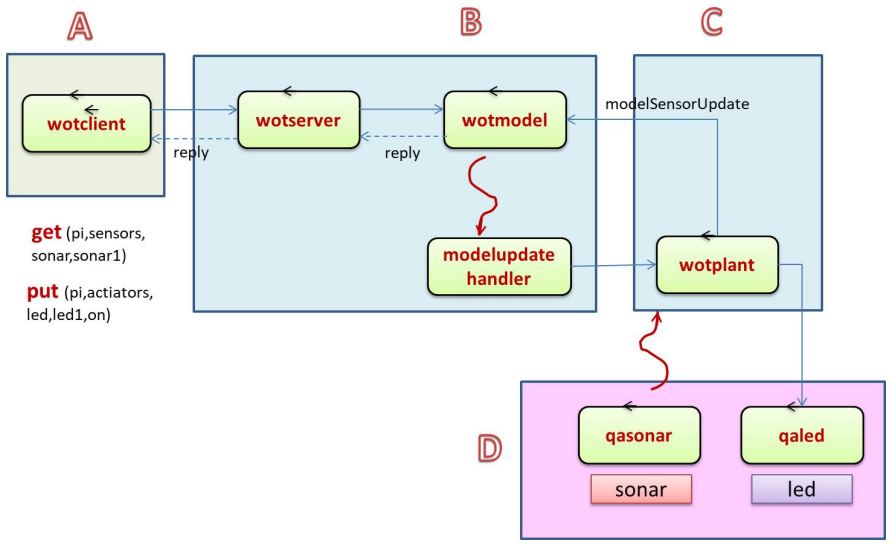

From the structural point of view, our model does introduce 4 contexts:

- The `user` context, represented by `A`. This part of the software system could be implemented by a browser.
- The `server` context, represented by `B`. This part is usually implemented on a set of `N>1` computers.
- The `gateway` context, represented by `C`. This part is usually implemented on a conventional PC.
- The `device` context, represented by `D`. This part is usually implemented on low-cost devices like Arduino, Raspberry, etc.

The model can be viewed as an instance of the following schema (isnpired by the concept of *hexagonal architecture*):

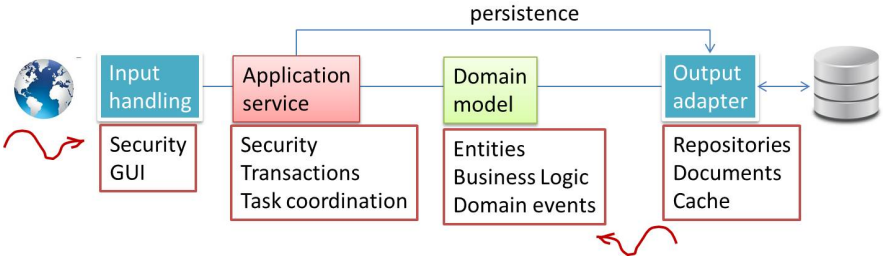

The relevant points are:

- all the components are modelled as active entities (e.g. `micro-services`) that interact via message passing or via events;
- the application layer and the physical devices are not directly connected: they interact by means of a `resource model` that is put at the centre of the system;
- the software that implements the domain layer does not depend on the other layers.

9.1.1 A resource model :

```
System wotLogic
Dispatch request         : request( CMD )   //sent by a client (via a browser)
Dispatch reply           : reply( V )       //reply to the client request
Dispatch resModelAction  : cmd(CMD )        //request to read/change the resource model
Dispatch resModelAnswer  : resanswer( A )   //answer from the model
Dispatch modelSensorUpdate : update(TYPE,ID,V) //request from a plant to change the model of a sensor

Event modelUpdate : modelUpdate( V )       //event raised when the resource model is changed
Event sonar      : p( Distance, SONARID )   //event raised by a sonar

Context ctxWotLogic ip [ host="localhost" port=8059 ]

/*
 * Resource model
 */
QActor wotmodel context ctxWotLogic -g yellow {  //
Rules{
root( pi, "WotPi", "Sensor on Raspberry", 8484 ).

sensor( pi, temperature, t1 ).
sensor( pi, pir, pir1 ).
sensor( pi, humidity, hum1 ).
sensor( pi, sonar, sonar1 ).
sensor( pi, sonar, sonar2 ).

actuator( pi, led, led1).
actuator( pi, led, led2).

descr( temperature, t1, data( "Temperature sensor 1", unit(celsius), value(0), gpio(12) ) ).
descr( humidity,  hum1, data( "Humidity sensor 1", unit(percent), value(0), gpio(12) ) ).
descr( pir,       pir1, data( "Passive Infrared 1", value(true), gpio(17) ) ).
descr( sonar,     sonar1, data( p(0,sonar1), gpio(11) ) ).
descr( sonar,     sonar2, data( p(0,sonar2), gpio(13) ) ).

descr( led,       led1, data( "Led 1", value(false), gpio(4) ) ).
descr( led,       led2, data( "Led 2", value(false), gpio(9) ) ).
}
    Plan init normal [
        println("wotmodel STARTS");
        demo consult("./src/it/unibo/wotmodel/routeRules.pl")
    ]
    switchTo handleRequest

    Plan handleRequest[ actorOp noOp ]
        transition stopAfter 30000
        whenMsg resModelAction  -> doResourceModelAction ,
        whenMsg modelSensorUpdate -> doResourceModelAction
        finally repeatPlan
    Plan doResourceModelAction resumeLastPlan[
      printCurrentMessage ;
      onMsg modelSensorUpdate : update(TYPE,ID,V) -> demo setsensor( model(pi,sensor,TYPE,ID,V), ANSWER );
      onMsg resModelAction  :   cmd(CMD) -> demo route(CMD, ANSWER);
      [ !? goalResult(R) ] println( wotmodel( R ) );
      [ !? goalResult(route(_, ANSWER)) ] println( wotmodel( ANSWER ) );
      [ ?? goalResult(route(_, ANSWER)) ] replyToCaller -m resModelAnswer : resanswer(ANSWER)
    ]
}
```

Listing 1.63. `wotLogic.qa`: resource model

9.1.2 Routing rules :

```
/*
```

```
2  ----------------------------------
3  it/unibo/qawotlserver/routeRules.pl
4  ----------------------------------
5  */
6  route( get(ROOT,sensors,TYPE,ID), ANSWER ) :-
7       %%output( get(ROOT,sensors,TYPE,ID) ),
8       getSensors( model(ROOT,sensor,TYPE,ID), ANSWER).
9
10 route( put(ROOT,sensors,TYPE,ID, V), ANSWER ) :-
11      %%output( put(ROOT,sensors,TYPE,ID,V) ),
12      setSensor( model(ROOT,sensor,TYPE,ID,V), ANSWER).
13
14 getSensors( model(ROOT,sensor,temperature,none) , todo(allTemperatore)):- !.
15     getSensors( model(ROOT,sensor,none,none) , todo(allSensor)):- !.
16 getSensors(model(ROOT,sensor,TYPE,ID) , ANSWER ) :-
17     sensor( ROOT, TYPE, ID ),
18     %%output( sensor( ROOT, TYPE, ID ) ),
19     descr(TYPE, ID, ANSWER ).
20
21 setSensor( model(ROOT,sensor,temperature,ID,V) , done(temperature,ID,V)) :-
22     %%output( setSensor_temperature ),
23     replaceRule(
24         descr( temperature, ID, data( D, U, value(X), GPIO ) ),
25         descr( temperature, ID, data( D, U, value(V), GPIO ) )
26     ) ,
27     actorobj(Actor),
28     Actor <- emit( "modelUpdate", modelUpdate( ID, GPIO ) ).
29 setSensor( model(ROOT,sensor,sonar,ID,V) , done(sensor,ID,V) ) :-
30     %%output( setSensor_sonar ),
31     replaceRule(
32         descr( sonar, ID, X, GPIO ),
33         descr( sonar, ID, V, GPIO )
34     ) ,
35     actorobj(Actor),
36     Actor <- emit( "modelUpdate", modelUpdate( ID, GPIO ) ).
37
38 initRules :- output( initRules ).
39 :- initialization(initRules).
```

Listing 1.64. `routeRules`

9.1.3 An actor working as a server :

```
1  QActor wotserver context ctxWotLogic {  //-g cyan
2     Plan init normal [ println("wotserver STARTS") ]
3     switchTo handleRequest
4
5     Plan handleRequest[ actorOp noOp ]
6         transition stopAfter 30000
7             whenMsg request -> elabRequest
8             finally repeatPlan
9     Plan elabRequest resumeLastPlan[
10      printCurrentMessage ;
11      onMsg request : request( CMD ) -> forward wotmodel -m resModelAction : cmd(CMD) ;
12      actorOp memoCurrentCaller  //otherwise replyToCaller does not work properly
13    ]
14    transition stopAfter 30000
15            whenMsg resModelAnswer -> handleModelAnswer
16    Plan handleModelAnswer resumeLastPlan[
17        onMsg resModelAnswer : resanswer(A) -> println( rrr(A)) ;
18        onMsg resModelAnswer : resanswer(A) -> replyToCaller -m reply : reply(A)
19    ]
20 }
```

Listing 1.65. `wotLogic.qa`: server

9.1.4 A client (simulator) :

```
QActor wotclient context ctxWotLogic -g cyan {
Rules{
    test( get(pi,sensors,temperature,t1) ).
    testChange( put(pi,sensors,temperature,t1, 10) ).

    test( get(pi,sensors,temperature,t1) ).
    testChange( put(pi,sensors,temperature,t1, 20) ).

    test( get(pi,sensors,sonar,sonar1) ).
}
    Plan init normal[
        println("wotclient STARTS " )
    ]
    switchTo doRequest

    Plan doRequest [
        //println("qawotlclient GET " ) ;
        [ ?? test(REQ)] forward wotserver -m request : request( REQ ) else endPlan "no more test"
     ]
    transition stopAfter 30000
        whenMsg reply -> getAnswer
    finally repeatPlan

    Plan getAnswer resumeLastPlan [
        onMsg reply : reply(V) -> println( client( V ) )
    ]
    switchTo changevalue

    Plan changevalue resumeLastPlan[
        //println("qawotlclient PUT " ) ;
        [ ?? testChange(REQ)] forward wotserver -m request : request( REQ ) else endPlan "no more testChange"
    ]
    transition stopAfter 30000
        whenMsg reply : reply(V) do println( client( V ) )
}
```

Listing 1.66. `wotLogic.qa`: client (simulator)

9.1.5 An actor that handles model-update events :

```
QActor modelupdatehandler context ctxWotLogic -g green {
    Plan init normal[
        actorOp noOp
    ]
    transition stopAfter 30000
        whenEvent modelUpdate : modelUpdate(V) do printCurrentEvent //println( modelUpdate( V ) )
    finally repeatPlan
}
```

Listing 1.67. `wotLogic.qa`: model update handler

9.1.6 An actor that simulates a sonar :

```
QActor qasonar context ctxWotLogic {
Rules{
    p(80,sonar1).
    p(70,sonar1).
    p(60,sonar1).
    p(40,sonar1).
```

```
}
    Plan init normal[
      delay time(1000) ;
     [ ?? p(DIST, SID) ] emit sonar : p(DIST,SID)
    ]
    finally repeatPlan 9
}
```

Listing 1.68. `wotLogic.qa`: sonar simulator

9.1.7 An actor that simulates a plant (that modifies the model) :

```
QActor qawotplant context ctxWotLogic -g white {
    Plan init normal[
        actorOp noOp
    ]
    transition stopAfter 120000
        whenEvent sonar -> updateTheModel
        finally repeatPlan
    Plan updateTheModel resumeLastPlan[
        printCurrentEvent;
        onEvent sonar : p(DIST,SID) ->
            forward wotmodel -m modelSensorUpdate : update( sonar,SID,p(DIST,SID) )
    ]
}
```

Listing 1.69. `wotLogic.qa`: plant simulator

10 Playing with real devices (in C)

In this section, we introduce, as an example of physical input device, a sonar HC-SR04. The device is connected to a RaspberryPi as follows:

- vcc pin connected to the physical GPIO 4 (5V)
- gnd pin connected to the physical GPIO 6 (GND)
- trig pin connected to the physical GPIO 16 (4 in WiringPi numeration)
- echo pin connected to the physical GPIO 18 (5 in WiringPi numeration)

The physical sonar is made working by the following program written in C:

```
#include <iostream>
#include <wiringPi.h>
#include <fstream>
#include <cmath>

//#define TRUE 1
//Wiring Pi numbers for radar with stepper
#define TRIG 4
#define ECHO 5

using namespace std;
/*
 * in the directory: of SonarAlone.c:
1)  [ sudo ../../pi-blaster/pi-blaster ] if servo
2)  g++  SonarAlone.c -l wiringPi -o SonarAlone
sudo ./SonarAlone
In nat/servosonar:
sudo java -jar  SonarAloneP2PMain.jar
sudo python radar.py
 */
void setup() {
    wiringPiSetup();
    pinMode(TRIG, OUTPUT);
    pinMode(ECHO, INPUT);

    //TRIG pin must start LOW
    digitalWrite(TRIG, LOW);
    delay(30);
}

int getCM() {
    //Send trig pulse
    digitalWrite(TRIG, HIGH);
    delayMicroseconds(20);
    digitalWrite(TRIG, LOW);

    //Wait for echo start
    while(digitalRead(ECHO) == LOW);

    //Wait for echo end
    long startTime = micros();
    while(digitalRead(ECHO) == HIGH);
    long travelTime = micros() - startTime;

    //Get distance in cm
    int distance = travelTime / 58;

    return distance;
}

int main(void) {
    int cm ;
    setup();
    while(1) {
        cm = getCM();
```

```
56          cout << cm <<  endl;
57          delay(300);
58      }
59      return 0;
60  }
```

Listing 1.70. `sonarAlone.c`

This program writes on the standard output strings of the form `p( Distance )`.

A proper *QActor* model can specify how to transform the data given by the sonar a *QActor* event of the form `polar : p(Distance, Angle)`. The `Angle` value is a integer (`0<=Angle<=90`) that can be used to distinguish among different sonar values. In the project *it.unibo.qactor.radar* this value is used to display the sonar values on an output device that simulates the screen of a radar.

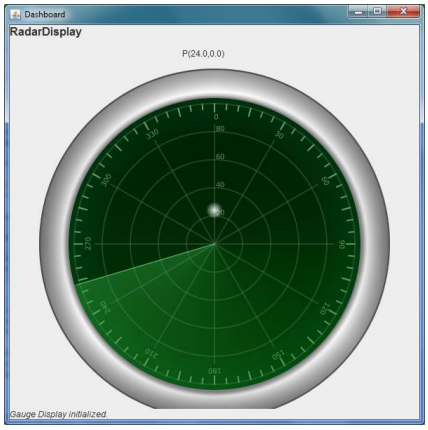

For example, in the *it.unibo.qactor.radar* project, we define an actor to be executed on the RaspberryPi connected to the sonar:

```
1   /*
2    * ============================================================
3    * sonarSensorEmitter.qa
4    * ============================================================
5    */
6   System sonarSensorEmitter
7   Event polar       : p( Distance, Angle )
8   Event alarm       : alarm( obstacle, p( Distance, Angle ) )
9   Dispatch polarMsg : p( Distance, Angle )
10
11  Context ctxRadarBase    ip [ host="localhost" port=8080 ] -standalone //192.168.43.229
12  /*
13   * WARNING: at the moment, for message passing
14   * we must known the names of the actors working in a standalone context
15   */
16  Context ctxSensorEmitter ip [ host="localhost" port=8073 ] -g yellow //localhost  192.168.1.3
17  EventHandler evh for alarm -print ;
18
19  QActor sensorsonar context ctxSensorEmitter {
20      Plan init normal [
21          println("sensorsonar STARTS")
22  //      actorOp startSonarC  //activate the program sonarAlone.c
23      ]
24      switchTo workSimulate
25
26      //Just to show if it works ...
27      Plan workSimulate  [
28          actorOp noOp ;
29  //      sendto radarguibase in ctxRadarBase -m polarMsg : p( 60, 90 ); delay 500;
```

```
//      sendto radarguibase in ctxRadarBase -m polarMsg : p( 50, 18 ); delay 500;
//      sendto radarguibase in ctxRadarBase -m polarMsg : p( 80, 90 ); delay 500

        emit polar : p(80,20) ; delay 500;
        emit polar : p(80,60) ; delay 500;
        emit polar : p(80,130) ; delay 500
    ]
    //switchTo workReal
    switchTo waitForAlarms

    Plan waitForAlarms[ ]
    transition stopAfter 600000
        whenEvent alarm : alarm(X,Y) do printCurrentEvent
    finally repeatPlan

    //Handle real data
    Plan workReal [
//      println("sensorsonar workReal") ;
        actorOp getDistanceFromSonar ; //get data from the output of sonarAlone.c
        [ !? actorOpDone( OP,d(D) )] println( p(D,90) ) ;
        [ ?? actorOpDone( OP,d(D) )] emit polar : p(D,90)
    ]
    finally repeatPlan
}


//QActor radarguibase context ctxRadarBase {
//  Plan init normal [
//      println("NEVER HERE. This is just a plave holder")
//  ]
//}
```

Listing 1.71. sonarSensorEmitter.qa

The flag `-standalone` in the declaration of a *Context* (`ctxRadarBase` in the example) indicates that our system is using actors working in a computational node already in existence. The actors declared (if any) in a `-standalone` *Context* are 'place holders' for already defined (and working) actors. Such a declaration is required for reference purposes (e.g. message passing, that requires a reference to an actor name). In this case we do not need any declaration, since we do not use messages; the events are automatically propagated to all the nodes by the *QActor* runtime.

The code written by the application designer is related to the operations `startSonarC` and `getDistanceFromSonar`:

```

public class Sensorsonar extends AbstractSensorsonar {
    protected BufferedReader readerC;
    protected String distance = ""; //d( distance )
    protected int counter = 1;

    public Sensorsonar(String actorId, QActorContext myCtx, IOutputEnvView outEnvView ) throws Exception{
        super(actorId, myCtx, outEnvView);
    }
/*
 * ADDED BY THE APPLICATION DESIGNER
 */

    public void startSonarC(){
        try {
            println("startSonarC" );
            Process p = Runtime.getRuntime().exec("sudo ./SonarAlone");
            readerC  = new BufferedReader(new java.io.InputStreamReader(p.getInputStream()));
            println("Process in C STARTED " + readerC);
//          println("Process in C reads " + getDistanceFromSonar() );
        } catch (Exception e) {
            e.printStackTrace();
        }
    }
```

```
25      public String getDistanceFromSonar(){
26          try {
27  //          println("getDistanceFromSonar" );
28              String inpS = readerC.readLine();
29  //          println("getDistanceFromSonar " + inpS );
30              //distance = "data( "+ counter++ + ", distance, d("+inpS+") )";
31              return "d("+inpS+")";
32          } catch (Exception e) {
33              e.printStackTrace();
34              return "d(0)";
35          }
36      }
37
38  }
```

Listing 1.72. `Sensorsonar.java`

11 Playing with buttons and leds (in Node.js)

The library `onoff` provides `GPIO` access and interrupt detection with Node.js on Linux (and RaspberryPi).

```
sudo npm install -g onoff
```

The Led implementation on a Raspberry can be defined as follows:

```
1   /*
2   * ====================================
3   * LedImplGpio.js
4   *
5   * Led implmentation on a RaspberryPi
6   * ====================================
7   */
8   var onoff = require('onoff');
9   var Gpio = onoff.Gpio;
10
11  var LedImplGpio = function(name,ledpin){
12      this.name     = name;
13      this.ledGpio  = new Gpio(ledpin, 'out');
14      this.ledState = 0;
15  }
16
17  LedImplGpio.prototype.turnOn = function(){
18      this.ledState = 1;
19      this.ledGpio.writeSync(1);
20  }
21  LedImplGpio.prototype.turnOff = function(){
22      this.ledState = 0;
23      this.ledGpio.writeSync(0);
24  }
25
26
27  // EXPORTS
28  if(typeof document == "undefined") module.exports.LedImplGpio = LedImplGpio;
```

Listing 1.73. `LedImplGpio.js`

The Button as a GOF-observable object that can also emit NodeJs events can be defined as follows:

```
1   /*
2   * ================================================
3   * ButtonObservable.js
4   * GOAL:
5   *   define a Button as a logical observable entity
6   *   that can call registered observers / functions
7   *   and that can rise (NodeJs) events
```

```
* ================================================
*/
/*
 * ******************************************
 * Observable prototype
 * ******************************************
 */
Observable = function(){
    this.nobs       = 0;
    this.nobsfunc   = 0;
    this.observerFunc = [ ];
    this.observer   = [ ];
    this.register   = function(obs){
        //println(" Observable register " + this.nobs);
        this.observer[this.nobs++] = obs;
    }
    this.registerFunc = function(func){
        //println(" Observable registerFunc " + this.nobs + " " + func);
        this.observerFunc[this.nobsfunc++] = func;
    }
    this.notify = function(){
        for(var i=0;i < this.observer.length;i++){
            //console.log(" Observable update " + this.observer[i] );
            this.observer[i].update();
        }
        for(var i=0;i < this.observerFunc.length;i++){
            //console.log(" Observable calls " + this.observerFunc[i] );
            this.observerFunc[i]();
        }
    }
 }

/*
 * ************************************************************
 * Button as an 'object' that inherits from Observable
 * and works also as an event emitter.
 * project it.unibo.bls2016.qa
 * ************************************************************
 */
var EventEmitter = require('events').EventEmitter;

function Button ( name ){
    this.emitter = new EventEmitter();
    this.name    = name;
    this.evId    = "pressed";
    this.count   = 0;
}

//Shared
Button.prototype     = new Observable();
Button.prototype.press = function(level){
    //console.log(" Button press " + level );
    this.notify();
    this.emitEvent() ;
}
Button.prototype.emitEvent = function(){
    console.log(" Button emits " + this.evId + " count=" + this.count++);
    this.emitter.emit(this.evId,'buttonPressed') ;
}
Button.prototype.getEmitter = function(){
    return this.emitter;
}
Button.prototype.setHandler = function( handler ){
    this.emitter.on(this.evId, handler );
}
Button.prototype.removeHandler = function( handler ){
    this.emitter.removeAllListeners(this.evId);
}

```

```
//EXPORTS
module.exports.Button = Button;
//To work is a browser, run: browserify ButtonObservable.js -o ButtonObservableBro.js
```

Listing 1.74. `ButtonObservable.js`

Here is the definition of a system that can work on a PC and on a RaspberryPi.

```
/*
 * ======================================================
 * blsOop.js
 *
 * VISION:
 *   A logic architecture should guide any software development
 * GOAL :
 *  1) build a prototype working on a pc
 *  2) test the prototype on the pc
 *  3) refactor (extend) the code so to work on a RaspberryPi
 * ======================================================
*/
var ButtonHL = require("./ButtonObservable");
var LedHL   = require("./Led");
/*
 * ------------------------------------------------
 * BUTTON HIGH-level
 * ------------------------------------------------
 */
var b1       = new ButtonHL.Button( "b1" );
/*
 * ---------------------------------
 * CONFIGURATION ON RASPBERRYPI
 * ---------------------------------
*/
configureForRasp = function(){
    var LedOnRasp = require("./LedImplGpio");
    var onoff     = require( 'onoff' );
    var Gpio      = onoff.Gpio;
    var l1gpio    = new LedOnRasp.LedImplGpio("l1rasp", 25);
    var buttonGpio = new Gpio(24, 'in', 'both');
    var l1rasp    = new LedHL.Led("l1rasp",l1gpio);

// b1.registerFunc( function(){ l1rasp.switchState(); });    //callback
//Set an interrupt handler that calls the business logic
 buttonGpio.watch(function (err, level) {
      if (err) {   throw err;  }
      //console.log('Interrupt level=' + level + " on " + b1);
      if( level == 1 ) b1.press(level); //activates the observers
  });
  //Set another event handler (for the HL button as an emitter)
  b1.getEmitter().on( b1.evId, function(v){console.log(" %%% HL RASP event handler: event content=" + v); } )
}
/*
 * ---------------------------------
 * CONFIGURATION ON PC
 * ---------------------------------
*/
configureForPc = function(){
    var LedOnPc  = require("./LedImplPc");
    var l1pc     = new LedOnPc.LedImplPc("l1pc");
    l1           = new LedHL.Led("l1pc",l1pc);
    /*
     * handler of the event 'pressed' emitted by the button
     */
    b1.setHandler(
        function(msg){
            console.log("  configureForPc handler msg=" + msg +" when led=" + l1.getState());
            l1.switchState();
    } );
     //Set another event handler (for the HL button as an emitter)
    b1.getEmitter().on( b1.evId,
```

```
63            function(v){console.log(" %%% HL PC event handler: event content=" + v); } )
64
65    //RAPID CHECK (working also on a RaspberryPi)
66    for( i=1; i<=5; i++ ) b1.press();
67  }
68
69  /*
70   * CTRL-C handling
71   */
72  process.on('SIGINT', function () {
73    ledGpio.writeSync(0);
74    ledGpio.unexport();
75    buttonGpio.unexport();
76    console.log('Bye, bye!');
77    process.exit();
78  });
79
80  //Main
81  console.log('blsOop STARTS' );
82  configureForPc();
83  //configureForRasp();
84  console.log('blsOop ENDS' );
85
86
87  //EXPORTS
88  if(typeof document == "undefined") module.exports.b1 = b1; //USED BY HttpServerBls.js
```

Listing 1.75. `blsOop.js`

```
1  var wpi = require('wiring-pi');
2
3  // GPIO pin of the button
4  var configPin = 7;
5
6  wpi.setup('wpi');
7  var started = false;
8  var clock = null;
9
10 wpi.pinMode(configPin, wpi.INPUT);
11 wpi.pullUpDnControl(configPin, wpi.PUD_UP);
12 wpi.wiringPiISR(configPin, wpi.INT_EDGE_BOTH, function() {
13   if (wpi.digitalRead(configPin)) {
14     if (false === started) {
15       started = true;
16       clock = setTimeout(handleButton, 3000);
17     }
18   }
19   else {
20     started = false;
21     clearTimeout(clock);
22   }
23 });
24
25 function handleButton() {
26   if (wpi.digitalRead(configPin)) {
27     console.log('OK');
28   }
29 }
```

Listing 1.76. `button.js`

```
1  var wpi = require('wiring-pi');
2
3  // GPIO pin of the led
4  var configPin = 7;
5  // Blinking interval in usec
6  var configTimeout = 1000;
7
```

```
8  wpi.setup('wpi');
9  wpi.pinMode(configPin, wpi.OUTPUT);
10
11 var isLedOn = 0;
12
13 setInterval(function() {
14     isLedOn = +!isLedOn;
15     //isLedOn = !isLedOn;
16     wpi.digitalWrite(configPin, isLedOn );
17 }, configTimeout);
```

Listing 1.77. `led.js`

12 Playing with virtual devices (in Unity)

During software analysis and testing, it could be preferable to use virtual devices rather real, physical devices. Unity can be used as a simulation environment able to provide a virtual working environment and sensor data. For example, the following Unity scene shows an environment made of a set of walls and fixed obstacles, a mobile obstacle (the cylinder) and a sonar (the small box in green).

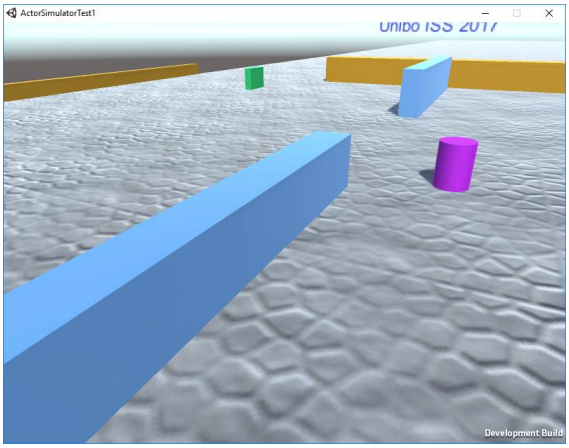

Our Unity environment has been modified to interact with *QActor* systems.

The operation `createSimulatedActor` can be used in a *QActor* model to 'inject' into the virtual environment a qactor (to be called `rover`, at the moment) that can be moved in a Unity scene by using proper commands (`onward, backwards, left, right, stop`).

When the `rover` is intercepted by the sonar, the (modified) Unity system emits the event `sonar : sonar(SONAR, TARGET, DISTANCE)`.

Moreover, the virtual game object that represents the `rover` is equipped (in its front) with a sonar, that emits the event `sonarDetect : sonarDetect(X)` when detects an obstacle.

Both these events that cam be handled by our applications. For example:

```
System testRover
Event sonarDetect  : sonarDetect(X) //From (virtual robot) sonar
Event sonar        : sonar(SONAR, TARGET, DISTANCE) //From (virtual) sonar

Context ctxRover ip [ host="localhost" port=8070 ]
EventHandler evh for sonarDetect , sonar -print ;

QActor rover context ctxRover {
    Plan init normal [
            println("rover START");
            actorOp workWithUnity("localhost") ;
            actorOp createSimulatedActor("rover","Prefabs/CustomActor") ;
            right 50 time ( 1000 ) //position
        ]
        switchTo moveVitualRobot

    Plan moveVitualRobot [
        println("moveVitualRobot")
    ]
    reactive onward 40 time ( 5000 )
            whenEnd -> endOfMove
            whenTout 30000 -> handleTout
            whenEvent sonarDetect -> handleObstacle
            or whenEvent sonar  -> handleSonar
    finally repeatPlan

```

```
27      Plan handleSonar resumeLastPlan [
28          onward 50 time ( 300 ) ; //out of sonar range
29          stop 50 time ( 1000 )   //stop for a while ...
30      ]
31      Plan handleObstacle resumeLastPlan [ backwards 50 time ( 3500 ) ]
32      Plan endOfMove resumeLastPlan [ println("endOfMove") ]
33      Plan handleTout [ println("handleTout") ]
34
35  }
```

Listing 1.78. `testRover.qa`

13 Web-based interaction with a QActor

Any modern (IOT) application should provide the possibility to be used by humans or by other machines by means of a web interface.

In order to achieve this goal during the system prototyping phase, the *QActor* software factory does introduce a built-in support, by creating a HTTP web-socket server on port 8080 when the -httpserver flag for a Context is set. The factory generates also (just once) a set of HTML pages in the in the package of the srcMore directory associated with that *Context*. These pages do provide the web interface shown in the following picture:

All the buttons are implemented as devices that emit some predefined *QActor* event. In particular, The RUN button at the top of the GUI allows an human user to emit string commands, while the buttons at the bottom are introduced to emit prefixed commands and send alarms.

This interface emits the following events:

`inputcmd : usercmd(executeInput(CMD))`	(RUN button)
`usercmd : usercmd(robotgui(w(low)))`	(FORWARD button)
`alarm : alarm(fire)`	(FIRE button)
`obstacle : obstacle(X)`	(OBSTACLE button)
`cmd : cmd(start)`	(START button)
`cmd : cmd(stop)`	(STOP button)

This built-in behaviour can be modified by the Application designer by changing the given HTML pages. However, these events usually provide a sort of 'internal standard' that increases understanding and promotes fast prototyping.

13.1 The (local) GUI user interface

When the -g flag for an Actor is set, the *QActor* software factory generates a GUI interface for that actor, whose form shown in the following picture:

The `INPUT` button generates the event :

```
local_inputcmd : usercmd(executeInput(CMD))
```

where `CMD` is the content of the input field on the left.

The Application designer can modify this Actor-specific `GUI` with two actions:

1. exclude the built-in panels by redefining with an empty body the following methods:

   ```
   protected void addInputPanel(int size){  }
   protected void addCmdPanels(){  }
   ```

2. create his/her own Panels and inject (with the built-in method `addPanel`) them in the built-in `GUI` environment.

Of course, the Application designer can avoid to introduce the built-in interface support (the `-g` flag) and define application-specific methods for provide the actor with a custom `GUI` interface.

13.2 A front-end written in Node.js

In section we aim at promoting machine-to-machine (M2M) interaction between an actor an an external entity, by providing the actor with an application-specific REST interface written in Node.js.

Differently from Section 8, the Node.js server must replace the built-in HTTP web-socket server and maps external REST requests into actor actions.

The project is named *it.unibo.blsNode.qa* and is available via GIT at https://github.com/anatali/lss0

- RestClientHttp
- HttpServerCrud.js
- httpClient.qa

bls0.qa defines a system that sends PUT requests to the node server and handles the fileChanged events by switching a led.

```
1  System bls0
2  Event fileChanged : fileChanged(FNAME,CONTENT) //emitted by watchFileInDir
3
4  Context ctxBls0 ip [ host="localhost" port=8029 ] //-g cyan
5  //ASSUMPTION: A Node.js HttpServerCrud writes 'click' on the file sharedFiles/cmd.txt
6  QActor qabls0led context ctxBls0 -g yellow{
7      Plan init normal [
8          println( "qabls0led STARTS" ) ;
9          actor0p createLedGui
10     ]
11     switchTo work
12
13     Plan work [
14         println("qabls0led waits")
15     ]
16     transition stopAfter 600000
17         whenEvent fileChanged : fileChanged(F,press) do actor0p ledSwitch
18         finally repeatPlan
19 }
20 QActor qafilewatcher context ctxBls0 {
21     Plan init normal [
22         actor0p watchFileInDir("./sharedFiles") //C:/repoGitHub/it.unibo.blsNode.qa/sharedFiles
23     ]
24     finally repeatPlan
25 }
26 QActor qabls0client context ctxBls0 {
27     Plan init normal [
28         println( "qabls0client wait for server activation ... " ) ;
29         delay 4000
30     ]
31     switchTo work
32
33     Plan work[
34         println( "qabls0client sendPut" ) ;
35         actor0p sendPut("click", 8080) ;
```

Listing 1.79. bls0.qa

14 Reactive actions

In Subsection 2.4 we introduced the concept of ***action*** as an activity that must always terminate, while Section 5 has shown how actions can be activated in asynchronous way.

In this section we introduce the idea of `Reactive Action` as an activity that can be suspended (interrupted) by the occurrence of events.

As an example, let us consider the case of a Led that must blink until an `alarm` event occurs. The application designer writes the action `ledBlink` in the following way:

```
1    boolean goon = true;
2    public void ledBlink(){
3        while( goon ) {
4            ledSwitch();
5            waitfor(500);
6        }
7    }
```

To 'interrupt' the action is is sufficient to give the value `false` to the variable `goon`. Let us introduce some action to handle such a variable:

```
1
2    public void setupLedBlink() {
3        goon = true;
4    }
5    public void ledblinkstop(){
6        goon = false;
7    }
```

Now we can introduce a *QActor* model that calls the `ledBlink` action as a reactive action that reacts to the `alarm` event emitted by the `FIRE` button of the web interface introduced in Section 13.

```
1  /*
2   * blsHlBlinkReactiveWeb.qa
3   * ------------------------------------------------------------
4   * The system provides a button that generates the event cmd : cmd(X)
5   * When it perceives the event, the system starts blinking a led
6   * The blinking action must be 'interrupted' when an alarm event is raised
7   */
8  System blsHlBlinkReactiveWeb
9  Event cmd    : cmd(V)        //V : start/stop
10 Event alarm  : alarm(V)      //V : fire
11
12 Context ctxBlsHlBlimkreactiveWeb ip [ host="localhost" port=8029 ] // -httpserver
13
14 QActor qaledhlreactiveweb context ctxBlsHlBlimkreactiveWeb {
15 Rules{
16     config( led, gui ).
17 //  config( led, rasp ).
18 }
19     Plan init normal [
20         [ !? config( led, gui )]
21             javaOp "it.unibo.custom.led.LedFactory.createLedWithGui(\"l1\", this)"
22     ]
23     switchTo waitForCmd
24
25     Plan waitForCmd [
26         println("qaledhlreactiveweb WAITS")
27     ]
28     transition stopAfter 3000000
29         whenEvent cmd : cmd(start) do switchTo doLedBlink
30     finally repeatPlan
31
32     Plan doLedBlink[ ]
33     reactive javaOp "it.unibo.custom.led.LedFactory.ledBlink(\"l1\" )"
34         whenEnd             -> endWork
35         whenTout 30000      -> endWork
```

```
36          whenEvent alarm     -> stopBlink
37
38      Plan stopBlink[
39          println("qaledhlreactiveweb stopBlink") ;
40          actorOp suspendCurrentAction
41      ]
42      switchTo waitForCmd
43
44      Plan endWork[
45          println("qaledhlreactive ends") ;
46          delay 3000
47      ]
48  }
```

Listing 1.80. `blsHlBlinkReactiveWeb.qa`

The blinking is activated by clicking on the `START` button of the web interface, that emits the `cmd` event.

15 The MqttUtils

The MQ *Telemetry Transport* (MQTT) is an ISO standard (ISO/IEC PRF 20922) for a "light weight" messaging protocol (on top of TCP/IP) based on the publish-subscribe pattern.

The Eclipse Paho project provides open-source client implementations of MQTT and MQTT-SN for Sensor Networks[10]) to be used in emerging applications for *Machine-to-Machine* (M2M) and *Internet of Things* (IoT).

There are already MQTT C and Java libraries with Lua, Python, C++ and JavaScript at various stages of development.

The *QActor* runtime software provides a Java utility class to be used as a support for MQTT interaction. It is defined as follows:

```
1  package it.unibo.qactors.mqtt;
2  import it.unibo.qactors.akka.QActor;
3  import org.eclipse.paho.client.mqttv3.MqttCallback;
4  import org.eclipse.paho.client.mqttv3.IMqttDeliveryToken;
5  import org.eclipse.paho.client.mqttv3.MqttClient;
6  import org.eclipse.paho.client.mqttv3.MqttConnectOptions;
7  import org.eclipse.paho.client.mqttv3.MqttException;
8  import org.eclipse.paho.client.mqttv3.MqttMessage;
9  import alice.tuprolog.Struct;
10 import alice.tuprolog.Term;
11
12 public class MqttUtils implements MqttCallback{
13 private static MqttUtils myself = null;
14     protected String clientid = null;
15     protected String eventId  = "mqtt";
16     protected String eventMsg = "";
17     protected QActor actor    = null;
18     protected MqttClient client = null;
19
20     public static MqttUtils getMqttSupport( QActor qa ){
21 //      System.out.println("  %%% MqttUtils getMqttSupport qa="+ qa );
22         if( myself == null ) myself = new MqttUtils();
23         return myself ;
24     }
25     public MqttUtils(){
26         try {
27             myself  = this;
28         } catch (Exception e) {
29             println("  %%% MqttUtils WARNING: "+ e.getMessage() );
30         }
31     }
32     public void connect(QActor actor, String clientid, String brokerAddr, String topic ) {
33         try{
34             this.actor = actor;
35             client = new MqttClient(brokerAddr, clientid);
36 //          println("  %%% MqttUtils connect/4 "+ clientid + " " + brokerAddr + " " + topic + " " + client);
37             MqttConnectOptions options = new MqttConnectOptions();
38             options.setKeepAliveInterval(480);
39             options.setWill("unibo/clienterrors", "crashed".getBytes(), 2, true);
40             client.connect(options);
41         }catch(Exception e){
42             actor.println("MqttUtils connect ERROR " + e.getMessage());
43         }
44     }
45     public void disconnect( ) {
46         try{
47             println("  %%% MqttUtils disconnect "+ client );
48             if( client != null ) client.disconnect();
49         }catch(Exception e){
50             actor.println("MqttUtils disconnect ERROR " + e.getMessage());
51         }
52     }
```

[10] MQTT-SN is a protocol derived from MQTT, designed for connectionless underlying network transports such as UDP

```
53
54      public void subscribe(QActor actor, String clientid, String topic) throws Exception {
55          try{
56              this.actor = actor;
57              client.setCallback(this);
58              client.subscribe(topic);
59          }catch(Exception e){
60                  println("  %%% MqttUtils subscribe error "+ e.getMessage() );
61                  eventMsg = "mqtt(" + eventId +", failure)";
62                  println("  %%% MqttUtils subscribe error "+ eventMsg );
63                  if( actor != null ) actor.sendMsg("mqttmsg", actor.getName(), "dispatch", "error");
64                  throw e;
65          }
66      }
67      @Override
68      public  void connectionLost(Throwable cause) {
69          println("  %%% MqttUtils connectionLost = "+ cause.getMessage() );
70      }
71      @Override
72      public  void deliveryComplete(IMqttDeliveryToken token) {
73  //      println("         %%% MqttUtils deliveryComplete token= "+ token );
74      }
75      /*
76       * sends to a tpoic a content of the form
77       *      msg( MSGID, MSGTYPE, SENDER, RECEIVER, CONTENT, SEQNUM )
78       */
79      public void publish(QActor actor, String clientid, String topic, String msg,
80              int qos, boolean retain) throws MqttException{
81          MqttMessage message = new MqttMessage();
82          message.setRetained(retain);
83          if( qos == 0 || qos == 1 || qos == 2){//qos=0 fire and forget; qos=1 at least once(default);qos=2 exactly once
84              message.setQos(0);
85          }
86          message.setPayload(msg.getBytes());
87          try{
88              client.publish(topic, message);
89  //          println("         %%% MqttUtils published "+ message + " on topic=" + topic);
90          }catch(MqttException e){
91              println("  %%% MqttUtils publish ERROR "+ e );
92          }
93      }
94      /*
95       * receives a message of the form
96       *          msg( MSGID, MSGTYPE, SENDER, RECEIVER, CONTENT, SEQNUM )
97       * and sends it to the RECEIVER
98       */
99  //  private String msgID    = null;
100 //  private String msgType  = null;
101     private String msgSender = null;
102 //  private String dest     = null;
103 //  private String msgcontent = null;
104
105     @Override //MqttCallback
106     public void messageArrived(String topic, MqttMessage msg) {
107          String msgID     = null;
108          String msgType   = null;
109          String dest      = null;
110          String msgcontent = null;
111          try {
112 //             println("  %%% MqttUtils messageArrived on "+ topic + ": "+msg.toString());
113              Struct msgt    = (Struct) Term.createTerm(msg.toString());
114              println("messageArrived msgt "+ msgt + " actor=" + actor.getName() );
115               msgID     = msgt.getArg(0).toString();
116               msgType   = msgt.getArg(1).toString();
117               msgSender = msgt.getArg(2).toString();
118               dest      = msgt.getArg(3).toString();
119               msgcontent = msgt.getArg(4).toString();
120               if( actor != null ) //send a msg to itself (named without _ctrl)
121                  actor.sendMsg( msgSender, msgID, actor.getName().replace("_ctrl", ""), msgType, msgcontent);
122          } catch (Exception e) {
```

```
123 //         println("messageArrived ERROR "+e.getMessage() );
124         }
125     }
126 
127     //Used by QActor
128     public String getSender(){ return (msgSender!=null) ? msgSender.replace("_ctrl", "") : "notyet"; }
```

Listing 1.81. The utility class `MqttUtils.java`

An object of class `MqttUtils` is used as a *singleton* and works as the support for the actor that calls the operation `connect` (that creates a `MqttClient`). Thus, in this version a *QActor* can connect to a single `MQTTT` server only.

The `subscribe` operation sets this singleton support as the object that provides the callback (`messageArrived`) to be called when the `MqttClient` is a subscriber. The message must have the form of a *QActor* message:

```
msg( MSGID, MSGTYPE, SENDER, RECEIVER, CONTENT, SEQNUM )
```

The callback `messageArrived` sends the received message to the actor that is using the singleton support.

16 Introduction to QRobots

Since a `QRobot` (see Section 19) is a `QActor` able to interact with an instance of a *BaseRobot*, we must first of all understand what is a *BaseRobot*.

From the physical point of view, a `BaseRobot` is a custom device built with low-costs components including sensors, actuators and processing units like *RaspberryPi* and *Arduino*. Examples are given in the following picture:

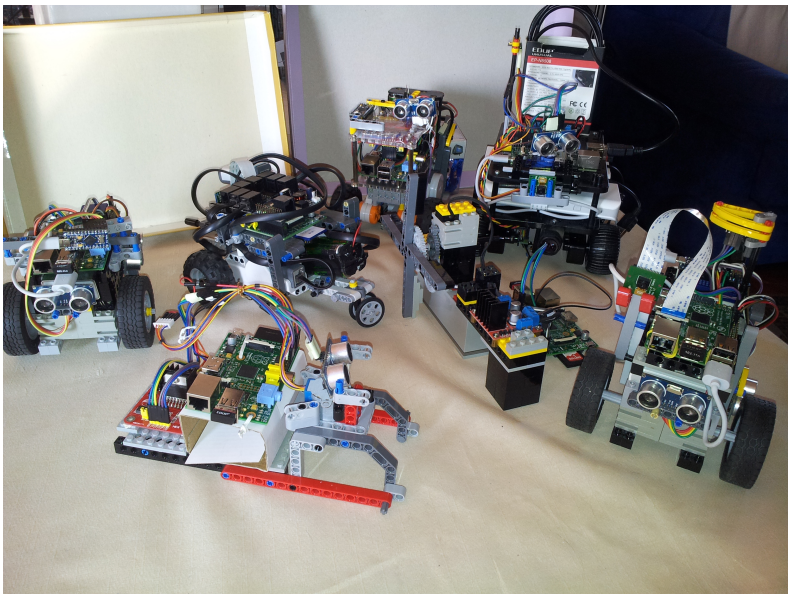

The hardware components of a `BaseRobot` and their configuration can be quite different from robot to robot. Thus, some software layer is required to hide these differences as much as possible and to build a 'technology independent' layer, to be used by application designers.

A software layer of this kind is provided by the library *labbaseRobotSam.jar*. More specifically:

it.unibo.lab.baseRobot	The basic software for differential drive robots that are able to move and to acquire sensor data. Library: *labbaseRobotSam.jar*.
it.unibo.lab.baseRobot.example	Example of the usage of the `API` of a BaseRobot.

16.1 A model for the BaseRobot

The main goal of the *labbaseRobotSam.jar* library is to simplify the work of an application designer by exposing at application level a very simple model of a `BaseRobot`:

- As regards the ***structure***, a `BaseRobot` can be viewed as a entity composed of two main parts:
  - An executor (with interface `IBaseRobot`), able to move the robot according to a a prefixed set of movement commands (`IBaseRobotCommand`)
  - A set of GOF-observable sensors (each with interface `ISensor`), each working as an active source of data.
- As regards the ***interaction***, a `BaseRobot` can be viewed as a POJO that implements the interface `IBaseRobot`, while providing a (possibly empty) set of observable sensors;

– As regards the ***behavior***, a `BaseRobot` is an object able to execute `IBaseRobotCommand` and able to update sensor observers defined by the application designer.

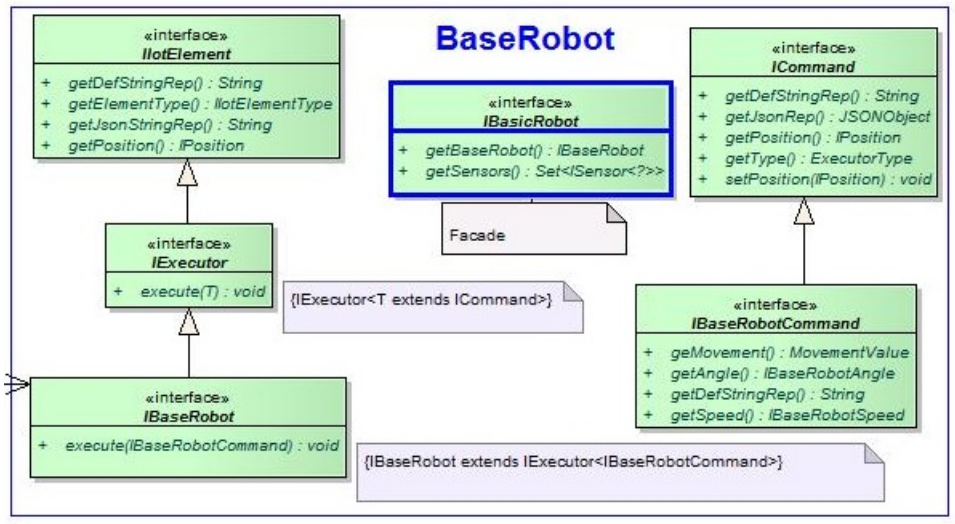

The interface `IBasicRobot` is introduced as a (GOF) *Facade* for the model.

```
1  package it.unibo.iot.baseRobot.hlmodel;
2  import java.util.Set;
3  import it.unibo.iot.executors.baseRobot.IBaseRobot;
4  import it.unibo.iot.sensors.ISensor;
5
6  public interface IBasicRobot {
7      public IBaseRobot getBaseRobot();   //selector
8      public Set<ISensor<?>> getSensors(); //selector
9  }
```

Listing 1.82. `IBasicRobot.java`

16.2 The BasicRobot class

The class `BasicRobot` provides a factory method to create a `BaseRobot` and to select its main components.

```
1  package it.unibo.iot.baseRobot.hlmodel;
2  import java.util.Set;
3  import it.unibo.iot.configurator.Configurator;
4  import it.unibo.iot.executors.baseRobot.IBaseRobot;
5  import it.unibo.iot.sensors.ISensor;
6
7  public class BasicRobot implements IBasicRobot{
8  private static IBasicRobot myself = null;
9  public static IBasicRobot getRobot(){
10     if( myself == null ) myself = new BasicRobot();
11     return myself;
12 }
13 public static IBaseRobot getTheBaseRobot(){
14     if( myself == null ) myself = new BasicRobot();
15     return myself.getBaseRobot();
16 }
17 //-----------------------------------------------
18 private Configurator configurator;
```

```
19 private IBaseRobot robot ;
20     //Hidden constructor
21     protected BasicRobot() {
22         init();
23     }
24     protected void init(){
25         configurator = Configurator.getInstance();
26         robot       = configurator.getBaseRobot();
27     }
28     public IBaseRobot getBaseRobot(){
29         return robot;
30     }
31     public Set<ISensor<?>> getSensors(){
32         Set<ISensor<?>> sensors = configurator.getSensors();
33         return sensors;
34     }
35 }
```

Listing 1.83. `BasicRobot.java`

This class shows that the work to set-up and access to the internal structure of a `BaseRobot` is delegated to a `Configurator`. This Configurator reads the specification of the robot structure written in a file named *iotRobot.properties*.

16.3 Using a BaseRobot

Let us introduce (project *it.unibo.lab.baseRobot.example*) a robot with configuration named `mocksimple`, equipped with two motors and a distance sensor, all simulated.

16.3.1 The project workspace The application designer must organize its project workspace as shown in the following snapshot:

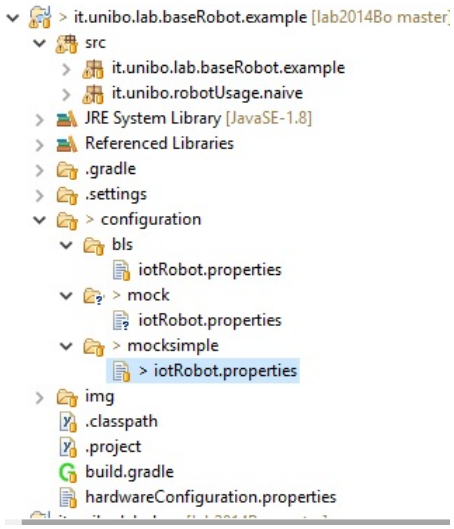

16.3.2 The code The application: *i)* first creates a sensor observer and adds it to all the sensors; *ii)* then it tells the robot to execute the commands it is able to understand.

```java
/*
 * ================================================================================
 * The file ./hardwareConfiguration.properties must contain the robot name:
       configuration=mocksimple
 * The file ./configuration/mocksimple/iotRobot.properties must contain the robot configuration
* ================================================================================
*/
package it.unibo.robotUsage.naive;
import it.unibo.iot.baseRobot.hlmodel.BasicRobot;
import it.unibo.iot.baseRobot.hlmodel.IBasicRobot;
import it.unibo.iot.executors.baseRobot.IBaseRobot;
import it.unibo.iot.models.commands.baseRobot.BaseRobotBackward;
import it.unibo.iot.models.commands.baseRobot.BaseRobotForward;
import it.unibo.iot.models.commands.baseRobot.BaseRobotLeft;
import it.unibo.iot.models.commands.baseRobot.BaseRobotRight;
import it.unibo.iot.models.commands.baseRobot.BaseRobotSpeed;
import it.unibo.iot.models.commands.baseRobot.BaseRobotSpeedValue;
import it.unibo.iot.models.commands.baseRobot.BaseRobotStop;
import it.unibo.iot.models.commands.baseRobot.IBaseRobotCommand;
import it.unibo.iot.models.commands.baseRobot.IBaseRobotSpeed;
import it.unibo.iot.sensors.ISensor;
import it.unibo.iot.sensors.ISensorObserver;
import it.unibo.system.SituatedPlainObject;

public class BasicRobotUsageNaive extends SituatedPlainObject{
private IBaseRobot robot ;
private int delay= 1500;
    public void doJob() throws Exception{
        IBasicRobot basicRobot = BasicRobot.getRobot();
        robot                  = basicRobot.getBaseRobot();
        addObserverToSensors(basicRobot);
        moveTheRobot();
        Thread.sleep(delay*6);
        println( "RobotUsageNaive ENDS " +
                robot.getDefStringRep() + " | " + robot.getJsonStringRep() );
        System.exit(1);
    }
    protected void addObserverToSensors(IBasicRobot basicRobot){
        ISensorObserver observer = new SensorObserver(outEnvView);
        for (ISensor<?> sensor : basicRobot.getSensors()) {
            println( "doJob sensor= " + sensor.getDefStringRep() + " class= " + sensor.getClass().getName() );
            sensor.addObserver(observer);
        }
    }
    protected void moveTheRobot(){
        IBaseRobotSpeed SPEED_LOW  = new BaseRobotSpeed(BaseRobotSpeedValue.ROBOT_SPEED_LOW);
        IBaseRobotSpeed SPEED_MEDIUM = new BaseRobotSpeed(BaseRobotSpeedValue.ROBOT_SPEED_MEDIUM);
        IBaseRobotSpeed SPEED_HIGH = new BaseRobotSpeed(BaseRobotSpeedValue.ROBOT_SPEED_HIGH);
        try {
            IBaseRobotCommand command = new BaseRobotForward(SPEED_HIGH);
            println( "Executing ... " + command.getDefStringRep() );
            robot.execute(new BaseRobotForward(SPEED_HIGH));
            Thread.sleep(delay);
            command = new BaseRobotLeft(SPEED_MEDIUM );
            println( "Executing ... " + command.getDefStringRep() );
            robot.execute(command);
            Thread.sleep(delay);
            command = new BaseRobotBackward(SPEED_HIGH) ;
            println( "Executing ... " + command.getDefStringRep() );
            robot.execute(command);
            Thread.sleep(delay);
            command = new BaseRobotRight(SPEED_MEDIUM ) ;
            println( "Executing ... " + command.getDefStringRep() );
            robot.execute(command);
            Thread.sleep(delay);
            command = new BaseRobotStop(SPEED_LOW) ;
            println( "Executing ... " + command.getDefStringRep() );
            robot.execute(command);
        } catch (InterruptedException e) {
            e.printStackTrace();
```

```
71          }
72      }
73   public static void main(String[] args) throws Exception{
74          new BasicRobotUsageNaive().doJob();
75   }
76  }
```

Listing 1.84. `BasicRobotUsageNaive.java`

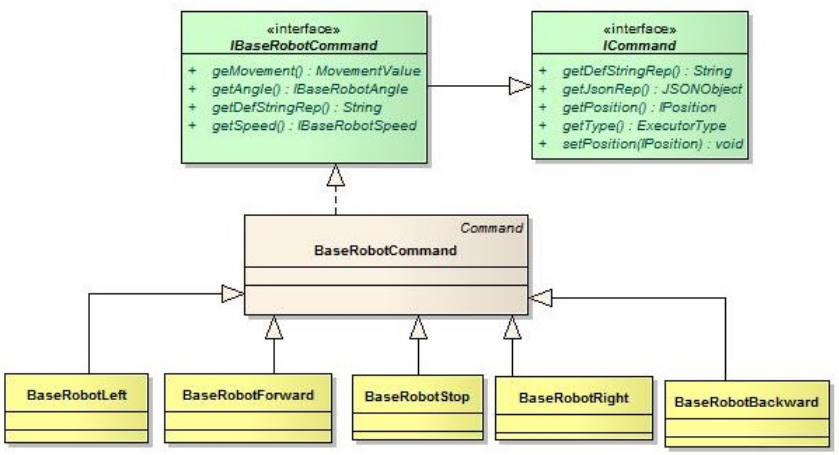

16.4 The work of the Configurator

An object of class *it.unibo.iot.configurator.Configurator*:

1. first looks at the file `hardwareConfiguration.properties` to get the name of the robot (e.g. mock)
2. then, it consults the file `iotRobot.properties` into the directory `configuration/mock`

For each specification line, the `Configurator` calls (by using Java reflection) a factory method of the specific `DeviceConfigurator` class associated to the name of the robot.

For example, let us consider a Mock robot equipped with two motors and a distance sensor, all simulated: (file *configuration/mocksimple/iotRobot.properties*):

```
1  # ================================
2  # ioRobot.properties for mocksimple robot
3  # Pay attention to the spaces
4  # ================================
5  # --------- MOTORS ---------
6  motor.left=mock
7  motor.left.private=false
8  #
9  motor.right=mock
10 motor.right.private=false
11 # --------- SENSORS ---------
12 distance.front=mock
13 distance.front.private=false
14 # --------- COMPOSED COMPONENT ---------
15 actuators.bottom=ddmotorbased
16 actuators.bottom.name=motors
17 actuators.bottom.comp=motor.left,motor.right
18 actuators.bottom.private=true
19 # --------- MAIN ROBOT ---------
20 baserobot.bottom=differentialdrive
```

```
baserobot.bottom.name=mocksimple
baserobot.bottom.comp=actuators.bottom
baserobot.bottom.private=false
```

Listing 1.85. `configuration/mocksimple/iotRobot.properties`

The Configurator calls (using an object of class `IotComponentsFromConfiguration`):

- `getMotorDevice` of *it.unibo.iot.device.mock.DeviceConfigurator* (for **motor.left=mock**)
- `getBaseRobotDevice` of *it.unibo.iot.device.differentialdrive.DeviceConfigurator* (for **baserobot.bottom=differentialdrive**)
- `getDistanceSensorDevice` of *it.unibo.iot.device.mock.DeviceConfigurator* (for **distance.front=mock**)
- `getMotorDevice` of *it.unibo.iot.device.mock.DeviceConfigurator* (for **motor.right=mock**)
- `getActuatorsDevice` of *it.unibo.iot.device.ddmotorbased.DeviceConfigurator* (for **actuators.bottom=ddmotorbased**)

16.5 From mocks to real robots

In order to use a physical robot rather than a Mock robot, the software designer must simply change the specification of the robot configuration; the application code is unaffected. For example, to use our standard '`nano`' robots, we have to include into the `configuration/nano` directory the following configuration file:

```
# ==================================
# ioRobot.properties for nano robot
# Pay attention to the spaces
# ==================================
# --------- MOTORS ---------
motor.left=gpio.motor
motor.left.pin.cw=8
motor.left.pin.ccw=9
motor.left.private=false
#
motor.right=gpio.motor
motor.right.pin.cw=12
motor.right.pin.ccw=13
motor.right.private=false
# --------- SENSORS ---------
distance.front_top=hcsr04
distance.front_top.trig=0
distance.front_top.echo=2
distance.front_top.private=false
# --------- COMPOSED COMPONENT ---------
actuators.bottom=ddmotorbased
actuators.bottom.name=motors
actuators.bottom.comp=motor.left,motor.right
actuators.bottom.private=true
# --------- MAIN ROBOT ---------
baserobot.bottom=differentialdrive
baserobot.bottom.name=nano
baserobot.bottom.comp=actuators.bottom
baserobot.bottom.private=false
```

Listing 1.86. `configuration/nano/iotRobot.properties`

17 Sensors and Sensor Data

The current version of the `BaseRobot` system implements the following sensors:

```
RobotSensorType: Line | Distance | Impact | Color | Magnetometer
```

Each sensor:

- is associated to a position that can assume one of the following values:

```
DONTCARE|
FRONT | RIGHT | LEFT | BACK | TOP | BOTTOM |
FRONT_RIGHT | FRONT_LEFT | BACK_RIGHT | BACK_LEFT |
TOP_RIGHT | TOP_LEFT | BOTTOM_RIGHT | BOTTOM_LEFT |
FRONT_TOP | BACK_TOP | FRONT_TOP_LEFT | FRONT_TOP_RIGHT |
FRONT_RIGHT_TOP | FRONT_LEFT_TOP | BACK_RIGHT_TOP | BACK_LEFT_TOP
```

- is a source of data, each associated to a specific class and interface:

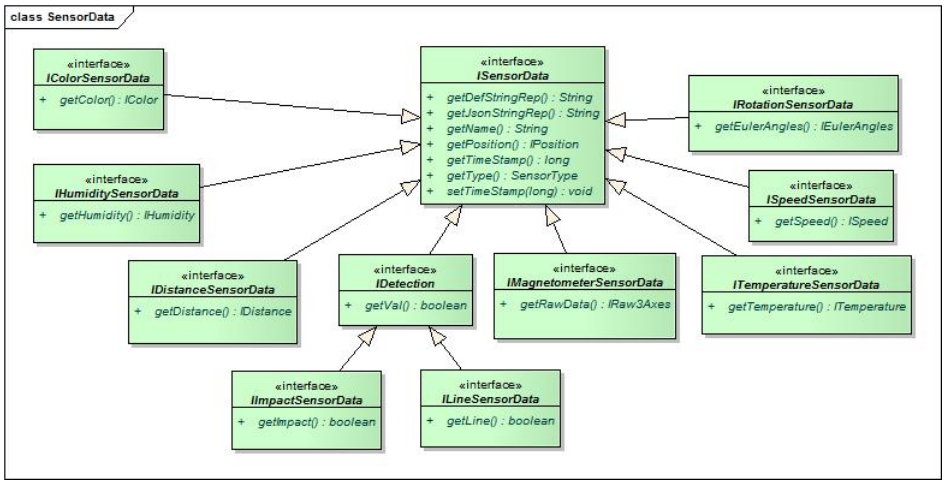

Each class related to sensor data inherits from a base class `SensorData`. For example:

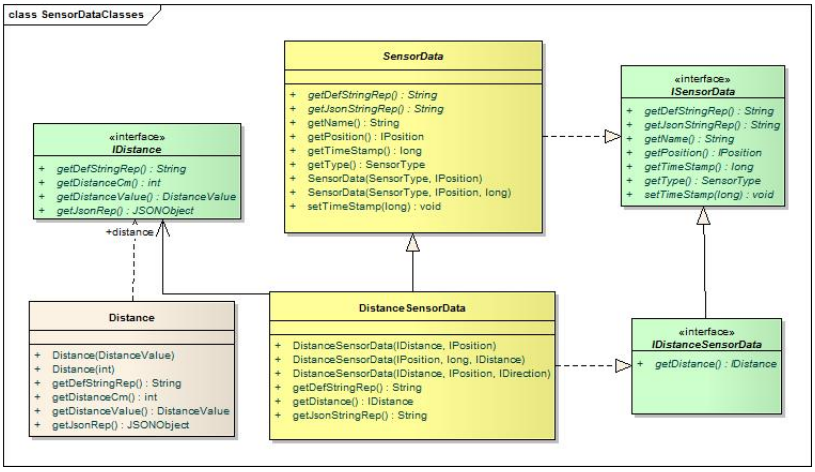

The class `SensorData` provides operations to represent data as strings in two main formats: *i)* in `Prolog` syntax and *ii)* in `Json` syntax. For example:

17.0.1 Sensor data representation in Prolog (high level)

COLOR	color(255 255 255, front)
DISTANCE	distance(43,forward, front)
IMPACT	impact(touch/loss, front)
LINE	line(lineLeft/lineDetected, bottom)
MAGNETOMETER	magnetometer(x(50),y(100),z(0), front)

17.0.2 Sensor data representation in Json (low level)

COLOR	"p":"f","t":"c","d":"color":"r":255,"b":255,"g":255,"tm":148...
DISTANCE	"p":"f","t":"d","d":"cm":43,"tm":14...
IMPACT	"p":"f","t":"i","d":"detection":"touch","tm":14...
LINE	"p":"b","t":"l","d":"detection":"lineDetected","tm":14...
MAGNETOMETER	"p":"f","t":"m","d":"raw3axes":"x":50,"y":100,"z":0,"tm":14...

17.1 Sensor model

The sensor subsystem of the `BaseRobot` is based on the class `Sensor` that represents a sensor from the logical point of view. Each sensor is associated to a class that inherits form `Sensor`.

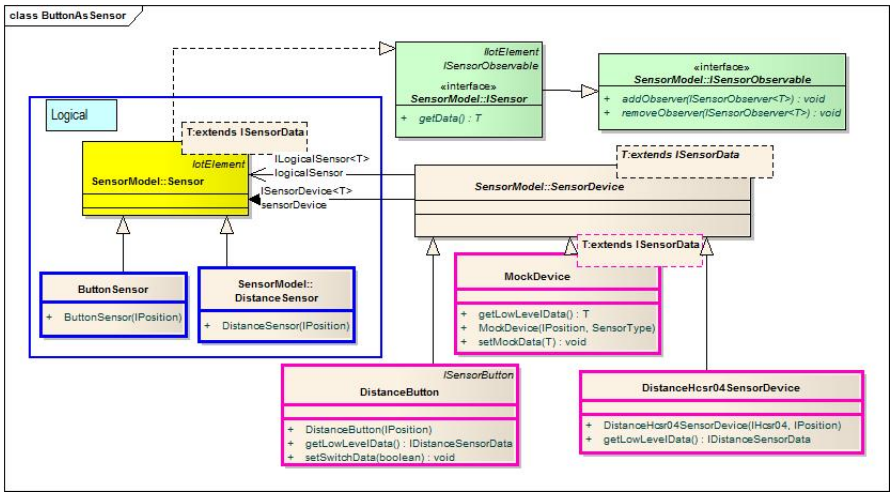

The model reported in the picture above shows that:

- A `DistanceSensor` is a logical `Sensor` associated (by the *Configurator*) to a concrete device (e.g. `DistanceHcsr04SensorDevice`). The same is true for a `ButtonSensor` (impact).
- A `DistanceHcsr04SensorDevice` is a concrete `SensorDevice` that updates its logical sensor when it produces a value. The same is true for a `DistanceButton` (impact). The diagrma shows also a `MockDevice` that can be used to simulate the behavior of the supported sensors.
- Any `Sensor` is an observable entity that, when updated from its concrete device, updates the registered application observers.

In this way, according to the GOF pattern *Bridge*, the `Sensor` abstraction hierarchy is decoupled from the hierarchy of `SensorDevice` implementation.

A more detailed picture is reported hereunder:

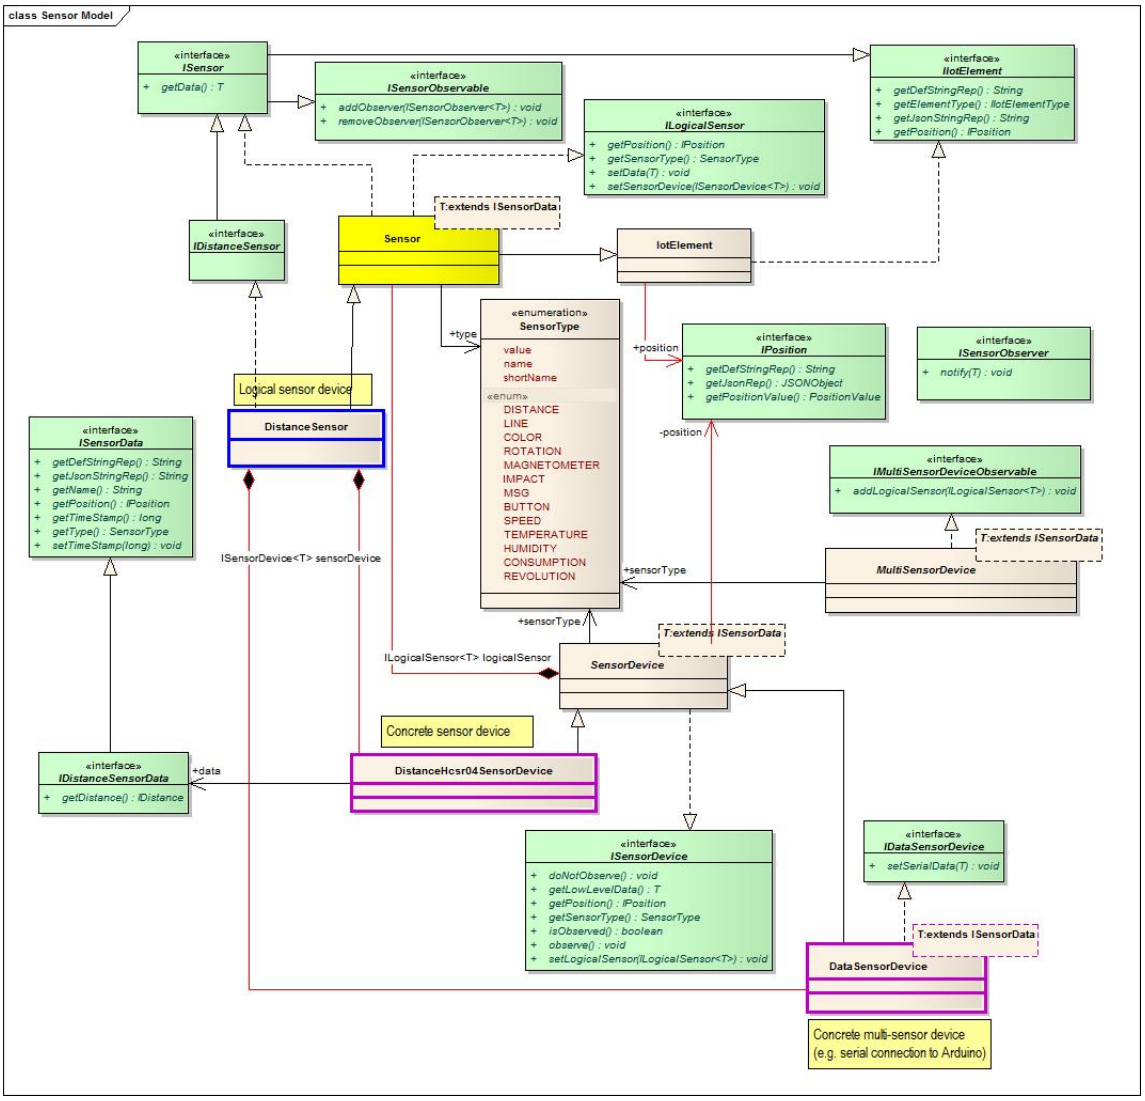

18 Actuators and Executors

The GOF Bridge pattern has been adopted also to model the 'motors' and the more general concept of 'executor'.

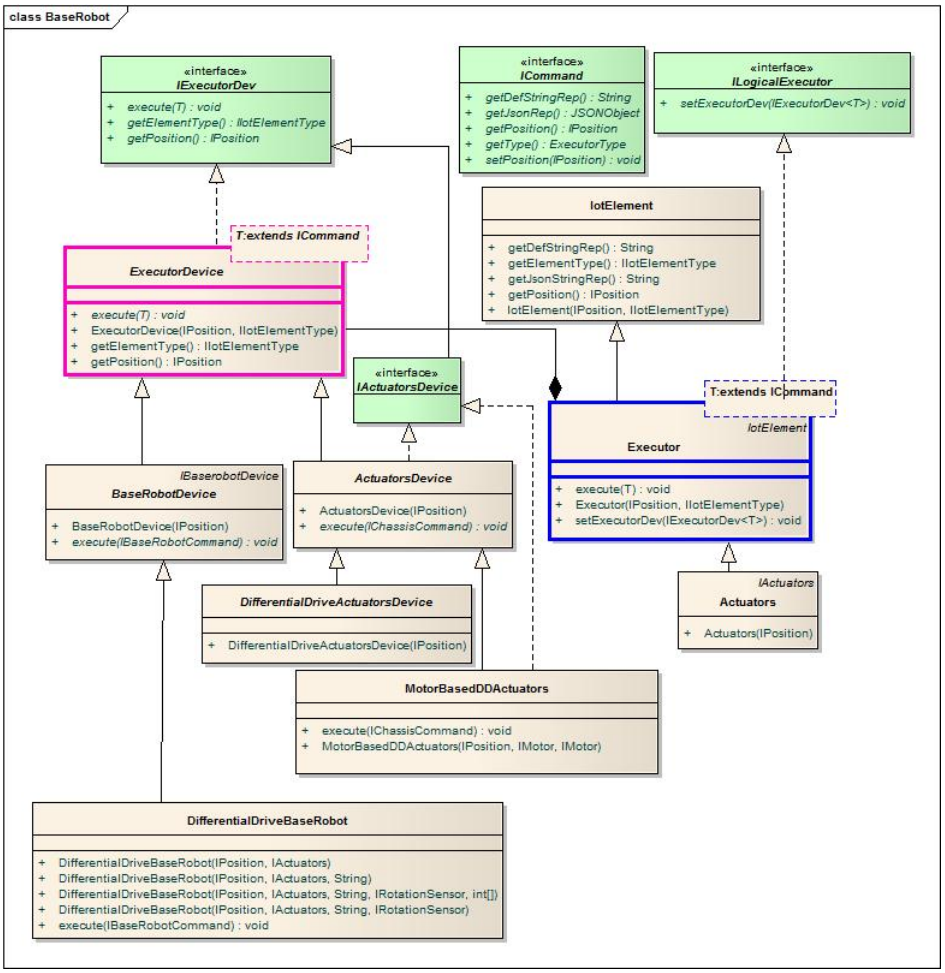

However this part of the `BaseRobot` can be ignored by the application designer and it is no more discussed here.

19 The QRobot

Modelling a robot like a `POJO` is not adequate in those application problems in which a robot should be viewed as a proactive entity, able to interact (via message-passing) with other robots or with some control unit and to react to events related to the external world (e.g. an alarm an obstacle) or to its internal behavior (e.g. low battey level).

To deal with this kind of problems, the concept of `QActor` is introduced, with the goal to endow a *BaseRobot* with new capabilities as regards the interaction.

From a conceptual point of view, a `QRobot` is a `QActor` that makes use of an instance of a *BaseRobot*. From a practical point of view, a `QRobot` is an instance of a class `RobotActor` (defined in the project *it.unibo.qactor.robot*) that inherits form `QActor`. The class `RobotActor` provides the run time support for the differential drive model, whose structure, interaction and behavior can be expressed in a custom `DSL` named `ddr`.

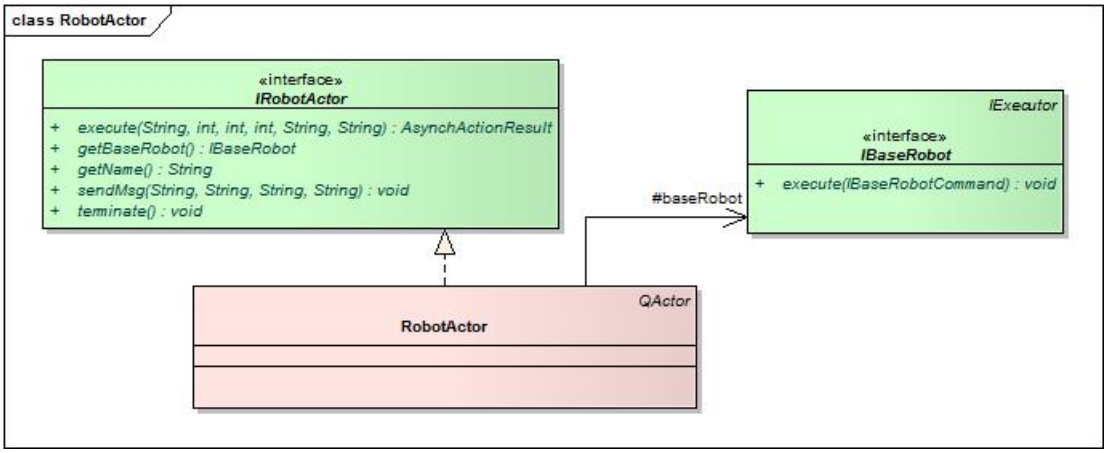

The set of projects related to the idea of `QRobot` is reported in the following table:

it.unibo.xtext.robot.base	The metamodel (file extension `.baseddr`) for ddr-robot configuration. Plugin: *it.unibo.xtext.robot.base_ 1.0.0.jar* Plugin: *it.unibo.xtext.robot.base.ui_ 1.0.0.jar*
it.unibo.xtext.qactor.robot	The metamodel (file extension `.ddr`) that extends the `QActor` metamodel with concepts related to a `ddr`. Plugin: *it.unibo.xtext.qactor.robot_ 1.3.4.jar* Plugin: *it.unibo.xtext.qactor.robot.ui_ 1.3.4.jar.*
it.unibo.qactor.robot	The run time support for `ddr` robots as qactors. Library: *uniboQactorRobot.jar*
it.unibo.xtext.qactor	The metamodel (file extension `.qa`) that defines the `QActor` metamodel . Plugin: *it.unibo.xtext.qactor_ 1.3.4.jar* Plugin: *it.unibo.xtext.qactor.ui_ 1.3.4.jar.*
it.unibo.qactors	The run time support for qactors. Library: *qa18Akka.jar*
it.unibo.qactor.robot.avatar	Examples of the usage of the `ddr` language/metamodel.

The application designer can specify the logical structure, interaction and behavior of a `QRobot` by using a custom meta-model language (the `ddr` language), defined as an extension of the `qa` language.

19.1 The baseddr metamodel

```
grammar it.unibo.xtext.robot.Base with org.eclipse.xtext.common.Terminals
generate base "http://www.unibo.it/xtext/robot/Base"

RobotBase :
     robots += BasicRobot (";" robots += BasicRobot )* ";"
;
BasicRobot :
    "RobotBase" name=ID
    (components += RobotComponent )*
    mainrobot = MainRobot
;
RobotComponent :
    Sensor | Executor | RobotComposedComponent
;
/*
 * ====================================
 * Basic component
 * ====================================
 */
Sensor:
    name=ID "="
    compType=RobotSensorType
    "position:" position=Position
    //"data" sensorData = SensorData
;
Executor:
    name=ID "="
    compType=RobotActuatorType
    "position:" position=Position
;
RobotSensorType:
    Line | Distance | Impact | Color | Magnetometer
;
Line:    "Line"  config=Configuration ;
Distance: "Distance" config=Configuration ;
Impact:  "Impact"    config=Configuration  ;
Color:   "Color"    config=Configuration ;
Magnetometer: "Magnetometer" config=Configuration  ;

RobotActuatorType:
    Motor | Servo
;
Motor:"Motor" config=Configuration ;
Servo:"Servo" config=Configuration ;
/*
 *  Configurations
 * Each configuration type is associated to a software resource (package) defined by
 * some system designer. The correct name of the software resource is defined in ConfigKb java class
 */
 Configuration:
    "[" type=ConfigurationType "]" (private ?= "private")?
 ;
 ConfigurationType:
     ConfigMock |
     ConfigGpioSwitch | ConfigGpioMotor |
     ConfigProcess   | ConfigSerial   |
     ConfigPiBlasterServo |
     ConfigSonarhcsr04 | ConfigMagnetohmc58831
;
ConfigMock :
    "simulated" debug = Boolean  //to avoid mock as a key word
;
ConfigGpioSwitch:
    "gpioswitch" "pin" pin=INT (pulldown ?= "pulldown")? (activelow ?= "activelow")?
;
ConfigGpioMotor:
    "gpiomotor" "pincw" pincw=INT "pinccw" pinccw=INT
;
```

```
ConfigProcess:
    "process" executable=STRING
;
ConfigSerial:
    "serial" "rate" rate=INT ("port" port=STRING)?
;
ConfigPiBlasterServo:
    "servoblaster" "pin" pin=INT "pos180" pos180=Float "pos0"pos0=Float
;
ConfigSonarhcsr04:
    "sonarhcsr04" "pintrig" trig=INT "pinecho" echo=INT
;
ConfigMagnetohmc5883l:
    "magneto5883l" "x" x= Integer "y" y=Integer "z" z=Integer
;
/*
 * ====================================
 * MainRobot ( a special case of RobotComposedComponent )
 * ====================================
 */
MainRobot:
    "Mainrobot" name=ID
     config=ComposedConfiguration
     ("pid" pids=Pids)?
;
ComposedConfiguration:
    "["  components += [RobotComponent] ("," components += [RobotComponent] )* "]"
    (private ?= "private")?
;
/*
 * ====================================
 * Composed component
 * ====================================
 */

RobotComposedComponent :
    name=ID "="
    compType=RobotComposedComponentType
    "position:" position=Position
;
RobotComposedComponentType:
    Actuators | Rotation | Radar | Gimbal //| Baserobot
;
Actuators:"Actuators" config=ComposedConfiguration ;
Rotation: "Rotation" config=ComposedConfiguration ;
Radar :  "Radar"     config=ComposedConfiguration ;
Gimbal:  "Gimbal"    config=ComposedConfiguration ;
/*
 * ============================================
 * DATA
 * ============================================
 */
Integer :
    (neg?="-")? v = INT
;
Boolean :
    v = INT //0 means false
;
Float:
    INT"."INT
;
Pids :
    "(" v1=INT "," v2=INT "," v3=INT ")"
;
Position:
    posval=PositionValue;
enum PositionValue:
    DONTCARE|
    FRONT | RIGHT | LEFT | BACK | TOP | BOTTOM |
    FRONT_RIGHT | FRONT_LEFT | BACK_RIGHT | BACK_LEFT |
```

```
139     TOP_RIGHT | TOP_LEFT | BOTTOM_RIGHT | BOTTOM_LEFT |
140     FRONT_TOP | BACK_TOP | FRONT_TOP_LEFT | FRONT_TOP_RIGHT |
141     FRONT_RIGHT_TOP | FRONT_LEFT_TOP | BACK_RIGHT_TOP | BACK_LEFT_TOP
142 ;
143
144 SensorData:
145     DistanceSensorData | ColorSensorData;
146
147 DistanceSensorData:
148     "distance" val=DistanceValue;
149 enum DistanceValue:
150     CLOSE | FAR | MEDIUM;
151
152 ColorSensorData:
153     "r" r=INT "g" g=INT "b" b=INT;
```

Listing 1.87. `Base.xtext`