VELQURA | CONSTRUCTION CHEMICALS

EDITION 2026

CONSTRUCTION CHEMICALS · PUNE

Product Brochure

The chemistry behind concrete confidence.

- Waterproofing & Bonding
- Tile Adhesives
- Masonry & Wall Prep
- Paints & Coatings
- Concrete Admixtures



ABOUT VELQURA

One supplier for the whole job

Velqura Construction Chemicals supplies waterproofing systems, tile adhesives, masonry mortars, wall finishes and concrete admixtures from Pune. From block jointing and tile fixing to the roof membrane and the last coat of paint, every product is built to work with the next one.



ULTRABOND URP · 1 KG · 5 KG · 20 KG

CONTENTS

01 Waterproofing & Bonding

- Ultrabond URP 03
- DampSeal Pro 03
- 2K Flex 04
- Sky Weather PU 04

02 Tile Adhesives

- Tile Bond Regular (T1) 05
- Tile Bond Plus (T2) 05
- Tile Bond Pro (T3) 06
- Tile Bond Premium (T4) 06

03 Masonry & Wall Prep

- BlockFix Mortar 07
- FineFinish Putty 07

04 Paints & Coatings

- Prime Guard 08
- Colourbond Distemper 08
- HomeShine · LuxeSheen · Apex EverShine 09

05 Concrete Admixtures

- High PCE 10
- VMA Admixture 10
- Low PCE · Mid PCE 11



SBR LATEX BONDING AGENT

Ultrabond URP

Bond stronger. Seal tighter.

A modified SBR latex used as a bonding aid and gauging liquid in cement systems. Resists hydrolysis; for indoor and outdoor use.

5	+40	+30	1:1:3
L / bag Per 50 kg cement	% Tensile strength	% Flexural strength	Bonding slurry

USES

- Bonding coats
- Concrete repair
- Waterproof plaster
- Floor screeds
- Grouts

KEY FEATURES

- Single component, easy to dose
- Strong bond to concrete, masonry and stone
- Cuts water and chloride entry
- Higher tensile and flexural strength
- Works with common cements

*Plain 1:3 mortar vs mortar with 5 L latex per 50 kg cement.

PACKING	COVERAGE	SHELF LIFE
Bottles & jerry cans 500 g · 1 · 5 · 20 · 50 kg	4–5 m² per litre (bonding slurry)	12 months, sealed



ELASTOMERIC WATERPROOF COATING

DampSeal Pro

Dry roofs. Cooler homes.

Elastomeric acrylic polymers with synthetic fibres. Cures into a thick, seamless membrane on roofs and walls.

7	380	3.5	10
bar Water pressure	% Stretch	mm Crack bridging	°C Cooler roof*

USES


- Roofs & terraces
- Parapets
- Sunshades
- Exterior walls
- Over IPS / brick-bat coba

KEY FEATURES

- Resists water pressure up to 7 bar
- Bridges cracks, stays elastic
- Up to 10°C cooler roofs (white)
- Fibre reinforced, abrasion resistant
- Protects rebar from carbonation

Warranty up to 10 years, subject to written terms.

PACKING	COVERAGE	COLOURS
Bucket 20 kg	0.93 m²/L roofs 2.32 m²/L walls	White · Terracotta · Grey

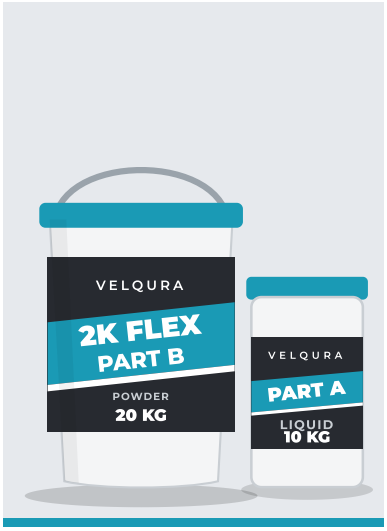

TWO-PART FLEXIBLE WATERPROOFING

2K Flex

Flexible protection for wet areas.

Pre-packed cement powder (Part B) and polymer liquid (Part A). Mixed 2 : 1 it forms a seamless, flexible, waterproof membrane.

2:1	5	≥50	7
Powder : liquid	bar Water pressure	% Stretch	days Full cure

USES

- Bathrooms & kitchens
- Sunken slabs
- Water tanks & sumps
- Basements & lift pits
- Terraces (protected)
- Planters

KEY FEATURES

- Pre-batched kit, no guesswork
- Bonds to damp (SSD) surfaces
- Bridges minor cracks
- Takes tiles, plaster or screed
- Positive and negative side use

Performance figures are target values. Do not add water, cement or solvent.

PACKING	COVERAGE	COLOUR
Bag 20 kg + Can 10 kg	1.8–2.0 kg/m² (two coats)	Grey



SINGLE-COMPONENT PU LIQUID MEMBRANE

Sky Weather PU

A weatherproof shield for exposed roofs.

A moisture-curing polyurethane coating that forms a tough, elastic, UV-resistant waterproof membrane for exposed roofs.

>400	>1.5	5	105
% Elongation	mm Crack bridging	bar No water leak	SRI Cool roof (white)

USES

- Exposed roofs
- Terraces
- Sloping & metal roofs
- Podiums
- Cool roofs
- Gutters
- Over old APP/SBS felt

KEY FEATURES

- UV resistant, for exposed use
- Cures with air moisture
- Reflects heat (white)
- Service −40°C to +70°C
- Resists mild acids, alkalis, salts

Conforms to ASTM C 836. Water-test only after full cure.

PACKING	COVERAGE	SHELF LIFE
Bucket 20 kg	20–25 sq ft/kg per coat 1.5–2.0 kg/m² @ 1.5 mm	12 months, sealed



CLASS C1T TILE ADHESIVE · IS 15477

Tile Bond Regular T1

Everyday tiling, done right.

A grey, cement-based, polymer-modified powder. Needs only clean water to make a smooth, workable tile mortar.

≥20	3–12	0.90	24
min	mm	N/mm²	hours
Open time	Bed thickness	Bond strength	Ready to grout

USES

Ceramic tiles · Clay tiles · Interior walls · Interior floors

KEY FEATURES

- Easy mixing, good workability
- Good bond on cement surfaces
- High water resistance
- Low VOC
- Not for gypsum, paint, wood, metal

PACKING	COVERAGE	COLOUR
Bag 20 kg	50–55 sq ft per bag (3 mm bed)	Grey



CLASS C2TE TILE ADHESIVE · IS 15477

Tile Bond Plus T2

Built for big tiles.

A high-polymer, cement-based adhesive with high bond strength, long open time and good water resistance.

≥30	3–15	1.30	150
min	mm	N/mm²	min
Open time	Bed thickness	Bond strength	Pot life

USES

Vitrified tiles · Large format (≤3% porosity) · Natural stone · Glass mosaic · Wet areas · Exterior floors

KEY FEATURES

- High tensile and shear bond
- Extended open time
- Good slip resistance on walls
- Suitable for wet areas
- Low VOC

PACKING	COVERAGE	COLOUR
Bag 20 kg	50–55 sq ft per bag (3 mm bed)	Grey / White



CLASS C2TES1 TILE ADHESIVE · IS 15477

Tile Bond Pro T3

Flexible bond, inside and out.

A highly polymerised, deformable adhesive with long open time, slip resistance and high water resistance.

≥35	3–15	1.60	S1
min Open time	mm Bed thickness	N/mm² Bond strength	Flexible grade

USES

- Ceramic & porcelain
- Vitrified & basalt
- Natural stone
- Glass mosaic
- Tile-on-tile
- Interior & exterior

KEY FEATURES

- Extended open time
- Flexible — S1 deformation
- Excellent tensile and shear bond
- Highly water resistant
- Low VOC

PACKING	COVERAGE	COLOUR
Bag 20 kg	50–55 sq ft per bag (3 mm bed)	Grey



CLASS C2TES1 TILE ADHESIVE · IS 15477

Tile Bond Premium T4

Our strongest bond.

A white, highly polymer-modified adhesive with our highest bond strength, flexibility and long open time.

≥35	1.70	1.60	S1
min Open time	N/mm² Bond strength	N/mm² Bond after soaking	Flexible grade

USES

- Vitrified & ceramic
- Basalt & clay
- Natural stone
- Glass mosaic
- Tile-on-tile
- Interior & exterior

KEY FEATURES

- Highest initial bond in the range
- 1.60 N/mm² after water and freeze-thaw
- Flexible — S1 deformation
- Extended open and adjustment time
- Low VOC

PACKING	COVERAGE	COLOUR
Bag 20 kg	50–55 sq ft per bag (3 mm bed)	White



READY-MIX THIN-BED MORTAR

BlockFix Mortar

Thin joints. Faster walls.

Polymer-modified cement, graded sand and additives in one bag. Replaces 12–18 mm sand-cement joints with a thin, strong bond.

2–4	>6	≥0.8	24
mm	N/mm²	N/mm²	hours
Joint thickness	Strength	Adhesion	Ready to plaster

USES

- AAC blocks
- Concrete blocks
- Fly ash bricks

KEY FEATURES

- Ready to use — just add water
- Thin joints save mortar
- High adhesion, good water retention
- Self-curing; minimal water curing
- Plaster within 24 h, site permitting

PACKING	COVERAGE	SHELF LIFE
Bag 40 kg	90–100 sq ft per bag (3 mm joint)	6 months, dry



WHITE CEMENT WALL PUTTY

FineFinish Putty

Smooth walls before you paint.

White cement, fillers and polymers. A base coat that covers pinholes and unevenness so primer and paint last longer.

>85	2–3	2	>0.80
%	mm	coats	MPa
Whiteness	Total thickness	Recommended	Bond strength

USES

- Interior walls
- Exterior walls
- Ceilings
- Concrete & rendered walls
- Blockwork & precast

KEY FEATURES

- Smooth, long-lasting finish
- Protects paint from damp and peeling
- Reduces paint use and repainting
- Highly water resistant
- UV resistant

PACKING	COVERAGE	COLOUR
Bag 40 kg	10–15 sq ft per kg (2–3 mm)	White



WATER-BASED WALL PRIMER

Prime Guard

The right start for every paint.

Water-based white primer for interior and exterior masonry. Seals the wall and gives top coats a strong, even base.

3–5	1	White	Water
hours Recoat time	coat Before paint	Colour	Thinner

USES

- Interior plaster
- Exterior plaster
- Concrete
- Ceilings & asbestos sheets
- Repaints

KEY FEATURES

- Good whiteness and opacity
- Alkali resistant
- Superior top-coat adhesion
- No water curing needed (exterior)
- Helps stop top-coat peeling

PACKING	COVERAGE
Bucket 20 kg	Interior: 200–220 sq ft/coat Exterior: 10–12 m²/L



ACRYLIC DISTEMPER · SMOOTH MATT

Colourbond Distemper

Colour that costs less.

A water-based acrylic distemper with a smooth matt finish and good colour retention. Washable once fully cured.

85–100	30	4–6	Matt
sq ft/kg Two coats	min Touch dry	hours Recoat time	Finish

USES

- Interior plastered walls
- Primed cement surfaces
- Economical projects

KEY FEATURES


- Smooth matt finish
- Good colour retention
- Washable after about 2 weeks
- Wide shades + Brilliant White
- Economical

PACKING	COVERAGE	SHELF LIFE
Bucket 20 kg	85–100 sq ft per kg (two coats)	2 years, sealed

INTERIOR & EXTERIOR EMULSIONS

Emulsion paints

Water-based emulsions for walls and ceilings, from everyday interiors to premium finishes.

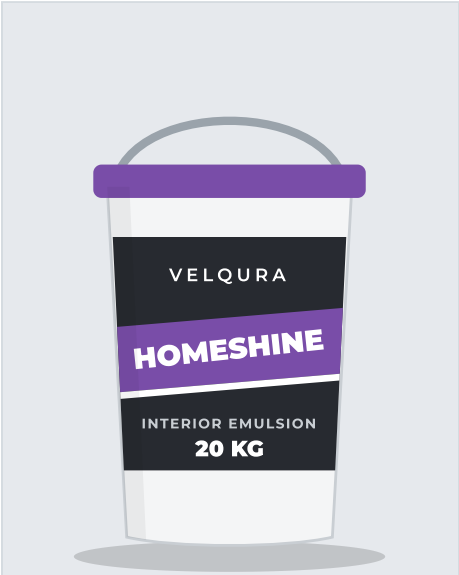

HomeShine

INTERIOR EMULSION

Packing	**Bucket 20 kg**
Specifications	**On request**



LuxeSheen

EMULSION PAINT

Packing	**Bucket 20 kg**
Specifications	**On request**



Apex EverShine


EMULSION PAINT

Packing	**Bucket 20 kg**
Specifications	**On request**

USES

Interior walls · Ceilings · New work · Repaints

Need data for a specific grade? Ask us for the Technical Data Sheet and a site trial recommendation.

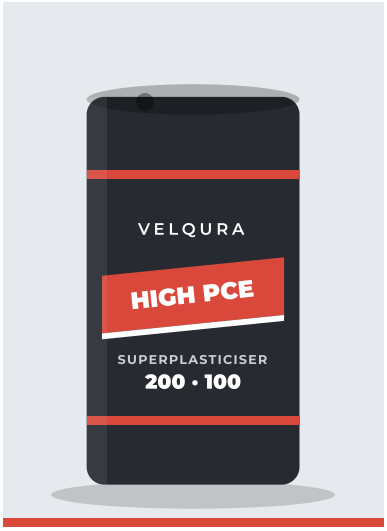

HYBRID PCE SUPERPLASTICISER

High PCE

More flow. Less water.

A hybrid polycarboxylic ether superplasticiser for structural concrete. High water reduction with long slump retention.

0.35–1.5	≤1.5	Nil	12
% of cement Dosage	% Air entrainment	Chloride	months Shelf life

USES


- Ready-mix concrete
- Pumpable concrete
- High-fluidity concrete
- Durable concrete
- Long-haul transport
- Concrete pavements

KEY FEATURES

- High water reduction
- Keeps workability for longer
- Resists segregation when fluid
- Works in mixes with high fines
- Suits OPC, SRC, PFA, GGBFS, microsilica

Overdosing may delay setting or cause bleeding. Agitate well if the product has frozen.

PACKING	DOSAGE	SHELF LIFE
Drum 200 · Can 100	0.35–1.5% by weight of cementitious material	12 months; keep from frost

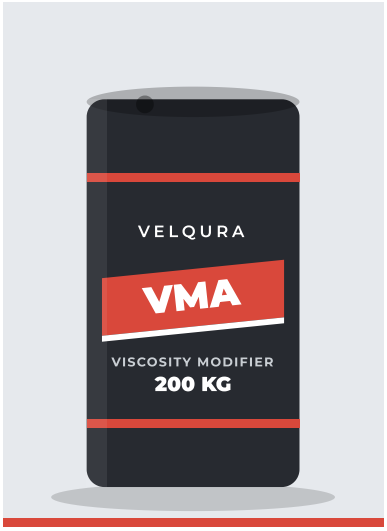

VMA · VISCOSITY MODIFYING ADMIXTURE FOR SCC

VMA Admixture

Flowing concrete that stays together.

A ready-to-use liquid admixture that raises viscosity, controls bleeding and stops segregation in highly fluid concrete.

50–1000	1.01	<0.2	12
ml / 100 kg Dosage	Relative density	% Chloride	months Shelf life

USES

- Self-compacting concrete
- Underwater / anti-washout
- Manufactured sand mixes
- Lean mixes
- Gap-graded aggregates

KEY FEATURES

- Stops segregation in fluid mixes
- Controls bleeding
- Better pumping and finishing
- Less sagging
- Use with a PCE superplasticiser

Not compatible with sulphonate-based superplasticisers.

PACKING	DOSAGE	SHELF LIFE
HDPE barrel 200 kg Bulk on request	50–1000 ml per 100 kg cementitious	12 months

PCE SUPERPLASTICISERS

Low & Mid PCE

Polycarboxylate ether admixtures that cut water and improve the flow and strength of concrete.



Low PCE

PCE ADMIXTURE

Packing	**Drum 200 · Can 100**
Specifications	**On request**



Mid PCE

PCE ADMIXTURE

Packing	**Drum 200 · Can 100**
Specifications	**On request**

USES

Ready-mix concrete · Precast elements · Pumped concrete · High-strength concrete

Need data for a specific grade? Ask us for the Technical Data Sheet and a site trial recommendation.

GOOD PRACTICE

Four rules for best results

Clean, dry, sound surface
Remove dust, oil, laitance and loose material first.

Powder into water
Add powder to the measured water; never add extra water later.

Work between 10 °C and 40 °C
Avoid direct sun, rain and frost while it sets.

Store sealed and dry
Keep packs closed, off the floor, away from heat and damp.

Values shown are typical laboratory results; results on site vary. Read the product Technical Data Sheet and Safety Data Sheet before use. Mfd. & packed by OM Enterprises, Pune.

VELQURA | CONSTRUCTION CHEMICALS

Talk to us about your project

Ishan Bhote
CHIEF EXECUTIVE OFFICER

PHONE	+91 98814 25990
ALTERNATE	+91 80103 34377
EMAIL	bhoteishan@gmail.com
OFFICE	A1 Tower, Terra Green Office Space 01, Gat No. 111, Sangavade Road, near Bhagwati Group, Sangavade, Pimpri Chinchwad, Pune, Maharashtra 412101