


Inner ring — 8 × 10 mm tags (IDs 1-8), centers on r = 55 mm, 45° pitch,
ID 1 at 12 o'clock, all upright (IS §3.5) · crosshair = stud-axis center



MR-003: use flat on the board (layout L-A) or raised on a shop-bought spacer (L-B).
Spacer height: ARBITRARY, measured and recorded — never cut to a spec dimension.

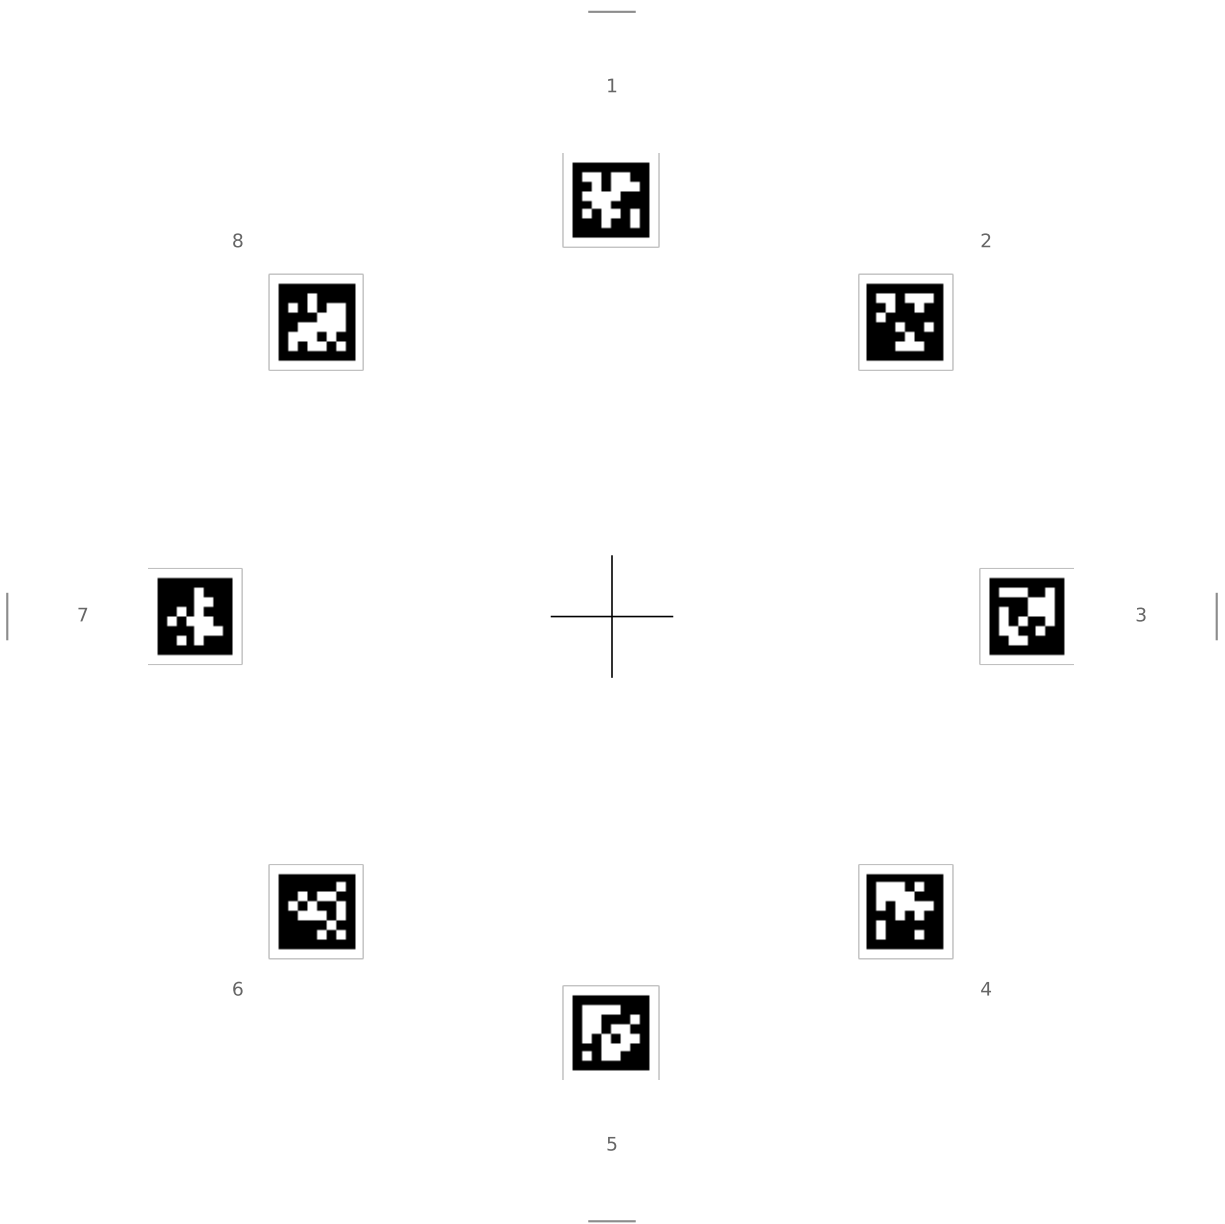