REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
	F	SERVICE SIGN OFF	12-06-01	MDR
	G	SEE ECP NO. 12HE007200	12-09-27	MDR
	H	SEE ECP NO. 13CE004300	13-10-30	MDR
	J	SEE ECP NO. 17CE001900	17-05-30	RLM
	K	SEE ECP NO. 18HE000200	18-01-17	RLM
	L	SEE ECP NO. 19HE001100	19-08-09	CRG

CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.

NOTES:

1. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.100.

2. REPLACE EXISTING STRAP (PART OF FN 1) WITH FN 19.

3. RECONFIGURE HAND BRAKES (PART OF FN 1) AS OUTLINED IN VIEW J-J. ASSEMBLE WITH FN 13 (BRACKET, BRAKE) WHERE SHOWN USING EXISTING SCREWS (4X 3/8-16 INCH UNC GRADE 8 X 2.25 INCH LONG), AND NUTS (4X 3/8-16 INCH UNC-3B SELF LOCKING).

4. MARKING:
   ALL MARKINGS SHALL BE BLACK ON GREEN OR BROWN BACKGROUND AND GREEN ON BLACK BACKGROUND. ALL MARKINGS COVERED BY CAMOUFLAGE PAINT SHALL BE REMARKED. APPLY THE FOLLOWING NEW MARKINGS IN .7-1.1 INCH HIGH CHARACTERS:
   A. STENCIL "TP 70 PSI" ON TOP CENTER FLANGE OF BOTH FENDERS OF TRAILER, APPROXIMATELY AS SHOWN.
   B. STENCIL "ACCESSORY BOX" APPROXIMATELY AS SHOWN.
   C. STENCIL "LIFT HERE" ADJACENT TO LIFTING EYES, FOUR PLACES ON TRAILER, APPROXIMATELY AS SHOWN.

5. ATTACH BRAKE CABLE (PART OF FN 1) TO FN 10 (BRACKET, BRAKE) USING EXISTING STRAP (PART OF FN 1), SCREWS (4X .312-18 INCH UNC-2A X 1.250 INCH LONG), WASHERS (8X .344 INCH ID X .875 INCH OD X .064 INCH NOM THKNS) AND NUTS (4X 5/16-18 INCH UNC-3B).

6. REMOVE FN 17 (ACCESSORY BOX) AND REINSTALL PLACING 3 OF FN 3 (WASHERS, .344 INCH ID X .875 INCH OD X .064 INCH NOM THKNS) BETWEEN FN 17 AND FN 7 (STEP, FRONT, CURBSIDE) AT EACH FASTENER LOCATION.

7. FN 20 (PLATE, IDENTIFICATION) SHALL BE LOCATED APPROXIMATELY AS SHOWN AND SECURED WITH FN 21 (ADHESIVE).

8. LINE DRILL FN 1 (CHASSIS) IN 2 PLACES USING FN 13 (BRACKET, BRAKE) AS A TEMPLATE. HOLES SHALL BE Ø.403±.007 INCH.

9. INSTALL FN 25 (PLATE, IDENTIFICATION) APPROXIMATELY AS SHOWN. DRILL 4X Ø5.05±0.25 HOLES IN FENDER OF FN 1 (CHASSIS) USING EXISTING HOLE IN FN 25 (PLATE, IDENTIFICATION) AS GUIDE. ASSEMBLE WITH FN 26 (RIVETS).

NOTES: (CONTINUED)

10. REMOVE BRAKE LINE STOWAGE BRACKETS (PART OF FN 1). INSTALL FN 45 (2X PLATE, MOUNTING) USING FN 2 (4X .312-18 INCH UNC 1.250 INCH LONG SCREWS), FN 3 (8X .344 ID X .875 OD X .064 NOM) AND FN 4 (4X .312-18 UNC INCH). REATTACH BRACKETS TO FN 45 (PLATE, MOUNTING) USING EXISTING SCREWS (4X .312-18 INCH UNC X 1.250 INCH LONG) AND NUTS (4X .312-18 UNC INCH).

11. IDENTIFY IN ACCORDANCE WITH MIL-STD-130, METHOD OPTIONAL.

12. FN 27 (FUEL DRUM ADAPTER), FN 28 (DRIVER/PULLER), FN 29 (HAMMER), FN 30 (RODS, GROUND), FN 31 (ELBOW, 90 DEGREE), AND FN 32 (HOSE, DRAIN) SHALL BE STORED IN FN 17 (ACCESSORY BOX). FN 28 (DRIVER/PULLER) SHALL BE DISASSEMBLED FOR STORAGE. REMOVE THE GROUND TERMINAL LUG FROM FN 30 (RODS, GROUND).

13. GROUND WIRE, SUPPLIED WITH FN 30 (RODS GROUND), SHALL BE SOLDER COATED ON BOTH ENDS FOR A LENGTH OF .25 INCH MINIMUM IN ACCORDANCE WITH MANUFACTURER'S COMMERCIAL PRACTICES AND SHALL BE STOWED IN FN 17 (ACCESSORY BOX).

14. ATTACH FN 38 (TAG, INSTRUCTION) TO FN 22 (TERMINAL, LOAD) USING FN 39 (STRAP). INSTALL FN 23 (WASHER, LOCK) AND FN 24 (NUT) ONTO FN 22 (TERMINAL, LOAD) PRIOR TO OVER PACKING AND STORING IN FN 17 (ACCESSORY BOX).

15. FN 37 (EXTINGUISHER, FIRE) SHALL BE OVER PACKED AND SHALL BE STOWED IN FN 17 (ACCESSORY BOX).

16. FN 42, 43, AND 44 (GENERATOR MOUNTING HARDWARE) SHALL BE OVER PACKED AND SHALL BE STOWED IN FN 17 (ACCESSORY BOX).

17. TREAT AND PAINT IN ACCORDANCE WITH MIL-DTL-53072. TOP COAT SHALL BE GREEN 383, COLOR NUMBER 34094 IN ACCORDANCE WITH SAE-AMS-STD-595.

18. TORQUE FASTENER ACCORDING TO THE FOLLOWING LIST:

	THREAD SIZE	TORQUE
FN 2, 4, 6, 12	.312-18 INCH UNC	30-37 N-m.
FN 34, 36	.625-11 INCH UNC	259-316 N-m.
FN 47, 50	.190-32 INCH UNC	3.3-3.9 N-m.
FN 53, 54	.25-20 INCH UNC	15-18 N-m.

NEXT ASSY	USED ON
04-5106	04-5106
04-5105	04-5105
04-3116	04-3116
04-3115	04-3115
04-3114	04-3114
04-3112	04-3112
04-3111	04-3111
04-3106	04-3106
04-3105	04-3105
04-3102	04-3102
04-3101	04-3101
04-2113	04-2113
04-2112	04-2112
04-2111	04-2111
04-2103	04-2103
04-2102	04-2102
04-2101	04-2101

APPLICATION TABLE

NEXT ASSY	USED ON
18-3106	18-3106
18-3105	18-3105
18-3102	18-3102
18-3101	18-3101
18-2113	18-2113
18-2112	18-2112
18-2111	18-2111
18-2103	18-2103
18-2102	18-2102
18-2101	18-2101

APPLICATION TABLE

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED.

DOD RELEASE		
	DESIGN	PRODUCTION
AIR FORCE		
ARMY	T.DOOLEY	D.NGUYEN
NAVY		
MARINE CORPS		

DRAWING REPOSITORY
U.S. ARMY COMMUNICATION-ELECTRONICS RESEARCH, DEVELOPMENT & ENGINEERING CENTER
ABERDEEN, PROVING GROUND, MD. 21005

SEE TABLE	SEE TABLE
NEXT ASSY	USED ON

APPLICATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM
TOLERANCES ANGLES ± 1.0°
2 PLACE DECIMALS ± 0.38
1 PLACE DECIMALS ± 0.8
FRACTIONS ±

MATERIAL
SEE PARTS LIST

CONTRACT NO.
W15P7T-04-D-A003

DATE 04-09-24

PREPARED	J.CARRICO	09-01-29
CHECKED	R.LEIRMO	09-01-29
ENGINEER	R.CHANGELA	09-01-29

DEPT OF DEFENSE PROJECT MANAGER MOBILE ELECTRIC POWER
MARK D. ROONEY

DOD PROJECT MANAGER
EXPEDITIONARY ENERGY & SUSTAINMENT SYSTEMS
WASHINGTON, D.C.

TRAILER, GENERATOR ASSEMBLY, M200A1 GENERATOR ASSEMBLY

SIZE	CAGE CODE	DRAWING NO.
D	30554	04-21234

SCALE 3/32 REV LETTER L SHEET 1 OF 4

CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.

FIND NO.	CAGE CODE	PART OR IDENTIFYING NO.	QTY REQD	NOMENCLATURE OR DESCRIPTION	SPECIFICATION	MATERIAL
34	05047	B1821BH062C175N	4	SCREW, HEX HD, .625-11 UNC-2A X 1.750 L, GR 8	ASME B18.2.1	
33	19207	8363978	1	CLIP, SPRING TENSION		
32		04-21619	1	HOSE, DRAIN		NOTE 12
31		04-21671	1	ELBOW, 90 DEGREE		NOTE 12
30	58536	A-A-55804	1	RODS, GROUND, (WITH ATTACHMENTS), SECTIONAL 9 FT,	A-A-55804	NOTE 12, 13
29	58536	B107.54 NSN 5120-00-251-4489	1	HAMMER, HAND, ENGINEERS, DOUBLE FACE, 8 LB	ASME B107.54	NOTE 12
28		13226E7741	1	DRIVER/PULLER, GROUND ROD		NOTE 12
27		13211E7541 NSN 5342-00-066-1235	1	ADAPTER ASSEMBLY, FUEL DRUM		NOTE 12
26		13230E6383-6-4	4	RIVET, BLIND, UNIVERSAL HEAD		
25		04-21845	1	PLATE, IDENTIFICATION		
24		13218E0320-331	3	NUT, MACHINE, FINISHED, HEXAGON (1/4-20 UNC-2B, BRASS)		NOTE 14
23		13230E6743-108	1	WASHER, LOCK, FLAT-INTERNAL TOOTH (.250 NOM SIZE, TIN-BRS OR PH BRZ)		NOTE 14
22		69-692-3	1	TERMINAL, LOAD		NOTE 14
21		13230E6684	AR	ADHESIVE, RUBBER BASE GENERAL PURPOSE		
20		13230E6796	1	PLATE, IDENTIFICATION		
19		13214E1271	2	STRAP, BRAKE CABLE		
18		13229E6108	1	PLATFORM, FRONT		
17		13229E7946	1	ACCESSORY BOX		
16		13214E1268	1	CHANNEL		
15		13214E1462	1	STEP, FRONT, ROADSIDE		
14		13214E1272	4	SPACER		
13		04-21233	2	BRACKET, BRAKE		
12	05047	B1821BH031C100N	4	SCREW, HEX HD, .312-18 UNC-SA X 1.00 L, GR 8	ASME B18.2.1	
11		13230E6858	1	BRACKET, FIRE EXTINGUISHER, 5 LB		
10		13214E1270	2	BRACKET, BRAKE CABLE		
9		13214E1264	1	FENDER, ROADSIDE		
8		13214E1263	1	FENDER, CURBSIDE		
7		13214E1461	1	STEP, FRONT, CURBSIDE		
6	05047	B1821BH031C175N	6	SCREW, HEX HD, .312-18 UNC-2A X 1.750 L, GR 8	ASME B18.2.1	
5		13214E1267-1	2	SPACER		
4		13230E6382-4	84	NUT, SELF-LOCKING, HEXAGON (5/16-18 UNC-3B, CS, ZINC PLD, WITH NYLON INSERT)		
3		88-20033-25A	164	WASHER, FLAT (.344 ID X .875 OD X .064 NOM THK, CS, ZINC CTD)		
2	05047	B1821BH031C125N	74	SCREW, HEX HD, .312-18 UNC-2A X 1.250 L, GR 8	ASME B18.2.1	
1		13229E9633	1	CHASSIS 2 1/2 TON		

PARTS LIST

FIND NO.	CAGE CODE	PART OR IDENTIFYING NO.	QTY REQD	NOMENCLATURE OR DESCRIPTION	SPECIFICATION	MATERIAL
54		13230E6382-2	1	NUT, LOCKING, 1/4-20, NYLON INSERT, GRADE 8, ZINC PLATED		
53		MS35206-283Z	1	SCREW, MACHINE, 1/4-20 X 1, PAN HEAD, STEEL, ZINC PLATED	NASM35206	
52		04-21828	1	SUPPORT, REAR, ROADSIDE		
51		04-21827	1	SUPPORT, REAR, CURBSIDE		
50		13218E0320-89	4	NUT, MACHINED, FINISHED , HEXAGON #10-32 INCH		
49		13230E6744-43	4	WASHER,LOCK-SPRING, HELICAL (#10)		
48		88-20033-11A	4	WASHER, FLAT		
47		13230E6673-68	4	SCREW, MACHINE, FLAT COUNTERSUNK HEAD (#10-32 X .62 HEAD)		
46		13218E5091	2	STRAP ASSEMBLY		
45		04-21362	2	PLATE, MOUNTING		
44		13230E6382-10	8	NUT, SELF-LOCKING, HEXAGON (1/2-13 UNC-3B, CS, ZINC PLD, WITH NYLON INSERT)		NOTE 16
43		88-20033-40A	16	WASHER, FLAT (.500 ID X 1.250 OD X .083 NOM THK, CS, ZINC CTD)		NOTE 16
42	05047	B1821BH050C225N	4	SCREW, HEX HD, .500-13 UNC-2A X 2.25 L, GR 8	ASME B18.2.1	NOTE 16
41		04-21716	1	FRAME, SPACER		
40		88-20033-20A	2	WASHER, FLAT, 1/4 SAE, STEEL, ZINC PLATED		
39		88-20018-2	1	STRAP, TIEDOWN		NOTE 14
38		02-23013	1	TAG, INSTRUCTION, GROUND TERMINAL		NOTE 14
37		13230E6831	1	EXTINGUISHER, FIRE, CARBON DIOXIDE		NOTE 15
36		13230E6382-14	4	NUT, SELF-LOCKING, HEXAGON (5/8-11 UNC-3B, CS, ZINC PLD, WITH NYLON INSERT)		
35		88-20033-45A	8	WASHER, FLAT (.656 ID X 1.312 OD X .095 NOM THK, CS, ZINC CTD)		

PARTS LIST (CONTINUED)

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED.

DOD PROJECT MANAGER
EXPEDITIONARY ENERGY & SUSTAINMENT SYSTEMS
WASHINGTON, D.C.

SIZE	CAGE CODE	DRAWING NO.
D	30554	04-21234
SCALE 3/32	REV LETTER L	SHEET 2 OF 4

CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.

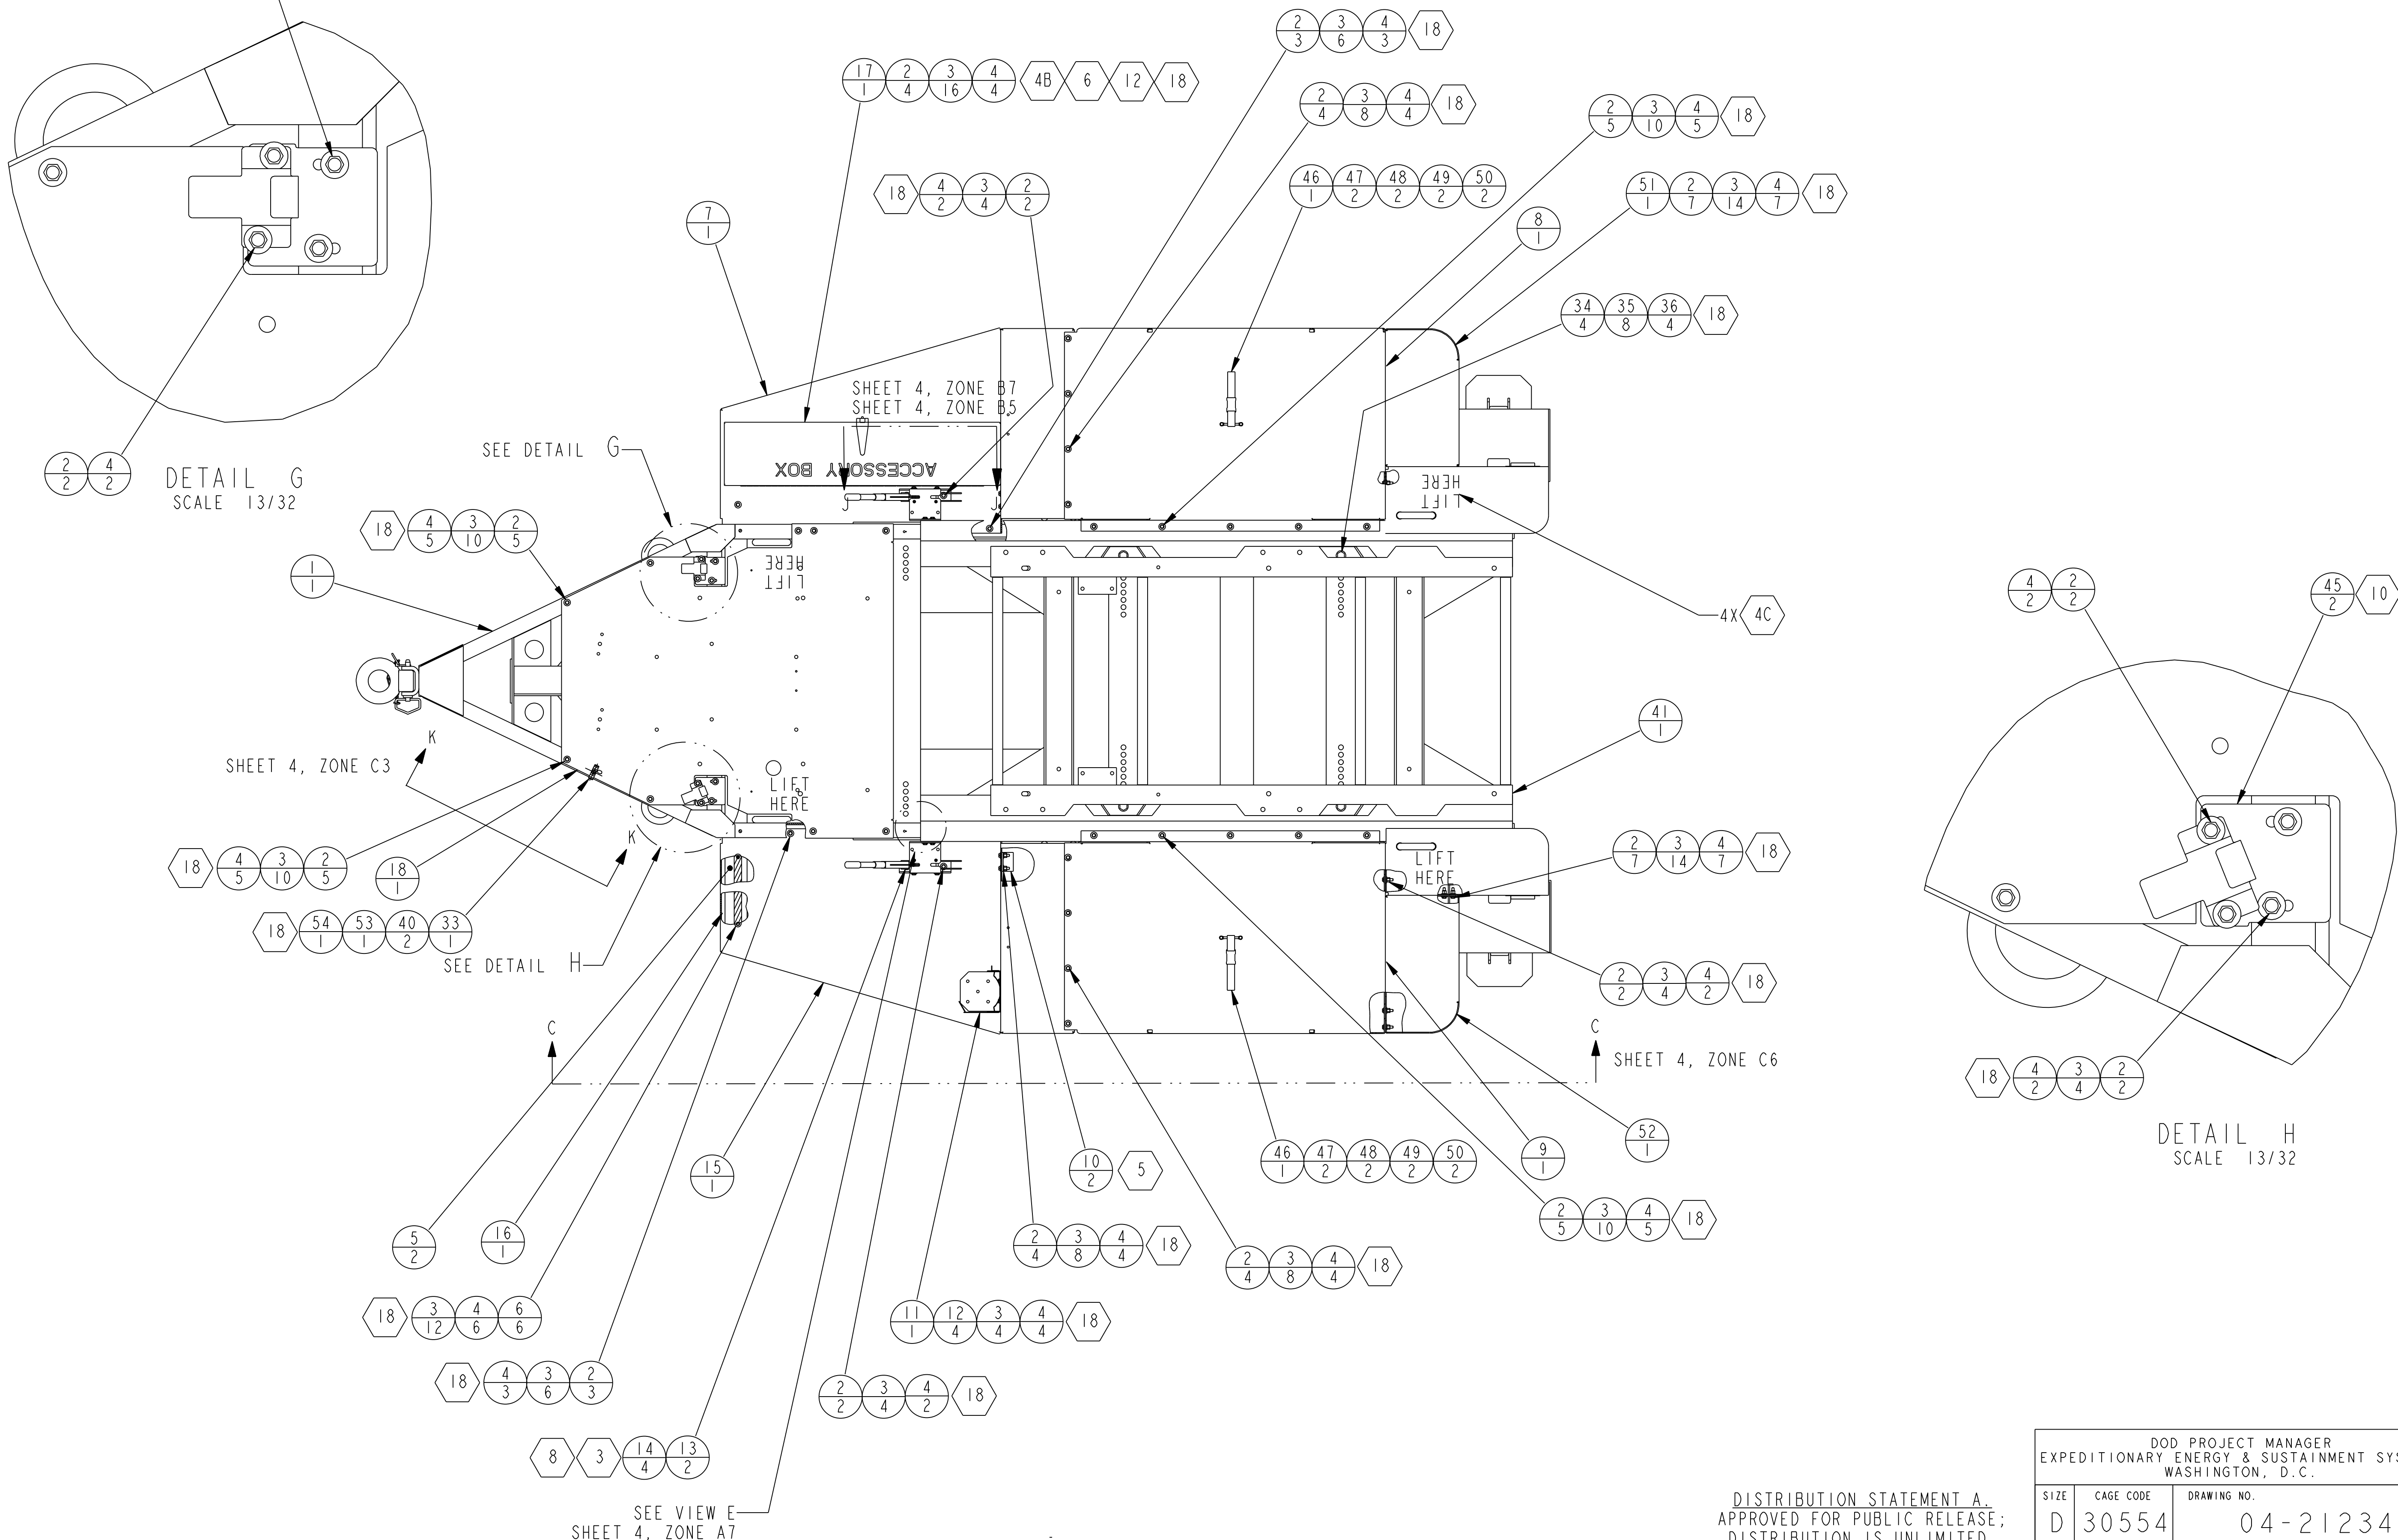

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED.

DOD PROJECT MANAGER EXPEDITIONARY ENERGY & SUSTAINMENT SYSTEMS WASHINGTON, D.C.			
SIZE D	CAGE CODE 30554	DRAWING NO. 04-21234	
SCALE 3/32	REV LETTER L		SHEET 3 OF 4

CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.

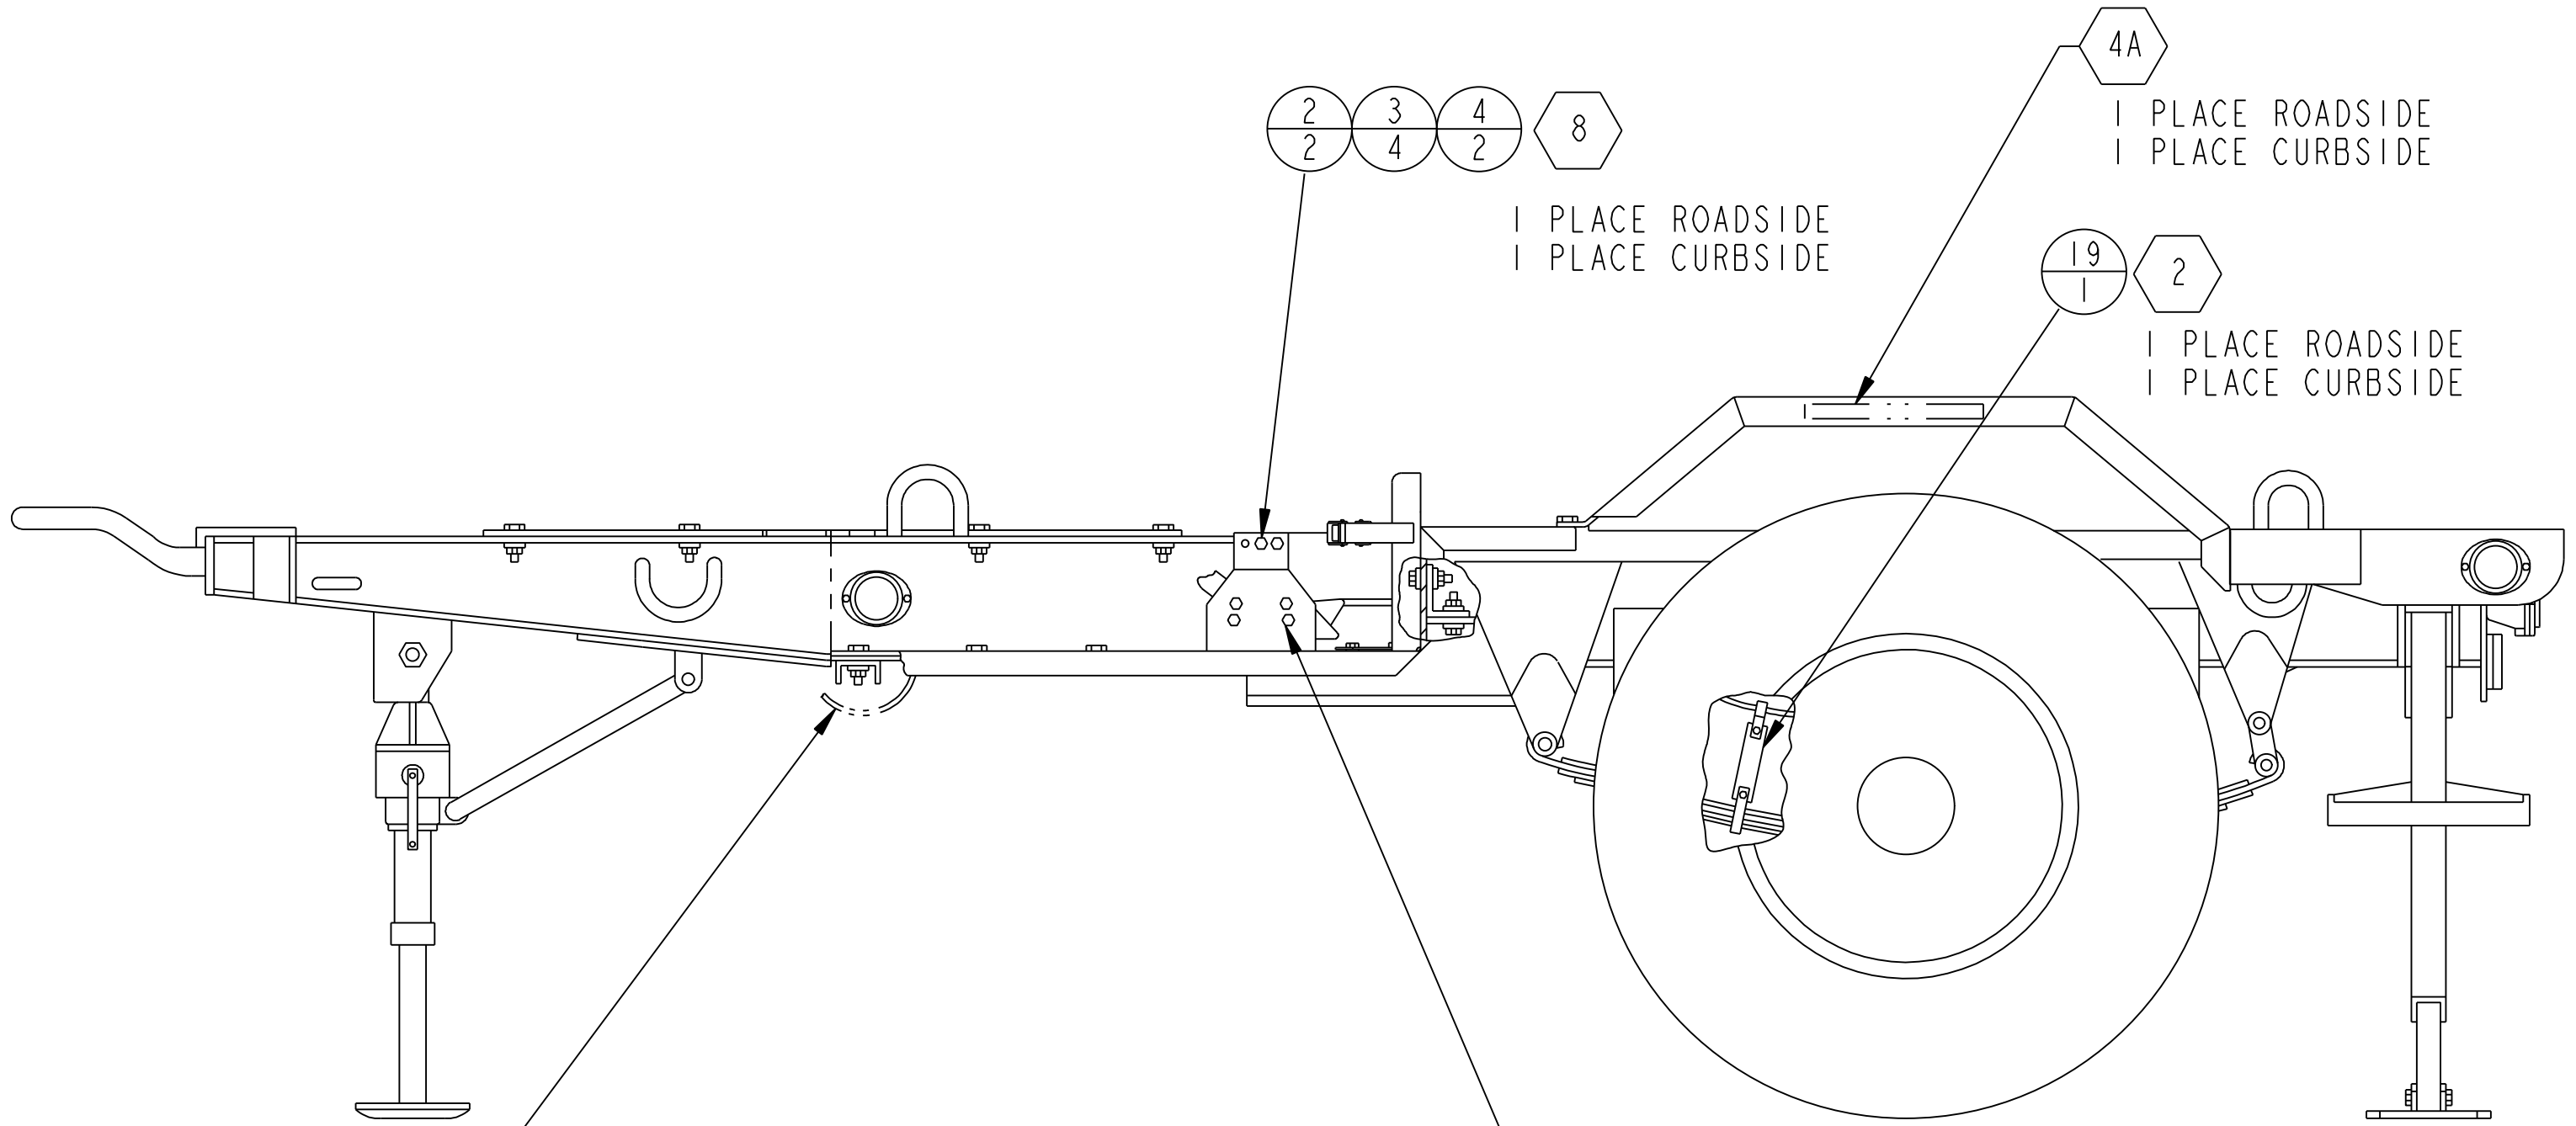

VIEW C-C
SHEET 3, ZONE B3

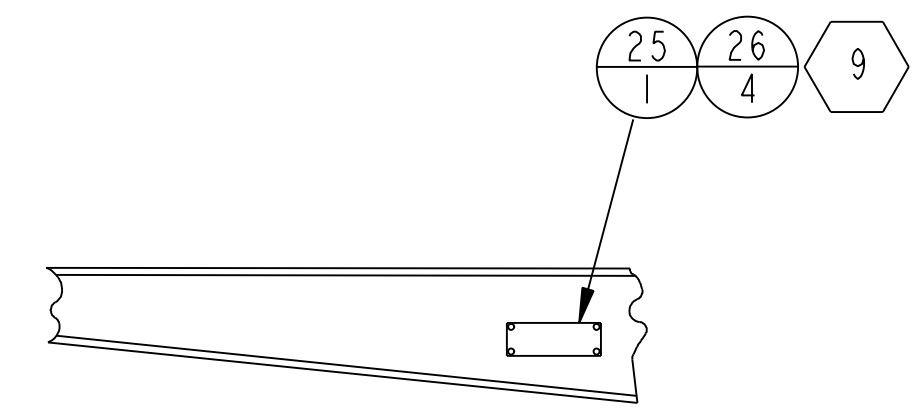

VIEW K-K
SHEET 3, ZONE B8
SCALE I/I0
ROTATED 26° CCW

PROCEDURE:

1. DISASSEMBLE TRIANGULAR PIVOT FROM BRAKE HANDLE ASSEMBLY AND REMOVE BUSHING.
2. NOTE ORIENTATION OF TRIANGULAR PIVOT AND DISASSEMBLE CLEVIS. ENLARGE IN-LINE HOLE TO $\varnothing 9.8^{+0.00}_{-0.08}$.
3. DISASSEMBLE CLEVIS FROM ARM AND MODIFY CLEVIS AS SHOWN.
4. REMOVE NUT, BOLT AND STANDOFF FROM POSITION MARKED A.
5. REVERSE AND INSTALL TRIANGULAR PIVOT THERE, ASSEMBLING THROUGH THE REMAINING BUSHING IN THE TRIANGULAR PIVOT USING HARDWARE REMOVED IN PROCEDURE I.
6. REATTACH CLEVIS TO ARM, WITH ALTERED EDGE UP, AND REASSEMBLE WITH TRIANGULAR PIVOT AT HOLE FROM WHICH BUSHING WAS REMOVED.
7. INSTALL SPACERS, FIND NO. I4, BETWEEN BRACKET, FIND NO. I3, AND BRAKE HANDLE ASSEMBLY, ON MOUNTING SCREWS.

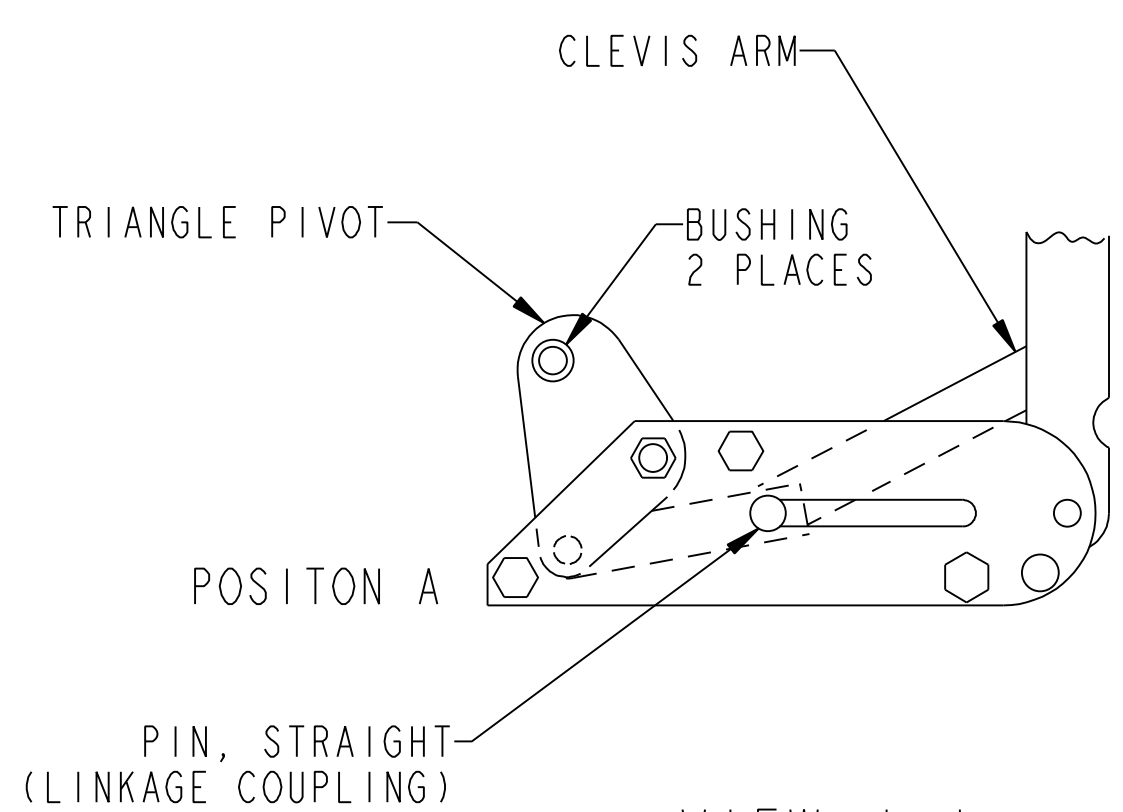

VIEW J-J
SHEET 3, ZONE C5
EXISTING CONFIGURATION

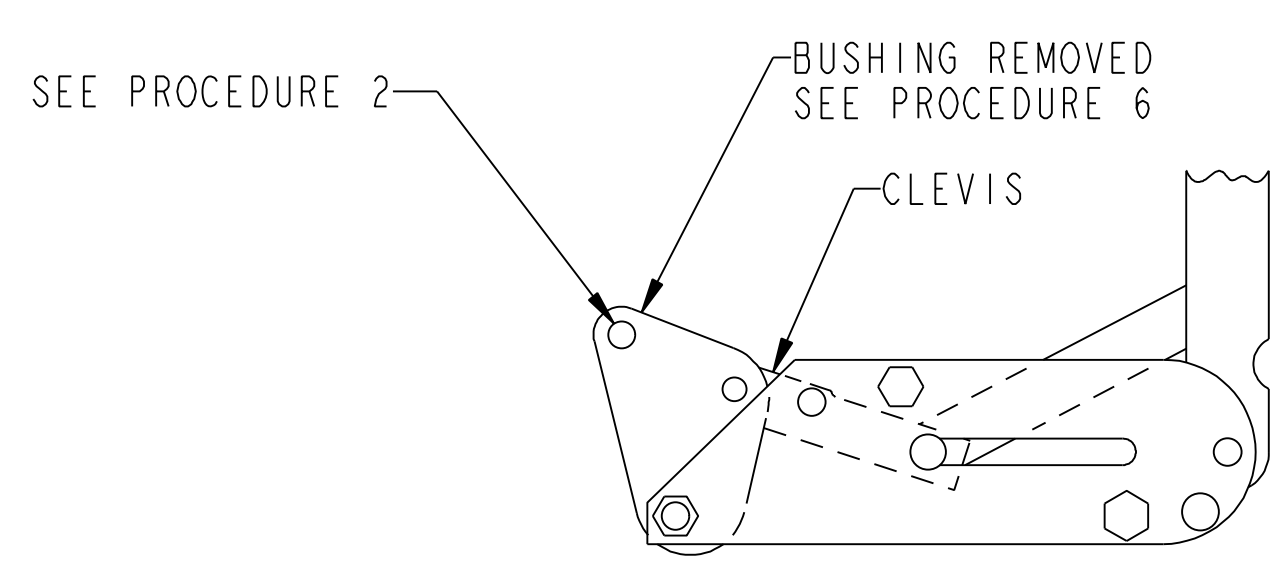

VIEW J-J
SHEET 3, ZONE C5
REVISED CONFIGURATION

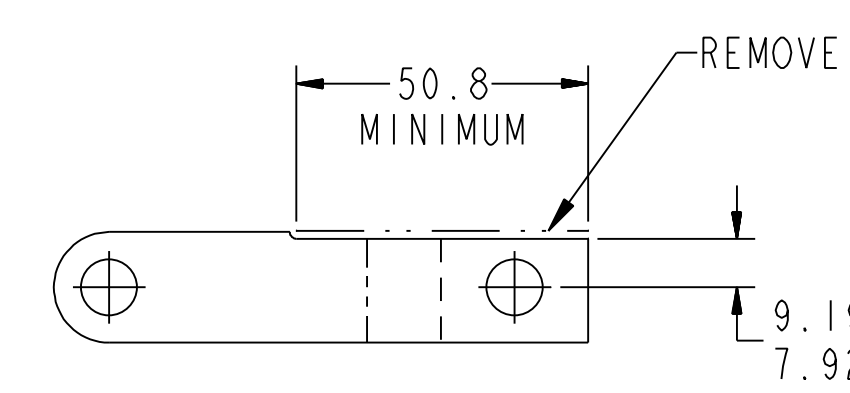

CLEVIS ALTERATION

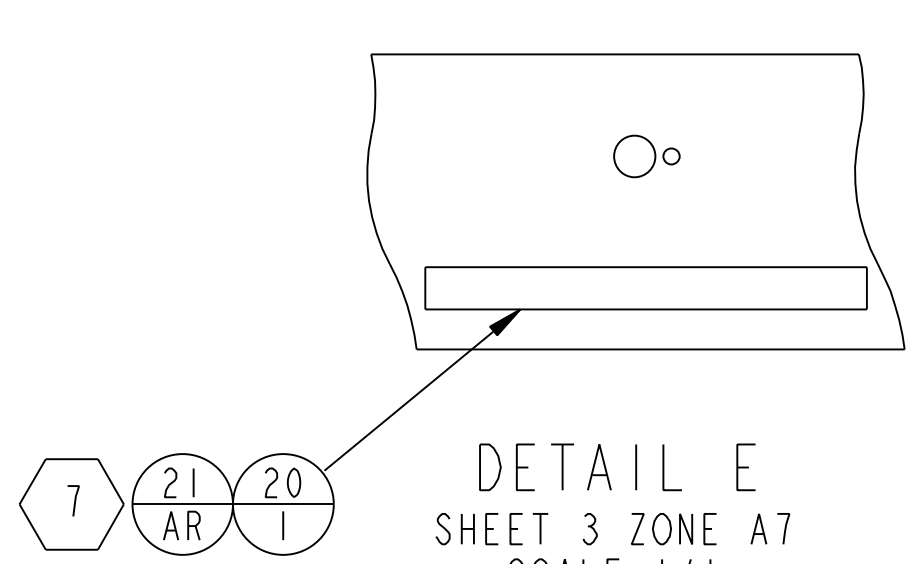

DETAIL E
SHEET 3 ZONE A7
SCALE I/I

DOD PROJECT MANAGER
EXPEDITIONARY ENERGY & SUSTAINMENT SYSTEMS
WASHINGTON, D.C.

SIZE	CAGE CODE	DRAWING NO.
D	30554	04-21234

SCALE 3/32 | REV LETTER L | SHEET 4 OF 4