

1

2

3

4

5

PARTS LIST

PC. NO.	QTY.	DESCRIPTION	Specifications
1	4	OUTTER SIDE PLATE	2" X 40" X 40", MILD STEEL
2	4	MIDDLE SIDE PLATE	2" X 36" X 37.5", MILD STEEL
3	4	INNER SIDE PLATE	2" X 32" X 34", MILD STEEL
4	1	OUTTER BOTTOM PLATE	2" X 42" X 42", MILD STEEL
5	1	MIDDLE BOTTOM PLATE	2" X 38" X 38", MILD STEEL
6	1	INNER BOTTOM PLATE	2" X 30" X 30", MILD STEEL
7	4	LOWER PLUG PAD	3" X 14" X 14", BUNA-N, DUROMETER 50-80
8	4	PADEYE	1.75" X 3.5" X 6", ASTM A131/131M or MIL-S-22698 GRADE DH-36 STEEL
9	4	SEALING GASKET	1" X 2" X 36", BUNA-N, DUROMETER 50-80
10	8	SHIELDED PLUG PLATE	2" X 16.5" X 16.5", MILD STEEL
11	1	TOP PLATE	2" X 42" X 42", MILD STEEL
12	2	DIVIDER PLATE	2" X 30" X 32", MILD STEEL
13	4	UPPER PLUG PAD	0.5" X 11.5" X 11.5", BUNA-N, DUROMETER 50-80
14	12	STUD	3/4"-10 UNC X 6" LENGTH, STUD, STEEL GRADE 5 OR BETTER
15	12	LOCK WASHER	FOR 3/4" FASTENER, STEEL/CRES
16	12	LOCK NUT	3/4"-10 UNC W/ NYLON INSERT, HEX NUT, STEEL/CRES

Document No. 6042ZN01
Attachment (A)
DWG 2370.2-8145V Rev Q

FABRICATION NOTES

- WELDING REQUIREMENTS:
 - WELDING SHALL BE IN ACCORDANCE WITH AMERICAN WELDING SOCIETY D1.1.
 - WELD SIZES SHOWN ARE MINIMUM REQUIREMENTS.
 - SNIPES CORNERS IN THE WAY OF FILLETS AND EXISTING WELDS. CLOSE ALL SNIPES AT WELDING. SEQUENCE THE WELDING OF MATERIALS AS NECESSARY TO MINIMIZE DISTORTION.
- BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND WELD SPLATTER. ALL OTHER SURFACES TO BE FINISHED TO 250 RMS.
- PAINTING REQUIREMENTS:
 - INTERIOR OF THE BOX WILL BE PRIMED WITH A NON-HAZARDOUS, RUST INHIBITIVE PRIMER.
 - EXTERIOR OF BOX WILL BE LEFT AS BARE METAL.
- EACH CONTAINER SHALL HAVE A BUNA-N GASKET (PC 9) SEALING EACH TOP. EACH GASKET SHALL BE PROVIDED WITH A CURE DATE AND AT LEAST 85% OF SHELF LIFE REMAINING UPON SHIPMENT.
- NO CADMIUM IS TO BE USED ON THIS BOX. DO NOT USE CADMIUM PLATED FASTENERS. STEEL FASTENERS SHALL HAVE A BLACKENED, ZINC PLATED FINISH, OR NO FINISH.
- ALL DIMENSIONS ARE TYPICAL UNLESS OTHERWISE NOTED.
- ALL BUNA-N (PCS 7, 9, AND 13) SHALL BE SHIPPED UNINSTALLED.
- PADEYES SHALL BE SHIPPED UNATTACHED TO BOX.
- BOX SHALL BE SHIPPED WITH NON-LOCK NUTS INSTALLED ON STUDS (PC. 14). SHIP LOCKING NUTS (PC. 16) UNINSTALLED

REVISIONS

ZONE	REV	DESCRIPTION	DATE	CHANGE BY	APPROVAL
UNK	OI-G	UNKNOWN		N/A	
UNK	H	ADD ASSEMBLY VIEW, UPDATE PAGE FORMAT	6/3/2005	C. MUTH	K. HOOVER
UNK	I	CHANGE BOLTS TO STUDS AND NUTS AND CHANGE LAYOUT OF STUD HOLES	10/10/2008	J. MUNNELLY	K. HOOVER
SH 1,3,8	J	CHANGE WASHERS AND NUTS, INCL OMISSION OF CADMIUM. OMIT PADEYE WELD INFO	6/1/2010	P. JOHNSON	R. HABERKORN
ALL	K	CHANGE TO NEW EQUIP DWG FORMAT, ADD 1/4"-45° BEVEL TO PADEYES, ADD WELD TO PADEYES	6/15/2011	W. SIFUENTES	R. HABERKORN
ALL	L	MODIFIED NOTES AND PARTS LIST. REORDERED DWGS. REMOVED PADEYE WELD INFO. REMOVED DELETED NOTES AND PARTS, INCL CLEANLINESS NOTE.	3/14/2012	H. HADDIX	R. HABERKORN

CONTINUED ON SHEET 2

REVISION OF SHEETS

Sheet	1	2	3	4	5	6		
Revision	Q	Q	N	O	N	N		

APPROVAL/CONCURRENCE

	SIGNATURE	DATE
COGNIZANT ENGINEER	<i>Elizabeth Blair</i>	1/16/18
CHECKED BY	<i>SBaker</i>	1/16/18
SUPERVISOR	<i>P. W.</i>	1/16/18
CONCURRENCE	N/A	
CONCURRENCE	N/A	

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES, AND TOLERANCES ARE AS FOLLOWS:

Decimals:

UP TO 24" = ± 1/8"
24" & UP = ± 1/4"
Angles = ± 1°

DRAWING DIMENSIONAL AND GEOMETRIC TOLERANCES ARE PER ASME Y14.5M-1994



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING



NO DEVIATIONS SHALL BE MADE WITHOUT C-2370 APPROVAL

TITLE RSMA DISPOSAL BOX		
SIZE A	CAGE CODE 81601	SCALE See Sheet
DRAWING No. 2370.2-8145V	RF No. RF-8145V	
SHEET No. Sheet 1	REV. Q	

1

2

3

4

5

D

C

B

A

D

C

B

A

REVISIONS

ZONE	REV	DESCRIPTION	DATE	CHANGE BY	APPROVAL
SH 1 & 4	M	INCREASE ANGLE OF PADEYE BEVEL TO 52°.	3/26/2013	H. HADDIX	R. HABERKORN
ALL	N	WIDENED THE SIZE OF LID BOLT HOLES TO 1". ADDED FABRICATION NOTE 9. ADDED SHEET 2 FOR REVISIONS, AND CHANGED THE SHEET NUMBERS.			
ALL	O	ADDED WELDING SYMBOL	4/4/2017	ELISHA WILSON	K. HOOVER
SH1 & 2	P	CORRECTED TYPO	4/10/2017	S. BAKER	R. HABERKORN
1-D2 2-C3	Q	CHANGE PADEYE MATERIAL TO DH-36 STEEL	1/16/2018	Z. BLAIS	R. HABERKORN

NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICINGNO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

RSMA DISPOSAL BOX

RF No.

RF-8145V

Drawing No.

2370.2-8145V

REV.

Q

SHEET NO.

Sheet 2


1

2


3

4


5

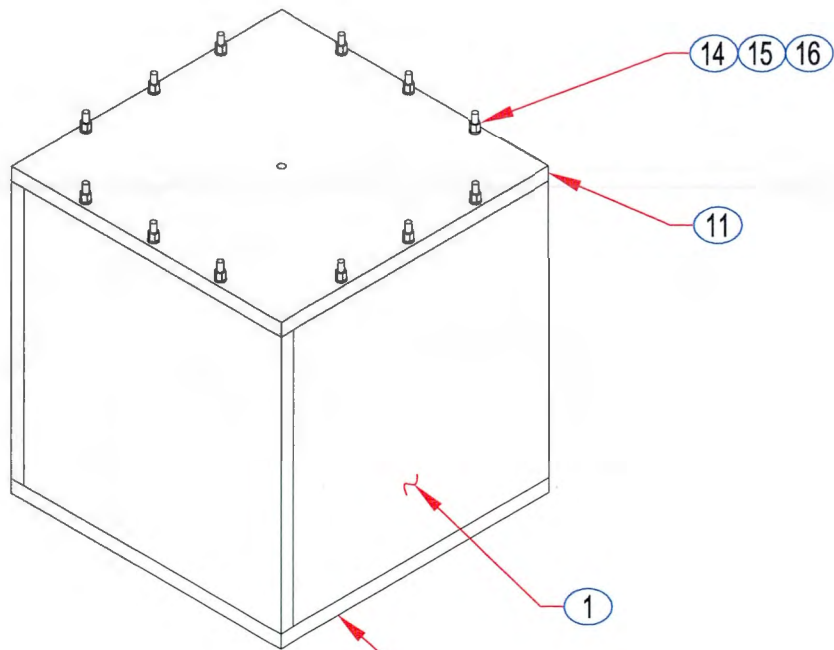

ISOMETRIC VIEW

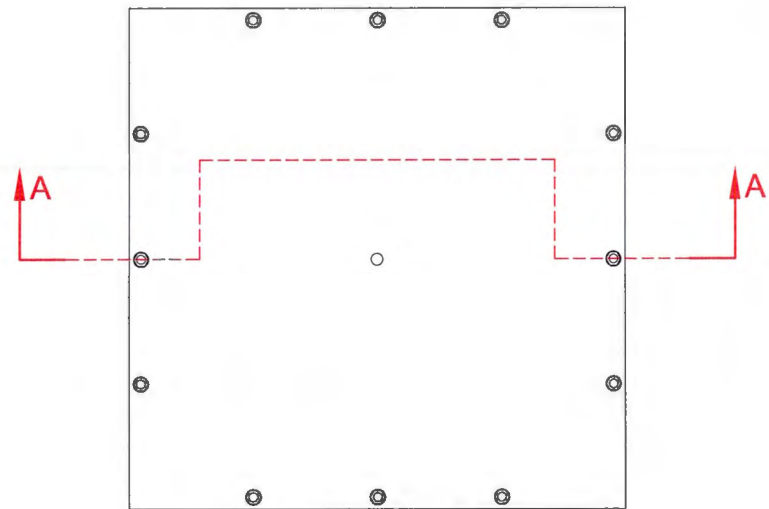

TOP VIEW

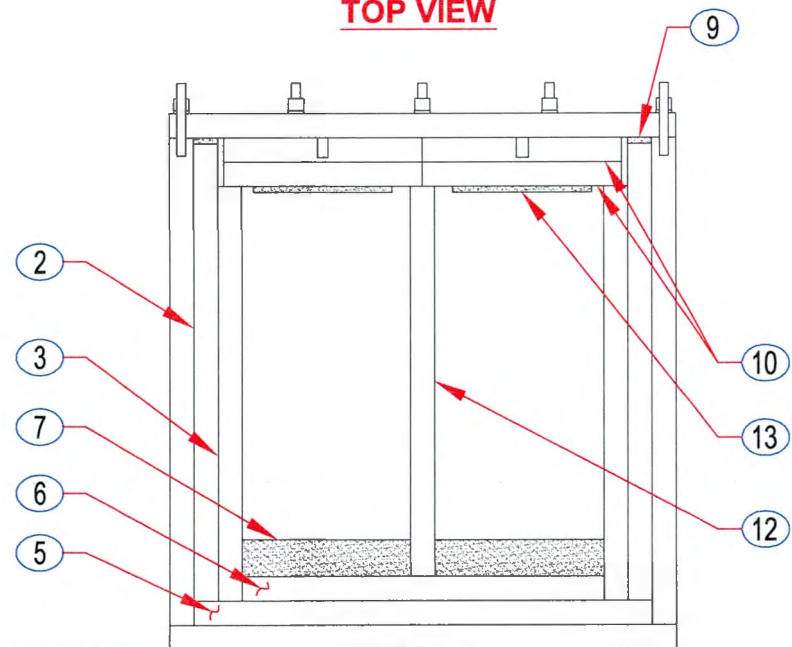

SECTION A-A

PCS 7, 9, 13, SEE NOTE 7

ASSEMBLY



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING



NO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

RSMA DISPOSAL BOX

RF No.

RF-8145V

Drawing No.

2370.2-8145V

REV.

N

SHEET NO.

Sheet 3

1

2

3

4

5

D

C

B


A

D


C

B

A

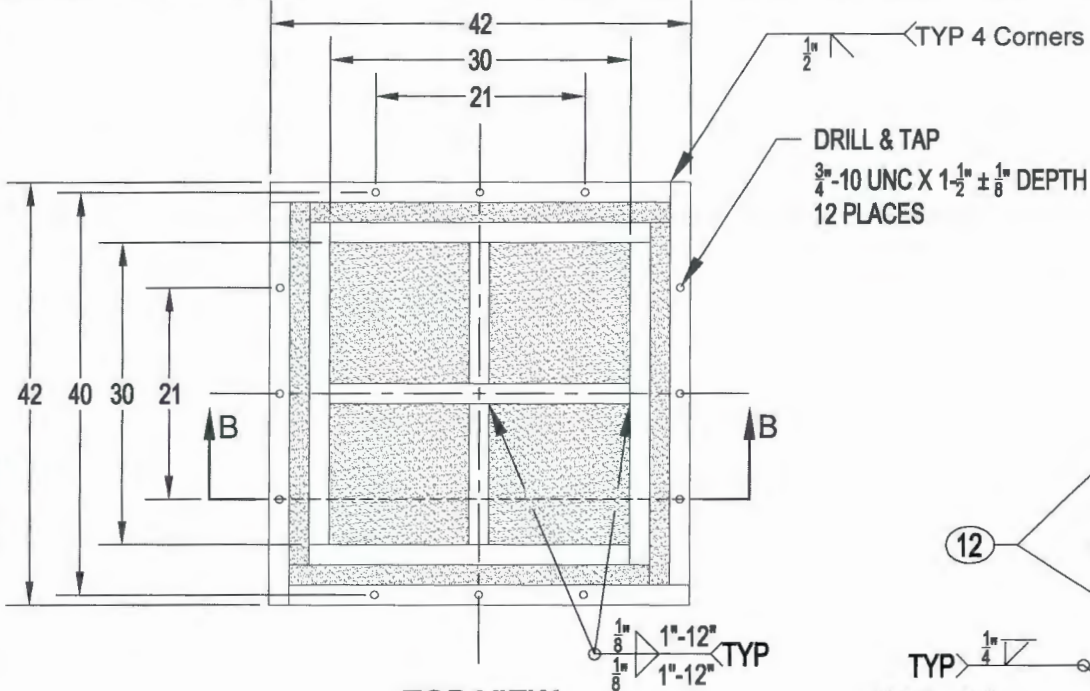

TOP VIEW

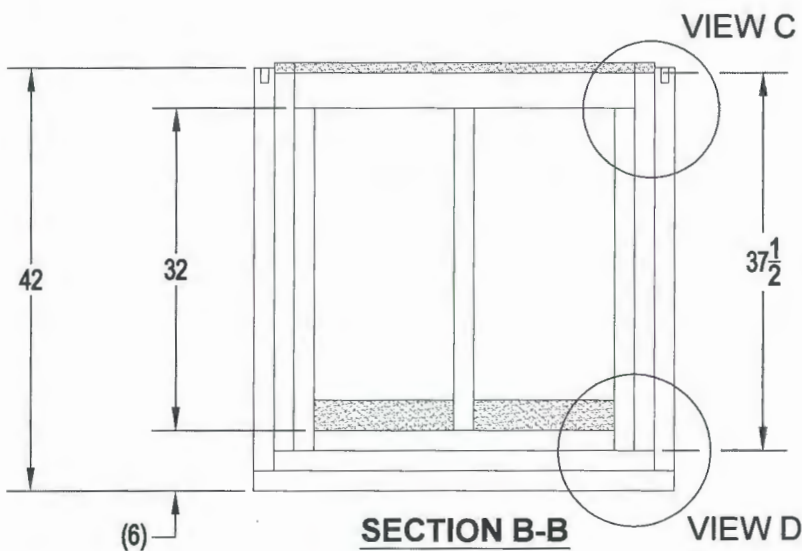

SECTION B-B


TYP 1/4"
PCS 3 TO 6

7
SEE NOTE 7

6

5

VIEW D

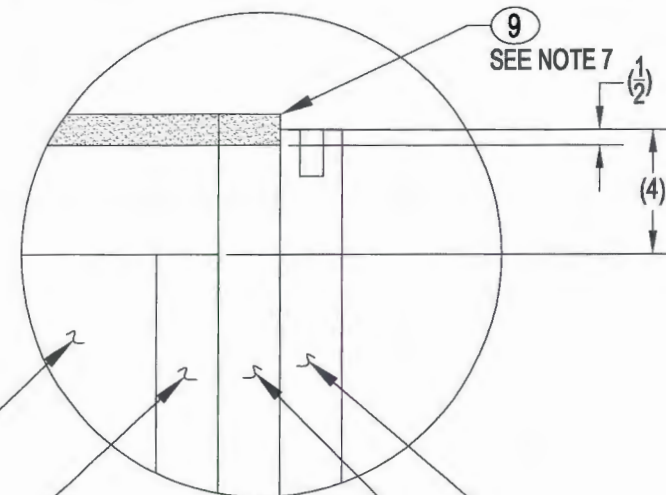

VIEW C

ASSEMBLY W/O LID



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING

NO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

RSMA DISPOSAL BOX

RF No.

RF-8145V

Drawing No.

2370.2-8145V

REV.

O

SHEET NO.

Sheet 4

1

2

3

4

5

1

2

3

4

5

D

C

B


A

D


C

B

A

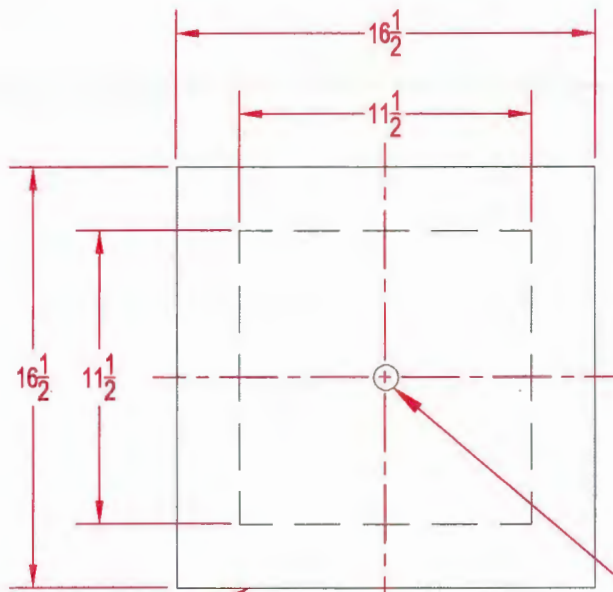**TOP VIEW**

DRILL & TAP
1"-8 UNC X $1\frac{5}{8}$ " $\pm\frac{1}{8}$ " DEPTH

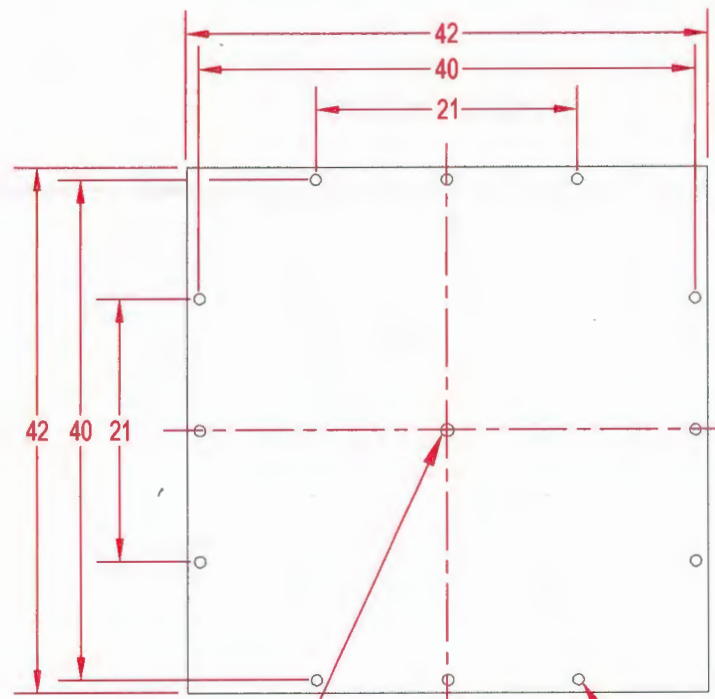
**TOP VIEW**

DRILL & TAP
1"-8 UNC X $1\frac{5}{8}$ " $\pm\frac{1}{8}$ " DEPTH

Ø 1" THRU
12 PLACES

**SIDE VIEW****PCS 10 & 13**

SEE NOTE 7

**SIDE VIEW****PC 11**

$\frac{1}{4}$ " ∇ 1"-6" TYP
PC 10 TO PC 10



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING



NO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

RSMA DISPOSAL BOX

RF No.

RF-8145V

Drawing No.

2370.2-8145V

REV.

N

SHEET NO.

Sheet 5

1

2


3

4


5

1 2 3 4 5

D
C
B
A

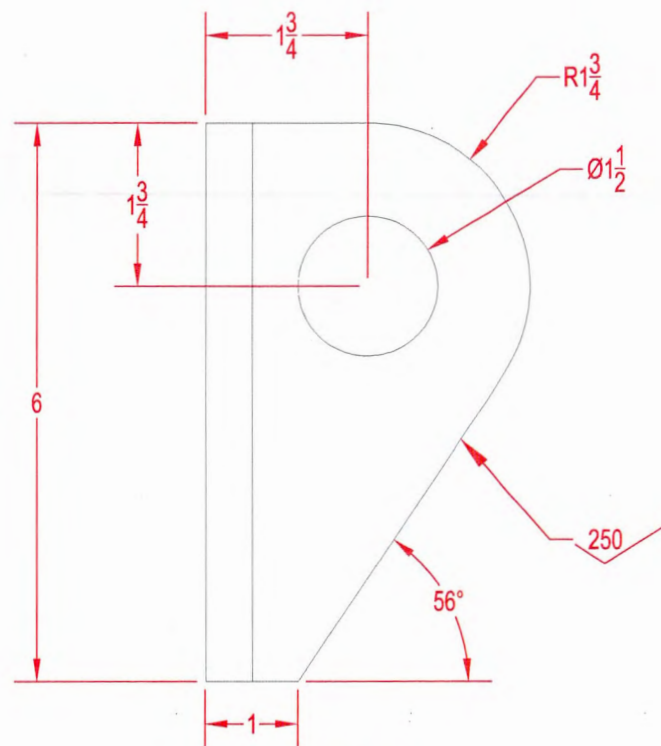

SIDE VIEW

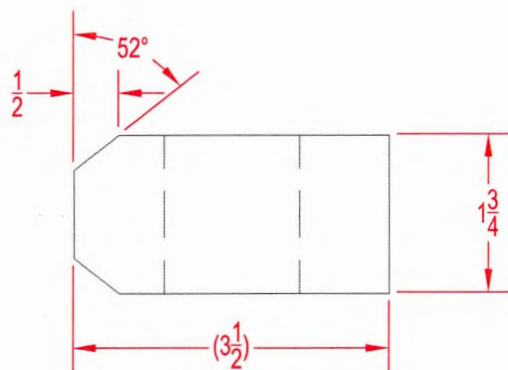

TOP VIEW

PC 8

D
C
B
A



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING



NO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

RSMA DISPOSAL BOX

RF No.

RF-8145V

Drawing No.

2370.2-8145V

REV.

N

SHEET NO.

Sheet 6

1 2 3 4 5