

Pictures of the Current Wagon



Technical Schematics of the Current Wagon

NOTES:

1. FINISH: NONE.
2. ITEMS CALLED OUT IN PARTS LIST NOT SHOWN ON DRAWING.
3. SEAT BELT STRAPS SOURCE OF SUPPLY:
SEATBELTSPUS
12900 N DYSAT ROAD
SURPRISE, AZ 85379
HTTPS://WWW.SEATBELTSPUS.COM/



MIX AND MATCH SEAT BELT STRAPS FOR BEST COMBINATION FOR DESIRED

LENGTH OF FIXED CLIP AND ADJUSTABLE BUCKLE TO SECURE CASKET.
ATTACH IN 2 OF 4 LOCATIONS. USE BOLT AND NUT INSTALLATION
HARDWARE. DO NOT USE SPLIT WASHERS AND LARGE WASHERS. USE PN:
MS27183-14 IN PLACE.


REPLACES: N/A

PROTOTYPE REVISIONS

REV	DESCRIPTION	DFTR	DATE	APVD
X0	INITIAL CONCEPT RELEASE	GJS	2023-11-21	GJS
X1	CHANGED TO DISTRO A INITIAL PROTOTYPE RELEASE SHT 1D4- ADDED NOTES 2, 3, AND 4 SHT 1B2 - ADDED PN: MS27183-14, 45803, BIER40101, BIER40630, 1800-48-1000, 1800-74-1000, 1800-96-1000, AND 1800-110-1000 SHT 1A1 - PN A3417573-1 WAS -0	GJS	2024-06-17	GJS

10	A/R	NA	1800-96-1000	SEAT BELT, 96" CHROME LIFT LATCH LAP		2
9	A/R	NA	1800-74-1000	SEAT BELT, 74" CHROME LIFT LATCH LAP		2
8	A/R	NA	1800-48-1000	SEAT BELT, 48" CHROME LIFT LATCH LAP		2
7	A/R	NA	1800-110-1000	SEAT BELT, 110" CHROME LIFT LATCH LAP		2
6	A/R	7PAZ5	BIER40630	BIER PIN, 1/2" ROUND QREL ADJUSTABLE		2
5	A/R	7PAZ5	BIER40101	BIER PIN, 1/2" ROUND ADJUSTABLE		2
4	1	6X8Q7	45803	CLEVIS PIN, 1" DIA. WITH HANDLE AND CLIP		
3	4	80205	MS27183-14	WASHER, FLAT, .375 NOM X .812 OD, STL CAD	NASM27183	
2	1	80063	A3417582-1	LIMBER ASSY.		
1	1	80063	A3417574-1	CAISSON ASSY.		
FIND NO.	QTY	CAGE CODE	PART NUMBER OR IDENTIFYING NUMBER	DESCRIPTION	MATERIAL / SPECIFICATION	NOTE

PARTS LIST


CAD MAINTAINED CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY			UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES REMOVE BURRS/SHARP EDGES R.03 MAX DIMENSIONS APPLY BEFORE FINISHING ALL SHEETS ARE AT SAME REV. LEVEL INTERPRET DRAWING IAW: ASME Y14.100-2013 ASME Y14.5-2009		U.S. ARMY CSISR CENTER PROTOTYPE INTEGRATION FACILITY ABERDEEN PROVING GROUND MARYLAND 21005		CASSION ASSY, TOP LEVEL			
					DATE:	2023-09-27	CAGE CODE	PART NUMBER		
					DRAFTER:	G STIEMLY	80063	A3417573-1		
					CHECKER:	PI&T CHK GP	SIZE	DRAWING NUMBER		
					ENGINEER:	G STIEMLY	B	A3417573		
USED ON	NEXT ASSY		DECIMAL TOLERANCES 2 PL ±.03 3 PL ±.005 ANGLES ± .5°	THIRD ANGLE PROJECTION 	CUSTOMER:	TOG	SCALE	WEIGHT	SHEET	REV
APPLICATION					DWG. STATE:	PROTOTYPE RELEASED	NONE	1211.4 LBS	1 OF 2	X1

		DECIMAL TOLERANCES	THIRD ANGLE PROJECTION
		2 PL ±.03 3 PL ±.005 ANGLES ± .5°	



DISTRIBUTION A

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

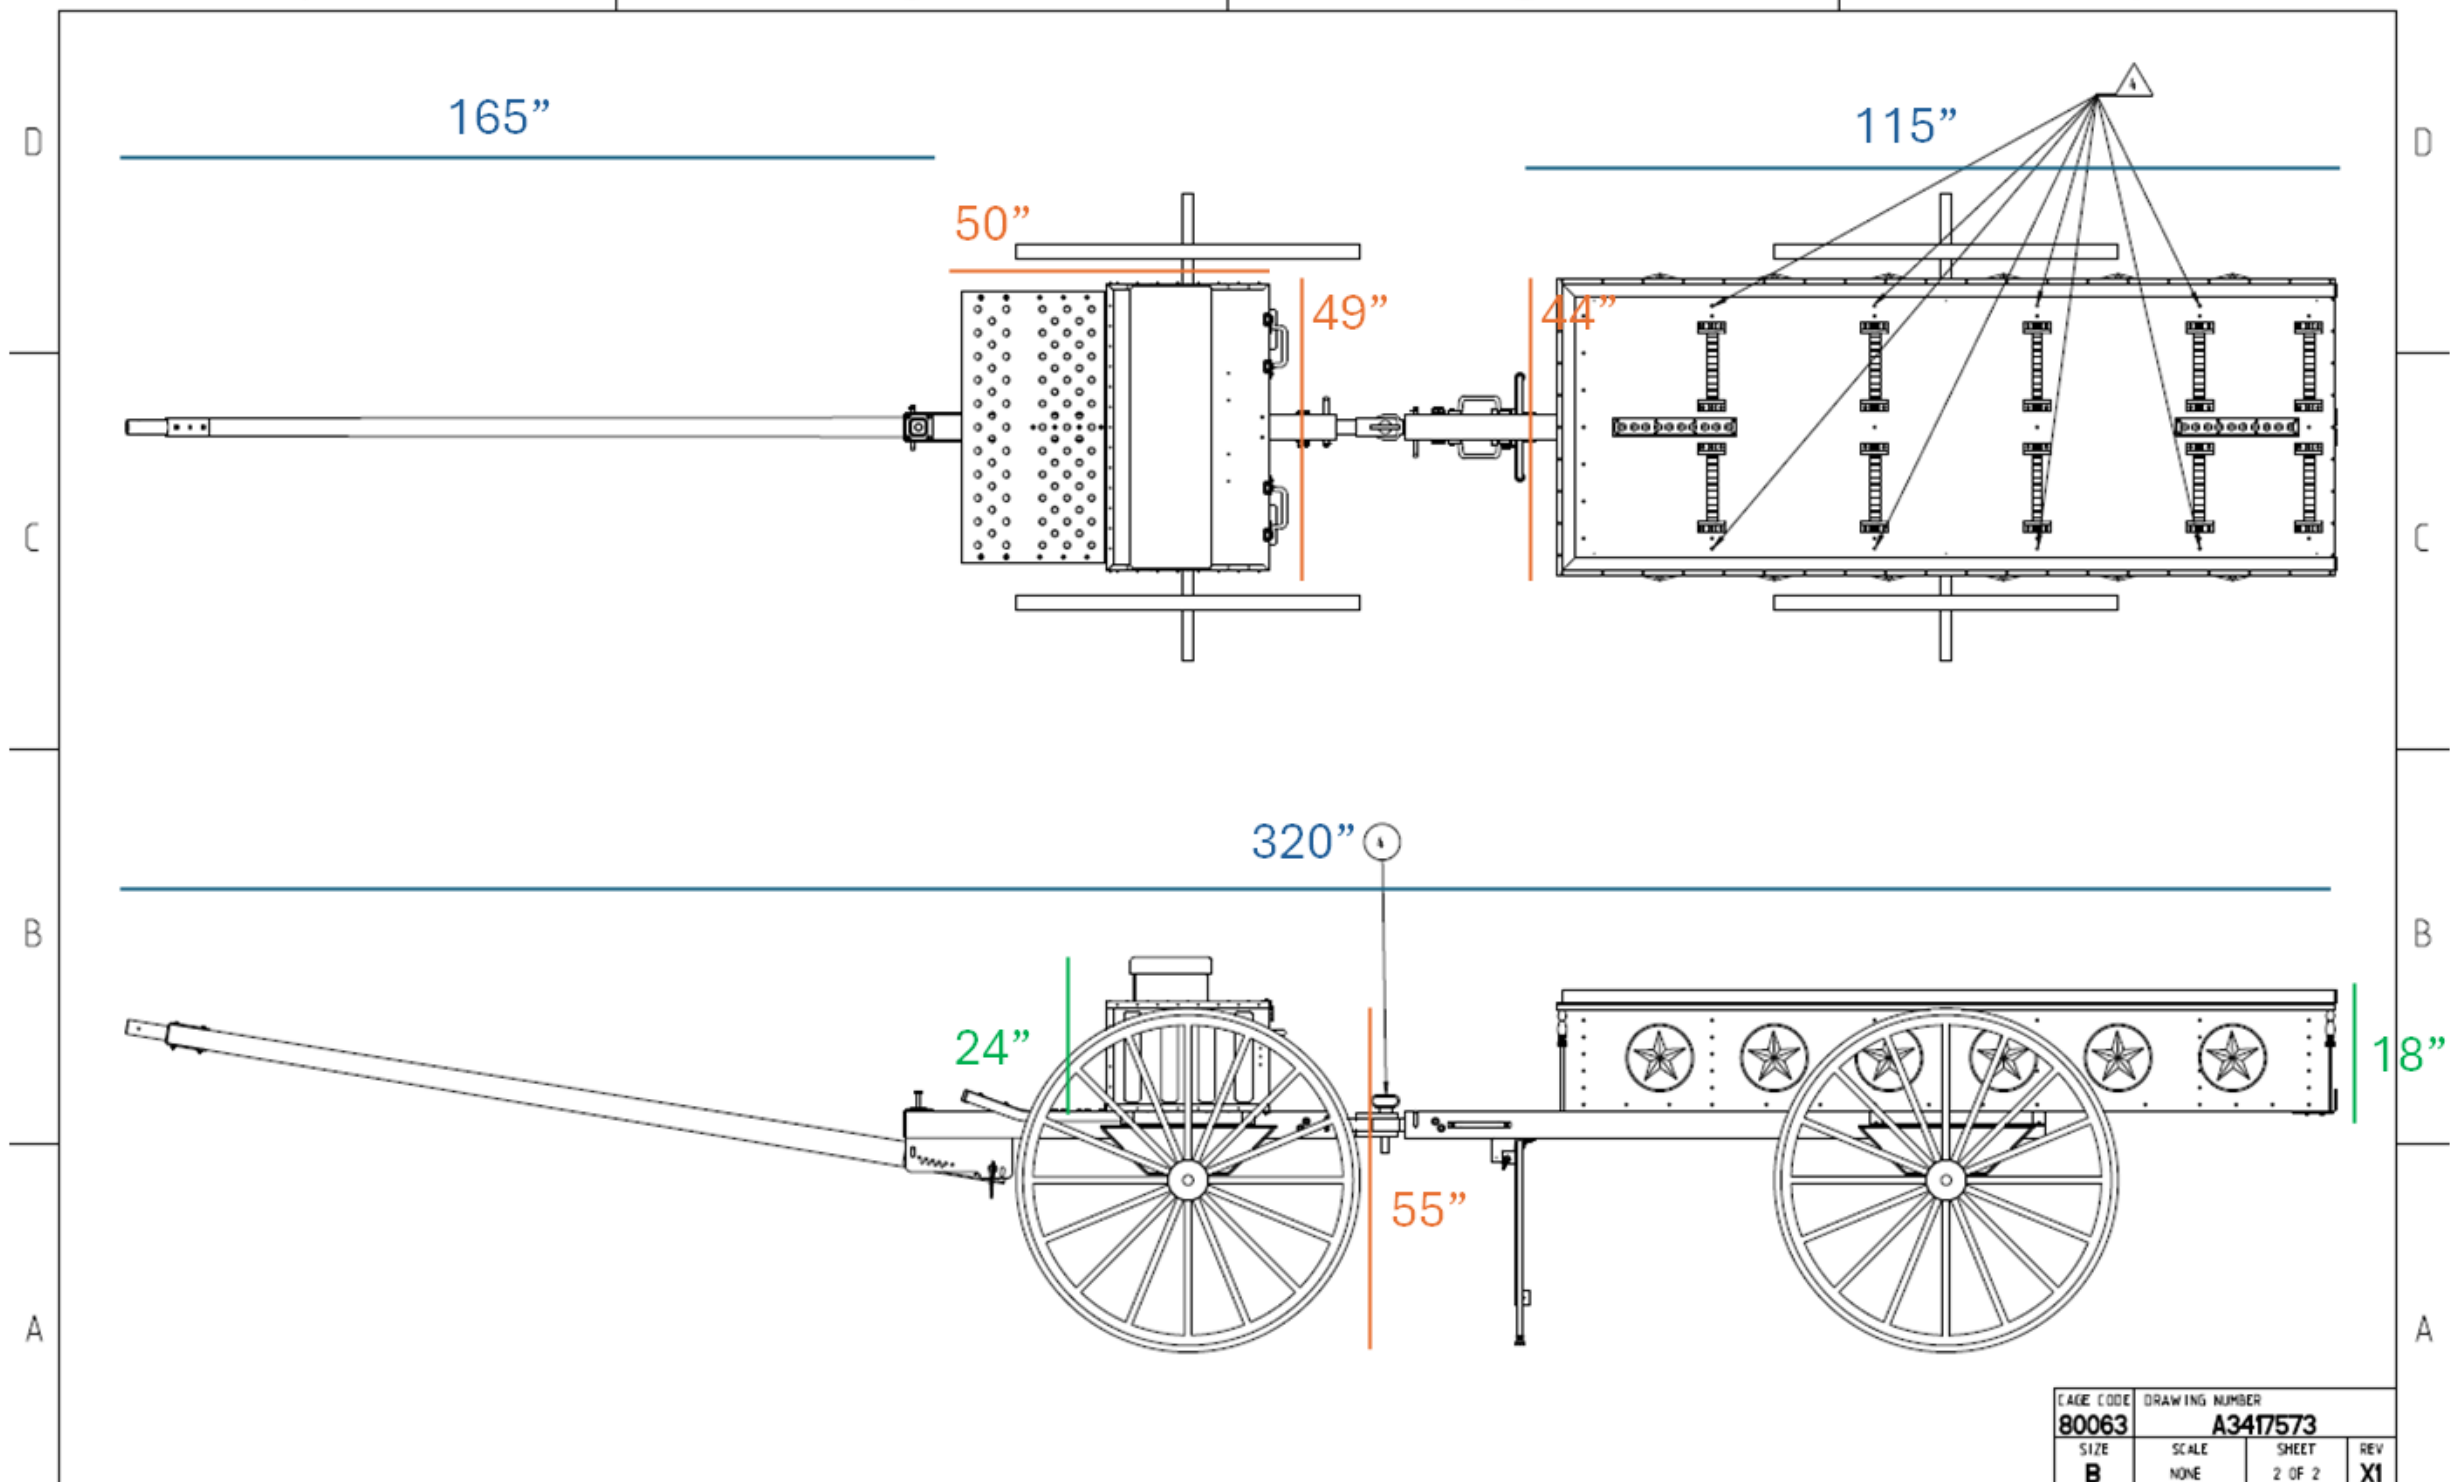

CAGE CODE	DRAWING NUMBER		
80063	A3417573		
SIZE	SCALE	SHEET	REV
B	NONE	2 OF 2	X1

NOTES:


1. FINISH: NONE.
2. INSTALL USING MEDIUM STRENGTH THREADLOCKING ADHESIVE, GROUP 3, CLASS 2, GRADE 1 PER ASTM-D5363.
3. INSTALL PN: CE23102, UBOLT KIT IN LOCATION CONNECTING WHEELS AND AXLE WITH A34174595-0 WITH KIT HARDWARE. DO NOT USE SPLIT WASHERS FROM KIT, USE PN: MS27183-14 IN PLACE.
4. TORQUE BOLTS TO FOLLOWING:

A. PN: MS90728-62 (A3417575 TO A3417580) TO 32 FT-LB

B. PN: MS90728-127 (A3417592 TO A3417580) TO 95 FT-LBS

C. PN: MS90728-62 (A3417595 TO A3417580) TO 42 FT-LBS

D. PN: CE23102 U-BOLTS (WHEELS TO A3417595) TO 25 FT-LBS TORQUE BOTH SIDES OF U-BOLT. THEN COMELETE REST OF ASSEMBLY AND RETORQUE.
5. APPLY PN:10455 ON UNDERNEATH SIDE OF A3417575, CUT TO SIZE IN LOCATIONS BETWEEN RIBS.
6. APPLY PN: 3828N19 STRIP APPROXIMATELY 18" LONG IN APPROXIMATE LOCATION
7. ITEMS CALLED OUT IN THE PARTS LIST NOT SHOWN ON DRAWING.

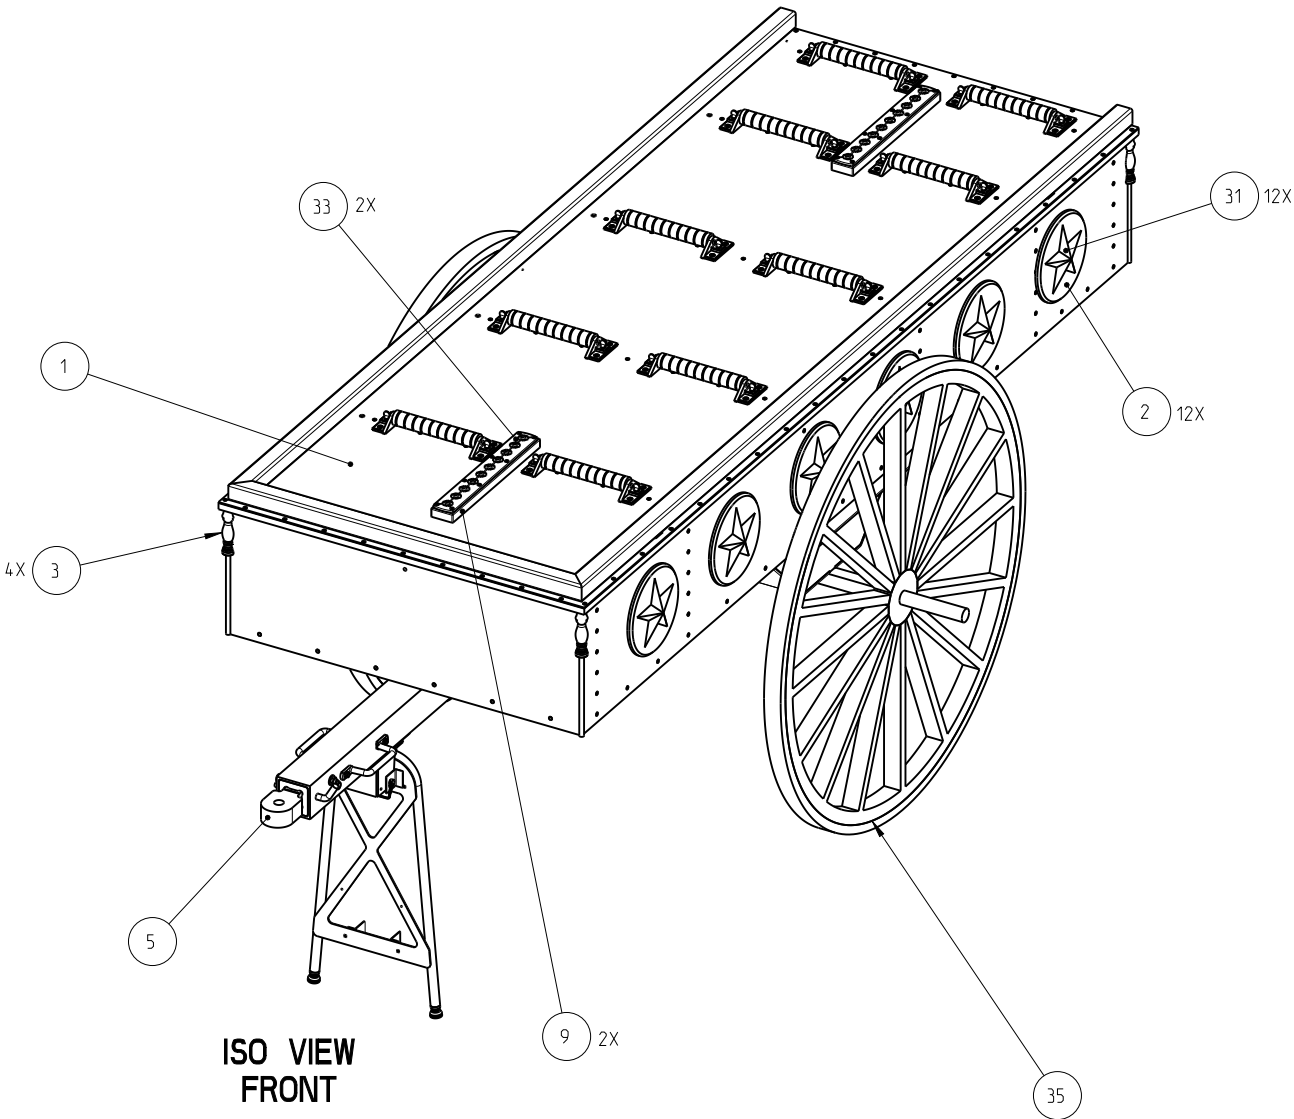

ISO VIEW
FRONT

DISTRIBUTION A

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.


REPLACES: N/A

PROTOTYPE REVISIONS


REV	DESCRIPTION	DFTR	DATE	APVD
X0	INITIAL CONCEPT RELEASE	GJS	2023-11-20	GJS
X1	INITIAL PROTOTYPE RELEASE SHT 1A4 - UPDATED TO DISTRO A SHT 1D4 - ADDED NOTE 6. SHT 2B4 - ADDED PN: 3828N19 SHT 1A1 - PART NUMBER A3417574-1 WAS -0	GJS	2024-06-07	GJS

SEE SHEET 2 FOR PARTS LIST

CAD MAINTAINED CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY			UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES REMOVE BURRS/SHARP EDGES R.03 MAX DIMENSIONS APPLY BEFORE FINISHING ALL SHEETS ARE AT SAME REV. LEVEL INTERPRET DRAWING IAW: ASME Y14.100-2013 ASME Y14.5-2009		U.S. ARMY CSISR CENTER PROTOTYPE INTEGRATION FACILITY ABERDEEN PROVING GROUND MARYLAND 21005		CAISSON ASSY,			
					DATE:	2023-09-14	CAGE CODE	PART NUMBER		
							80063	A3417574-1		
					DRAFTER:	G STIEMLY	SIZE	DRAWING NUMBER		
					CHECKER:	PI&T CHK GP	B	A3417574		
A3417573	A3417573				ENGINEER:	G STIEMLY				
USED ON	NEXT ASSY				CUSTOMER:	TOG	SCALE	WEIGHT	SHEET	REV
APPLICATION					DWG. STATE:	PROTOTYPE RELEASED	NONE	750.0 LBS	1 OF 6	X1

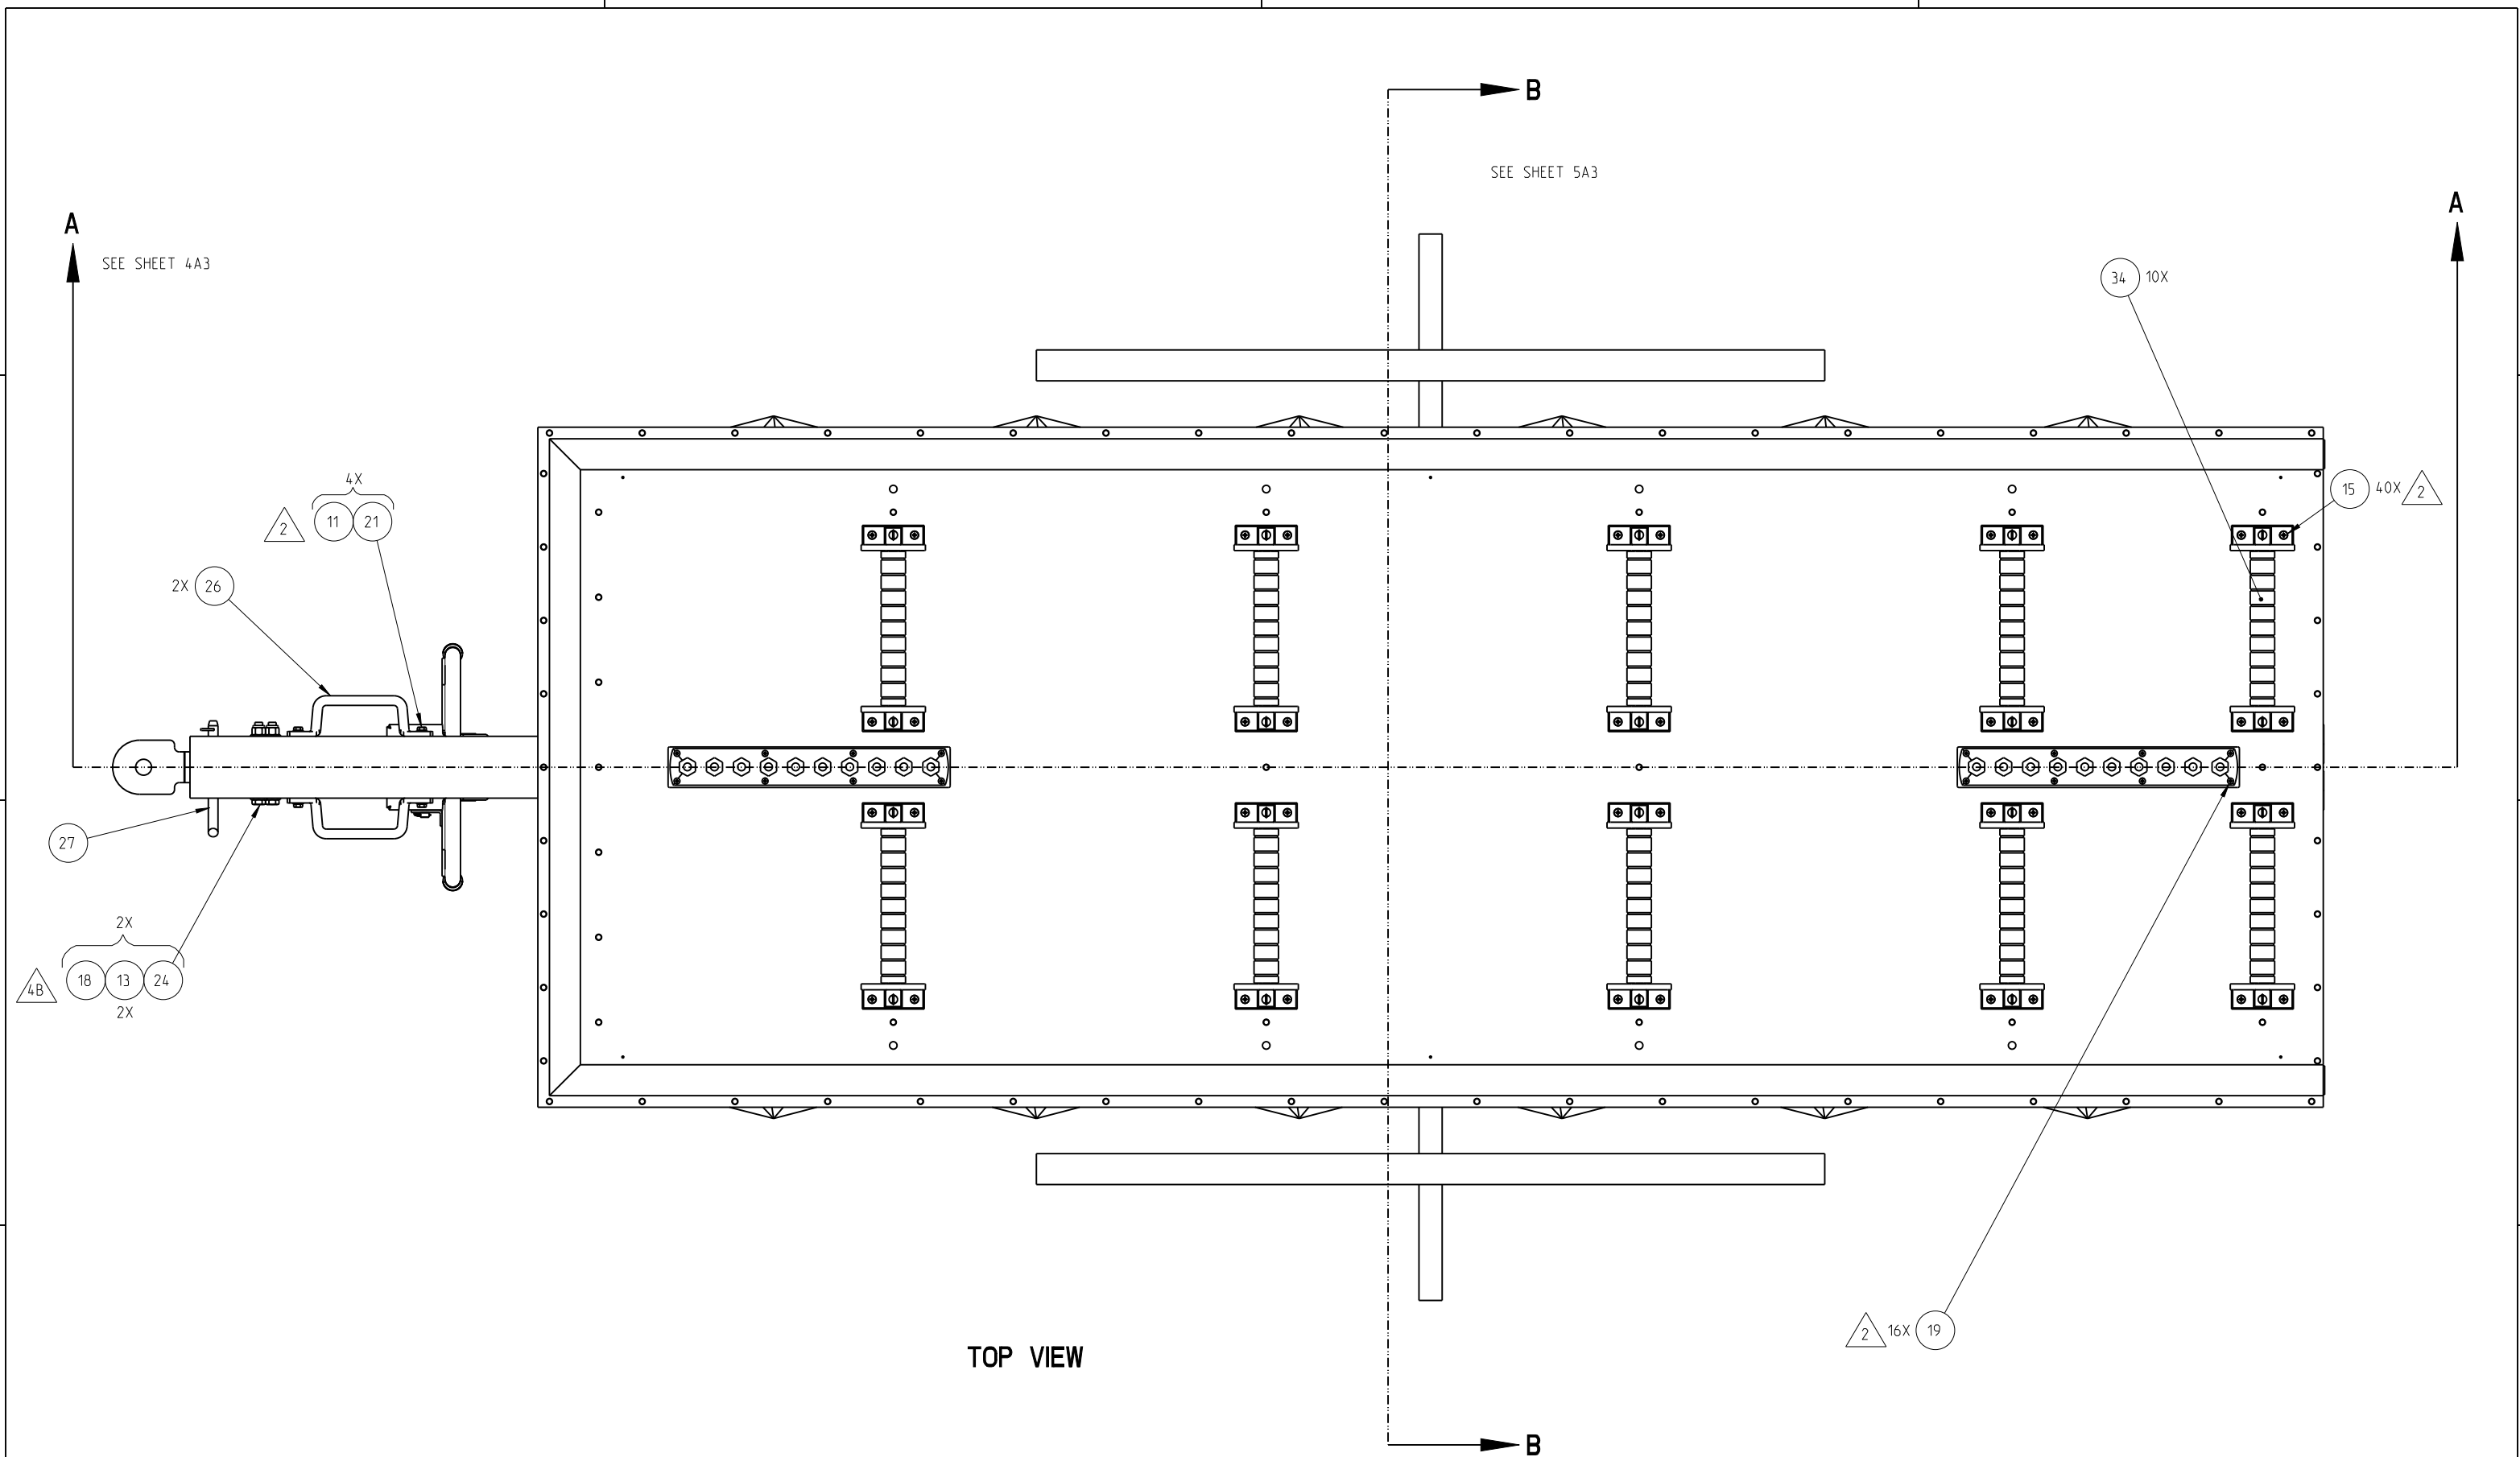


CAGE CODE 80063		DRAWING NUMBER A3417574	
SIZE B	SCALE NONE	SHEET 3 OF 6	REV X1

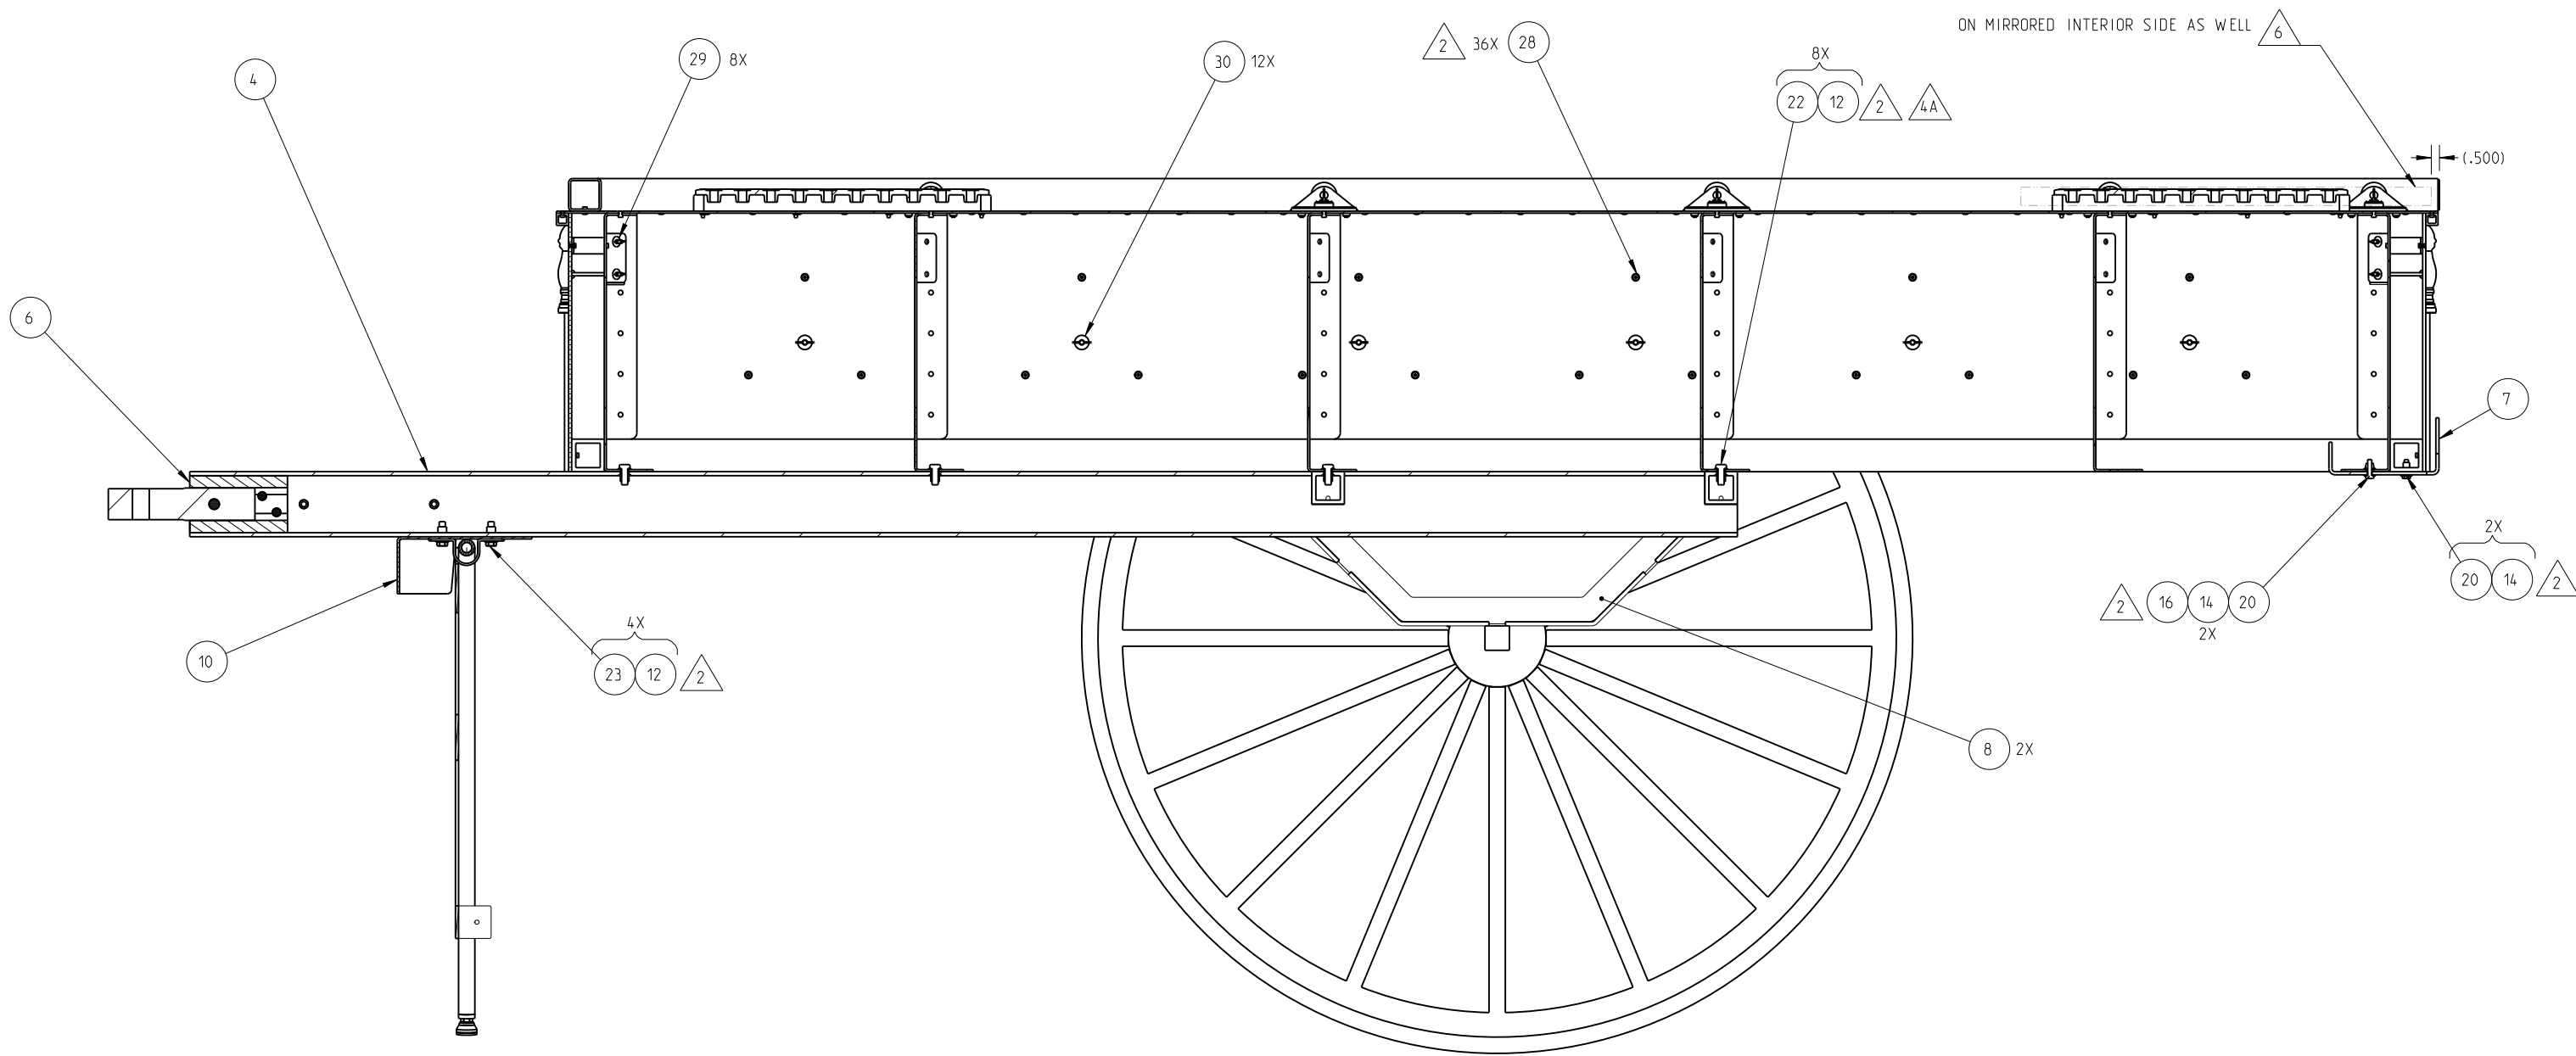

SECTION A-A
SEE SHEET 3D4

CAGE CODE		DRAWING NUMBER	
80063		A3417574	
SIZE	SCALE	SHEET	REV
B	NONE	4 OF 6	X1

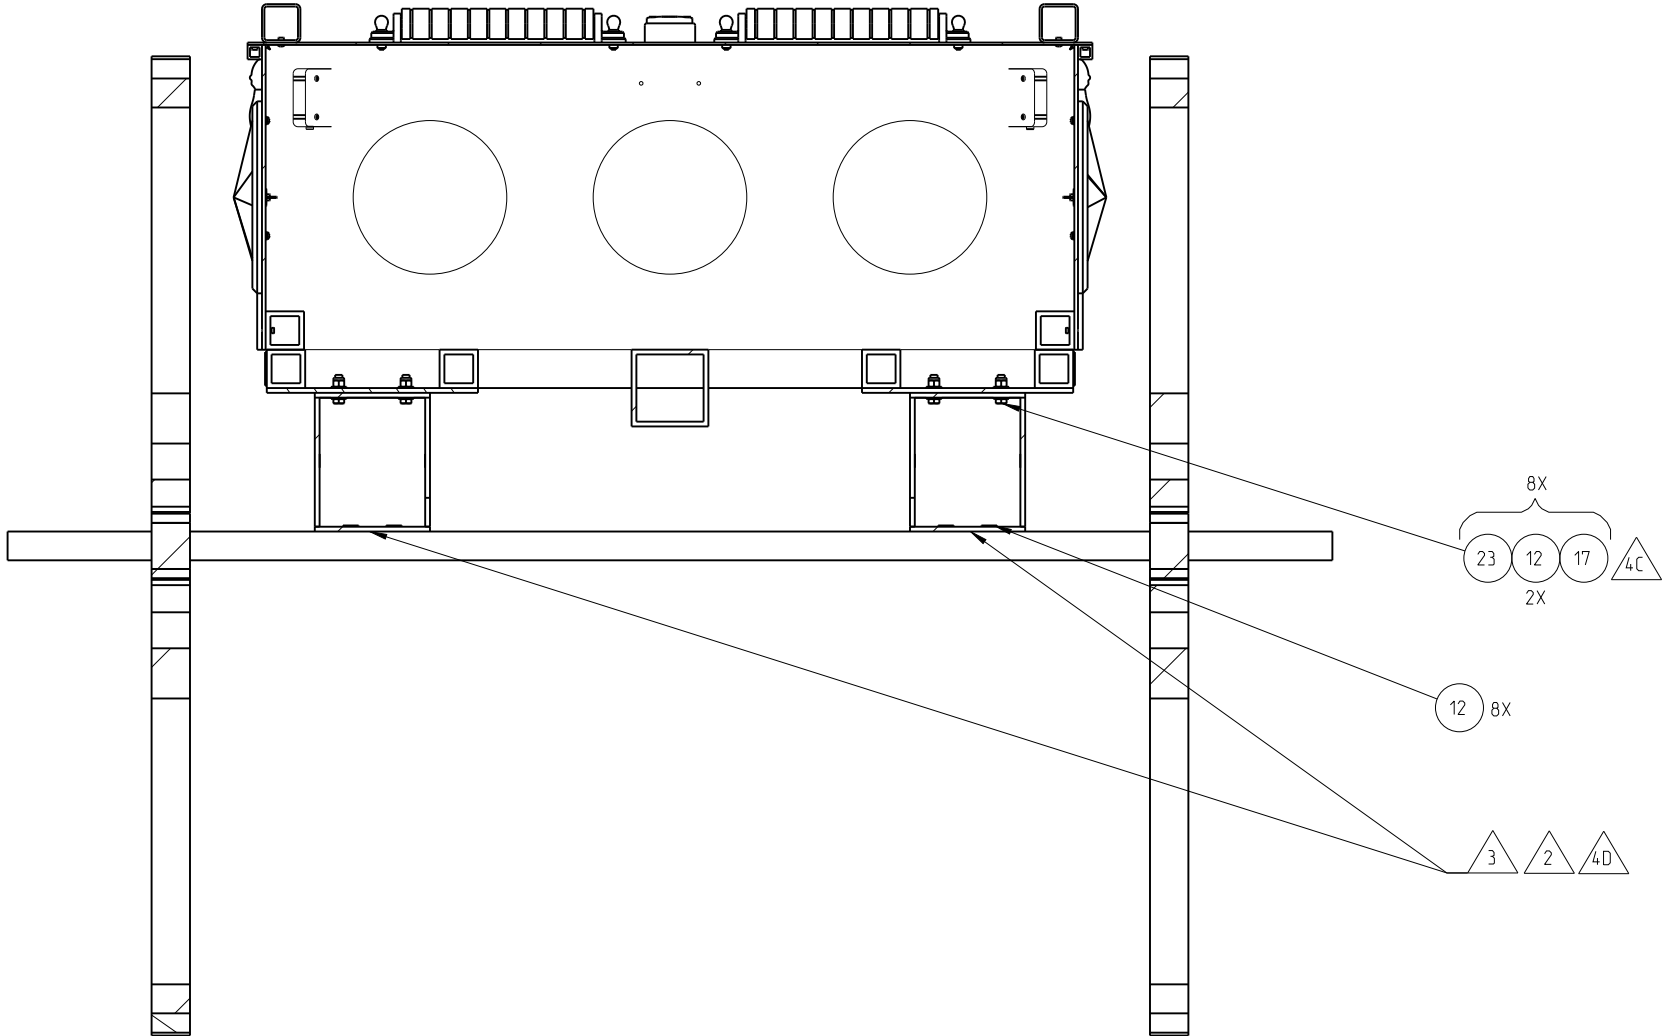

SECTION B-B
SEE SHEET 3D2

CAGE CODE		DRAWING NUMBER		
80063		A3417574		
SIZE	SCALE	SHEET	REV	
B	NONE	5 OF 6	X1	