

1

2

3

4

5

PARTS LIST

PC. NO.	QTY.	DESCRIPTION	SPECIFICATIONS
1	4	OUTER SIDE PLATE	2" X 25" X 151.5", MILD STEEL
2	4	MIDDLE SIDE PLATE	2" X 21" X 149.5", MILD STEEL
3	4	INNER SIDE PLATE	1" X 18" X 146.5", MILD STEEL
4	1	OUTER BOTTOM PLATE	2" X 27" X 27", MILD STEEL
5	1	MIDDLE BOTTOM PLATE	2" X 23" X 23", MILD STEEL
6	1	INNER BOTTOM PLATE	2" X 19" X 19", MILD STEEL
7	4	BUNA-N PADDING	8.25" X 8.25" X 2", BUNA-N OR SILICONE, DUROMETER 50-80
8	3	PAD EYE	1-3/4" X 3-1/2" X 6", ASTM A131/131M or MIL-S-22698 GRADE DH-36 STEEL
9	4	TOP SEAL GASKET	1/4" THICKNESS, 27" X 27" SQUARE OUTSIDE DIMENSIONS, 23" X 23" CENTERED SQUARE CUTOUT (2" WIDE GASKET) (ONE PIECE GASKET WITH BOLT HOLES), BUNA-N OR SILICONE, DUROMETER 20-40
10	4	SHIELDED PLUG PLATE	1" X 9-1/2" X 9-1/2", MILD STEEL
11	1	TOP PLATE	2" X 27" X 27", MILD STEEL
12	2	DIVIDER PLATE	1/2" X 17" X 146.5", MILD STEEL
13	2	CHANNEL	18" DEPTH X 4.2" FLANGE WIDTH X 27" LENGTH, MC 18 X 58, MILD STEEL
14	4	SHIELDED PLUG PADDING	7" X 7" X 1/2", BUNA-N OR SILICONE, DUROMETER 20-40
15	14	STUD	3/4"-10UNC X 6" LENGTH, ALLOY STEEL, GRADE 5 OR BETTER
16	14	LOCK WASHER	3/4" LOCK WASHER, STEEL/CRES
17	14	LOCK NUT	3/4"-10UNC, NUT WITH NYLON INSERT, STEEL/CRES
18	1	RUBBER PAD	19" X 19" X 1/8" THICKNESS, BUNA-N OR SILICONE, DUROMETER 20-40

Document No. 6042ZN02
Attachment (A)
DWG 2370.2-8143V Rev Z

FABRICATION NOTES

- THIS DRAWING PROVIDES FABRICATION DETAILS FOR A LEAD SCREW-TIE ROD DISPOSAL BOX.
- WELDING REQUIREMENTS:
 - WELDING SHALL BE IN ACCORDANCE WITH AMERICAN WELDING SOCIETY D1.1.
 - WELD SIZES SHOWN ARE MINIMUM REQUIREMENTS.
 - SNIPES CORNERS IN THE WAY OF FILLETS AND EXISTING WELDS. CLOSE ALL SNIPES AT WELDING. SEQUENCE THE WELDING OF MATERIALS AS NECESSARY TO MINIMIZE DISTORTION.
- BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND WELD SPLATTER. ALL OTHER SURFACES TO BE FINISHED TO 250 RMS.
- WELD PCS 1, 2, AND 3 TOGETHER TO ACHIEVE FINALL WALL THICKNESS. WELD PCS 4, 5, AND 6 TOGETHER TO ACHIEVE FINAL WALL THICKNESS. WELD SHAPE AND SIZE AT VENDOR'S DISCRETION UNLESS OTHERWISE NOTED.
- PAINTING REQUIREMENTS:
 - INTERIOR OF THE BOX WILL BE PRIMED WITH NON-HAZARDOUS, RUST INHIBITIVE PRIMER.
 - EXTERIOR WILL BE LEFT AS BARE METAL.
- EACH CONTAINER SHALL HAVE A BUNA-N OR SILICONE RUBBER GASKET FOR SEALING EACH TOP. EACH GASKET SHALL BE PROVIDED WITH A CURE DATE AND AT LEAST 85% OF SHELF LIFE REMAINING UPON SHIPMENT. GASKETS SHALL BE SHIPPED UNINSTALLED.
- THE TWO THREADED HOLES ON THE SIDE OF PIECE 11 SHOULD BE ORIENTED ON THE OPPOSITE SIDE OF THE CHANNEL.
- NO CADMIUM IS TO BE USED ON THE BOX. DO NOT USE CADMIUM PLATED FASTENERS. STEEL FASTENERS SHALL HAVE A BLACKENED, ZINC PLATED FINISH OR NO FINISH.
- PC 8, PADEYES SHALL BE SHIPPED UNATTACHED TO BOX.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	CHANGE BY	APPROVAL
	01-K	UNKNOWN			
	L	ADDED P2J2.2 PARTIAL PENETRATION TO WELD NOTE ON SH 3. CONSISTENT WITH S8G-225AS0034	3/15/2007	E. HOWE (SOF)	K. HOOVER (SOF)
	M	ADDED P2J2.2 PARTIAL PENETRATION TO WELD NOTE ON SH 3. CONSISTENT WITH S8G-225AS0034.	10/9/2008	J. MUNNELLY (SOF)	K. HOOVER (SOF)
	N	DELETED EXTRA PADEYE FROM SH 7A. ADDED DIMENSIONS TO LOWER PADEYE IN SH 5A.	4/22/2009	M. KELLY (SOF)	R. HABERKORN (SOF)
	O	CORRECTED NUMBER OF PADEYES ON MATERIAL LIST.	4/22/2009	M. KELLY (SOF)	K. HOOVER (SOF)
	P	DELETED REFERENCE TO FULL PENETRATION WELDS.	4/28/2009	M. KELLY (SOF)	K. HOOVER (SOF)
	Q	CORRECTED VARIOUS ADMIN ERRORS, INCL PROPPER DESIGN OF BOX AND WELD CALLOUTS.	7/21/2009	M. KELLY (SOF)	K. HOOVER (SOF)

CONTINUED ON SHEET 2

REVISION OF SHEETS

SHEET	1	2	3	4	5	6
REVISION	Z	Z	W	Y	Y	W

APPROVAL/CONCURRENCE

	SIGNATURE	DATE
COGNIZANT ENGINEER	<i>Zachary Blair</i>	1/16/18
CHECKED BY	<i>SBaker</i>	1/16/18
SUPERVISOR	<i>A W</i>	1/16/18
CONCURRENCE	N/A	

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES, AND TOLERANCES ARE AS FOLLOWS:

UP TO 24" = $\pm 1/8"$
24" AND UP = $\pm 1/4"$
ANGLES = $\pm 1^\circ$

DRAWING DIMENSIONAL AND GEOMETRIC TOLERANCES ARE PER ASME Y14.5M-1994



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING



NO DEVIATIONS SHALL BE MADE WITHOUT C-2370 APPROVAL

TITLE
LEAD SCREW-TIE ROD DISPOSAL BOX

SIZE A CAGE CODE 81601 SCALE NOT TO SCALE

DRAWING No. 2370.2-8143V RF No. RF-8143V

SHEET No. Sheet 1 REV Z

1

2

3

4

5

REVISIONS (CONTINUED FROM SHEET 1)

ZONE	REV	DESCRIPTION	DATE	CHANGE BY	APPROVAL
	R	CHANGE WASHERS AND NUTS, INCL OMISSION OF CADMIUM. OMITTED PADEYE WELD INFO AND FIX QTY TYPO.	6/1/2010	P. JOHNSON (SOF)	R. HABERKORN (SOF)
	S	CHANGE WASHERS AND NUTS, INCL OMISSION OF CADMIUM. OMITTED PADEYE WELD INFO AND FIX QTY TYPO.	9/1/2010	J. LABORDE (SOF)	R. HABERKORN (SOF)
	T	CHANGE SPECS ACCEPTABLE FOR PC. 9.	9/16/2010	D. MIDDLETON (SOF)	R. HABERKORN (SOF)
	U	UPDATE TO NEW DWG FORMAT, ADDED 1/2-45° BEVEL TO PADEYES AND WELDING PADEYES.	6/13/2011	W. SIFUENTES (SOF)	R. HABERKORN (SOF)
ALL	V	CHANGE TO LOCK FASTENERS, UPDATE LOADED WEIGHT, REMOVED DELETED FAB NOTES, REMOVE WELDING INFORMATION FOR PADEYES.	3/14/2011	H. HADDIX (SOF)	R. HABERKORN (SOF)
1-C1, 2-C4, 3-B1, 4-A1, 6-A2	W	ADD AND REARRANGE STUDS/WASHERS/LOCKNUTS TO PREVENT INTERFERENCE DURING DOWNENDING/UPRIGHTING	7/18/2012	H. HADDIX (SOF)	R. HABERKORN (SOF)
1-A5, 2-B5, 5-B4	X	INCREASE ANGLE OF PADEYE BEVEL TO 52°.	4/1/2013	H. HADDIX (SOF)	R. HABERKORN (SOF)
1-A5, 2-B1, 2-B5, 4-B3, 5-B5	Y	ADD FAB NOTE 9, INCREASE DIAMETER OF BOLT THRU-HOLES, CHANGE DIRECTION OF ANGLE ON PADEYE BEVEL.			
1-D3 2-B3	Z	CHANGE PADEYE MATERIAL TO DH-36 STEEL	1/16/2018	Z. BLAIS (SOF)	R. HABERKORN (SOF)

FABRICATION NOTES (Continued from Sheet 1)

9. PC 8, PADEYES SHALL BE SHIPPED UNATTACHED TO BOX.
10. BOX SHALL BE SHIPPED WITH NON-LOCK NUTS INSTALLED ON STUDS (PC 15). SHIP LOCKING NUTS (PC 17) UNINSTALLED.



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING



NO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

LEAD SCREW-TIE ROD DISPOSAL BOX

RF No.

RF-8143V

Drawing No.

2370.2-8143V

REV.

Z

SHEET NO.

Sheet 2


1

2

3

4

5

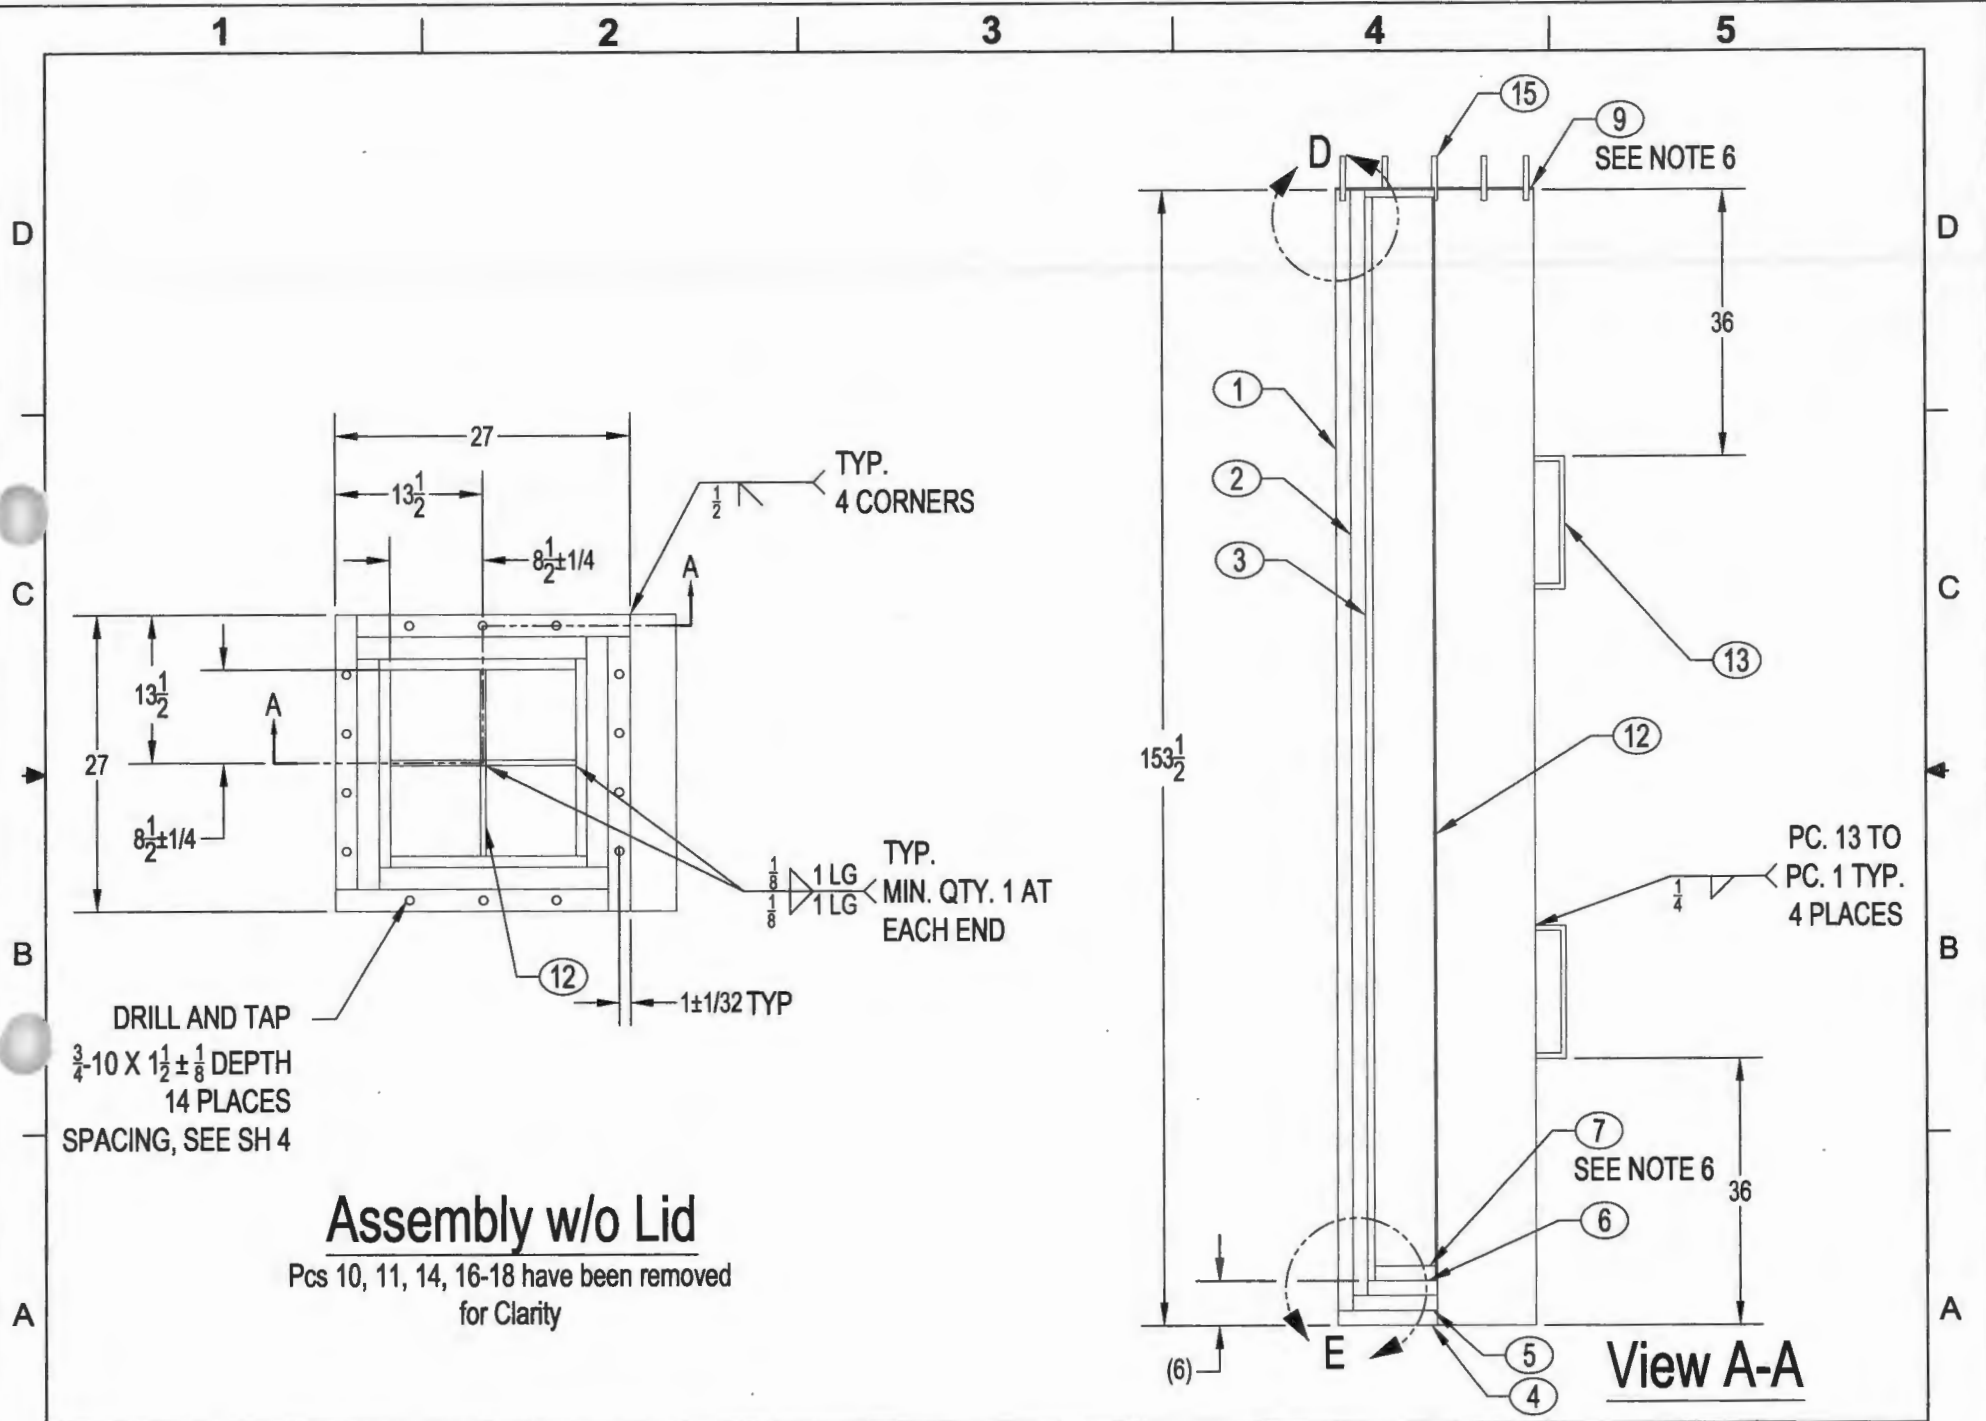


Assembly w/o Lid

Pcs 10, 11, 14, 16-18 have been removed
for Clarity

View A-A

	NORFOLK NAVAL SHIPYARD C-2370, REACTOR SERVICING	NO DEVIATIONS SHALL BE MADE WITHOUT CODE 2370 APPROVAL	TITLE LEAD SCREW-TIE ROD DISPOSAL BOX	RF No. RF-8143V	Drawing No. 2370.2-8143V	REV. W	SHEET NO. Sheet 3
--	---	---	--	--------------------	-----------------------------	-----------	----------------------

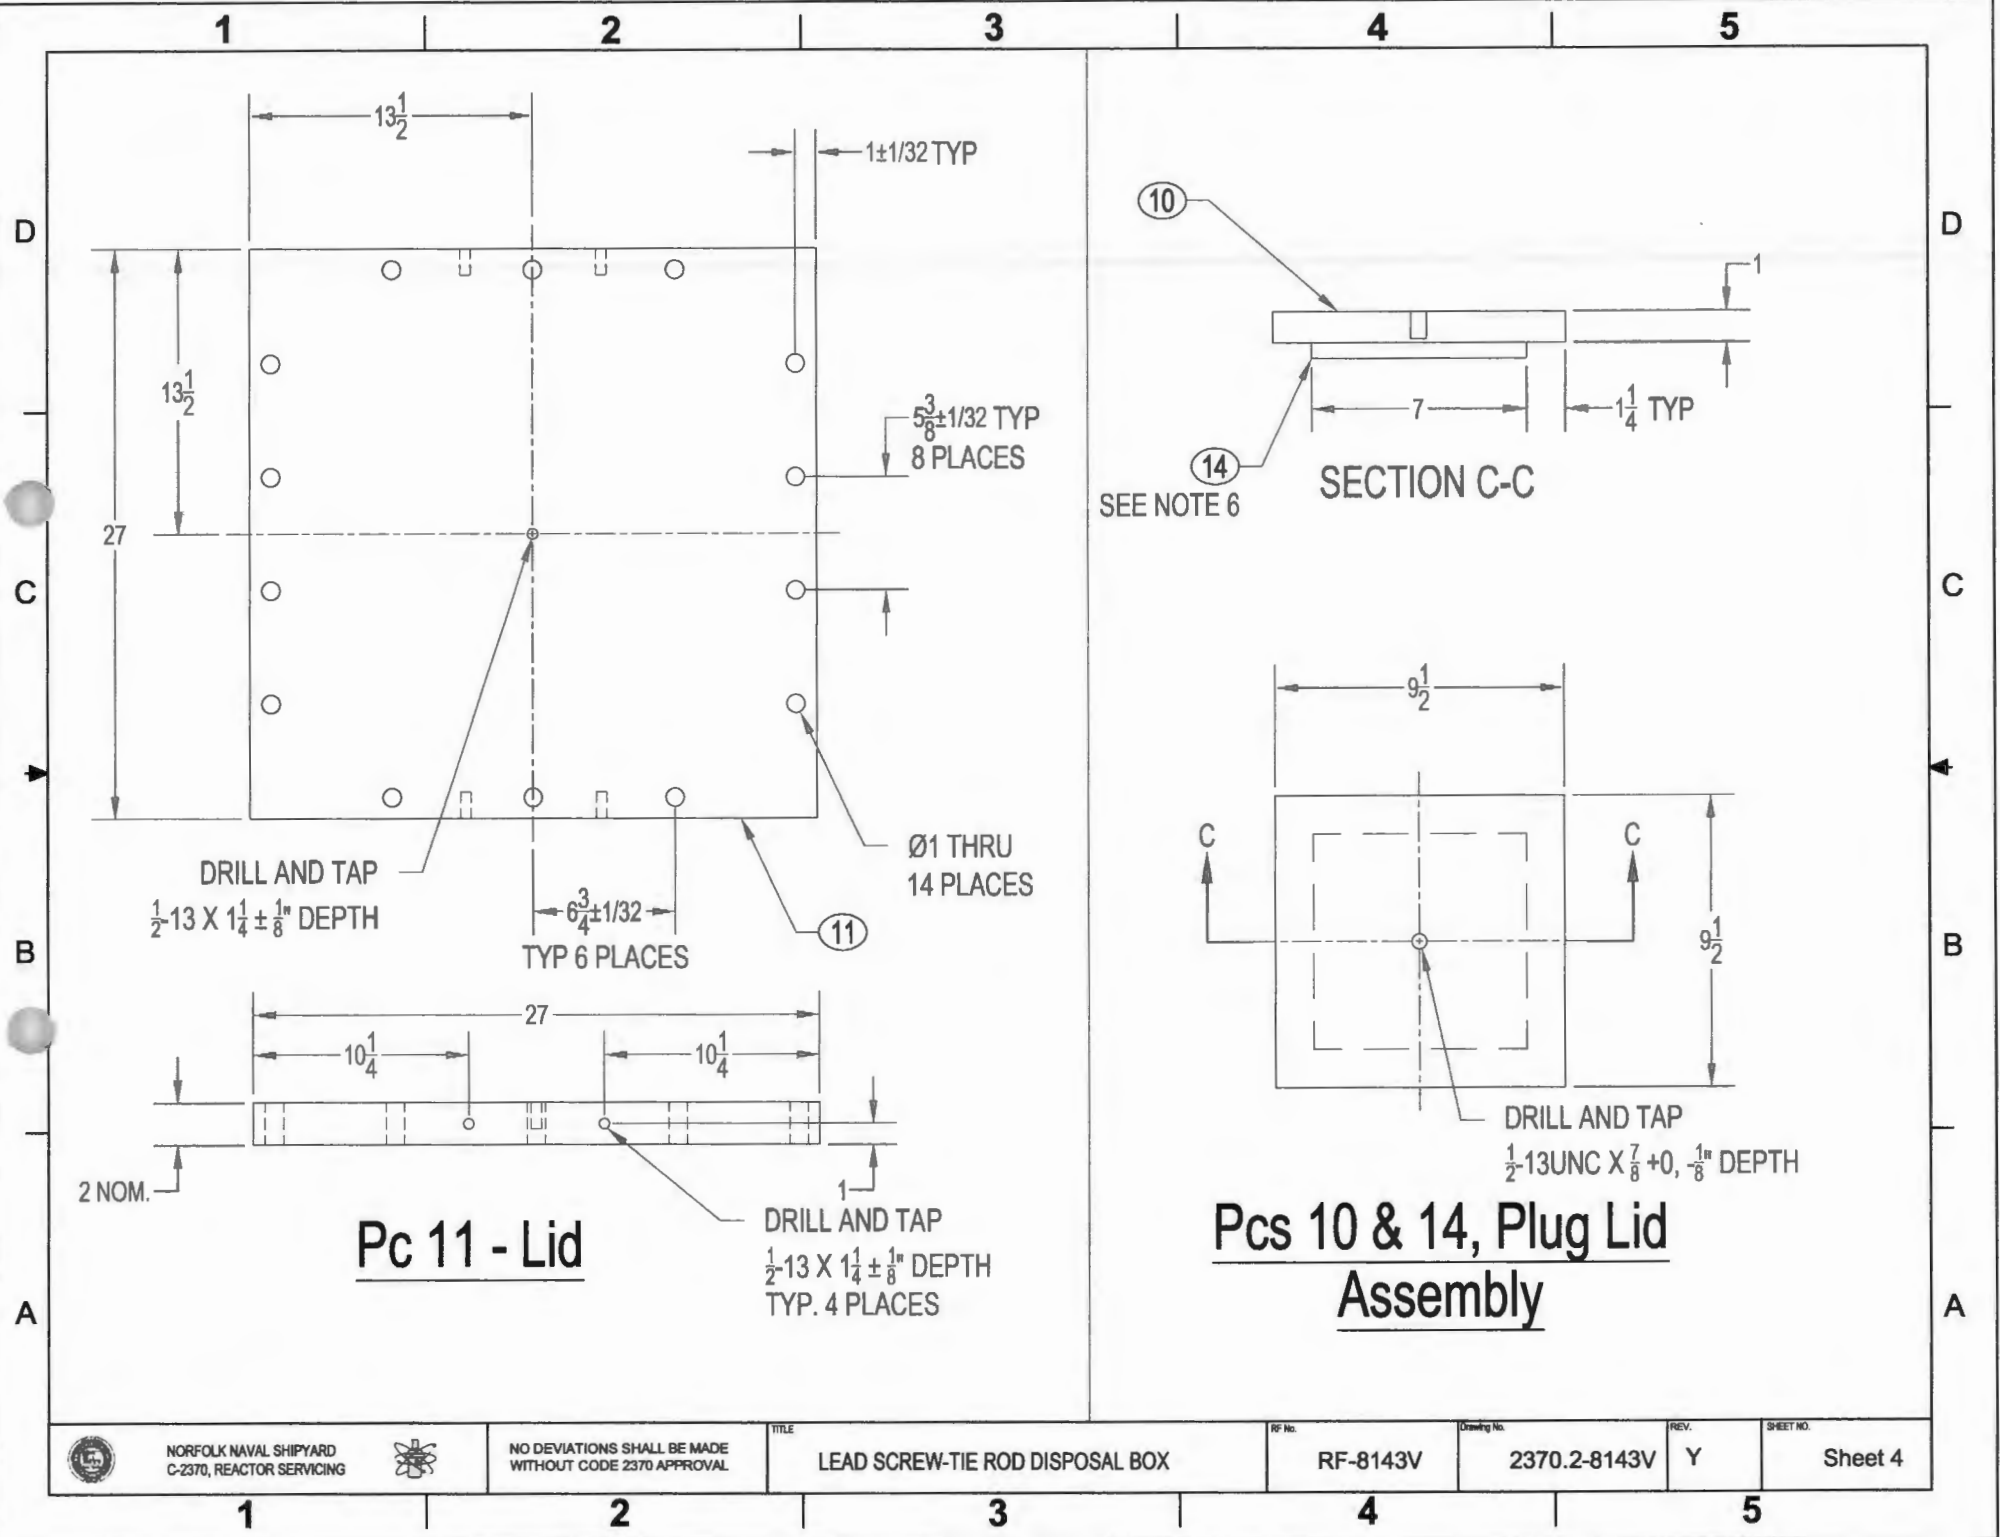

1

2

3

4

5

D

C

B


A

D


C

B



A

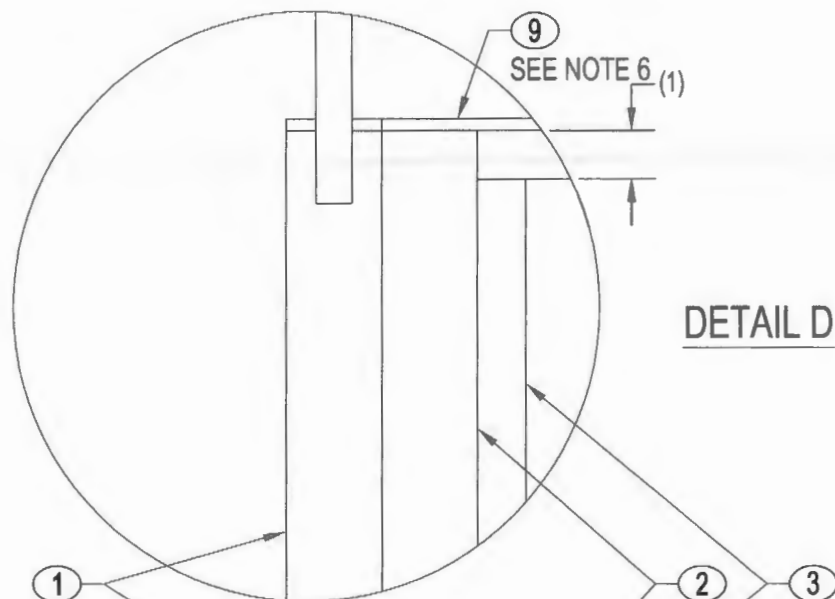

DETAIL D

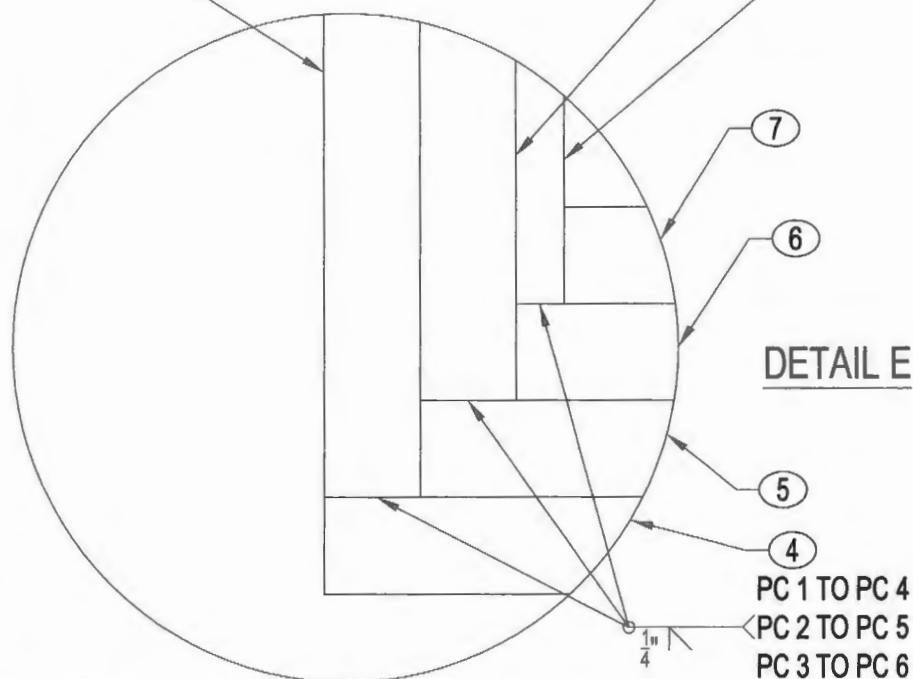

DETAIL E

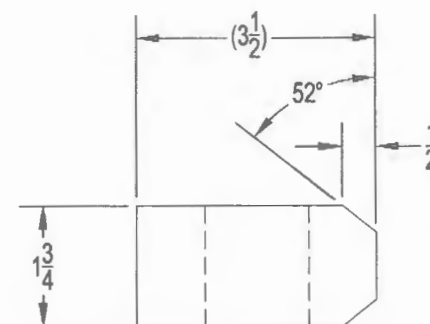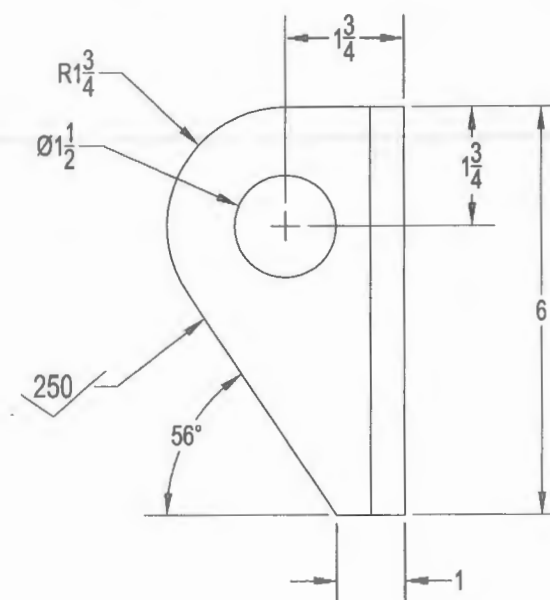

PADEYE (PC 8) SHALL BE SHIPPED
UNATTACHED TO BOX, NO WELDING
REQUIRED.



NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICING



NO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

LEAD SCREW-TIE ROD DISPOSAL BOX

RF No.

RF-8143V

Drawing No.

2370.2-8143V

REV.

Y

SHEET NO.

Sheet 5

1

2

3

4

5

1

2

3

4

5

D

C

B


A

D


C

B

A

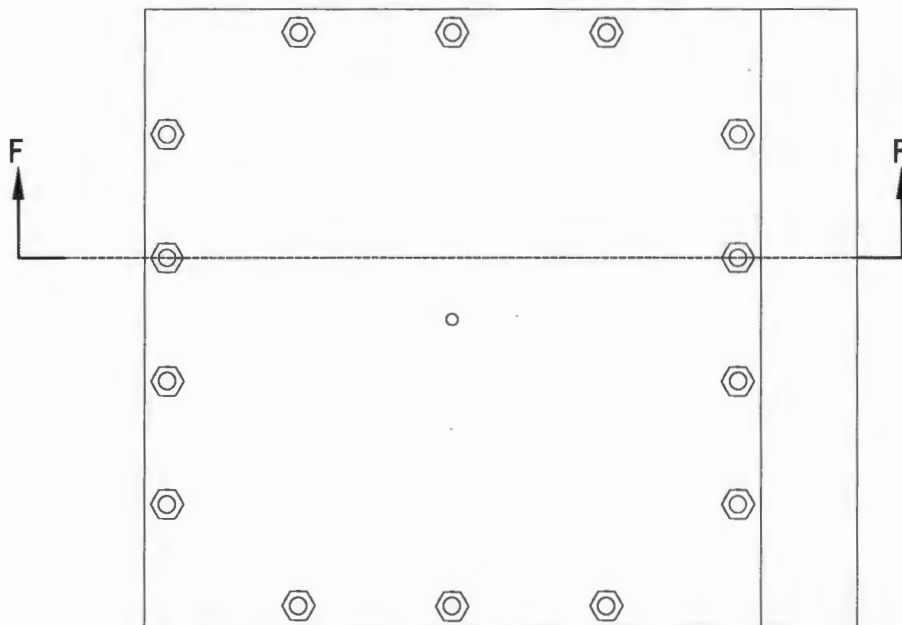

TOP VIEW

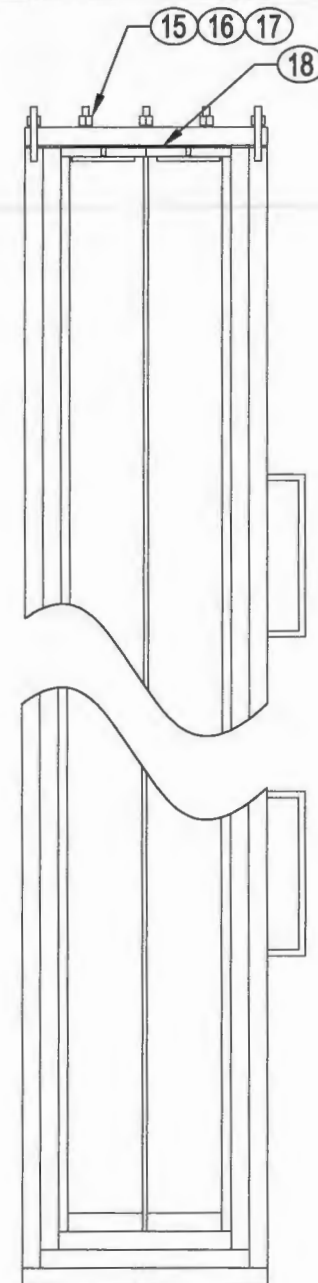Final Assembly

SECTION F-F

NORFOLK NAVAL SHIPYARD
C-2370, REACTOR SERVICINGNO DEVIATIONS SHALL BE MADE
WITHOUT CODE 2370 APPROVAL

TITLE

LEAD SCREW-TIE ROD DISPOSAL BOX

RF No.

RF-8143V

Drawing No.

2370.2-8143V

REV.

W

SHEET NO.

Sheet 6

1

2

3

4

5