

Requirements

1. Materials: Case - High Density Polyethylene (HDPE), Color #26132 per Fed STD 595a or equal
Cushioning - flame retardant, convoluted, polyether, polyurethane conforming to MIL-P-26514 Type 1, Class 2, Grade A
2. Cushioning: Both top and bottom cushion pads shall be securely adhered to the container.
3. Label Holder - Not required.

4. Identifications: The following copy information shall be molded in the recessed portion of the container base location as shown on sheets 5 & 7. Character size shall be .125" minimum:

CONTAINER SHIPPING AND STORAGE

FOR CIRCUIT CARDS OR MODULES

CONTAINER NSN _____ (Insert proper NSN)

P/N 80132-P069- _____ (Insert P069 dash number corresponding to NSN in accordance with Table I)

MFG (FSCM) AND PART NUMBER _____ (Insert appropriate Vender part number corresponding to NSN)


PROPERTY OF US GOVERNMENT

CONTRACT NO. & DATE OF MANUFACTURE, e.g. N00383/12/C/3456 03/83

5. Testing. The supplier is responsible for the performance of all inspection and test requirements specified herein, to be performed at his facility or a commercial testing laboratory. First article tests shall be witnessed by a government representative appointed by the contracting office. The government reserves the right to perform any reinspection or testing deemed necessary.

Distribution Statement A; Approved for public release; distribution is unlimited

REVISION		DATE	DWG	APP
P	Revised Para 5.1.3, added P069-7 Dwg Views to Sht 3	8/87	WFG 10/86	EBB 10/86

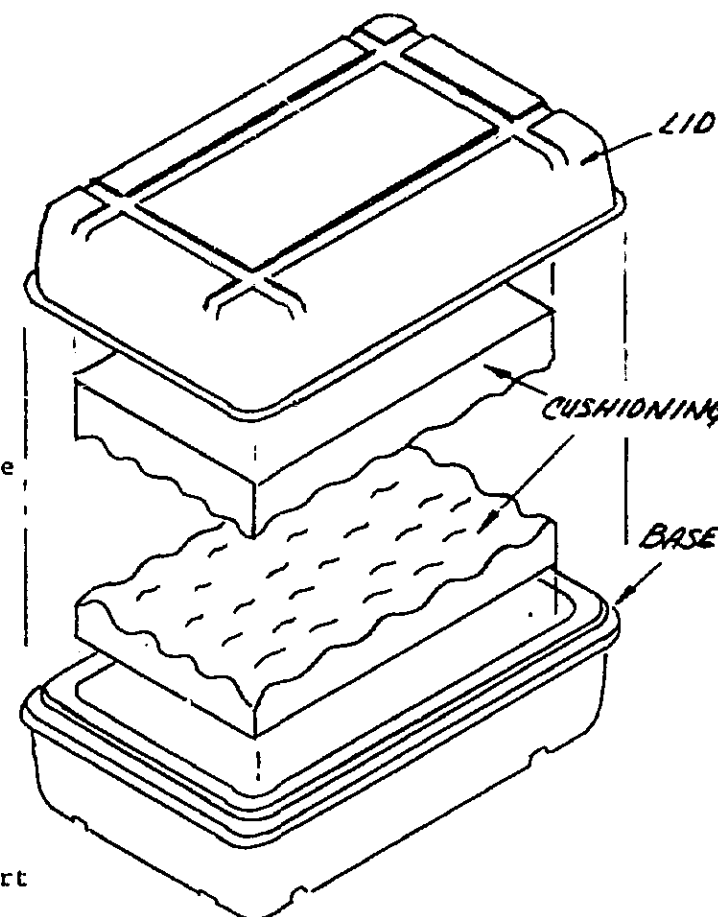FIGURE I
TYPICAL

DATE		AVIATION SUPPLY OFFICE		
DRAWN	12/74	BLOW MOLDED REUSABLE CONTAINER ASSY. FOR CIRCUIT CARDS AND MODULES		
APP	12/74			
MB				
DIMENSIONS IN INCHES		CODE IDENT. 80132	DWG NO. P069	REV. P
TOL * .125		SCALE ~	SHEET 1 OF 7	

5.1 First Article Tests. First Article tests shall be performed when one of the following applies:

- a. The container is being made by a manufacturer who has not previously submitted a first article sample.
- b. The container material, construction, etc. has been changed since the previous first article sample.

5.1.1 Drop Test. A total of eight (80) drops shall be performed with a dummy test load, supplied by the manufacturer, which conforms to Table 2. The tests shall conform to objective A of ASTM D-775. Drop test height shall be forty-eight (48) inches and the container shall be dropped eight (8) times on each of the four (4) corners and four (4) edges of the closure and on the container top and bottom. Any cracking of the container surfaces or any damage which would impair the functional performance of the container shall be cause for rejection.

5.1.2 In the event the first article sample fails the tests, the container shall be redesigned to correct the area(s) of deficiency and retested. ASO, Code EPPL-A shall be notified in writing of any failures and complete details as to how the design of the container will be changed to correct the area(s) of deficiency.

5.1.3 Compression/Deflection Test. This test shall be performed without dummy load at an ambient temperature of $70^{\circ}\text{F} \pm 10^{\circ}$. The container shall be placed/centered on the lower platen of the test machine. A top platen of .25 inch steel shall be provided and placed/centered on the top of the container. Both upper and lower platens shall be larger than the overall length and width of the container. Apply the load with a continuous motion of the testing machine at a speed of 0.5 ± 0.1 in (12.7 $\pm$ 2.5mm)/min. With the applied load, the container height shall not compress more than the deflection specified (see Table I). Deflection of the steel platen during test shall be kept to a maximum of .25 inches therefore a support brace or heavier platen shall be required on the larger cases (i.e., P069-6 & -7).

TABLE (I)
Min Load Max Deflection
(Pounds) (Inches)



P069-1	1250	.75
-2	1250	1.25
-3	1600	.75
-4	1600	1.25
-5	750	.75
-6	2600	1.25
-7	3000	1.50

5.1.4 After successful completion of the test, the first article sample with the dummy load, and the data requirements specified on Form DD 1423 of the contract, shall be submitted to ASO, Code EPPL-A for approval.

DRAWN		DATE		AVIATION SUPPLY OFFICE			
PEP		12/74		BLOW MOLDED REUSABLE CONTAINER ASSY.			
APP MB		12/74		FOR CIRCUIT BCARDS AND MODULES			
DIMENSIONS IN		CODE IDENT.		DWG NO.		REV.	
INCHES		80132		P069		P	
TOL $\pm$ 125		SCALE None		SHEET 2		OF 7	

5.2 Production Testing. Containers must undergo quality assurance testing. One percent of a minimum of one sample, whichever is greater, from each lot must be tested. A lot shall consist of any total scheduled shipment quantity of any single size container under contract. Representative sampling shall be used, i.e., the samples are to be selected at random throughout the lot. If any sample fails a test, the number of original samples shall be doubled and retested. If any retest samples fail, the lot shall be rejected. A rejected lot may be reworked only once. After lot correction (rework), representative samples, as defined above for quantity and method of selection shall be submitted to production retesting.

5.2.1 Drop Test. The sample shall be loaded and drop tested as described above (para. 5.1.1) except that the container shall be dropped two (2) times on each surface described in paragraph 5.1.1 a total of twenty (20) drops. Any cracking of the container surface, or any damage which would impair the functional performance of the container shall be cause for rejection.

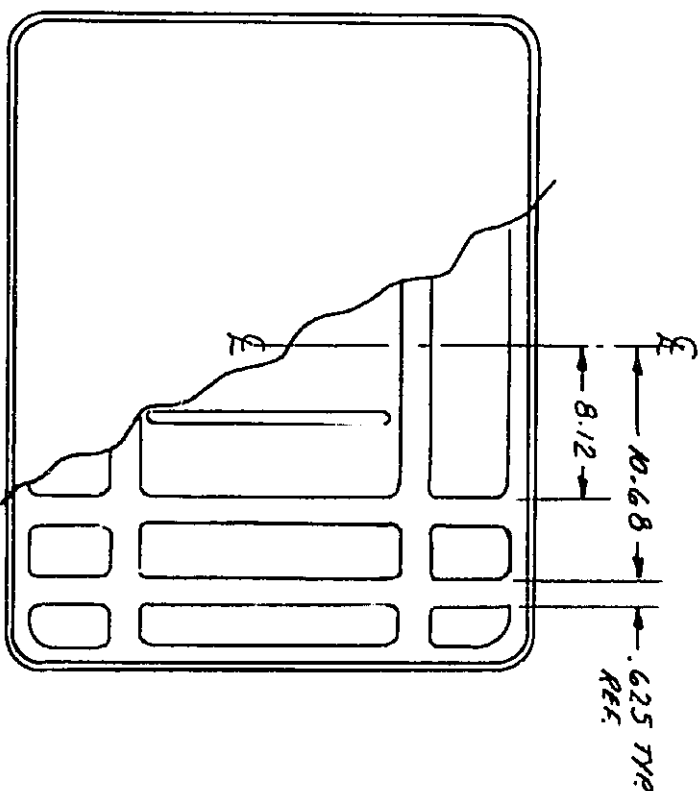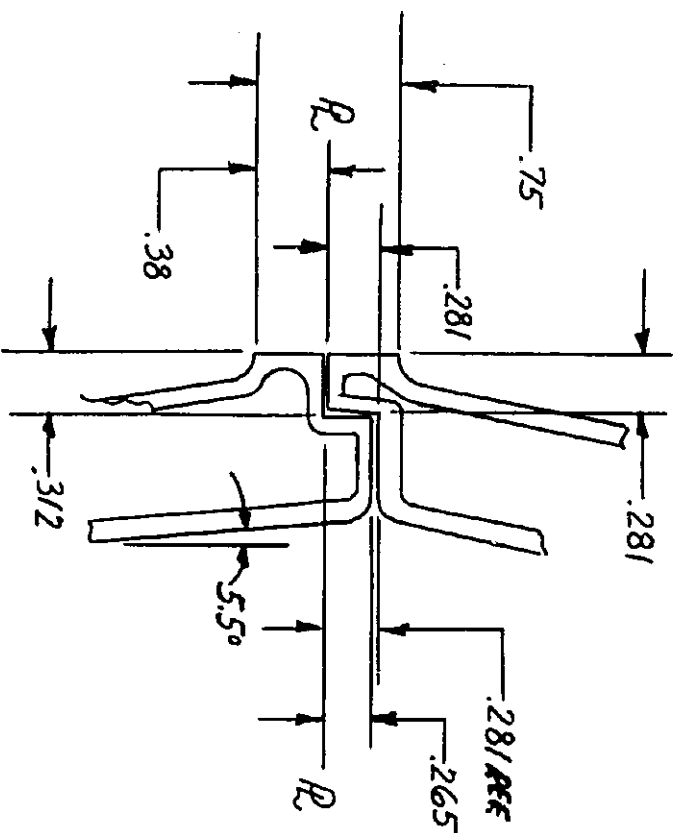

DETAIL X1
closure
P069-7 ONLY


DETAIL X2
TAPE TRACK
P069-7 ONLY

		DATE		AVIATION SUPPLY OFFICE					
DRAWN		12/74		BLOW MOLDED REUSABLE CONTAINER ASSY. FOR CIRCUIT CARDS AND MODULES					
PEP									
APP		12/74							
MB									
DIMENSIONS IN INCHES				CODE IDENT.		DWG. NO.		REV.	
				80132		P069		P	
TOL ± .125				SCALE None		SHEET 3		OF 7	

TABLE II


TABLE II															
PART NO.	DIMENSIONS, INCH										Nom. Cush. thickness K	DUMMY TEST LOAD		CONTAINER	
	A	B	C	D	E	F	G	H	J	O.D., inch		WT. LBS.	TYPE	IRM8145-	
80132-	A	B	C	D	E	F	G	H	J						
P069-1	9.25	11.75	2.62	1.25	2.50	1.62	0.81	3.50	4.75	0.75 "	8.5 X 6.0 X 1.00	3	I	00 260 9556 TA	
P069-2	9.25	11.75	5.00	2.44	4.88	4.00	2.00	3.50	4.75	1.50 "	8.5 X 6.0 X 3.25	3	I	00 260 9548 TA	
P069-3	11.25	13.75	2.62	1.25	2.50	1.62	0.81	4.50	5.75	0.75 "	10.5 X 8.0 X 1.00	4	I	00 260 9559 TA	
P069-4	11.25	13.75	5.00	2.44	4.88	4.00	2.00	4.50	5.75	1.50 "	10.5 X 8.0 X 3.25	4	I	00 260 9562 TA	
P069-5	5.25	7.25	2.56	1.19	2.38	1.62	.081	2.00	3.00	0.75 "	5.0 X 3.0 X 1.00	2	IT	01 014 0440 TA	
P069-6	14.41	20.91	5.00	2.44	4.88	4.00	2.00	6.00	9.00	1.50 "	16.0 X 10.0 X 2.12	3	I	01 012 4088 TA	
P069-7	14.44	27.00	7.09	3.50	7.00	6.00	3.00	6.00	12.00	* 2.50"	20.0 X 10.0 X 2.60	3	I	01 164 4073 TA	

*P069-7 for special cushioning requirement see detail Z below
 **P069-7 for special closure and extra tape track location see details X₁ & X₂ sheet 3.

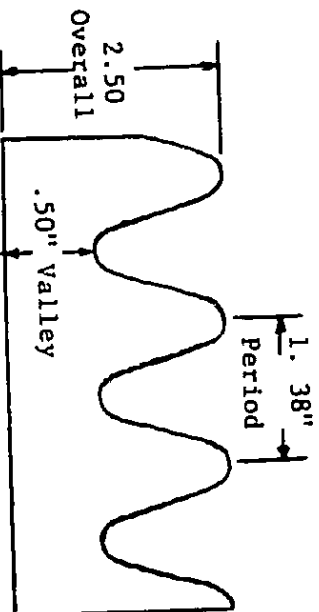

DRAWN		DATE		AVIATION SUPPLY OFFICE			
PEP		12/74		BLOW MOLDED REUSABLE CONTAINER ASSY.			
APP		12/74		FOR CIRCUIT CARDS AND MODULES			
MB				CODE IDENT.		Dwg NO.	
DIMENSIONS IN INCHES				80132		P069	
TOL. .125				SCALE		SHEET 4 OF 7	
						REV. P	

SEE PARA 4
(SWATT)

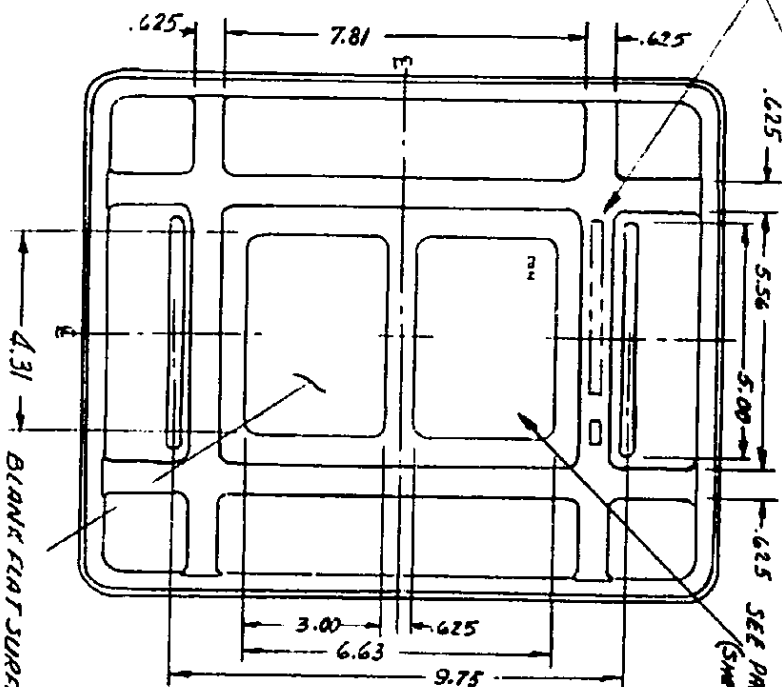


BLANK FLAT SURFACE

SEE DETAIL
(SHEETS)
X

NOTE: 1. All Radii shall be standard commercial

1. All Radii shall be standard commercial practice.
2. All draft angles 10° unless otherwise specified.
3. A Tolerance of $\pm .03$ " shall apply to all 3 place decimal dimensions

DATE		AVIATION SUPPLY OFFICE	
DRAWN PEP	12/74	BLOW MOLDED REUSABLE CONTAINER ASSY. FOR CIRCUIT CARDS AND MODULES	
APPROB 12/74			
DIMENSIONS IN INCHES		CODE IDENT.	DWG NO.
TOL ± .125		80132	P069
SCALE	5	of	7
			REV. P

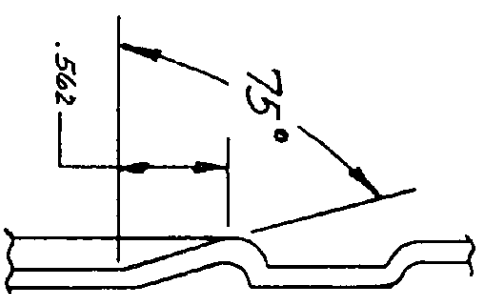

SECTION AA
(REF. SHEETS)

NOTE: —
CUSHIONING TYPICAL
FOR TYPE I & II CONTAINERS
FOR THICKNESS SEE TABLE II
SHEET 4.

DETAIL X
(REF. SHEET 5)

		DATE		AVIATION SUPPLY OFFICE			
DRAWING PEP		12/74		BLOW MOLDED REUSABLE CONTAINER ASSY. FOR CIRCUIT CARDS AND MODULES			
APP MB		12/74					
DIMENSIONS IN INCHES		CODE IDENT.		Dwg NO.		REV.	
10L ± .125		50132		P069		P	
SCALE		SHEET		6 OF 7			

Contract

No. 6



Date of

MYGR.

See

Pat. 4

Sheet 1

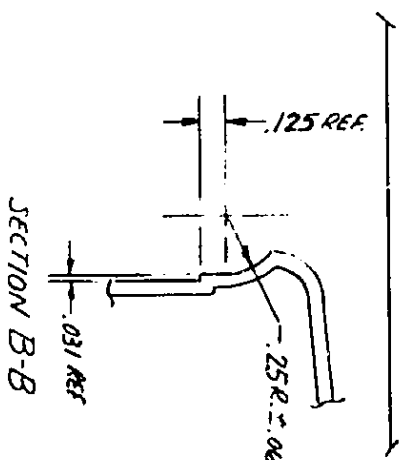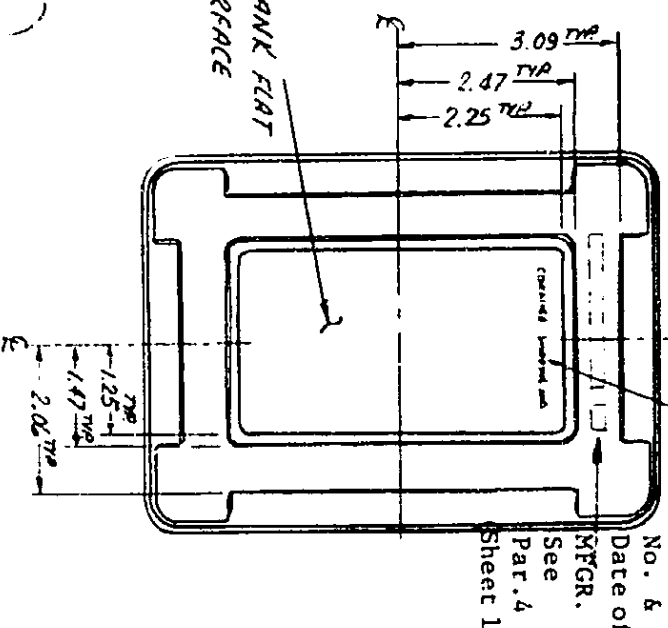

3. A tolerance of $\pm .03$ shall apply to all 3 place decimal dimensions.

		DATE		AVIATION SUPPLY OFFICE	
DRAWM PEP		12/74		BLOW MOLDED REUSABLE CONTAINER ASSY. FOR CIRCUIT CARDS AND MODULES	
APP MB		12/74			
DIMENSIONS IN INCHES		CODE IDENT. 8C132		DWG NO. P069	
SCALE ~		SHEET 7		OF 7	
TOL ± .125				REV. P	