

GATR Site

1x TCRM19G (2U)
1x TC3840-5
3x TC3846-6
1x Simplex SFP (G5751)
1x Simplex SFP (G7551)

12x Links Available (12 used)
8x links to tower
3x links to BOPS
1 link to Command Post

Simplex SFP (G5751)
Tx: 1310nm
Rx: 1550nm

Simplex (1-strand) single mode fiber

Ground Control Approach (GCA) (Bldg. 739)

1x TCRM19G (4U)
1x TC3840-5
2x TC3846-6
1x Simplex SFP (G5751)
1x Simplex SFP (G7551)

8x Links Available (8 used)
8x links to GATR

Simplex SFP (G7551)
Tx: 1550nm
Rx: 1310nm

Simplex SFP (G5751)
Tx: 1310nm
Rx: 1550nm

Simplex (1-strand) single mode fiber

Simplex SFP (G7551)
Tx: 1550nm
Rx: 1310nm

Simplex (1-strand) single mode fiber

Simplex SFP (G5751)
Tx: 1310nm
Rx: 1550nm

Command Post

1x TCRM19D (1U)
1x TC3840-5
1x Simplex SFP (G5751)
1x Simplex SFP (G7551)

4x Links Available (1 used)
1x links to GATR

Simplex SFP (G7551)
Tx: 1550nm
Rx: 1310nm

Simplex (1-strand) single mode fiber

Simplex SFP (G5751)
Tx: 1310nm
Rx: 1550nm

Simplex SFP (G7551)
Tx: 1550nm
Rx: 1310nm

BOPS


1x TCRM19D (1U)
1x TC3840-5
1x TC3846-6
1x Simplex SFP (G5751)
1x Simplex SFP (G7551)

4x Links Available (3 used)
3x links to GATR

TCRM19GR 2U chassis - Front view

GATR

TCRM19GR
(2U chassis)

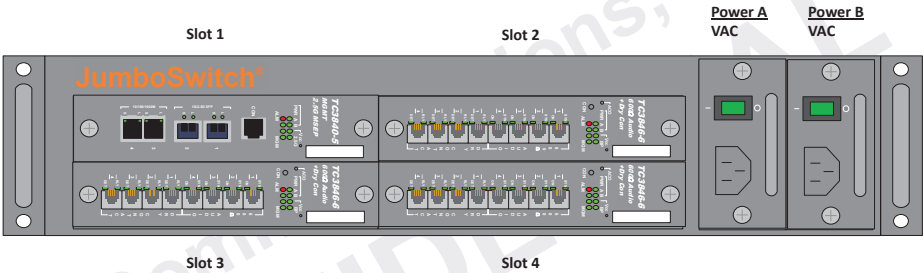


Slot	Part Number	Description
1	TC3840-5	Ethernet management card
2	TC3846-6	4-channel 4-wire 600ohm analog and Bi-directional Dry contact detector and relay over IP
3	TC3846-6	4-channel 4-wire 600ohm analog and Bi-directional Dry contact detector and relay over IP
4	TC3846-6	4-channel 4-wire 600ohm analog and Bi-directional Dry contact detector and relay over IP

	DRAWN BY Jay Su	DRAWING # Page 1/1	TITLE TCRM19GR 2U chassis - Front view	Notes
	DATE August 27, 2025	SCALE NA	CUSTOMER USAF - Maxwell AFB	

TCRM19GR 2U chassis - Front view

Tower

TCRM19GR
(2U chassis)

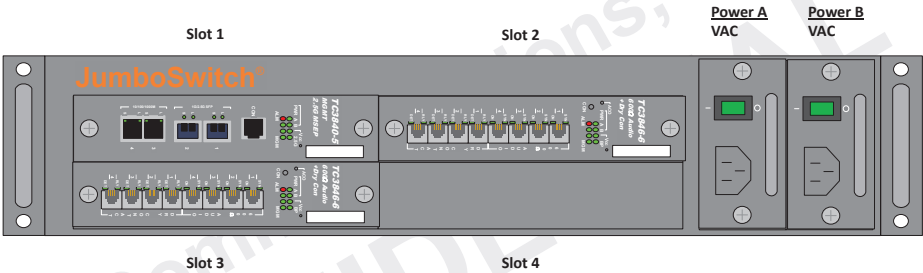


Slot	Part Number	Description
1	TC3840-5	Ethernet management card
2	TC3846-6	4-channel 4-wire 600ohm analog and Bi-directional Dry contact detector and relay over IP
3	TC3846-6	4-channel 4-wire 600ohm analog and Bi-directional Dry contact detector and relay over IP
4		

	DRAWN BY Jay Su	DRAWING # Page 1/1	TITLE TCRM19GR 2U chassis - Front view	Notes
	DATE August 27, 2025	SCALE NA	CUSTOMER USAF - Maxwell AFB	


TCRM19DR 1U chassis – Front and Rear View

BOPS and Command Post

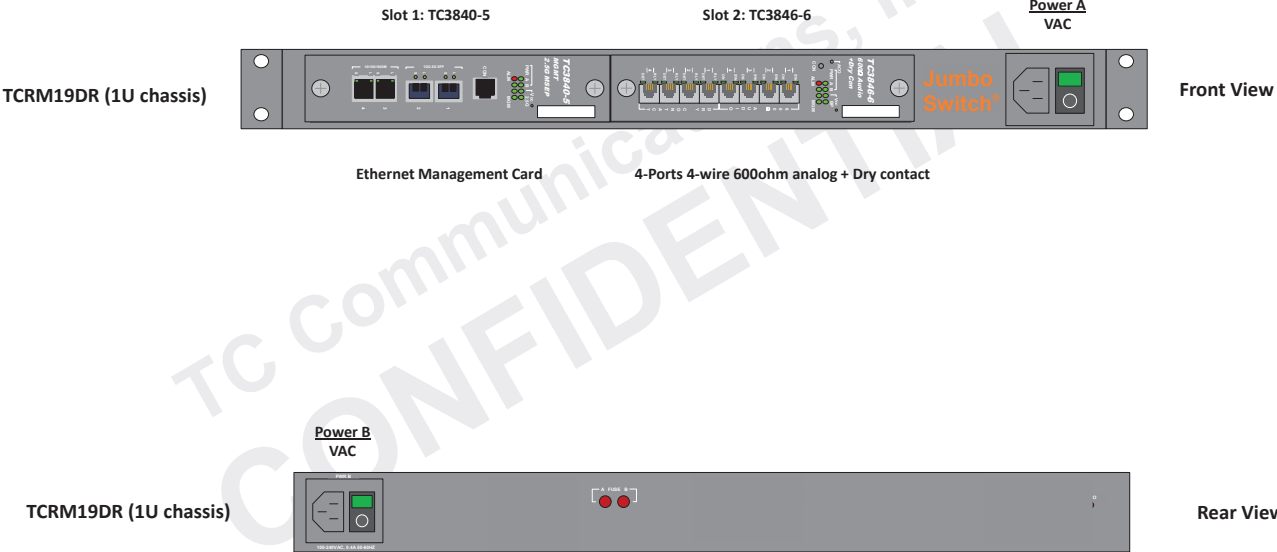


	DRAWN BY Jay Su	DRAWING # Page 1/1	TITLE TCRM19DR 1U chassis – Front and Rear View	Notes The TCRM19DR offer power redundancy via Power A in the front and Power B in the rear
	DATE August 27, 2025	SCALE NA	CUSTOMER USAF - Maxwell AFB	

TC3846-6 Port Mapping

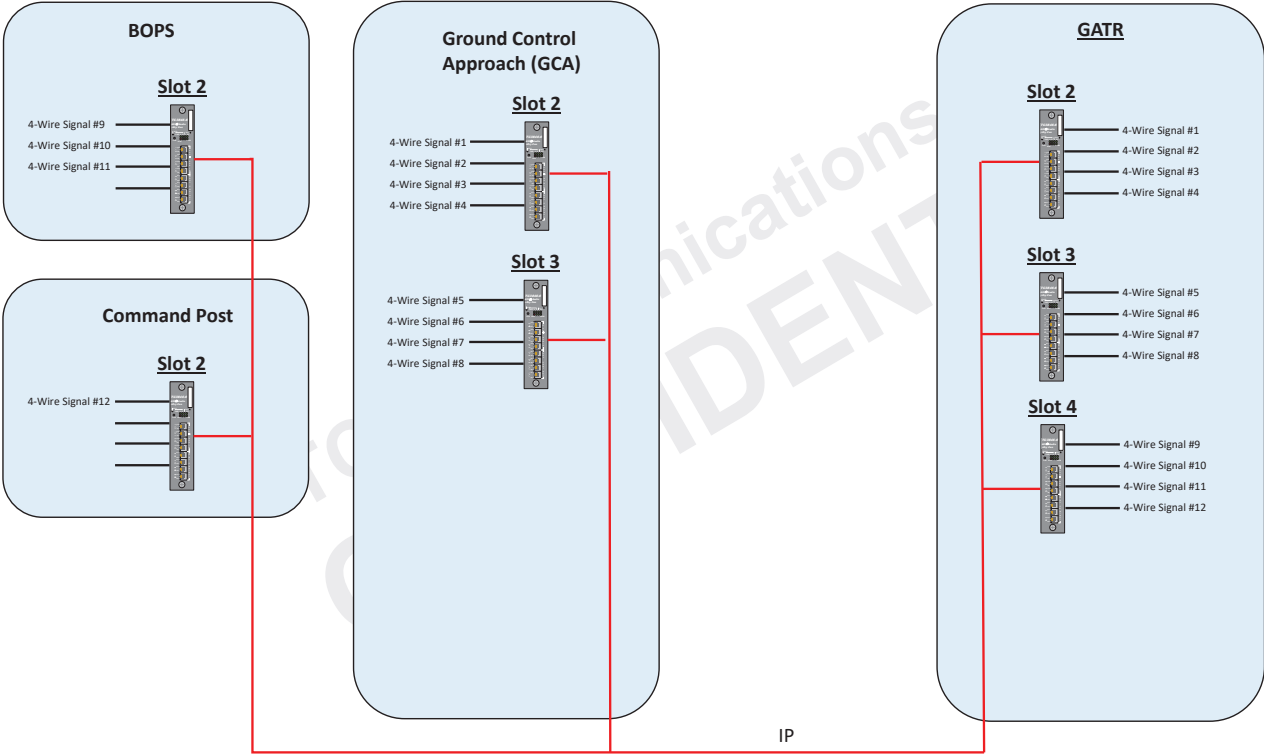

	DRAWN BY Jay Su	DRAWING # Page 1/1	TITLE TC3846-6 Port Mapping	Notes
	DATE August 27, 2025	SCALE NA	CUSTOMER USAF - Maxwell AFB	


TC3840-5 Front View

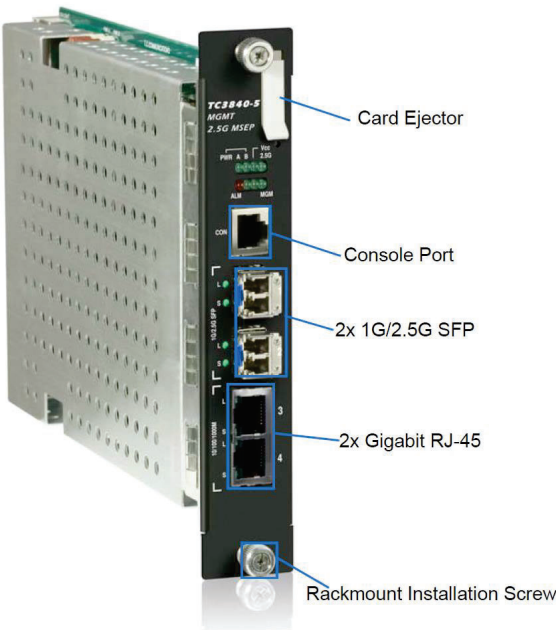

	DRAWN BY Jay Su	DRAWING # Page 1/1	TITLE TC3840-5 Front View	Notes
	DATE August 27, 2025	SCALE NA	CUSTOMER USAF - Maxwell AFB	

TC3846-6 Front View and Pinout

Front Panel

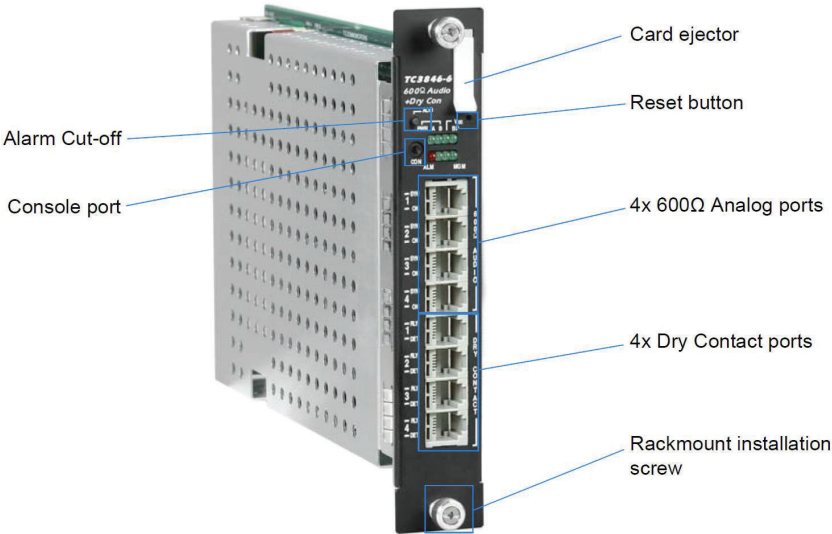

TC3846-6 4-Channel 600Ω Analog & Dry Contact Card

600Ω Analog 4-Wire Port RJ-11 Pin Assignment

Pin	Connection
1	N/A
2	Input RING
3	Output RING
4	Output TIP
5	Input TIP
6	N/A

Dry Contact Port RJ-11 Pin Assignment

Pin	Connection
1	N/A
2	Relay
3	Relay
4	Detector
5	Detector GND
6	N/A

Simplex SFP – 760-G57S1-20

1.25 Gbps SFP Transceiver

L4 Optics | Single Mode | Bi-Directional 1310/1550 nm | 20 km

Optics

760-G57S1-20
760-G57S1-25

Features

- Transceiver unit with independent:
 - FP Laser Diode transmitter
 - InGaAs PIN Photodiode receiver
- Digital diagnostic monitoring (DDM)
- Meets SFP MSA and SFF-8472 with simplex LC receptacle
- Qualified for Bellcore reliability practices
- Compliant with IEEE 802.3Z
- Compliant RoHS and lead free
- Compliant with UL standard
- Hardened temperature version (optional)



Specifications

General		Parameter	Value
Mode			Single Mode
Wavelength	Transmit:		1310 nm
	Receive:		1550 nm
Operating Data Rate			1.25 Gbps
Connector			LC
Transmitter Type			FP Laser Diode
Receiver Type			PIN Photodiode
Storage Temperature			-40 ~ 85 °C
Operating Temperature	760-G57S1-20:		-20 ~ 70 °C
	760-G57S1-25:		-40 ~ 85 °C
Voltage			3.3 V

Simplex SFP – 760-G75S1-20

1.25 Gbps SFP Transceiver

L4 Optics | Single Mode | Bi-Directional 1550/1310 nm | 20 km

Optics
760-G75S1-20
760-G75S1-25

Features

- Transceiver unit with independent:
DFB Laser Diode transmitter
InGaAs PIN Photodiode receiver
- Digital diagnostic monitoring (DDM)
- Meets SFP MSA and SFF-8472 with simplex LC receptacle
- Qualified for Bellcore reliability practices
- Compliant with IEEE 802.3Z
- Compliant RoHS and lead free
- Compliant with UL standard
- Hardened temperature version (optional)



Specifications

Parameter		Value	
Mode		Single Mode	
Wavelength	Transmit:	1550 nm	
	Receive:	1310 nm	
Operating Data Rate		1.25 Gbps	
Connector		LC	
Transmitter Type		DFB Laser Diode	
Receiver Type		PIN Photodiode	
Storage Temperature		-40 ~ 85 °C	
Operating Temperature	760-G75S1-20:	-20 ~ 70 °C	
	760-G75S1-25:	-40 ~ 85 °C	
Voltage		3.3 V	

MAXWELL AFB, AL TC COMMUNICATIONS RADIO SOLUTION INSTALLATION LIST OF MATERIALS (LoM)

Line Item (LI #)	Item Description/Nomenclature	Manufacturer	NSN or Part #	U/I	Qty	Picture	U/I Price	Total
1	Horizontal Cable Organizer with 5 D rings	Emcor Crenlo	CMP-1U-19	EA	3		\$	\$
2	EZ-RJ12/11 Connectors, 100pc. Box	Platinum	100026B	Box	2		\$	\$
3	EZ-RJ45 CAT5/5E Connectors, 100pc. Box	Platinum	100003B	Box	1		\$	\$
4	100Ft Modular Bulk Cable 4 Conductor (28 AWG, Stranded copper, silver, flat jacket	Cables4Sure.com	417100-04	EA	2		\$	\$
5	CAT5e, 500' Box	Cables 2 Go	27341	BX	1		\$	\$
6	Voice 6P4C Patch Panel with Male Telco in 24 Ports and 1 RMS	ICC	ICMPP024T4	EA	2		\$	\$
7	Cable, 25 Pair, Cat3, Gray (500 foot reel)	Black Box	ELN25TA-0500	RL	1		\$	\$
8	Prewired Block, S66, M Series 4x50, 50 Pair, Wire Wrapped, (2) 25 Pair Female Connectors, S89D Bracket, Bridged	Siemon	M4-2W	EA	2		\$	\$
9	Amphenol Connector, Receptacle Kit (female), 50 pin, 24 AWG, 90 Deg, B Slot Type, Without Mating Connector Lock	Amp/Tyco	5229913-1	EA	4		\$	\$
10	Amphenol Connector, Plug Kit (Male), 50 pin, 24 AWG, 90 Deg, B Slot Type, Without Mating Connector Lock	Amp/Tyco	5229912-1	EA	4		\$	\$
11	Chemical-Resistant Heat-Shrink Tubing, 0.63" ID Before Shrinking, 6" L Black pk 5	McMaster-Carr	7132K517	PK	1		\$	\$
12	Colored Bridging Clip, Daul, Blue	Seimon	SMBC-2-6	EA	50		\$	\$
13	Colored Bridging Clip, Daul, Green	Seimon	SMBC-2-7	EA	50		\$	\$

14	Colored Bridging Clip, Daul, Red	Seimon	SMBC-2-3	EA	50		\$	\$
15	Single Bridge Clip, Pack 100	Siemon	SA1-SS-100	Pk	1		\$	\$
16	Crossconnect Wire, Blue/White, 1000ft	General Cable	XCW-1P24-BL/WH-S-GCC	Spool	2		\$	\$
17	Crossconnect Wire, Orange/White, 1000ft	General Cable	XCW-1P24-OR/WH-S-GCC	Spool	2		\$	\$
18	Crossconnect Wire, Green/White, 1000ft	General Cable	XCWF-1P24-W/GR-S-GCC	Spool	2		\$	\$
19	Hinged Cover, 66 Block, Orange	Siemon	MC4LH-9	EA	2		\$	\$
20	17M LC-LC 9/125 OS2 DUPLEX SINGLE-MODE PVC FIBER OPTIC CABLE	Galaxy Electronics Company	FZP35802017M-LC.LC	EA	2		\$	\$
21	16M LC-LC 9/125 OS2 DUPLEX SINGLE-MODE PVC FIBER OPTIC CABLE	Galaxy Electronics Company	FZP35802016M-LC.LC	EA	2		\$	\$
22	3M LC-LC 9/125 OS2 DUPLEX SINGLE-MODE PVC FIBER OPTIC CABLE	Legrand	14402	EA	4		\$	\$
23	3M LC-SC 9/125 OS2 DUPLEX SINGLE-MODE PVC FIBER OPTIC CABLE	Cables 2 Go	34615	EA	2		\$	\$
24	1-1/4" Plenum Innerduct, per foot	PETROFLEX	PC125PL	Feet	110		\$	\$
25	Wire Distribution Spool, with #10 Wood Screw	Siemon	S20B	EA	8		\$	\$
26	Cable Tie, Narrow 4" Long, Pk 100	McMaster-Carr	7130K12	PK	2		\$	\$
27	Cable Tie, Narrow 14" Long, Pk 100	McMaster-Carr	80005K12	PK	2		\$	\$
28	Cable Tie, Wide 12" Long, Pk 50	McMaster-Carr	7130K45	PK	2		\$	\$

29	Cable Tie Mount, PK 50	McMaster-Carr	7566K25	PK	1		\$	\$
30	Cable Tie Mount, Natural, PA 6.6, 0.86X0.61", #10 Screw, PK of 100	Panduit	TM3S10-C	PK	1		\$	\$
31	#10 x 1", Pan Head Self Drilling Screw, Pack of 100	Generic	PPTK0100100CZ-PK100	PK	1		\$	\$
32	Wood Screw, No. #8, 3/4" Long, Pan Head, Pk 100	McMaster-Carr	91555A104	PK	1		\$	\$
33	Hook and Loop Cable Tie, 1/2 inch wide, 15 feet long roll	McMaster-Carr	9402T51	Roll	2		\$	\$
34	DYMO Letratag Label Cartridge, 1/2" White w/Black lettering	Newell Brands	91331	EA	2		\$	\$
							TOTAL	\$
Inflation Estimate							\$	\$
Materials Estimated Shipping							\$	\$
Grand Total							\$	\$