



DEPARTMENT OF THE AIR FORCE FURNISHINGS MANAGEMENT SECTION



SPECIFICATIONS:

Case goods refer to furniture made of hard materials, such as wood, metal, glass or plastic. Pieces of furniture refer to chests of drawers that provide interior storage space and/or pieces of living or bedroom furniture. Colors will be identified on each Delivery Order (i.e. light, medium or dark cherry, birch or oak tones) and all surfaces shall match inside and out. Color needs to be consistent and uniform. All surfaces must be polished, sealed and smooth to the touch to pass a wipe test with a cotton-wool ball. A cotton-wool ball wipe test consist of testing the furniture for consistency in smoothness. No cotton-wool material shall be stuck to the furniture after the cotton wool has been wiped across the surface on the furniture. Surface material shall be scratch resistant non-fading and sun light resistant for the entire expected life cycle. Metal bed frames shall be black.

Furniture shall be moderately scaled with modern style (simple lines or rounded profiles), free of ornamentation and have detailing that is durable and easily maintained. All furnishings specified herein shall be of a design, material, and workmanship to withstand heavy daily usage with minimum need for maintenance and repair. All case goods (including tables) should be similar in appearance and construction and all of the seating pieces should be compatible with the case goods. All furniture series will have integral or recessed hardware pulls that do not protrude from the face of the door or drawer.

Furnishings manufacturing processes will be in compliance with US federal or local host nation requirements in regards to energy and water efficiency guidelines for furnishings production plants. Whenever feasible bio-based environmentally preferable, non-ozone depleting materials, non-toxic or less-toxic alternatives, shall be used during production to meet the performance requirements listed in the specifications. Low-emitting materials and resource reuse shall be considered during production process. All plywood and plastic laminated panels bonded with urea formaldehyde or melamine formaldehyde adhesive shall meet the formaldehyde emission requirements in voluntary standards. (i.e. for US ANSI/Hardwood Plywood and Veneer Association (HPVA) HP-1-1994 or applicable European Union (EU) outlines) Contractor conformance with ISO 14001, Environmental Management Systems is desirable.

The contractor is responsible for verifying the quality and safety of offered products and provides applicable testing documentation for products respective parts, i.e. 100 lbs. minimum weight / industrial testing for moveable parts 50.000 - 100.000 cycles for drawers and runners.

Description:

All items shall be "first" quality goods. Factory "seconds" will not be accepted. Design shall represent best engineering, material and technological developments to ensure durability and strength. All items will be of durable quality based on the construction types:

Type A: "Wood Veneer on minimum of Hardwood Veneer-core Plywood"

Type B: "Solid Hard Wood (Oak, Ash, Maple or Beech)"

Type C: "Plywood corpus with laminated Top"

Note: Particle Board or medium density fiberboard (MDF) are NOT acceptable substitutes.

Each item description provides dimensions. Dimensions referring to given commercial standards, i.e. bed frame sizes with corresponding mattress sizes need to be fully adhered to; same applies to underbed storage units required to fit under bedframes; chair's seating or chair heights need to correlate to desk or table heights with variations not greater than 1" / 2.5 cm to ensure items fit with associated corresponding items and/or other standard sized items already in use at Government possessed inventories. For all other furnishing items a tolerance of 2" / 5 cm smaller and up to 4" / 10cm or 5% larger is acceptable only in order to meet a company's commercial product already on market, provided this change is not reducing the functionality or interfering with the use of corresponding items within the SOW.

Materials and Finishes:

Use of hardwoods such as Oak, Beech, Ash and Maple is required. All softwoods such as Pine or rain forest species are not acceptable. All wood shall be kiln-dried to a moisture content of 5-10%. All exposed wood parts shall be clear cutting and free of knots, splits, or checks. Interior wood parts shall be of suitable hardwoods free of any defects that may affect the structural integrity of the furniture. All internal framing shall be constructed from selected mixed hardwoods. The furniture finish shall be a multi-coat formulation, premium grade for filled grained woods. Steam bent wood parts shall be of species suitable for bending and if exposed shall have grain and finishing characteristics similar to other exposed wood parts. Laminates shall be matte-finish, high-pressure plastic laminate. Laminate color shall match the wood species and color.

Fabrication:

No fiberboard, particleboard, medium density fiberboard or hardboard (MDF), shall be used in any part of the furniture or in any plywood component. Exterior surfaces and exposed interior surfaces shall be solid hard wood or hard wood veneer. All framing materials shall be solid hard wood. All joints must be stronger than the substrate itself and must resist racking and withstand loading. Lamination shall consist



DEPARTMENT OF THE AIR FORCE FURNISHINGS MANAGEMENT SECTION



of planks no less than 19 mm (3/4") or more than 100 mm (4") in width. Any other edges or borders require minimum 2mm thick ABS (Acrylnitril-Butadien-Styrol) plastic to be heavy wear and tear resistant. All materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials (e.g. recycled steel). Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products is allowed under this specification. Other fabrication requirements follow:

Side Panels:

Type A (Veneer on Hardwood Veneer-Core Plywood):

Side panels shall be minimum 19 mm (3/4") 5-ply hardwood veneer-core plywood with wood veneer. Exposed edges on the front of the piece shall be provided with minimum 10 mm (3/8") thick solid hard wood edge banding or may be covered by solid hard wood front frame. Back edges of side panels, if exposed, shall be finished for appearance, as the backs of some of these units may be exposed to view. Top edges of side panels, if exposed, shall be finished smooth, and sealed, for cleaning. Bottom edges of side panels shall be sealed to eliminate the possibility of water wicking up the side panels when floors are mopped. As a minimum, side panels that will be visible, such as in wardrobes, nightstands, etc., shall be finished on both faces to match other panels.

Type B (Solid Hard Wood (Oak, Ash, Maple or Beech):

Side panels shall be minimum 19 mm (3/4") solid hard wood. All exposed edges shall be finished. As a minimum, side panels that will be visible, such as in wardrobes, drop-lid desks, one-drawer nightstands, etc., shall be finished on both faces to match other panels.

Type C ("Plywood corpus with laminated Top"):

Side panels shall be minimum 19 mm (3/4") plywood and/or solid hard wood. All exposed edges shall be Polyvinylchloride (PVC) edge banding with edges rounded. As a minimum, side panels that will be visible, such as in wardrobes, drop-lid desks, nightstands, etc., shall be finished on both faces to match other panels. Exposed Wood Surfaces: doors, shelf-edges, ends, front, back and vertical folding edges shall be veneered with minimum 2 mm Polyvinylchloride (PVC) edge banding / Acrylnitril-Butadien-Styrol (ABS) border.

Back Panels:

For all construction types, standard back panels shall be minimum 8 mm (3/8") hardwood finished wood veneer plywood for pieces of furniture where the back panel is not a structural element (to resist racking, etc.). If the back panel is a structural element, it shall be minimum 5-ply hardwood finished wood veneer plywood, 19 mm (3/4") thick. Visible back panels, such as in wardrobes, nightstands, etc. shall be finished on both faces to match other panels. All exposed panel edges must be finished as specified above for side panels, including all bottom edges to eliminate the possibility of water penetration and wicking through the core material.

Other Panels:

Headboard and footboard panels shall be a minimum of 13 mm (1/2") thick.

Doors:

Construction shall be minimum 19 mm (3/4") 5-ply hard wood veneer-core plywood. If the door is recessed flush with the edges of the side panels or face frame, provide veneer edge banding on all 4 sides. If the door is on the face of the cabinet, so that the hinged-edge of the door is readily accessible and susceptible to damage, provide a minimum 10 mm (3/8") thick solid hard wood internal or exterior edge banding on the hinged-edge of the door. All edges need a minimum of veneer edge banding to ensure the part is completely sealed so that moisture cannot penetrate.

Tops:

For all construction types the following options may be provided for tops. Horizontal surfaces of interior compartments on the desk, under bed storage units, etc.; and all writing surfaces shall be plastic laminate in high commercial quality, scratch resistant. The top surfaces shall be matte-finish, high-pressure plastic laminate unless otherwise noted in the item descriptions. Laminate color shall match the wood in both species and color. All tops must be a minimum of 19 mm (3/4") hardwood plywood. All exposed edges must be finished with minimum 10 mm (3/8") thick solid hard wood edge banding or may be covered by solid hard wood front frame. Laminated tops may have minimum overall thickness of 19 mm (3/4") core. Core must be provided with a minimum 19 mm (3/4") hardwood lumber band on all 4 sides. The top must be completely sealed from moisture by use of the laminate, the lumber band, and a backer sheet. The top may not be relied on for structural integrity. In other words, the top alone cannot be providing resistance to racking. In addition, furniture shall be movable by lifting and handling the piece by the top. Consideration should be given to connecting the side and back panels to the top in the lumber band. This may be accomplished through blocking located behind the panels, or by a metal angle that allows the top to be connected to the other panels closer to the edges of the top. The glue line between the lumber band and the core material must be supported.



DEPARTMENT OF THE AIR FORCE FURNISHINGS MANAGEMENT SECTION



Dust Shields:

Dust shields will be provided in the bottom of all units with drawers. Dust shields shall be a minimum of 5 mm (3/16") thick. Materials other than plywood may not be used for the dust shields.

Shelves:

Adjustable shelves shall be either wood veneer on hardwood plywood or plastic laminate on hardwood plywood. Both faces of shelves must be finished the same to allow for flipping of shelves in case of warp age. Minimum of front and back edges must be edge banded with solid hard wood or hard wood veneer.

Drawers:

Drawer depth shall be within 30 mm (1 3/8") of cabinet depth. For all construction types, drawer fronts shall be minimum 19 mm (3/4") solid hard wood. Drawer sides and backs shall be minimum 15 mm (9/16") solid hard wood or all hard wood veneer-core plywood with no voids and shall have a sealed lacquer finish. Edges shall be finished smooth. All drawers shall be provided with replaceable drawer fronts.

Drawer construction and materials, to include drawer bottoms, shall be able to withstand a load of 125% of the rated load of the drawer guides without sagging or failing. All drawer joints shall be glued. At a minimum, drawer bottoms shall be perimeter glued and vertically supported by routed grooves. Drawers shall open to their full length 100%. Chest of Drawers will stand stable without tilting forward when all unloaded drawers are open.

Internal Construction:

Interior framing shall be a minimum of front and back hard wood rails at every drawer level. Rails shall be joined by mortise and tenon or half-lap joint and screwed to side panels or dowel construction, glued and screwed. Additional attachment to the side panels is required if solid hard wood is not used. Frame rails shall be a minimum of 38 mm (1 1/2") x 19 mm (3/4") thick. The base and top shall be screwed to the interior framing of the cabinet. All cabinets shall have reinforcing corner blocks screwed, as a minimum, into the corner of the base. Screw cleats may be added where necessary.

Tables:

All tables shall be constructed of premium grade material, unless otherwise specified. All table frame joints shall be secured with glue and double doweled, unless otherwise specified. Wood dowels shall be multi-grooved and kiln-dried to a moisture content of 10% or less. All frames shall be reinforced with corner blocks, glued and screwed to the frame. The top of the table shall be joined to the frame with screws and glue blocks. Any top must be able to handle moving of the furniture that will be accomplished by lifting the piece by the top. Adhesives used for laminating panels and assembly shall conform to industry standards. All exposed edges shall be rounded (ABS). For removing table legs no tools should be required; wing nuts screws shall be used.

HARDWARE PARTS:

Provide all hardware and accessories required for each item. All exposed metal hardware shall be powder coated; the color shall complement the wood finish or chrome /stainless steel. All concealed hardware shall be finished to complement adjacent surfaces. Typical hardware items include, but are not limited to, the following:

Catches:

Double roller or magnetic.

Drawer Guides:

Side mounted with 30 kg (66 lb.) capacity guides for drawers less than 0.06 m³ (2.0 cu.ft.). Drawers between 0.06 and 0.11 m³ (2.0 and 4.0 cu. ft.), and keyboard shelves, shall be provided with 45 kg (100 lb.) capacity guides. Drawers greater than 0.11 m³ (4.0 cu. ft.) shall be provided with 68 kg (150 lb.) capacity guides. Guides shall be provided with positive 100% out and in stops. Drawer guides metal runners soft closure, smooth mechanisms. Non rusting (stainless steel is preferred) with nylon wheels or bearing systems. Mechanism shall have undergone industry testing for movable parts.

Gliders:

All legs of furnishings or parts touching the ground shall have plastic gliders screwed on the bottom in correspondence of the weight/size of the item. When so specified in the item description (i.e. SOW Paragraph 9.7) gliders need to be height adjustable and allow item to be moved or slid, without damage to item or flooring. Non-skid rust-free steel with nylon gliders are therefore required. Gliders shall be easily accessible, and provided on all four corners of items. For seating items gliders shall be equipped with either adjustable or screw type gliders, with caps of rustproof material. Gliders less than 11/16" in diameter at the largest cross-section are not acceptable. Nylon or other durable plastic composition may be used in lieu of nickel or chrome plated steel.

Adjustable gliders when so required per item description shall be adjustable without use of tools, easily accessible, and provided on all four corners of items



DEPARTMENT OF THE AIR FORCE FURNISHINGS MANAGEMENT SECTION



Shelf Supports:

Four adjustable metal push or screw-in tabs per shelf minimum.

Drawer and Door Pulls:

Pulls shall not protrude beyond front edge of cabinet. Two pulls shall be provided for drawers 760 mm (30") wide or wider. Options for drawer and door pulls can be:

- Semi-recessed wood pull. This pull is an insert placed into the drawer front or door.
- Or
- Pull-length groove. This is a "concealed" type of pull that allows you to open the drawer or door by means of a groove or lip that runs the full length of the door or drawer.

Door Hinges:

Semi-concealed or butt hinges, with minimum of 4 through-door bolt fasteners per hinge (2 per hinge leaf). Hinges shall provide a 270-degree opening angle. If fasteners are exposed when door or drop-lid is closed, security fasteners must be provided. Hinges and handles shall be metal parts.

OTHER MATERIALS:

Metal parts:

All metal shall be smooth, free from rust, scale, pits, scratches, laps, and buckles affecting strength and appearance. Unless otherwise specified herein, the gauge numbers or thickness specified for steel are subject to standard tolerances. Steel tubing for bed frames, adapters, and stretcher braces shall be electric resistance welded type. Steel angles for spring fabric frame shall be 2.0 inches by 1.5 inches by 0.1875-inch thick. Edges of angles shall be slightly rounded to avoid sharpness. Small parts like hinges, handles or rods and pins shall be made of stainless steel.

Finish and Painting:

All metal surfaces of beds, except plated steel shoes, shall be powder coated. Application of the finish shall produce smooth and uniform surfaces without runs or wrinkles and shall be free from objectionable defects such as scale under the finish, rust, or discoloring. Treated surfaces, this includes metal parts, shall be painted with an epoxy powder coating and applied and baked in accordance with the coating manufacturer's recommendations.

UPHOLSTERY:

- Upholstery must be fitted and padding must be even and shall be neatly tailored. Stripe patterned fabric shall be aligned between adjacent components. Upholstery coverings whenever technically possible i.e. for cushions type portions shall be removable to be washable. Casters shall rotate smoothly and be securely attached. All wood surfaces not covered with upholstery materials shall have a smooth finish. The natural grain of the wood shall not be clouded by finishing materials. The application of materials shall be controlled to produce items with smooth, uniform exposed surfaces without blisters, pits, wrinkles, runs, tackiness or orange peel appearance. Ferrous metal shall not be exposed.
- All upholstered items parts shall comply with all applicable country specific provisions of Flame Resistance of Cloth and Filling Materials for Upholstered Furniture. For example: fabric shall not exceed two seconds after-flame time nor exceed a burn length of 3".
- Fabric finish and backing shall be stain and moisture / water resistance (Krypton or equivalent type). Capability of field replacement covers for both seat and back cushion upholstery. Fabric shall be a minimum of medium grade from manufacturer's standard upholstery line. Must meet or exceed the surface abrasion requirement for heavy-duty fabric (i.e. 60,000 double-rub cycles tested)
- All upholstery tailoring shall be performed in accordance with accepted best industry practice. Appearance shall likewise be typical of results obtained by such tailoring techniques. Patterns, where used, should be in proper alignment between the various upholstered surfaces of the seating. Seams should not be placed on a heavy-wear location of the furniture (such as on the centerline of the upper surface of the arm). Any double needle seam stitching should be tape reinforced.
- All joints and joining of furniture shall be done in a secure and rigid manner in accordance with best industry practice. Dry joints, poorly fitted joints, or joints where glue appears on a finished surface are not acceptable. All exposed screws and bolts that are not decorative shall be countersunk and plugged for finished appearance except where established as part of the design and shown acceptable by customer usage. Dowels, tenons, chucking and boring with adequate glue applied shall be used where applicable, with appropriate mechanical reinforcements used where necessary and practical. Reinforcing cleats and/or corner blocks, glued and screwed, shall be used where necessary for secure fastening.
- The following types of seat suspension systems are acceptable: drop-in prefab metal spring units, sinusoidal "No-Sag" type, sinusoidal wire helical coil, conventional eight-way hand tied coil springs, "woven mesh" type web construction, and "permanent sheeting" type construction (where the suspension is cut as one continuous sheet rather than from wide strips which are then woven together as in the woven mesh construction). All springs shall be adequately tied and covered with padding of quality and composition acceptable in best



DEPARTMENT OF THE AIR FORCE
FURNISHINGS MANAGEMENT
SECTION




industry practice. Padding shall be such that the seat maintains proper shape and comfort in continued daily use. Polyurethane foam shall be a flexible high resiliency polyurethane material suitable for use as furniture cushioning. It shall be manufactured from pure polyether type polyurethane without the addition of fillers. Pigments may be used to designate grades etc. The foam shall be open cell structure, 100% new material, and shall be such that odors and absorbed materials from alcohol, body fluids, and other substances shall be readily removed by washing with soap and mild detergents without damage to the urethane foam.

- Density, Compression, Load Deflection and Fatigue Testing results shall be provided to verify product quality meets all industry standards and warrants expected durability for the entire expected live cycle use without loss of comfort and stays within minimum volume tolerances outlined in the applicable industry standards.
- Upholstered backs shall be padded with adequate quantity, quality, and composition of padding materials in accordance with best industry practice to maintain proper shape and comfort in continued daily use.
- All items that are considered to be soft furnishing with fabric / upholstery cloth like chairs and sofas are required to comply with US fire standards or the equivalent local fire standards of the country in which items are used / delivered to.

Itemized List

Summary:


Currency: [REDACTED]

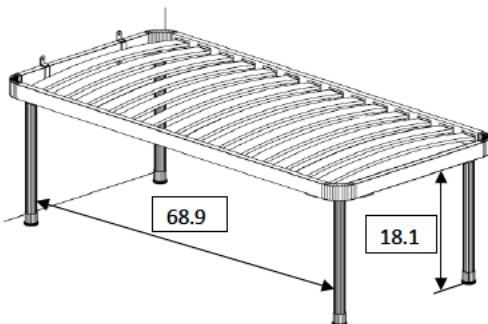Item Number	Description:	BED METAL FRAME / SLAT BEDSPRING (LONG LEGS)		Quantity	Unit Price	Total
	Part Number:					
0001	<u>DIMENSIONS:</u> 18" / 45.7cm Height* X 38" / 96.5cm-39" /99.1 cm Width X 80" / 203.2cm Length					
	<u>DESCRIPTION:</u> The steel bed shall be of all steel three piece construction consisting of matching steel tube, head and foot ends, a wedge type corner lock with four bearing points, and a fully framed spring unit with sinuous (no-sag type) spring deck. Head at foot ends will be equal height to support the open bay head-to-foot configuration. Bed w/o headboard external Frame: 1.97" / 50mm x 1.18" / 30mm Metallic, 0.05" / 1.2mm thick, 14n Wood spring slats are 0.4" / 10mm thick, 2.68" / 68mm wide, 37" / 940mm long, size Layer laminated wood strips. Four Legs round Metal Tubing 1.97" / 50mm in diameter by 13,78" / 35cm long with 0.39" / 10mm washer and plastic end cap color Black. Frame with epoxy polyester resin at a thickness of 50 microns, slats are light brown. Caps and shoes shall be removable without the use of tools. To optimize transport and to ensure no parts are lost during transport the removable legs shall also be mountable in a horizontal position towards the interior of the basic frame and not extend beond the sled frame. *Note: Leg height for Dorm beds require to fit with the under bed storage units.					
	<u>COLOUR:</u> Metal frame and legs black.					
						
						
				68		



DEPARTMENT OF THE AIR FORCE
FURNISHINGS MANAGEMENT
SECTION

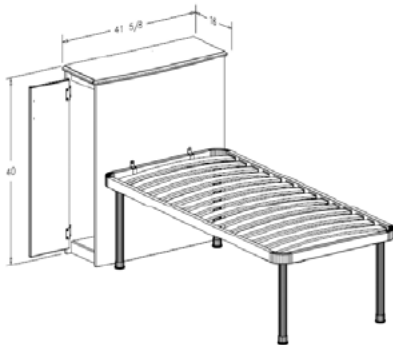

Item Number	Description:	STORAGE HEADBOARD BOX SMALL		Quantity	Unit Price	Total
	Part Number:					
0002	<u>DIMENSIONS:</u> 40" / 106cm Height X 41" / 104.1cm Length X 16" / 40.6cm Width					
	<u>DESCRIPTION:</u> Storage headboard unit both side doors to open or top open min 90 degree, minimum two hinges each, if top opens must be soft close mechanism, noise reduced. Material Type A					
	<u>COLOUR:</u> Cherry medium.					
	 					
				68		

Item Number	Description:	UNDER-BED STORAGE UNIT With 4 DRAWERS (FOR LONG LEG BEDSLATS)		Quantity	Unit Price	Total
	Part Number:					
0003	<u>DIMENSIONS:</u> 17" / 43.1 cm Height* X 68" / 172.7cm Length X 24" / 61cm Width					
	<u>DESCRIPTION:</u> Unit must fit under bed size (see CLIN 001). Unit consists of 4 individual drawers two on each row on casters, Drawer depth shall be a minimum of 80% of the width of the bed. Material Type C. *must fit under the applicable metal bed frame supplied at “SLAT BEDSPRING long legs”. <u>COLOUR:</u> Cherry medium.					
						
				68		



DEPARTMENT OF THE AIR FORCE
FURNISHINGS MANAGEMENT
SECTION



Item Number	Description:	CHEST OF 3 DRAWERS Dorms		Quantity	Unit Price	Total
0004	Part Number:					
	<u>DIMENSIONS:</u> 30" / 76.2cm Height X 30" / 76.2cm Length X 18" / 45.7cm Width <u>DESCRIPTION:</u> Top/Side/Drawers high quality plywood, 16-19mm, drawers with metal glides. Material Type A. <u>COLOUR:</u> Cherry medium.					
				68		


Item Number	Description:	DESK				Total
	Part Number:			Quantity	Unit Price	
0005	<u>DIMENSIONS:</u> 30" / 76.2cm Height X 42" / 106.7cm Length X 24" / 61cm Width					
	<u>DESCRIPTION:</u> Desk unit to be free-standing. Desks shall have one drawer with solid hard wood sides. Material Type C <u>COLOUR:</u> Cherry medium.					
						
				68		



**DEPARTMENT OF THE AIR FORCE
FURNISHINGS MANAGEMENT
SECTION**



Item Number	Description:	CHAIR DESK/DINING			Total
	Part Number:		Quantity	Unit Price	
0006	<u>DIMENSIONS:</u> 35" / 88.9cm Height (chair seat height is 18" / 45.7cm) X 18" / 45.7cm Length X 18" / 45.7 cm Width.				
	<u>DESCRIPTION:</u> Stackable chairs (up to 6 each), solid hard wood (Type B) with rounded edges Chair style need to correspond to dining table. Upholstery shall not be damaged by stacking chairs. Maximum weight 7kg / 15.4lbs.				
	<u>UPHOLSTERY MATERIAL:</u> Leather substitute / Vinyl padding for comfort on the seat surface and rear rest upholstery using firm density foam.				
	<u>COLOUR:</u> Wood - Cherry medium. Leather substitute / Vinyl - Gunslinger Red / Unicolor / Medium				
	  CHAIR DESK / DINING				
			156		

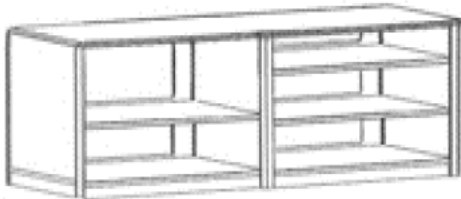Item Number	Description:	TV UNIT BASIC		Total
	Part Number:		Quantity	Unit Price
0007	<u>DIMENSIONS:</u> 22" / 55.9cm Height X 16" / 40.6cm - 22" / 55.9cm Length X 32" / 81.3cm- 44" / 111.8cm Width.			
	<u>DESCRIPTION:</u> TV basic unit and TV add on unit must be stand alone with option to be fixed as one or to stand next to each others without gap. Two rows with two/three adjustable shelves, rear partly open to allow cables to be concealed while unit is flush against a wall. Material Type C			
	<u>COLOUR:</u> Cherry medium.			
	TV unit basic   TV UNIT BASIC			
			3	



DEPARTMENT OF THE AIR FORCE
FURNISHINGS MANAGEMENT
SECTION





Item Number	Description:	DINING TABLE		Quantity	Unit Price	Total
0008	Part Number:					
	<u>DIMENSIONS:</u> 30" / 76.2cm Height X 36" / 91.4cm Width X 55" / 139.7cm Length. <u>DESCRIPTION:</u> Tabletop high quality plywood, rounded edges, four solid hard wood legs mounting of legs will not require use of any tools; wing nuts screws shall be used. Material Type C for top, Type B for legs (solid hard wood) and frame. <u>COLOUR:</u> Cherry medium. 					
				5		

Item Number	Description:	TABLE ACTIVITY SQUARE		Quantity	Unit Price	Total
	Part Number:					
0009	<u>DIMENSIONS:</u> 30" / 76.2cm Height X 30" / 76.2cm Length X 30" / 76.2cm Width.					
	<u>DESCRIPTION:</u> Tabletop high quality plywood, rounded edges, four solid hard wood legs mounting of legs will not require use of any tools; wing nuts screws shall be used. Material Type C for top, Type B for legs (solid hard wood) and frame.					
	<u>COLOUR:</u> Cherry medium.					
						



DEPARTMENT OF THE AIR FORCE
FURNISHINGS MANAGEMENT
SECTION



Item Number	Description:	RECLINER	Quantity	Unit Price	Total
0010	<u>DIMENSIONS:</u> 36" / 91.4cm Height X 28" / 71.1cm Length X 30" / 76.2cm Width.				
	<u>DESCRIPTION:</u> Recliner heavy duty with robust side catch mechanism (not extending out over side item width). Smooth operation for adjustable tilt positions (minimum 3 positions), whereby rear will not extent out (wall hugger). Solid hard wood legs with free wheel rotating castors. All materials (quality, thickness) and mechanism used are to meet Industrial standard for commercial heavy duty use. Metal mechanism tested for 10,000 cycles rates, 10-15 cycles per minute. Upholstery Materials Scotch guarded/stain and water resistant with microbial foam/barrier. Covering to pass rub testing. Applicable test documentation shall be provided.				
	<u>UPHOLSTERY MATERIAL:</u> Leather substitute / Vinyl				
	<u>COLOUR:</u> Gunslinger Red / Unicolor / Medium				
	 Side catch  wall  Flip Storage in arm rest Cup holder  RECLINER				
			68		

Item Number	Description:	LOUNGE EASY SEAT UPHOLSTERED		Total
	Part Number:	Quantity	Unit Price	
0011	<u>DIMENSIONS:</u> 36" / 91.4cm Height X 35" / 89cm Width X 35" / 89cm Length			
	<u>DESCRIPTION:</u> Fully upholstered design with soft lines and rounded arms. Interior construction shall be robust. Interiors shall be of solid hard wood with steel no-sag springs to withhold heavy duty usage of the seating element. Seat rears and side upholstered cushions need to be reversible with Zipper and Velcro Straps allowing replacing or cleaning / easy maintenance. All upholstery/ cushion parts will require affixing mechanisms to stay in position when used. Upholstery/ cushion parts are interchangeable and will fit easy lounge seat, 2 and 3 easy seat couches. Upholstery color TBD via Delivery Order. Option of soft/med/firm density foam TBD via Delivery Order. Maximum weight 45 kg/99.2 lbs			
	<u>UPHOLSTERY MATERIAL:</u> Leather substitute / Vinyl			
	<u>COLOUR:</u> Gunslinger Red / Unicolor / Medium.			
				
	LOUNGE EASY SEAT UPHOLSTERED			
		15		



DEPARTMENT OF THE AIR FORCE
FURNISHINGS MANAGEMENT
SECTION



Item Number	Description:	LOUNGE SOFA 3 SEAT UPHOLSTERED		Quantity	Unit Price	Total
0012	Part Number:					
	<u>DIMENSIONS:</u> 36" / 91.4cm Height X 89" / 226.1cm Width X 35" / 89cm Length					
	<u>DESCRIPTION:</u> Fully upholstered design with soft lines and rounded arms. Interior construction shall be robust. Interiors shall be of solid hard wood with steel no-sag springs to withhold heavy duty usage of the seating element. Seat rears and side upholstered cushions need to be reversible with Zipper and Velcro Straps allowing replacing or cleaning / easy maintenance. All upholstery/ cushion parts will require affixing mechanisms to stay in position when used. Upholstery/ cushion parts are interchangeable and will fit easy lounge seat, 2 and 3 easy seat couches. Upholstery color TBD via Delivery Order. Option of soft/med/firm density foam TBD via Delivery Order. Maximum weight 75kg /165.3lbs					
	<u>UPHOLSTERY MATERIAL:</u> Leather substitute / Vinyl					
	<u>COLOUR:</u> Gunslinger Red / Unicolor / Medium.					
				8		

Item Number	Description:	COFFEE TABLE		Quantity	Unit Price	Total
0013	Part Number:					
	<u>DIMENSIONS:</u> 18" / 45.7cm Height X 42" / 106.7cm Width X 22" / 55.9cm Length.					
	<u>DESCRIPTION:</u> Tabletop high quality plywood, rounded edges, four solid hard wood legs mounting of legs will not require use of any tools. Material Type A					
	<u>COLOUR:</u> Cherry medium.					
				4		