

Section A - Solicitation/Contract Form

6K Electric Pallet Jack Shipboard Qualified w/Spare Battery

Section B - Supplies or Services & Prices or Costs

Additional Information/Notes

SOLICITATION REMARKS:

1. This requirement is pursuant to Emergency Acquisition Flexibilities (EAF).
2. The resultant award of this solicitation will be issued bilaterally, requiring the contractor's written acceptance prior to execution.
3. All contractual documents (i.e. contracts, purchase orders, task orders, delivery orders, and modifications) related to the instant procurement are considered to be "issued" by the Government when copies are either deposited in the mail, transmitted by facsimile, or sent by other electronic commerce methods such as email. The Government's acceptance of the contractor's proposal constitutes bilateral agreement to "issue" contractual documents as detailed herein.
4. Any contract awarded as a result of this solicitation will be certified for national defense under the Defense Priorities and Allocations System (DPAS). Provision 52.211-14, Notice of Priority Rating for National Defense, Emergency Preparedness, and Energy Program Use, shall be inserted in solicitations when the contract to be awarded shall be a rated order.
5. The option provision is included in the event the Government has an additional requirement 365 DAYS after issuance of the award. This will authorize the Government to add the additional quantity, up to the percentage cited, to the order, via modification without having to re-solicit.
6. Faxed, NECO, or postal mail quotes will NOT be accepted. Electronically submit quotes to the Contract Specialist at brittany.a.langletz.civ@us.navy.mil.

Item	Supplies/Service	Estimated Quantity	Unit	Unit Price	Amount
0001	PNICN LLCQB0114 FFP Item Nomenclature: 6K, 42 inch, WEP (Walkie Electric Pallet Jack)				
0001AA	PNICN LLCQB0114 FFP Nomenclature: 6K, 42 inch, WEP (Walkie Electric Pallet Jack) East coast (Norfolk) shipping costs should be included in unit price. Model#/P/N* _____ *To be completed by vendor Delivery: 365 Days from receipt of contract Inspection at Source Acceptance at Source NOTE: The requirements in DFARS 252.211-7003, Item Identification and Valuation, are applicable for this line item. The contractor shall provide DoD unique identification or a DoD recognized unique identification equivalent. Manufacturer's Part Number: 6877100 Pricing Arrangement: Firm Fixed Price	2	Each		
	PNICN LLCQB0114 FFP Nomenclature: 6K, 42 inch, WEP (Walkie Electric Pallet Jack) East coast (Norfolk) shipping costs should be included in unit price. Model#/P/N* _____ *To be completed by vendor				

0001AB	Delivery: 365 Days from receipt of contract Inspection at Source Acceptance at Source NOTE: The requirements in DFARS 252.211-7003, Item Identification and Valuation, are applicable for this line item. The contractor shall provide DoD unique identification or a DoD recognized unique identification equivalent. Pricing Arrangement: Firm Fixed Price	2	Each		
0002	Shipboard Qualified Spare Battery Inspection and acceptance: source/source East coast shipping cost: N33543 _____				
0002AA	Shipboard Qualified Spare Battery Inspection and acceptance: source/source East coast shipping cost: N33543 should be included in unit price NOTE: The requirements in DFARS 252.211-7003, Item Identification and Valuation, are applicable for this line item. The contractor shall provide DoD unique identification or a DoD recognized unique identification equivalent. Pricing Arrangement: Firm Fixed Price	1	Each		
0002AB	Shipboard Qualified Spare Battery Inspection and acceptance: source/source East coast shipping cost: N33543 should be included in unit price NOTE: The requirements in DFARS 252.211-7003, Item Identification and Valuation, are applicable for this line item. The contractor shall provide DoD unique identification or a DoD recognized unique identification equivalent. Pricing Arrangement: Firm Fixed Price	1	Each		
0003	Exhibit A - CDRLS Form DD1423 Not Separately Priced Pricing Arrangement: Firm Fixed Price	1	Set		
Option Line Item 0004	PNICN LLCQB0114 FFP Item Nomenclature: 6K, 42 inch, WEP (Walkie Electric Pallet Jack) Up to 100% option. This option can be exercised in any quantity up to 100% of the based quantity within 365 days from date of award. NOTE: The requirements in DFARS 252.211-7003, Item Identification and Valuation, are applicable for this line item. The contractor shall provide DoD unique identification or a DoD recognized unique identification equivalent. Pricing Arrangement: Firm Fixed Price	4	Each		
	Shipboard Qualified Spare Battery				

Option Line Item 0005	Up to 100% option. The option quantity can be exercised in any quantity up to 100% of the base quantity within 365 days from date of award. NOTE: The requirements in DFARS 252.211-7003, Item Identification and Valuation, are applicable for this line item. The contractor shall provide DoD unique identification or a DoD recognized unique identification equivalent. Pricing Arrangement: Firm Fixed Price	2	Each		
--------------------------	---	---	------	--	--

Section C - Description/Specifications/Statement of Work

Requirements

6K EPJ Shipboard - DDG 134/136 with Spare Battery

Section D - Packaging and Marking

Section E - Inspection and Acceptance

Additional Regulation or Supplemental Clauses Incorporated by Full Text

WSSTERMEZ07 INSPECTION/ACCEPTANCE POINT

(Nov 2002)

1. Inspection of Supplies: At contractor's facility

Name/Address/Location where supplies are to be inspected: At Contractor's Facility

2. Inspection of Packaging (if different from Inspection of Supplies):

Name/Address/Location where Packaging will be Performed and Inspected (if different from Name/Address/Location where supplies are to be inspected):

3. Final Acceptance: At Contractor's Facility

Name/Address/Location where final acceptance is to take place: At Contractor's Facility

Section F - Deliveries or Performance

Overall Contract Delivery Period

Contractor
Destination

Line Item	Delivery Schedule	Estimated Quantity	Address and POC	Special Handling/Notes
0001AA		2 Each		FoB Details Contractor Destination
0001AB		2 Each		FoB Details Contractor Destination
0002AA		1 Each		FoB Details Contractor Destination
0002AB		1 Each		FoB Details Contractor Destination
Option Line Item 0004		4 Each		FoB Details Contractor Destination

FAR Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
52.247-34	F.o.b. Destination.	Jan 1991		

Additional Regulation or Supplemental Clauses Incorporated by Full Text

WSSTERMFZ06 GENERAL INFORMATION-FOB-DESTINATION

(Jun 2002)

TRANSPORTATION: Quotations are requested with transportation costs prepaid to destination. Unless otherwise specified, award will be made on an FOB Destination basis.

INSPECITION/ACCEPTANCE shall occur at:

Contractor's Plant

If different than address on page one please cite location:

NOTE: If Inspection & Acceptance is at Destination charges must be included in offered price.

DELIVERY: _____ Days

(Offeror Insert)

INFORMATION TO BE FURNISHED BY OFFEROR:

Company is:

- ☐ large
- ☐ small
- ☐ woman owned enterprise
- ☐ Mfr
- ☐ minority business enterprise
- ☐ 8(a) enterprise
- ☐ Dealer

To assist the Contracting Officer in analyzing each proposed price in order to determine the fairness and reasonableness of that proposed price, it is requested you provide with your quotation the appropriate information listed:

A. Catalog Price

1. Is the item a standard commercial product sold in substantial quantities to the General Public? If yes, request furnish a copy of the price sheet with your quotation.

YES ☐ NO ☐

2. Is the item, while not the exact catalog item, sufficiently similar so as to be compared with the catalog item? If yes, request provide a copy of catalog price and briefly explain the difference.

YES ☐ NO ☐

B. Contractor's Pricing System

(In development of the current price, were the following generally accepted estimating procedures utilized:)

1. Were cost estimates reviewed and approved by responsible company official(s)?

YES ☐ NO ☐

2. Were specific procedures used in estimating direct/indirect costs?

YES ☐ NO ☐

3. Were the source data used in development of cost elements current, accurate and complete?

YES ☐ NO ☐

4. Were recently audited and approved rates and/or forward pricing rates negotiated and approved by the Administrative Contracting Officer utilized?

YES ☐ NO ☐

Section G - Contract Administration Data

DFARS Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
252.232-7003	Electronic Submission of Payment Requests and Receiving Reports.	Dec 2018		

DFARS Clauses Incorporated by Full Text

252.232-7006 Wide Area WorkFlow Payment Instructions. (Jan 2023)

WIDE AREA WORKFLOW PAYMENT INSTRUCTIONS (JAN 2023)

(a) *Definitions.* As used in this clause-

"Department of Defense Activity Address Code (DoDAAC)" is a six position code that uniquely identifies a unit, activity, or organization.

"Document type" means the type of payment request or receiving report available for creation in Wide Area WorkFlow (WAWF).

"Local processing office (LPO)" is the office responsible for payment certification when payment certification is done external to the entitlement system.

"Payment request" and "receiving report" are defined in the clause at 252.232-7003, Electronic Submission of Payment Requests and Receiving Reports.

(b) *Electronic invoicing.* The WAWF system provides the method to electronically process vendor payment requests and receiving reports, as authorized by Defense Federal Acquisition Regulation Supplement (DFARS) 252.232-7003, Electronic Submission of Payment Requests and Receiving Reports.

(c) *WAWF access.* To access WAWF, the Contractor shall-

(1) Have a designated electronic business point of contact in the System for Award Management at <https://www.sam.gov>; and

(2) Be registered to use WAWF at <https://wawf.eb.mil/> following the step-by-step procedures for self-registration available at this web site.

(d) *WAWF training.* The Contractor should follow the training instructions of the WAWF Web-Based Training Course and use the Practice Training Site before submitting payment requests through WAWF. Both can be accessed by selecting the "Web Based Training" link on the WAWF home page at <https://wawf.eb.mil/>

(e) *WAWF methods of document submission.* Document submissions may be via web entry, Electronic Data Interchange, or File Transfer Protocol.

(f) *WAWF payment instructions.* The Contractor shall use the following information when submitting payment requests and receiving reports in WAWF for this contract or task or delivery order:

(1) *Document type.* The Contractor shall submit payment requests using the following document type(s):

(i) For cost-type line items, including labor-hour or time-and-materials, submit a cost voucher.

(ii) For fixed price line items-

(A) That require shipment of a deliverable, submit the invoice and receiving report specified by the Contracting Officer.

Stand-Alone Receiving Report - Certifications; COMBO - Receiving Report & Invoice - Material

(Contracting Officer: Insert applicable invoice and receiving report document type(s) for fixed price line items that require shipment of a deliverable.)

(B) For services that do not require shipment of a deliverable, submit either the Invoice 2in1, which meets the requirements for the invoice and receiving report, or the applicable invoice and receiving report, as specified by the Contracting Officer.

(Contracting Officer: Insert either "Invoice 2in1" or the applicable invoice and receiving report document type(s) for fixed price line items for services.)

(iii) For customary progress payments based on costs incurred, submit a progress payment request.

(iv) For performance based payments, submit a performance based payment request.

(v) For commercial financing, submit a commercial financing request.

(2)) Fast Pay requests are only permitted when Federal Acquisition Regulation (FAR) 52.213-1 is included in the contract.

[Note: The Contractor may use a WAWF "combo" document type to create some combinations of invoice and receiving report in one step.]

(3) *Document routing.* The Contractor shall use the information in the Routing Data Table below only to fill in applicable fields in WAWF when creating payment requests and receiving reports in the system.

Routing Data Table*

<i>Field Name in WAWF</i>	<i>Data to be entered in WAWF</i>
Pay Official DoDAAC	<u>To Be Determined (TBD)</u>
Issue By DoDAAC	<u>N00104</u>
Admin DoDAAC	<u>TBD</u>
Inspect By DoDAAC	<u>TBD</u>
Ship To Code	<u>N33543 - Norfolk</u>
Ship From Code	<u>TBD</u>
Mark For Code	<u>TBD</u>
Service Approver (DoDAAC)	N/A
Service Acceptor (DoDAAC)	<u>N/A</u>
Accept at Other DoDAAC	<u>N/A</u>
LPO DoDAAC	<u>N/A</u>

DCAA Auditor DoDAAC	<u>N/A</u>
Other DoDAAC(s)	<u>N/A</u>

(*Contracting Officer: Insert applicable DoDAAC information. If multiple ship to/acceptance locations apply, insert "See Schedule" or "Not applicable.")

(**Contracting Officer: If the contract provides for progress payments or performance-based payments, insert the DoDAAC for the contract administration office assigned the functions under FAR 42.302(a)(13).)

(4) *Payment request.* The Contractor shall ensure a payment request includes documentation appropriate to the type of payment request in accordance with the payment clause, contract financing clause, or Federal Acquisition Regulation 52.216-7, Allowable Cost and Payment, as applicable.

(5) *Receiving report.* The Contractor shall ensure a receiving report meets the requirements of DFARS Appendix F.

(g) *WAWF point of contact.*

(1) The Contractor may obtain clarification regarding invoicing in WAWF from the following contracting activity's WAWF point of contact.

(Contracting Officer: Insert applicable information or "Not applicable.")

(2) Contact the WAWF helpdesk at 866-618-5988, if assistance is needed.

(End of clause)

Section H - Special Contract Requirements

Additional Regulation or Supplemental Clauses Incorporated by Full Text

WSSTERMHZ17 MANDATORY USE OF WORKFLOW PRO (WFP) MOD ASSIST MODULE (Mar 2026)

The use of Workflow Pro (WFP) Mod Assist is required under this purchase order/contract.

Mod Assist is the mandatory means of submitting an official request for modification of this contract. Unless otherwise authorized, in writing, by a warranted Contracting Officer, no other means for submitting a request for modification to a contract, or a request for any action that would require a modification to the contract to execute will be accepted by the Government.

Submission of a request for modification of terms and conditions to this contract is not a guarantee that the terms or conditions will be modified.

The Mod Assist module should not be used by contractors to request signatures of End Use Certificates, Non-transfer Certificates.

Should the Contractor experience concerns with the use of Mod Assist, the Contractor must contact brittany.a.langletz.civ@us.navy.mil. The Government will not be responsible for any contract delay or disruption or any increased costs of performance of the Contractor due to the required use or any failure by the Contractor to use the Mod Assist module.

PROCEDURES FOR CONTRACTORS TO REQUEST ACCESS TO WORKFLOW PRO (WFP) MOD ASSIST

Click on the link [https://public.navsupsup.navy.mil/public/ops\\$workflow_pro_public.LOGIN](https://public.navsupsup.navy.mil/public/ops$workflow_pro_public.LOGIN) to open the NAVSUP WSS Workflow Pro (WFP) Mod Assist Vendor page.

To request an account, navigate to the bottom of the page and click "Request Account".

Fill in the information to create the user profile, you must select a Point of Contact from the drop-down menu.

Select "Privacy Act Agreement"; after reading the statement, click "Agree".

When all data has been entered on the form, click the blue "Submit" button.

Notification will be sent when the account is established.

Section I - Contract Clauses

FAR Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
52.203-19	Prohibition on Requiring Certain Internal Confidentiality Agreements or Statements.	Jan 2017		
52.204-9	Personal Identity Verification of Contractor Personnel.	Jan 2011		
52.204-10	Reporting Executive Compensation and First-Tier Subcontract Awards.	Jun 2020		
52.204-13	System for Award Management Maintenance.	Oct 2018		
52.209-6	Protecting the Government's Interest When Subcontracting With Contractors Debarred, Suspended, Proposed for Debarment, or Voluntarily Excluded	Jan 2025		
52.212-4	Contract Terms and Conditions-Commercial Products and Commercial Services.	Nov 2023		
52.222-3	Convict Labor.	Jun 2003		
52.222-19	Child Labor-Cooperation with Authorities and Remedies.	Jan 2025		
52.222-35	Equal Opportunity for Veterans.	Jun 2020		
52.222-36	Equal Opportunity for Workers with Disabilities.	Jun 2020		
52.222-37	Employment Reports on Veterans.	Jun 2020		
52.222-50	Combating Trafficking in Persons.	Oct 2025		
52.222-54	Employment Eligibility Verification.	Jan 2025		
52.223-23	Sustainable Products and Services.	May 2024		
52.226-8	Encouraging Contractor Policies to Ban Text Messaging While Driving.	May 2024		
52.232-33	Payment by Electronic Funds Transfer-System for Award Management.	Oct 2018		
52.232-40	Providing Accelerated Payments to Small Business Subcontractors.	Mar 2023		
52.233-3	Protest after Award. (Deviation) (Alternate I)	Feb 2026	Alternate I	Feb 2026
52.233-3	Protest after Award.	Aug 1996		
52.233-4	Applicable Law for Breach of Contract Claim.	Oct 2004		
52.240-91	Security Prohibitions and Exclusions. (Deviation)	Feb 2026		
52.244-6	Subcontracts for Commercial Products and Commercial Services.	Oct 2025		

DFARS Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
252.203-7000	Requirements Relating to Compensation of Former DoD Officials.	Sep 2011		
252.203-7002	Requirement to Inform Employees of Whistleblower Rights.	Dec 2022		
252.204-7003	Control of Government Personnel Work Product.	Apr 1992		
252.204-7012	Safeguarding Covered Defense Information and Cyber Incident Reporting. (DEVIATION 2024-O0013 REVISION 1)	May 2024	Deviation 2024-O0013	May 2024
252.204-7015	Notice of Authorized Disclosure of Information for Litigation Support.	Jan 2023		
252.204-7018	Prohibition on the Acquisition of Covered Defense Telecommunications Equipment or Services.	Jan 2023		
252.211-7008	Use of Government-Assigned Serial Numbers.	Sep 2010		
252.223-7008	Prohibition of Hexavalent Chromium.	Jan 2023		
252.225-7001	Buy American and Balance of Payments Program.	Feb 2024		
252.225-7048	Export-Controlled Items.	Jun 2013		
252.225-7056	Prohibition Regarding Business Operations with the Maduro Regime.	Jan 2023		
252.225-7060	Prohibition on Certain Procurements from the Xinjiang Uyghur Autonomous Region.	Jun 2023		
252.225-7993	Prohibition on Providing Funds to the Enemy. (DEVIATION 2024-O0003)	Dec 2023	Deviation 2024-O0003	Dec 2023
252.232-7010	Levies on Contract Payments.	Dec 2006		
252.247-7023	Transportation of Supplies by Sea.	Oct 2024		

FAR Clauses Incorporated by Full Text

52.217-6 Option for Increased Quantity. (Mar 1989)

Option for Increased Quantity (Mar 1989)

The Government may increase the quantity of supplies called for in the Schedule at the unit price specified. The Contracting Officer may exercise the option by written notice to the Contractor within 365 days. Delivery of the added items shall continue at the same rate as the like items called for under the contract, unless the parties otherwise agree.

(End of clause)

52.222-35 Equal Opportunity for Veterans. (Alternate I) (Feb 2026) Alternate I (Jul 2014)

Alternate I (JUL 2014). As prescribed in 22.1310 (a)(2), add the following as a preamble to the clause:

Notice: The following term(s) of this clause are waived for this contract: _____[List term(s)].

52.222-36 Equal Opportunity for Workers with Disabilities. (Alternate I)

(Feb 2026) Alternate I (Jul 2014)

Alternate I (JUL 2014). As prescribed in 22.1408 (b), add the following as a preamble to the clause:

Notice: The following term(s) of this clause are waived for this contract: _____[List term(s)].

DFARS Clauses Incorporated by Full Text

252.211-7003 Item Unique Identification and Valuation.

(Jan 2023)

ITEM UNIQUE IDENTIFICATION AND VALUATION (JAN 2023)

(a) *Definitions.* As used in this clause-

"Automatic identification device" means a device, such as a reader or interrogator, used to retrieve data encoded on machine-readable media.

"Concatenated unique item identifier" means-

(1) For items that are serialized within the enterprise identifier, the linking together of the unique identifier data elements in order of the issuing agency code, enterprise identifier, and unique serial number within the enterprise identifier; or

(2) For items that are serialized within the original part, lot, or batch number, the linking together of the unique identifier data elements in order of the issuing agency code; enterprise identifier; original part, lot, or batch number; and serial number within the original part, lot, or batch number.

"Data matrix" means a two-dimensional matrix symbology, which is made up of square or, in some cases, round modules arranged within a perimeter finder pattern and uses the Error Checking and Correction 200 (ECC200) specification found within International Standards Organization (ISO)/International Electrotechnical Commission (IEC) 16022.

"Data qualifier" means a specified character (or string of characters) that immediately precedes a data field that defines the general category or intended use of the data that follows.

"DoD recognized unique identification equivalent" means a unique identification method that is in commercial use and has been recognized by DoD. All DoD recognized unique identification equivalents are listed at <https://www.acq.osd.mil/asda/dpc/ce/ds/unique-id.html>.

"DoD item unique identification" means a system of marking items delivered to DoD with unique item identifiers that have machine-readable data elements to distinguish an item from all other like and unlike items. For items that are serialized within the enterprise identifier, the unique item identifier shall include the data elements of the enterprise identifier and a unique serial number. For items that are serialized within the part, lot, or batch number within the enterprise identifier, the unique item identifier shall include the data elements of the enterprise identifier; the original part, lot, or batch number; and the serial number.

"Enterprise" means the entity (e.g., a manufacturer or vendor) responsible for assigning unique item identifiers to items.

"Enterprise identifier" means a code that is uniquely assigned to an enterprise by an issuing agency.

"Government's unit acquisition cost" means-

(1) For fixed-price type line, subline, or exhibit line items, the unit price identified in the contract at the time of delivery;

(2) For cost-type or undefinitized line, subline, or exhibit line items, the Contractor's estimated fully burdened unit cost to the Government at the time of delivery; and

(3) For items produced under a time-and-materials contract, the Contractor's estimated fully burdened unit cost to the Government at the time of delivery.

"Issuing agency" means an organization responsible for assigning a globally unique identifier to an enterprise, as indicated in the Register of Issuing Agency Codes for ISO/IEC 15459, located at http://www.aimglobal.org/?Reg_Authority15459.

"Issuing agency code" means a code that designates the registration (or controlling) authority for the enterprise identifier.

"Item" means a single hardware article or a single unit formed by a grouping of subassemblies, components, or constituent parts.

"Lot or batch number" means an identifying number assigned by the enterprise to a designated group of items, usually referred to as either a lot or a batch, all of which were manufactured under identical conditions.

"Machine-readable" means an automatic identification technology media, such as bar codes, contact memory buttons, radio frequency identification, or optical memory cards.

"Original part number" means a combination of numbers or letters assigned by the enterprise at item creation to a class of items with the same form, fit, function, and interface.

"Parent item" means the item assembly, intermediate component, or subassembly that has an embedded item with a unique item identifier or DoD recognized unique identification equivalent.

"Serial number within the enterprise identifier" means a combination of numbers, letters, or symbols assigned by the enterprise to an item that provides for the differentiation of that item from any other like and unlike item and is never used again within the enterprise.

"Serial number within the part, lot, or batch number" means a combination of numbers or letters assigned by the enterprise to an item that provides for the differentiation of that item from any other like item within a part, lot, or batch number assignment.

"Serialization within the enterprise identifier" means each item produced is assigned a serial number that is unique among all the tangible items produced by the enterprise and is never used again. The enterprise is responsible for ensuring unique serialization within the enterprise identifier.

"Serialization within the part, lot, or batch number" means each item of a particular part, lot, or batch number is assigned a unique serial number within that part, lot, or batch number assignment. The enterprise is responsible for ensuring unique serialization within the part, lot, or batch number within the enterprise identifier.

"Type designation" means a combination of letters and numerals assigned by the Government to a major end item, assembly or subassembly, as appropriate, to provide a convenient means of differentiating between items having the same basic name and to indicate modifications and changes thereto.

"Unique item identifier" means a set of data elements marked on items that is globally unique and unambiguous. The term includes a concatenated unique item identifier or a DoD recognized unique identification equivalent.

"Unique item identifier type" means a designator to indicate which method of uniquely identifying a part has been used. The current list of accepted unique item identifier types is maintained at <https://www.acq.osd.mil/asda/dpc/ce/ds/unique-id.html>.

(b) The Contractor shall deliver all items under a contract line, subline, or exhibit line item.

(c) *Unique item identifier.*

(1) The Contractor shall provide a unique item identifier for the following:

(i) Delivered items for which the Government's unit acquisition cost is \$5,000 or more, except for the following line items:

Contract Line, Subline, or

Exhibit Line Item Number

Item Description

_____	_____
_____	_____
_____	_____

(ii) Items for which the Government's unit acquisition cost is less than \$5,000 that are identified in the Schedule or the following table:

Contract Line, Subline, or

Exhibit Line Item Number

Item Description

_____	_____
_____	_____
_____	_____

(If items are identified in the Schedule, insert "See Schedule in this table.")

(iii) Subassemblies, components, and parts embedded within delivered items, items with warranty requirements, DoD serially managed repairables and DoD serially managed nonrepairables as specified in Attachment Number ____.

(iv) Any item of special tooling or special test equipment as defined in FAR 2.101 that have been designated for preservation and storage for a Major Defense Acquisition Program as specified in Attachment Number ____.

(v) Any item not included in (i), (ii), (iii), or (iv) for which the contractor creates and marks a unique item identifier for traceability.

(2) The unique item identifier assignment and its component data element combination shall not be duplicated on any other item marked or registered in the DoD Item Unique Identification Registry by the contractor.

(3) The unique item identifier component data elements shall be marked on an item using two dimensional data matrix symbology that complies with ISO/IEC International Standard 16022, Information technology - International symbology specification - Data matrix; ECC200 data matrix specification.

(4) *Data syntax and semantics of unique item identifiers.* The Contractor shall ensure that-

(i) The data elements (except issuing agency code) of the unique item identifier are encoded within the data matrix symbol that is marked on the item using one of the following three types of data qualifiers, as determined by the Contractor:

(A) Application Identifiers (AIs) (Format Indicator 05 of ISO/IEC International Standard 15434), in accordance with ISO/IEC International Standard 15418, Information Technology - EAN/UCC Application Identifiers and Fact Data Identifiers and Maintenance and ANSI MH 10.8.2 Data Identifier and Application Identifier Standard.

(B) Data Identifiers (DIs) (Format Indicator 06 of ISO/IEC International Standard 15434), in accordance with ISO/IEC International Standard 15418, Information Technology - EAN/UCC Application Identifiers and Fact Data Identifiers and Maintenance and ANSI MH 10.8.2 Data Identifier and Application Identifier Standard.

(C) Text Element Identifiers (TEIs) (Format Indicator 12 of ISO/IEC International Standard 15434), in accordance with the Air Transport Association Common Support Data Dictionary; and

(ii) The encoded data elements of the unique item identifier conform to the transfer structure, syntax, and coding of messages and data formats specified for Format Indicators 05, 06, and 12 in ISO/IEC International Standard 15434, Information Technology - Transfer Syntax for High Capacity Automatic Data Capture Media.

(5) *Unique item identifier.*

(i) The Contractor shall-

(A) Determine whether to-

(1) Serialize within the enterprise identifier;

(2) Serialize within the part, lot, or batch number; or

(3) Use a DoD recognized unique identification equivalent (e.g. Vehicle Identification Number); and

(B) Place the data elements of the unique item identifier (enterprise identifier; serial number; DoD recognized unique identification equivalent; and for serialization within the part, lot, or batch number only: original part, lot, or batch number) on items requiring marking by paragraph (c)(1) of this clause, based on the criteria provided in MIL-STD-130, Identification Marking of U.S. Military Property, latest version;

(C) Label shipments, storage containers and packages that contain uniquely identified items in accordance with the requirements of MIL-STD-129, Military Marking for Shipment and Storage, latest version; and

(D) Verify that the marks on items and labels on shipments, storage containers, and packages are machine readable and conform to the applicable standards. The contractor shall use an automatic identification technology device for this verification that has been programmed to the requirements of Appendix A, MIL-STD-130, latest version.

(ii) The issuing agency code-

(A) Shall not be placed on the item; and

(B) Shall be derived from the data qualifier for the enterprise identifier.

(d) For each item that requires item unique identification under paragraph (c)(1)(i), (ii), or (iv) of this clause or when item unique identification is provided under paragraph (c)(1)(v), in addition to the information provided as part of the Material Inspection and Receiving Report specified elsewhere in this contract, the Contractor shall report at the time of delivery, as part of the Material Inspection and Receiving Report, the following information:

(1) Unique item identifier.

(2) Unique item identifier type.

- (3) Issuing agency code (if concatenated unique item identifier is used).
- (4) Enterprise identifier (if concatenated unique item identifier is used).
- (5) Original part number (if there is serialization within the original part number).
- (6) Lot or batch number (if there is serialization within the lot or batch number).
- (7) Current part number (optional and only if not the same as the original part number).
- (8) Current part number effective date (optional and only if current part number is used).
- (9) Serial number (if concatenated unique item identifier is used).
- (10) Government's unit acquisition cost.
- (11) Unit of measure.
- (12) Type designation of the item as specified in the contract schedule, if any.
- (13) Whether the item is an item of Special Tooling or Special Test Equipment.
- (14) Whether the item is covered by a warranty.

(e) For embedded subassemblies, components, and parts that require DoD item unique identification under paragraph (c)(1)(iii) of this clause or when item unique identification is provided under paragraph (c)(1)(v), the Contractor shall report as part of the Material Inspection and Receiving Report specified elsewhere in this contract, the following information:

part. (1) Unique item identifier of the parent item under paragraph (c)(1) of this clause that contains the embedded subassembly, component, or

(2) Unique item identifier of the embedded subassembly, component, or part.

(3) Unique item identifier type.**

(4) Issuing agency code (if concatenated unique item identifier is used).**

(5) Enterprise identifier (if concatenated unique item identifier is used).**

(6) Original part number (if there is serialization within the original part number).**

(7) Lot or batch number (if there is serialization within the lot or batch number).**

(8) Current part number (optional and only if not the same as the original part number).**

(9) Current part number effective date (optional and only if current part number is used).**

(10) Serial number (if concatenated unique item identifier is used).**

(11) Description.

** Once per item.

(f) The Contractor shall submit the information required by paragraphs (d) and (e) of this clause as follows:

(1) End items shall be reported using the receiving report capability in Wide Area WorkFlow (WAWF) in accordance with the clause at 252.232-7003. If WAWF is not required by this contract, and the contractor is not using WAWF, follow the procedures at <http://dodprocurementtoolbox.com/site/uidregistry/>.

(2) Embedded items shall be reported by one of the following methods-

(i) Use of the embedded items capability in WAWF;

(ii) Direct data submission to the IUID Registry following the procedures and formats at <http://dodprocurementtoolbox.com/site/uidregistry/>; or

(iii) Via WAWF as a deliverable attachment for exhibit line item number (fill in) ____, Unique Item Identifier Report for Embedded Items, Contract Data Requirements List, DD Form 1423.

(g) *Subcontracts*. If the Contractor acquires by subcontract, any item(s) for which item unique identification is required in accordance with paragraph (c)(1) of this clause, the Contractor shall include this clause, including this paragraph (g), in the applicable subcontract(s), including subcontracts for commercial products or commercial services.

(End of clause)

Section J - List of Attachments

Exhibits:

Id	Exhibit Name	Exhibit Description	Reference Identifier	Date	Line Item
A	Exhibit A CDRLS_WEP_N7 2025 11-19-25	Contract Data Requirements List (CDRL)		24 Mar 2026	0003

Attachments:

Number	Attachment Name	Attachment Description	Reference Identifier	Date
01	1.04_WEP - SOW TE_6K Walkie Electric Pallet Truck_26 February 2026	Statement of Work		24 Mar 2026

Section K - Representations, Certification, & Other Statements

FAR Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
52.240-90	Security Prohibitions and Exclusions Representations and Certifications. (Deviation)	Feb 2026		

DFARS Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
252.203-7005	Representation Relating to Compensation of Former DoD Officials.	Sep 2022		
252.204-7008	Compliance with Safeguarding Covered Defense Information Controls.	Oct 2016		
252.225-7055	Representation Regarding Business Operations with the Maduro Regime.	May 2022		
252.225-7059	Prohibition on Certain Procurements from the Xinjiang Uyghur Autonomous Region-Representation.	Jun 2023		

FAR Clauses Incorporated by Full Text

52.204-90 Offeror Identification. (Deviation) (Feb 2026)

OFFEROR IDENTIFICATION (FEB 2026) (DEVIATION)

If the Offeror will not have an active Federal Government contracts registration in the System for Award Management (<https://www.sam.gov>) when submitting its offer, it shall complete paragraphs (c) and (d) of this provision and include its responses with its offer.

(a) *Definitions.* As used in this provision-

Commercial and Government Entity (CAGE) code has the meaning provided in the clause at FAR 52.204-91, Contractor Identification, of this solicitation.

Common parent means that corporate entity that owns or controls an affiliated group of corporations that files its Federal income tax returns on a consolidated basis, and of which the offeror is a member.

Electronic Funds Transfer (EFT) indicator means a bank account identifier to establish additional System for Award Management records for identifying alternative EFT accounts (see part 32) for the same entity.

Highest-level owner means the entity that owns or controls an immediate owner of the offeror, or that owns or controls one or more entities that control an immediate owner of the offeror. No entity owns or exercises control of the highest-level owner.

Immediate owner means an entity, other than the offeror, that has direct control of the offeror. Indicators of control include, but are not limited to, one or more of the following: ownership or interlocking management, identity of interests among family members, shared facilities and equipment, and the common use of employees. There may be more than one immediate owner (e.g., joint ventures).

Predecessor means an entity whose assets were acquired by the offeror or another entity (most often through merger or acquisition) and whose affairs are now carried out by the offeror or the other entity under a new name.

Taxpayer Identification Number means the number required by the Internal Revenue Service (IRS) to be used by the offeror to report income tax and other returns. It may be either a Social Security Number or an Employer Identification Number.

Unique entity identifier (UEI) has the meaning provided in the clause at FAR 52.204-91, Contractor Identification, of this solicitation.

(b) *Unique entity identifier (UEI).*

(1) The Offeror shall enter, in the block with its name and address on the cover page of its offer, the annotation "Unique Entity Identifier" followed by the UEI that identifies the Offeror's name and address exactly as stated in the offer. The Offeror shall also enter its EFT indicator, if applicable.

(2) If the Offeror does not have a UEI, it shall go to <https://www.sam.gov> to obtain one. The Government will independently validate the existence and uniqueness of the Offeror before assigning a UEI.

(c) *Taxpayer identification.* The Offeror shall provide with its offer the following information that is necessary to comply with debt collection requirements of 31 U.S.C. 7701(c) and 3325(d); reporting requirements of 26 U.S.C. 6041, 6041A, and 6050M; and the implementing IRS regulations:

(1) Taxpayer identification number (TIN)

☐ TIN: ____;

☐ TIN has been applied for; or

☐ TIN is not required because:

☐ Offeror is a nonresident alien, foreign corporation, or foreign partnership that does not have income effectively connected with the conduct of a trade or business in the United States and does not have an office or place of business or a fiscal paying agent in the United States;

☐ Offeror is an agency or instrumentality of a foreign government; or

☐ Offeror is an agency or instrumentality of the Federal Government.

(2) *Type of organization.*

☐ Sole proprietorship;

☐ Partnership;

☐ Corporate entity (not tax-exempt);

☐ Corporate entity (tax-exempt);

☐ Government entity (Federal, State, or local);

☐ Foreign government;

☐ International organization per 26 CFR 1.6049-4; or

☐ Other.

(3) *Common parent.*

☐ Offeror is not owned or controlled by a common parent as defined in paragraph (a) of this provision; or

☐ Name and TIN of common parent:

Name: _____

TIN: _____

(4) The TIN provided in paragraph (c)(1) of this provision may be matched with IRS records to verify the accuracy of the Offeror's TIN. The Government may use the TIN to collect and report on any delinquent amounts arising out of the Offeror's relationship with the Government (31 U.S.C. 7701(c)(3)).

(d) Commercial and Government Entity (CAGE) code.

(1) The Offeror shall provide its CAGE code with its offer with its name and location address or otherwise include it prominently in its offer. The CAGE code shall be for that name and location address. Insert the word "CAGE" before the code. The Offeror may obtain a CAGE code as indicated in the following table.

If the Offeror is...	Then...
Located in the United States or its outlying areas	Submit a request to the DLA CAGE Branch via https://cage.dla.mil
Located outside the United States and its outlying areas and its country is a member of the	Contact the appropriate National Codification Bureau (https://www .

North Atlantic Treaty Organization (NATO) or a sponsored nation	nato.int/structur/ac/135/about/contacts)
Located outside the United States and its outlying areas and its country is not a member of NATO or a sponsored nation	Contact the NATO Support and Procurement Agency (NSPA) (https://eportal.nspa.nato.int/AC135Public/scage/CageList.aspx)

(2) The Offeror shall provide the CAGE code and legal business name (Do not use a "doing business as" name) for-

- (i) Its immediate owner(s), if any;
- (ii) Its highest-level owner, if any; and
- (iii) Any predecessor(s), or predecessor of an Offeror's predecessor, that held a Federal contract or grant within the last three years.

Owner Type	CAGE Code	Legal Business Name
Immediate owner	_____	_____
Highest-level owner	_____	_____
Predecessor*	_____	_____

* Predecessor CAGE code may be marked "Unknown."

(3) If the Offeror has more than one immediate owner (such as a joint venture), give the information for each owner (or joint venture participant). If the Offeror has more than one predecessor, provide information for each predecessor in reverse chronological order.

(End of provision)

DFARS Clauses Incorporated by Full Text

252.204-7016 Covered Defense Telecommunications Equipment or Services-Representation.

(Dec 2019)

COVERED DEFENSE TELECOMMUNICATIONS EQUIPMENT OR SERVICES-REPRESENTATION (DEC 2019)

(a) *Definitions.* As used in this provision, "covered defense telecommunications equipment or services" has the meaning provided in the clause 252.204-7018, Prohibition on the Acquisition of Covered Defense Telecommunications Equipment or Services.

(b) *Procedures.* The Offeror shall review the list of excluded parties in the System for Award Management (SAM) (<https://www.sam.gov>) for entities excluded from receiving federal awards for "covered defense telecommunications equipment or services".

(c) *Representation.* The Offeror represents that it ☐ does, ☐ does not provide covered defense telecommunications equipment or services as a part of its offered products or services to the Government in the performance of any contract, subcontract, or other contractual instrument.

(End of provision)

Prohibition on the Acquisition of Covered Defense Telecommunications Equipment or

252.204-7017 Services-Representation.

(May 2021)

**PROHIBITION ON THE ACQUISITION OF COVERED DEFENSE TELECOMMUNICATIONS EQUIPMENT OR SERVICES-
REPRESENTATION (MAY 2021)**

The Offeror is not required to complete the representation in this provision if the Offeror has represented in the provision at 252.204-7016, Covered Defense Telecommunications Equipment or Services-Representation, that it "does not provide covered defense telecommunications equipment or services as a part of its offered products or services to the Government in the performance of any contract, subcontract, or other contractual instrument."

(a) *Definitions.* "Covered defense telecommunications equipment or services," "covered mission," "critical technology," and "substantial or essential component," as used in this provision, have the meanings given in the 252.204-7018 clause, Prohibition on the Acquisition of Covered Defense Telecommunications Equipment or Services, of this solicitation.

(b) *Prohibition.* Section 1656 of the National Defense Authorization Act for Fiscal Year 2018 (Pub. L. 115-91) prohibits agencies from procuring or obtaining, or extending or renewing a contract to procure or obtain, any equipment, system, or service to carry out covered missions that uses covered defense telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system.

(c) *Procedures.* The Offeror shall review the list of excluded parties in the System for Award Management (SAM) at <https://www.sam.gov> for entities that are excluded when providing any equipment, system, or service to carry out covered missions that uses covered defense telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system, unless a waiver is granted.

(d) *Representation.* If in its annual representations and certifications in SAM the Offeror has represented in paragraph (c) of the provision at 252.204-7016, Covered Defense Telecommunications Equipment or Services-Representation, that it "does" provide covered defense telecommunications equipment or services as a part of its offered products or services to the Government in the performance of any contract, subcontract, or other contractual instrument, then the Offeror shall complete the following additional representation:

The Offeror represents that it ☐ will ☐ will not provide covered defense telecommunications equipment or services as a part of its offered products or services to DoD in the performance of any award resulting from this solicitation.

(e) *Disclosures.* If the Offeror has represented in paragraph (d) of this provision that it "will provide covered defense telecommunications equipment or services," the Offeror shall provide the following information as part of the offer:

(1) A description of all covered defense telecommunications equipment and services offered (include brand or manufacturer; product, such as model number, original equipment manufacturer (OEM) number, manufacturer part number, or wholesaler number; and item description, as applicable).

(2) An explanation of the proposed use of covered defense telecommunications equipment and services and any factors relevant to determining if such use would be permissible under the prohibition referenced in paragraph (b) of this provision.

(3) For services, the entity providing the covered defense telecommunications services (include entity name, unique entity identifier, and Commercial and Government Entity (CAGE) code, if known).

(4) For equipment, the entity that produced or provided the covered defense telecommunications equipment (include entity name, unique entity identifier, CAGE code, and whether the entity was the OEM or a distributor, if known).

(End of provision)

252.204-7998 Alternate A, Annual Representations and Certifications. (DEVIATION 2026-O0043) (Feb 2026) Alternate A Deviation 2026-O0043 (Feb 2026)

Alternate A, Annual Representations and Certifications (DEVIATION 2026-O0043)(FEB 2026)

Include the following paragraphs (e), (f), and (g) in the provision at FAR 52.204-7:

(e)(1) If the provision at FAR 52.204-7, System for Award Management - Registration, is included in this solicitation, paragraph (g) of this provision applies.

(2) If the provision at FAR 52.204-7, System for Award Management - Registration, is not included in this solicitation, and the Offeror has an active registration in the System for Award Management (SAM), the Offeror may choose to use paragraph (g) of this provision instead of completing the corresponding individual representations and certifications in the solicitation. The Offeror shall indicate which option applies by checking one of the following boxes:

☐ (i) Paragraph (g) applies.

☐ (ii) Paragraph (g) does not apply and the Offeror has completed the individual representations and certifications in the solicitation.

(f)(1) The following representations or certifications in the SAM database are applicable to this solicitation as indicated:

(i) 252.204-7016, Covered Defense Telecommunications Equipment or Services--Representation. Applies to all solicitations.

(ii) 252.216-7008, Economic Price Adjustment--Wage Rates or Material Prices Controlled by a Foreign Government. Applies to solicitations for fixed-price supply and service contracts when the contract is to be performed wholly or in part in a foreign country, and a foreign government controls wage rates or material prices and may during contract performance impose a mandatory change in wages or prices of materials.

(iii) 252.225-7042, Authorization to Perform. Applies to all solicitations when performance will be wholly or in part in a foreign country.

(iv) 252.225-7049, Prohibition on Acquisition of Certain Foreign Commercial Satellite Services--Representations. Applies to solicitations for the acquisition of commercial satellite services.

(v) 252.225-7050, Disclosure of Ownership or Control by the Government of a Country that is a State Sponsor of Terrorism. Applies to all solicitations expected to result in contracts of \$150,000 or more.

(vi) 252.229-7012, Tax Exemptions (Italy)--Representation. Applies to solicitations when contract performance will be in Italy.

(vii) 252.229-7013, Tax Exemptions (Spain)--Representation. Applies to solicitations when contract performance will be in Spain.

(2) The following representations or certifications in SAM are applicable to this solicitation as indicated by the Contracting Officer: [Contracting Officer check as appropriate.]

☐ (i) 252.209-7002, Disclosure of Ownership or Control by a Foreign Government.

☐ (ii) 252.225-7000, Buy American--Balance of Payments Program Certificate.

☐ (iii) 252.225-7020, Trade Agreements Certificate.

☐ Use with Alternate I.

☐ (iv) 252.225-7031, Secondary Arab Boycott of Israel.

☐ (v) 252.225-7035, Buy American--Free Trade Agreements--Balance of Payments Program Certificate.

☐ Use with Alternate I.

☐ Use with Alternate II.

☐ Use with Alternate III.

☐ Use with Alternate IV.

☐ Use with Alternate V.

☐ (vi) 252.226-7002, Representation for Demonstration Project for Contractors Employing Persons with Disabilities.

☐ (vii) 252.232-7015, Performance-Based Payments--Representation.

(g) The Offeror has completed the annual representations and certifications electronically via the SAM website at <https://www.sam.gov>. After reviewing the SAM database information, the Offeror verifies by submission of the offer that the representations and certifications currently posted electronically that apply to this solicitation as indicated in FAR 52.204-7 and paragraph (f) of this provision have been entered or updated within the last 12 months, are current, accurate, complete, and applicable to this solicitation (including the business size standard applicable to the NAICS code referenced for this solicitation), as of the date of this offer, and are incorporated in this offer by reference (see FAR 4.203-1); except for the changes identified below [Offeror to insert changes, identifying change by provision number, title, date]. These amended representation(s) and/or certification(s) are also incorporated in this offer and are current, accurate, and complete as of the date of this offer.

FAR/DFARS provision No.	Title	Date	Change
—	—	—	—

—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

Any changes provided by the Offeror are applicable to this solicitation only, and do not result in an update to the representations and certifications located in the SAM database.

(End of provision)

252.209-7002 Disclosure of Ownership or Control by a Foreign Government.

(Dec 2022)

DISCLOSURE OF OWNERSHIP OR CONTROL BY A FOREIGN GOVERNMENT

(DEC 2022)

(a) *Definitions.* As used in this provision-

(1) "Effectively owned or controlled" means that a foreign government or any entity controlled by a foreign government has the power, either directly or indirectly, whether exercised or exercisable, to control the election, appointment, or tenure of the Offeror's officers or a majority of the Offeror's board of directors by any means, e.g., ownership, contract, or operation of law (or equivalent power for unincorporated organizations).

(2) "Entity controlled by a foreign government"-

(i) Means-

(A) Any domestic or foreign organization or corporation that is effectively owned or controlled by a foreign government; or

(B) Any individual acting on behalf of a foreign government.

(ii) Does not include an organization or corporation that is owned, but is not controlled, either directly or indirectly, by a foreign government if the ownership of that organization or corporation by that foreign government was effective before October 23, 1992.

(3) "Foreign government" includes the state and the government of any country (other than the United States and its outlying areas) as well as any political subdivision, agency, or instrumentality thereof.

(4) "Proscribed information" means-

(i) Top Secret information;

(ii) Communications security (COMSEC) material, excluding controlled cryptographic items when unkeyed or utilized with unclassified keys;

(iii) Restricted Data as defined in the U.S. Atomic Energy Act of 1954, as amended;

(iv) Special Access Program (SAP) information; or

(v) Sensitive Compartmented Information (SCI).

(b) *Prohibition on award.* No contract under a national security program may be awarded to an entity controlled by a foreign government if that entity requires access to proscribed information to perform the contract, unless the Secretary of Defense or a designee has waived application of 10 U.S.C. 4874.

(c) *Disclosure.* The Offeror shall disclose any interest a foreign government has in the Offeror when that interest constitutes control by a foreign government as defined in this provision. If the Offeror is a subsidiary, it shall also disclose any reportable interest a foreign government has in any entity that owns or controls the subsidiary, including reportable interest concerning the Offeror's immediate parent, intermediate parents, and the ultimate parent. Use separate paper as needed, and provide the information in the following format:

Offeror's Point of Contact for Questions about Disclosure (Name and Phone Number with Country Code, City Code and Area Code, as applicable)	

Name and Address of Offeror	

Name and Address of Entity Controlled by a Foreign Government	Description of Interest, Ownership Percentage, and Identification of Foreign Government
_____	_____
(End of provision)	

252.225-7000 Buy American--Balance of Payments Program Certificate. (Feb 2024)

BUY AMERICAN-BALANCE OF PAYMENTS PROGRAM CERTIFICATE-BASIC (FEB 2024)

(a) *Definitions.* "Commercially available off-the-shelf (COTS) item," "component," "critical component," "critical item," "domestic end product," "foreign end product," "qualifying country," "qualifying country end product," and "United States," as used in this provision, have the meanings given in the 252.225-7001, Buy American and Balance of Payments Program-Basic clause of this solicitation.

(b) *Evaluation.* The Government-

(1) Will evaluate offers in accordance with the policies and procedures of Part 225 of the Defense Federal Acquisition Regulation Supplement; and

(2) Will evaluate offers of qualifying country end products without regard to the restrictions of the Buy American statute or the Balance of Payments Program.

(c) *Certifications and identification of country of origin.*

(1) For all line items subject to the Buy American and Balance of Payments Program-Basic clause of this solicitation, the Offeror certifies that-

(i) Each end product, except those listed in paragraphs (c)(2) or (3) of this provision, is a domestic end product and that each domestic end product listed in paragraph (c)(4) of this provision contains a critical component or a critical item; and

(ii) For end products other than COTS items, components of unknown origin are considered to have been mined, produced, or manufactured outside the United States or a qualifying country. For those end products that do not consist wholly or predominantly of iron or steel or a combination of both, the Offeror shall also indicate whether these foreign end products exceed 55 percent domestic content, except for those that are COTS items. If the percentage of the domestic content is unknown, select "no".

(2) The Offeror certifies that the following end products are qualifying country end products:

Line Item Number	Country of Origin

(3) The following end products are other foreign end products, including end products manufactured in the United States that do not qualify as domestic end products. For those foreign end products that do not consist wholly or predominantly of iron or steel or a combination of both, the Offeror shall also indicate whether these foreign end products exceed 55 percent domestic content, except for those that are COTS items. If the percentage of the domestic content is unknown, select "no".

Line Item Number	Country of Origin (If known)	Exceeds 55% Domestic Content (yes/no)

(4) The Offeror shall separately list the line item numbers of domestic end products that contain a critical component or a critical item (see Federal Acquisition Regulation 25.105).

Domestic end products containing a critical component or a critical item:

Line Item Number _____

[List as necessary]

(End of provision)

Section L - Instructions, Conditions, & Notices to Offerors or Quoters

FAR Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
52.203-18	Prohibition on Contracting with Entities that Require Certain Internal Confidentiality Agreements or Statements-Representation.	Jan 2017		
52.204-7	System for Award Management.	Nov 2024		
52.212-1	Instructions to Offerors-Commercial Products and Commercial Services.	Sep 2023		

DFARS Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
252.204-7024	Notice on the Use of the Supplier Performance Risk System.	Mar 2023		
252.215-7013	Supplies and Services Provided by Nontraditional Defense Contractors.	Jan 2023		

FAR Clauses Incorporated by Full Text

52.211-14	Notice of Priority Rating for National Defense, Emergency Preparedness, and Energy Program Use.	(Apr 2008)
-----------	---	------------

Notice of Priority Rating for National Defense, Emergency Preparedness, and Energy Program Use (Apr 2008)

Any contract awarded as a result of this solicitation will be [] DX rated order; < X > DO rated order certified for national defense, emergency preparedness, and energy program use under the Defense Priorities and Allocations System (DPAS) (15 CFR700), and the Contractor will be required to follow all of the requirements of this regulation. [*Contracting Officer check appropriate box.*]

(End of provision)

Section M - Evaluation Factors for Award

FAR Clauses Incorporated by Reference

Number	Title	Effective Date	Alternate/ Deviation	Variation Effective Date
52.217-4	Evaluation of Options Exercised at Time of Contract Award. (Deviation)	Feb 2026		
52.217-5	Evaluation of Options. (Deviation)	Feb 2026		

FAR Clauses Incorporated by Full Text

52.212-2 Evaluation-Commercial Products and Commercial Services. (Nov 2021)

EVALUATION-COMMERCIAL PRODUCTS AND COMMERCIAL SERVICES (NOV 2021)

(a) The Government will award a contract resulting from this solicitation to the responsible offeror whose offer conforming to the solicitation will be most advantageous to the Government, price and other factors considered. The following factors shall be used to evaluate offers:

_____[Contracting Officer shall insert the significant evaluation factors, such as (i) technical capability of the item offered to meet the Government requirement; (ii) price; (iii) past performance (see FAR 15.304); and include them in the relative order of importance of the evaluation factors, such as in descending order of importance.]

Technical and past performance, when combined, are ____[Contracting Officer state, in accordance with FAR 15.304, the relative importance of all other evaluation factors, when combined, when compared to price.]

(b) *Options*. The Government will evaluate offers for award purposes by adding the total price for all options to the total price for the basic requirement. The Government may determine that an offer is unacceptable if the option prices are significantly unbalanced. Evaluation of options shall not obligate the Government to exercise the option(s).

(c) A written notice of award or acceptance of an offer, mailed or otherwise furnished to the successful offeror within the time for acceptance specified in the offer, shall result in a binding contract without further action by either party. Before the offer's specified expiration time, the Government may accept an offer (or part of an offer), whether or not there are negotiations after its receipt, unless a written notice of withdrawal is received before award.

(End of provision)

Naval Supply Systems Command Weapons System Support
(NAVSUP WSS)
Material Handling Program Office, N964

Procurement Documents

Statement of Work No.: NAVSUP WSS SOW-WEP
Test and Evaluation Requirements No.: NAVSUP WSS TE-WEP

WEP

Shipboard, Walkie, Electric Pallet (WEP) Truck

(6000 lb. Rated Capacity)

Table of Contents

STATEMENT OF WORK	0
1.0 SCOPE	1
1.1 Acceptance Criteria.....	1
1.2 Background.....	1
2.0 APPLICABLE DOCUMENTS	1
2.1 Definitions.....	2
2.1.1 Vehicle Orientation.....	2
3.0 REQUIREMENTS	2
3.1 Salient Characteristics.....	2
Table SOW-1	3
3.2 First Article Testing (FAT).	3
3.3 Safety.....	4
3.3.1 Underwriters Laboratory (UL) Safety Rating.	4
3.3.2 Travel Control Automatic Reversing.	4
3.4 Controls.....	4
3.4.1 Direction and speed controls	4
3.4.2 Lift and lower controls	4
3.4.3 Lifting mechanism.....	4
3.5 Battery.	5
3.5.1 Battery Compartment.....	5
3.5.2 Battery Connectors.....	6
3.5.3 Battery Discharge Indicator.	6
3.6 Hydraulic System.	6
3.6.1 Relief Valves.	6
3.6.2 Hydraulic Hoses.	6
3.6.3 Hose and Tube Fittings.....	6
3.6.4 Cylinders.....	6
3.6.5 Cylinder Rods.	6
3.7 Maintainability & Serviceability.....	7
3.7.1 Lubricants and Hydraulic Fluids.....	7
3.8 Braking and Travel Disconnect.....	7

3.8.1	Service Parking Brake.	7
3.8.2	Travel Disconnect (Deadman Brakes).	8
3.8.3	Regenerative Braking.	8
3.9	Pallet Compatibility.	8
3.10	Fork Length.	8
3.11	Wheels Assemblies.	8
3.11.1	Deck Loading.	8
3.11.2	Load Wheels.	8
3.11.3	Floating Casters.	9
3.11.4	Steer/Drive Tires.	9
3.12	Steering.	9
3.13	Operator' Controls/Instruments.	9
3.13.1	Master Switch.	9
3.13.2	Weatherproof Design.	9
3.13.3	Hour-meter.	9
3.13.4	Warning and Notifications -Visual.	10
3.13.5	Warning Device – Audible.	10
3.14	Structural Testing.	10
3.15	Lifting and Tie-Down Points.	10
3.16	Slope Ascension.	10
3.16.1	Approach, Departure and Underclearance.	10
3.17	Ambient Operational Temperature.	10
3.18	Resistance to Saline Atmosphere.	11
3.19	High Impact (HI) Shock Requirement.	11
3.19.1	Tiedown Assemblies for HI-Shock.	11
3.19.2	Tiedown Deck Fitting Pattern.	11
3.20	Electromagnetic Interference (EMI) and Vulnerability (EMV).	11
3.20.1	Electromagnetic Interference (EMI).	11
3.20.2	Electromagnetic Vulnerability (EMV).	12
3.21	Rain.	12
3.21.1	Test Parameters.	12
3.22	Reliability.	12
3.22.1	Power Consumption.	12

3.23	Paint and Coatings.	13
3.23.1	Primer and Topcoat Paint Systems.	13
3.23.2	Powder Coat System.	13
3.23.3	Pre-treatments and Additional Topcoats.	13
3.23.4	Coverage and Color.	13
3.23.5	Cadmium Plating.	14
3.24	Information Plates.	14
3.24.1	Identification Plate.	14
3.24.2	Shipping Data Plate.	14
3.24.3	Instruction, Warning and Caution Plates.	14
3.24.4	Wheel Loading Plate.	15
3.24.5	UL Fire Safety Accreditation Plate.	15
3.24.6	Lubrication Plate.	15
3.24.7	Battery Information Plate.	15
3.25	Vehicle Marking.	15
3.25.1	U.S. Navy (USN) Registration (Serial) Number.	15
3.25.2	Vehicle Weight.	15
3.25.3	Safe Working Load.	16
3.25.4	UL Type Safety Designation.	16
3.25.5	Lifting and Tie-down.	16
3.25.6	Shipboard use.	16
3.26	Special tools and equipment.	16
3.27	Diagnostics.	16
3.27.1	Diagnostic Description.	16
3.27.2	Hand Held Diagnostic Devices.	17
3.27.3	Cyber Security.	17
3.27.4	Diagnostics during FAT.	17
3.27.5	Pre-test Inspection.	17
4.0	REGULATORY REQUIREMENTS	17
4.1	Recovered materials.	17
4.2	Hazardous Materials.	17
5.0	DOCUMENTATION	18
5.1	Technical Manuals.	18

5.1.1	Technical Manual Verification Review.	18
5.2	Provisioning.....	18
5.2.1	Critical Spares and Allowance Parts Lists.....	18
5.2.2	Engineering Data for Provisioning (EDFP).	19
5.2.3	Non-NSN Items.	19
5.2.4	Commercial and Government Entity (CAGE) Code.....	20
5.3	MIP/MRC.....	20
5.3.1	Recommended MIP/MRC developers.	20
5.4	Special Tools and Equipment.	21
5.5	Training.	21
5.5.1	Class Size.....	21
5.5.2	Instructor.....	21
5.5.3	Teaching Aids.....	21
5.5.4	Scheduling.	21
5.5.5	Length of Course.....	21
5.5.6	Syllabus.....	22
5.5.7	Training Certificate.....	22
6.0	PROGRAM MANAGEMENT.....	22
6.1	Contractor Responsibility.....	22
6.2	Conference Meetings.	22
6.2.1	Post-award Guidance Conference.....	22
6.2.2	Test Readiness Review.....	23
7.0	QUALITY ASSURANCE PROVISIONS.....	23
7.1	Contractor Certification.	23
7.1.1	Equipment conformance.	23
7.1.2	Quality Assurance Program Plan.	24
7.1.3	Warranty.....	24
7.1.4	Interchangeability.....	24
8.0	PREPARATION FOR DELIVERY.....	24
8.1	Packaging & Shipment.....	24
8.1.1	Packaging.	24
8.1.2	Freight on Board.	24
8.1.3	Transportation.....	24

8.1.4	Reassembly and Testing.	25
8.1.5	Spray-on Protective Coatings.	25
TEST & EVALUATION REQUIREMENTS		27
1.0	First Article Testing (FAT).	27
1.1	Units Under Test (UUT).	27
1.1.1	Disposition of UUT	27
1.2	Test Facilities, Equipment and Personnel.	27
2.0	Production quality conformance testing.	27
3.0	Test terms and conditions.	27
3.1	Environmental conditions.	27
3.2	Surface conditions.	27
3.3	Authorized maintenance.	28
3.4	Test Priority Recommendations.	28
3.4.1	Truck Dimensions.	28
3.4.2	Lift and Tiedown Testing.	28
3.4.3	Paint Inspection.	28
3.4.4	Reliability Demonstration Test.	28
3.4.5	Production Quality Conformance.	28
3.5	Test Loads.	28
3.6	Tests, Inspections and Demonstrations.	29
4.0	First Article Testing (FAT)	29
4.1	General Requirements.	29
4.1.1	FAT Scheduling.	29
4.1.2	FAT Test Plan.	29
4.1.3	FAT Report Summary.	30
4.2	Pre-test Inspections.	30
4.2.1	Wheel and Tire Inspection.	31
4.2.2	Inspection of Truck and Component Dimensions.	31
4.2.3	UL Fire Safety.	31
4.2.4	Hydraulic Hoses.	31
4.2.5	Battery.	31
4.2.6	Lubricants and Fluids.	31
4.2.7	Serviceability.	31

4.2.8	Controls, Gauges, Switches Indicators.....	32
4.2.9	Markings and Information Plates.....	32
4.2.10	Diagnostic Tool.	32
4.3	Reliability.....	32
4.3.1	Failures and Discrepancies During Test.....	32
4.4	Floating Caster Strength.....	32
4.5	Steering Test and Inspection.	33
4.6	Turning Radius.	33
4.7	Brakes.....	33
4.7.1	Production Quality Performance Brake Testing.....	33
4.8	Travel Speed.	33
4.9	Slope Ascension, Approach, Departure and Underclearance	33
	Table TE-1	34
4.10	Lifting and Lowering Speed.....	36
4.11	Pallet Compatibility.....	36
4.12	Resistance to Saline Atmosphere.....	36
4.12.1	Details.....	36
4.12.2	Additional Guidelines:	36
4.13	Heavyweight High-Impact (HI) Shock Test.....	37
4.13.1	H.I. Shock Test Plan.	37
4.13.2	HI-Shock Final Test Report.	37
4.14	Electromagnetic interference characteristics.....	37
4.14.1	MIL-STD-461.....	37
4.14.2	MIL-STD-464.....	39
4.15	Rain Test.....	39
4.16	Lifting and Tie-Down Points.	39
4.17	Deck Loading.	39
4.18	Characteristics Inspection.....	39
4.19	UL Fire Safety Compliance Inspection.	40
4.19.1	UL Labeling.....	40
4.20	Hydraulic Hoses and Cylinders Inspection.....	40
4.21	Serviceability Inspection.....	40
4.22	Lubricants and Fluids Inspection.....	40

4.22.1	Brand/Type.....	40
4.22.2	Post-Test.....	41
4.23	Control and Master Switch Inspection and Demonstration.....	41
4.24	Paint & Coatings Inspection.....	41
4.24.1	Paint Inspection of UUT.....	41
4.24.2	Paint Inspection for Production Testing.....	41
4.25	Information Plates and Vehicle Markings Inspection.....	41
4.26	Structural Testing.....	41
4.26.1	Guidelines for Structural testing.....	41
4.27	Diagnostics and Cyber Security.....	42
4.27.1	Cyber Security Demonstration.....	42
4.27.2	Diagnostic Check of FAT Unit.....	42
4.27.3	Production Truck.....	42
4.28	Ambient Operational Temperature.....	42
4.28.1	High Temperature.....	43
4.28.2	Low Temperature.....	43
4.29	Serviceability Inspection.....	43
4.30	Production Quality Conformance Testing.....	43
4.31	Production Quality Conformance (QC) Inspection and Testing.....	43
4.31.1	Incremental Production Inspections and Testing.....	44
4.31.2	Inspection.....	44
4.31.3	Testing.....	44
	Table TE-2.....	45
	Table TE-3.....	46
	Figure TE-1.....	47
	Test Method No. 1.....	49
1.0	Test Course:.....	49
2.0	Test Procedure:.....	49
	Figure TM-1.1. Reliability Test Course.....	49
	TEST METHOD NO. 2.....	51
1.0	Test Course:.....	51
2.0	Test Procedure:.....	51

Intentionally Left Blank

STATEMENT OF WORK
Shipboard, Walkie, Electric Pallet (WEP)
Truck

(6000 lb. Rated Capacity)

NAVSUP WSS SOW-WEP

1.0 SCOPE

This Statement of Work (SOW) covers the requirements for a 6,000 lb. capacity, electric powered, low-lift hand guided, walkie-type pallet truck for use on Navy ships. The walkie, electric pallet (WEP) trucks, shall be EE rated to comply with Navy requirements for the handling weapons and ammunition. Shipboard operations demand a truck capable of withstanding a marine/salt air environment, a high electromagnetic interference surrounding, possible high impact shock loads as well as a maneuverable design to accommodate the tight confines of shipboard magazines, storerooms and cargo holds.

1.1 Acceptance Criteria.

The truck must meet the requirements of this SOW and pass tests, inspections and demonstrations call out in NAVSUP WSS TE-WEP.

1.2 Background.

The 6,000 lb. capacity WEP trucks shall replace and supplement similar trucks currently in use on the following classes of Navy ships:

- LPD – Amphibious Transport Dock
- LSD – Landing Ship Dock
- LCC – Amphibious Command Ship
- ESB – Expeditionary Sea Base
- DDG – Guided Missile Destroyer
- CG - Guided Missile Cruiser

2.0 APPLICABLE DOCUMENTS

The revision of the following documents, in effect on the date of the request for proposal, shall form a part of this SOW to the extent specified herein. When documents conflict, this SOW shall govern.

NAVSUP WSS TE-WEP	Testing Requirements for Truck, Pallet, Powered, Electric, Non-Tiering, Walkie Type, Shipboard
NAVSUP Publication 538	Management of Materials Handling Equipment (MHE) and Shipboard Mobile Support Equipment (SMSE)
NAVSEA SW023-AH-WHM-010	Handling Ammunition and Explosives with Industrial Material Handling Equipment
29 CFR, Part 1910.178	Occupational Safety and Health Standards (OSHA)
ANSI/ITSDF B56.1	Safety Standard for Low Lift and High Lift Trucks
MIL-STD-130	Department of Defense Standard Practice: Identification Marking of U.S. Military Property
MIL-STD-209	Interface Standard for Lifting and Tiedown Provisions
MIL-HDBK 267	Guide for Selection of Lubricants and Hydraulic Fluids for use in Shipboard Equipment
NAS 411-1	Hazardous Materials Target List
MIL-STD-461	Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment
MIL-STD-464	Electromagnetic Environmental Effects Requirements for Systems

NAVSUP WSS SOW-WEP

NFPA 505	Fire Safety Standard for Powered Industrial Trucks Including Type Designations, Areas of Use, Conversions, Maintenance, and Operations
SAE J517	Hydraulic Hose
UL 583	Standard Safety for Electric Battery Powered Industrial Trucks
SAE AMS-STD-595	Colors Used in Government Procurement
MIL-STD-810	Environmental Engineering Considerations and Laboratory Tests
MIL-DTL-901	Shock Tests, HI (High Impact) Shipboard Machinery, Equipment, and Systems, Requirements For
MIL-STD-3034	Department of Defense Standard Practice: Reliability-Centered Maintenance (RCM) Process
DOD 4100.39-M VOL 1	Federal Logistics Information System (FLIS) Procedures Manual
DOD 5010.12	Acquisition Management Systems and Data Requirements Control List (AMSDL)
ISO 9001	Quality Management
NAVICP PD-21861	Purchase Description, Manual, Technical, Material Handling Equipment
MIL-P-24534	Planned Maintenance System: Development of Maintenance Requirement Cards, Maintenance Index Pages and Associated Documentation
MIL-DTL-23312	Pallets, Material Handling, Metal (For Ordnance Items) Mk 3 Mod 0, Mk 12, Mod 0 and Mod 1
MIL-STD-31000	Technical Data Package (TDP)

2.1 Definitions.

The following definitions apply to the requirements in this SOW.

2.1.1 Vehicle Orientation.

Within this statement of work and related documents, the forward end of the pallet truck shall be defined as the end that contains the control unit.

3.0 REQUIREMENTS

The truck shall be electrically powered utilizing an on-board maintenance free battery and meet the requirements as noted below.

3.1 Salient Characteristics.

The truck must meet the salient characteristics listed in [Table SOW-1](#), as well as the additional requirements stated within this SOW.

NAVSUP WSS SOW-WEP

Table SOW-1 Salient Characteristics

CHARACTERISTIC	
CAPACITY @ 24 INCH LOAD CENTER & TO FULL LIFT HT.	6,000 LB
MAXIMUM OVERALL LENGTH INCLUDING FORKS (steering handle to the vertical/braking position)	78 IN.
MAXIMUM WEIGHT (including battery)	3100 lbs
LOWERED FORK HEIGHT @ TOP OF FORKS (TOF) (not greater than)	3.25 IN.
LIFT (Minimum)	6 IN.
LIFT HEIGHT @ TOF (not less than)	9.25 IN.
MINIMUM OUTSIDE TURNING RADIUS W/ FORKS RAISED (Not greater than)	69 IN.
MAXIMUM OVERALL WIDTH	40 IN.
MINIMUM UNDERCLEARANCE	2.25 IN.
FORK SPACING - MIN. INSIDE DIM	8.75 IN.
FORK SPACING - MAX. OUTSIDE DIM	27 IN.
LIFTING AND LOWERING TIME (WITH RATED LOAD)	3 - 6 SEC.
MAXIMUM TRAVEL SPEED (Forward, reverse, loaded or unloaded)	3.5 MPH
SLOPE ASCENSION	7 DEG

3.2 First Article Testing (FAT).

To validate the proposed truck meets the Navy's requirements documented in this SOW, testing of pre-production truck(s) is required. The specific FAT requirements and methods are detailed in document: NAVSUP WSS TE-WEP (refer to page [27](#)). A truck used for FAT shall be production ready (fabricated and configured to the same standards as the planned production trucks). Similarly, the configuration of the truck that successfully completes FAT represents the Navy approved configuration. During FAT, no changes influencing the configuration of the FAT units (or production units) shall be incorporated without NAVSUP concurrence/approval.

3.3 **Safety.**

The truck shall conform to the applicable requirements of ANSI/ITSDF B56.1, NFPA 505, UL 583, 29 CFR 1910.178.

NOTE

Refer to paragraph 3.24.5 and 3.25.4 for UL labeling requirements.

3.3.1 **Underwriters Laboratory (UL) Safety Rating.**

The truck shall be designed and certified as type EE based on the requirements of UL 583. In addition, two (2) electrically conductive ground straps shall be incorporated to comply with Navy safety requirements of NAVSUP Publication 538. A copy of the official UL certification documents, from a Nationally Recognized Testing Laboratory (NRTL) shall be provided to NAVSUP prior to the start of production.

3.3.2 **Travel Control Automatic Reversing.**

A means shall be provided to automatically reverse the truck's travel direction if the steering tongue is in the operating range and its control end contacts the walking operator or obstruction.

3.4 **Controls.**

Travel and load handling controls shall meet the following requirements:

3.4.1 **Direction and speed controls.**

Direction and speed controls (rotating handle) shall be mounted on the steering handle and shall be located so that the operator may use either hand to control speed and direction. A means shall be provided to prevent simultaneous actuation of forward and reverse controls. Rotating handles, if used, shall be arranged so that forward rotation (same rotation as wheels) will cause forward motion of the truck and reverse rotation will cause reverse motion of the truck. Trigger type controls are not acceptable. The controls shall be constructed so that they return to neutral position when released. A directional safety device shall also be provided as specified above.

3.4.2 **Lift and lower controls.**

The lift and lower controls for the forks shall be lever or button actuated types and shall be located for operation by either hand. If buttons are used for both lifting and lowering, the one located nearest the operator or the top one, if arranged vertically, shall be actuated to raise the forks. The lift control shall be so arranged that the forks will remain at any position reached when the control is released.

3.4.3 **Lifting mechanism.**

The lifting mechanism (hydraulically operated) shall raise rated load on the forks to a maximum height of 6 inches above the lowered position of the forks. Lowered position of top surface of the forks from the ground surface shall not exceed 3-1/4 inches (+/- 1/8 inch). Lowering speed of the forks, with rated load, shall be manually controlled by activating and deactivating the lowering control to stop and hold load at random heights.

3.5 **Battery.**

The battery shall be 24 volts DEKA 12-G105-13 (DEKA DWG BL3D75). Each battery shall be equipped with the appropriate battery identification device (BID). The battery shall not sit in storage or idle period without the appropriate maintenance care. Maintenance charge/boost shall be conducted at the battery manufacturer's recommended time interval while in storage/idle period.

The battery installed in all production trucks, and spare batteries, presented for government acceptance inspection shall be manufactured within 3 months of the date of inspection.

The battery shall have the capacity necessary to meet the operational requirements as specified within the reliability test, paragraph 3.22. To be qualified for shipboard use, the first article test units batteries shall have full performance capability at the completion of first article testing (FAT).

NOTE

Battery Chargers used board navy ship are either GNB/Power Designers, Model LMT10KW48250TMIL or AeroVironment Inc., Model AVGESVS100(N).

3.5.1 **Battery Compartment.**

Battery Compartment. The battery compartment shall allow easy access for servicing and removal. Battery shall be removed/installed from the compartment either vertically or from the side of the truck.

3.5.1.1 **Battery vertical removal and installation.**

Vertical battery removal and installation shall utilize lifting points integrated into the battery box. Lifting point location as well as work/access space above the battery shall be compatible with a rigging configuration that includes a NAVY MK91 Hook Adapter attached to a MK18 Lifting Beam. Only common hand tools shall be required for fastening hardware on access covers or panels that must be removed to access the battery for removal or installation. Battery compartment and battery box shall be designed to minimize damage that may be caused due to swing of the suspended battery due to ship motion during the removal/installation process.

3.5.1.2 **Battery side removal and installation.**

For trucks utilizing a design that requires the battery to be removed from the side, a second forklift shall be the only handling device required for extracting or inserting the battery. Fully encapsulated forklift pockets shall be incorporated into the base of the battery housing. Fork pockets shall be large enough to allow the insertion of fork tines with a width of 6 in. and a thickness of 2 in. Lifting points shall be integrated into the battery box and shall be compatible with a rigging configuration that includes a NAVY MK91 Hook Adapter attached to a MK18 Lifting Beam. The design shall allow the battery to be removed or installed from both the left and right sides of the truck. Battery shall be restrained from uncontrolled movement due to ship motion during the entire removal or installation process. Appropriate guards shall be incorporated to

NAVSUP WSS SOW-WEP

prevent abrading, crushing, pinching, or other damage to the battery connector and cables during the removal or installation process. Only common hand tools shall be utilized for battery removal and installation.

3.5.2 Battery Connectors.

The battery connectors shall be EURO type-A320 female/male DIN 43589-1 with a mechanical latching system. Female/socket connector shall be installed on the battery cable and mounted to the forklift. The male/pin connector shall be installed on the truck's cable and include a handle.

3.5.3 Battery Discharge Indicator.

A battery discharge indicator, with lift cutout, shall be provided to protect the battery from approaching a dangerously low state of charge. The lift cutout will disable the controls for lifting the forks when the battery's charge reaches a critically low limit, allow enough charge to keep the truck mobile allow it to reach a charging location. A signal light shall visually alert the operator of a low charge condition.

3.6 Hydraulic System.

All system components shall be designed and located to comply with the hydraulic circuit safety requirements identified in ANSI/ITSDF B56.1. The brake system and drive assembly shall not be a part of the main hydraulic system

3.6.1 Relief Valves.

The hydraulic-system shall incorporate relief valve(s) to protect the hydraulic system from exceeding pressures greater than the maximum designed safe working limits.

3.6.2 Hydraulic Hoses.

The use of thermoplastic hoses defined in SAE J517, such as 100R7, 100R8, and 100R18, are prohibited.

3.6.3 Hose and Tube Fittings.

Hose and tube fittings shall be fabricated from corrosion resistant steel or coated to protect and withstand the highly corrosive conditions encountered when operating in a marine, salt air environment. Coatings that require scheduled maintenance to renew their effectiveness by applying/reapplying spay-on or brushed-on products are not acceptable. Corrosion resistance shall be verified by saline resistance testing. Refer to paragraph [3.18](#).

3.6.4 Cylinders.

All hydraulic cylinders shall be fabricated from either seamless steel tubing, or welded and redrawn tubing.

3.6.5 Cylinder Rods.

Hydraulic cylinder rods shall have a state-of-the-art corrosion resistance finish. For decades the Navy has relied on hard chrome plating as the minimum benchmark for a corrosion resistance coating for steel cylinder rods. Chrome plating is still acceptable but because of environmental concerns and rising costs related to this plating process,

NAVSUP WSS SOW-WEP

alternates corrosion resistant processes are being evaluated. The contractor's proposal shall provide detailed information regarding alternative corrosion prevention coating/plating for cylinder rods currently offer that is of equal or better corrosion resistance than chrome plating. This information shall include documentation identifying the advantages and disadvantages of each alternate coating and a cost comparison to chrome plating. Final proposal pricing shall breakdown each plating/coating as a separate option. The Navy shall specify which option is selected upon award.

3.6.5.1 Corrosion Resistance and Durability.

Acceptance of a proposed/offered cylinder rod plating option is not an approval by the Navy that the corrosion resistance is adequate. The hydraulic cylinders (as well as the entire truck) must still pass the resistance to saline atmosphere and durability testing (refer to paragraphs 3.18 and 3.22) before the cylinder rod plating/coating is acceptable and approved for use in the final/production configuration of the truck.

3.7 Maintainability & Serviceability.

All fluid reservoirs and lubrication points shall be easily accessible. Recommended reservoir fluid levels (maximum and minimum) shall be clearly identifiable when servicing reservoirs.

3.7.1 Lubricants and Hydraulic Fluids.

The contractor shall review maintenance requirements and determine when lubricants and hydraulic fluids specified in MIL HDBK 267 are acceptable alternatives. When applicable, operation and maintenance manuals shall incorporate the fluids military designation as cited in MIL-HDBK-267 rather than the equivalent commercial part number, name or trademark. Refer to paragraph 5.1 for additional technical manual requirements.

3.7.1.1 Fluid and Lubricant Inspection.

Prior to and following testing requiring the operation of the truck, fluids and lubricants shall be inspected for condition and compliance to recommended quantity. Lubrication points shall be inspected and lubricated as needed".

3.7.1.2 Fluid and Lubricant Servicing.

Any time during FAT should a fluid require replenishment or replacement, the same brand/type of fluids and lubricants shall be used.

3.8 Braking and Travel Disconnect.

The service parking brakes (3.8.1) and the travel disconnect (deadman brakes) (3.8.2) shall comply with, and meet the performance requirements of ANSI/ITSDF for motorized hand and hand/rider trucks, as follows:

3.8.1 Service Parking Brake.

The service parking brake shall be of the external contracting, internal expanding, or disc mounted on the drive motor shaft, countershaft or drive wheels and be able to set and stop the truck with sufficient torque to hold the truck with rated load on a 10 degree nonskid slope. The brake system shall be interlocked with a relay switch or other means

NAVSUP WSS SOW-WEP

to cause disconnection of the motor circuit from the battery when the brake is applied. The brake shall automatically be applied when the steering handle is within 10 degrees of the vertical (parking) and near horizontal position (service). Whenever the brake is activated, a simultaneous return from an operating position to a vertical braking position when released. Brakes shall be adjustable to compensate for wear.

3.8.2 Travel Disconnect (Deadman Brakes).

Truck shall comply with the electric motorized hand truck travel disconnect requirements in ANSI/ITSDF B56.1. In addition, the Navy requires the installation of hand operated dual brakes levers. The brakes shall be fully applied whenever these levers are in the released position regardless of steering handle position. Both levers must be depressed before the truck's travel controls can be operated (Motor control circuit is disconnected when brakes are applied).

3.8.3 Regenerative Braking.

Truck shall incorporate regenerative braking.

3.9 Pallet Compatibility.

The forks of the pallet truck shall completely enter and withdraw from an empty, double-faced pallet conforming to MIL-DTL-23312 without moving the pallet more than 6 inches in either forward or backward direction. There shall be no contact from fully lowered position to maximum lift height between part of the pallet and the lifting mechanism under the forks including the load wheels of the pallet truck. During the test, there shall be no physical contact between the top surface of the load wheels and the under surface of the pallet deck, and the surfaces of the load wheels shall not come in contact with the forks. Forks shall be end tapered on the underside to facilitate entry or withdrawal from double-faced standard military pallets. The top surfaces of the forks shall have a nonskid covering.

3.10 Fork Length.

Two fork lengths shall be available for trucks defined by this SOW: 36 inch and 42 inch length. Other specifications and performance characteristics shall be common between these two versions as required in this document. The quantity of each version being procured shall be identified within the contract/delivery order. FAT testing shall only be performed on the 42 inch fork length version with the 36 inch truck approved /certified by extension.

3.11 Wheels Assemblies.**3.11.1 Deck Loading.**

The truck carrying a rated load shall have the deck loading per wheel measured.

3.11.1.1 Configuration.

Truck shall be at gross vehicle weight for deck loading calculations and testing.

3.11.2 Load Wheels.

Pallet trucks shall be furnished with a minimum of four load wheels. Load wheels shall be assembled to the underside of the forks and shall be unobstructed when functioning

NAVSUP WSS SOW-WEP

both with and without a load. Load wheels shall be polyurethane with a maximum 6-inch end board and a 7-1/2 inch to 10-1/2 inch wheel opening.

3.11.3 Floating Casters.

Pallet trucks shall have two floating casters assembled to the underside of the pallet truck and straddling the longitudinal centerline of the pallet truck. The floating casters shall be spring loaded to produce an up-and-down motion when load on caster varies. The casters shall have polyurethane tired wheels. Each caster shall withstand, without failure, a static load of 2,000 pounds.

3.11.4 Steer/Drive Tires.

The steer/drive wheel tires shall be polyurethane with a minimum total width of 3 inches. The tires shall conform to sizes and loadings as listed in the Tire and Rim Association (T&RA) Handbook for pressed-on or molded-on solid industrial tires. Static discharge/electrical type tires are prohibited. Two (2) static ground straps with polyurethane tires shall be incorporated.

3.12 Steering.

The pallet truck shall be steered through the drive wheels by a steering handle/tiller equipped with handgrips. The pallet truck shall turn in the same direction as the steering handle when in forward motion. The steering handle shall turn the drive wheel assembly a minimum of 90 degrees in each direction from the neutral/straight movement position (longitudinal centerline). The force required to hold the steering handle in any operating position shall not exceed 10 pounds.

3.13 Operator' Controls/Instruments.

The operator's controls shall include:

3.13.1 Master Switch.

A keyed master switch shall be provided. When the key is removed, control circuits shall be opened or be interrupted making it impossible for any electrical control circuit to be activated. The key shall be removable only when the switch is in the off position. All pallet trucks under each contract shall be keyed identically. Two keys shall be supplied with each truck.

3.13.2 Weatherproof Design.

All truck components (controls, instruments, switches, electrical connections, labels, etc.) shall be weather proof and non-water absorbing. Refer to rain (para [3.20.1](#)), saline resistance atmosphere (para [3.18](#)), and temperature (para [3.17](#)) requirements. These components are not tested individually.

3.13.3 Hour-meter.

An electrically operated hour-meter shall be installed. Hour meter shall record the total number of operational hours for the drive/traction motor.

3.13.4 Warning and Notifications -Visual.

An indicator shall be placed in a location clearly visible to the operator to warn of vehicle faults, failures, or malfunctions. Warning lights may be separate from or integral to gauges or displays. A means shall be provided to check the operation of the indicator light prior to operating the truck.

3.13.5 Warning Device – Audible.

The truck shall be equipped with an electric horn. The horn push button shall be located on the steering handle within reach from the travel/lift controls.

3.14 Structural Testing.

The truck frame, forks, and related structures shall be capable of withstanding a structural test at the percentage of rated load stated below.

- First Article Test: 200 % rated load. This load shall be held for a minimum of one hour with no evidence of permanent deformation greater than 0.063 in or downward drift not exceeding 0.13 in.
- Production Units: 100% rated load. This load shall be held for a minimum of 10 minutes with no evidence of permanent deformation greater than 0.063 in or downward drift not exceeding 0.13 in.

3.15 Lifting and Tie-Down Points.

Permanently affixed lifting and tie down points shall be provided that enables the truck in its stowed configuration to be lifted or restrained to the deck. Lifting and tie down points shall conform to MIL-STD-209, for Type I equipment, excluding helicopter sling lift (HSL) and air transport requirements. Tiedown point shall be sized to allow for use of shipboard tiedown chain hooks as specified in paragraph 3.19.1. Tiedown points shall also withstand HI-Shock testing as specified in paragraph 3.19.

3.16 Slope Ascension.

Pallet trucks with rated load shall ascend a 7.0-degree slope from a dead stop position on the slope in both the forward and reverse pallet truck direction. In addition, the pallet truck shall ascend the 7.0-degree slope with rated load in both forward and reverse at a minimum speed of not less than 0.6 miles per hour.

3.16.1 Approach, Departure and Underclearance.

The truck with rated load shall have sufficient front, rear and underclearance to allow the truck when travelling with a rated load to transition from level ground to movement up a 7.0-degree slope and then at the top of the ramp to transition back traveling on a horizontal surface. No part of the truck shall contact the surface during these surface transitions with exception of wheels and grounding straps.

3.17 Ambient Operational Temperature.

The contractor shall clearly identify if the truck is designed for stowage and continuous operation under ambient temperatures from 0 – 120 degrees Fahrenheit. If non-standard

equipment must be added to meet this requirement, descriptions and specifications of these components and/or systems shall be identified in the contractor's proposal.

3.18 Resistance to Saline Atmosphere.

The truck shall be designed and fabricated to eliminate and/or minimize the corrosive effects of the marine/salt air operation aboard a Navy ship at sea. The truck shall be prepared and tested in accordance with MIL-STD-810, Method 509.7, Salt Fog.

3.19 High Impact (HI) Shock Requirement.

The truck shall withstand medium weight HI shock in accordance with MIL-DTL-901. The truck shall meet the requirements of Grade A, Class I, Type A, Deck mounted, base mounting plane and vertical axis restricted orientation. Truck, with battery installed and fully charged, shall be tested in its normal stowed configuration with forks lowered and steer handle raised.

3.19.1 Tiedown Assemblies for HI-Shock.

The tiedown assemblies used during HI-shock testing shall be Peck & Hale (CAGE 94658), Part Number 15MTC-1529 or equivalent as identified under NSN 2040-01-323-0772. Test facility shall determine the number of tiedowns required for testing. If these tiedowns are not available at the testing facility, the contractor is obligated to purchase these tiedowns and assure they are available for the scheduled test.

3.19.2 Tiedown Deck Fitting Pattern.

The tiedown deck fittings on the test platform shall be positioned to allow the pallet truck tiedown chains to be installed from the truck tiedown points at an angle as close to 45 degrees as possible (45 degrees is optimum). The pallet truck will be secured using a minimum of four tiedown points on the truck. Manufacture shall determine the number of tiedown assemblies recommended to safely restrain the unit during HI-Shock testing. The "minimum breaking strength" of the tiedown assembly (14,400 lbs MBS) shall be used in determining the number of required tiedown assemblies. Tiedown chain assemblies shall be crisscrossed such that a front left tiedown is secured to the deck near the rear left side of the MHE, and a rear left tiedown is secured to the deck near the front left side of the MHE. This configuration is the same for the right side tiedown assemblies. At a minimum, two tiedown assemblies shall be installed at each pallet truck tiedown point to provide sufficient holding force in all directions.

3.20 Electromagnetic Interference (EMI) and Vulnerability (EMV).

The truck shall undergo electromagnetic interference and electromagnetic vulnerability testing in accordance with MIL-STD-461 & 464. Proof of meeting these requirements shall be a certified test report that has been reviewed and approved by the appropriate Navy technical warrant holder.

3.20.1 Electromagnetic Interference (EMI).

The truck shall confirm to the radiated emissions (RE) and radiated susceptibility (RS) EMI requirements of MIL-STD-461. For radiated emissions, procedure RE102 shall be used. For susceptibility to electric fields, procedure RS103 shall apply. The contractor

NAVSUP WSS SOW-WEP

shall be responsible for identifying a suitable facility to perform EMI testing per MIL-STD-461, developing an acceptable test plan, scheduling the test within the time requirements of the contract, correcting identified deficiencies, retesting as necessary based on modifications incorporated and submitting a final test report for Navy technical review. Contractor is responsible for all costs associated with completing this requirement. Refer to NAVSUP WSS TE-WEP for detailed description of testing procedures.

3.20.2 Electromagnetic Vulnerability (EMV).

EMV test following the requirements and processes required under MIL-STD-464, shall be performed by personnel and facilities at the Naval Surface Warfare Center Dahlgren Division (NSWCDD), E3 Assessment & Evaluation Branch (B52), 5493 Marple Road, Suite 156, Dahlgren, VA 22448. To obtain a cost estimate and to establishing a Work for Private Parties (WFPP) Agreement contact NSWCDD directly, POC is Mr. Eric Leasure, (540) 653-3441, eric.a.leasure.civil@us.navy.mil.

Contractor is responsible for all costs associated with completing this testing requirement. The complete final test report including the Navy technical warrant's recommendations will be provided to the contractor within 60 days of completion of testing. In the event that testing identifies deficiencies with the unit under test preventing it from completing testing and/or meeting test requirements, NAVSUP WSS, Code N964, will provide a preliminary copy of the test results to the contractor within 14 days of test completion.

3.21 Rain.

The truck shall be capable of storage and full operation in the rain 5 minutes after testing. Resistance to rain shall be verified following testing requirements and guidelines specified in MIL-STD-810, Test Method 506.6, and Procedure I – Rain and Blowing Rain.

3.21.1 Test Parameters.

The rain test shall be performed with the truck in an unloaded, and parked configuration. The test shall consist of rainfall conditions of 4 inches of rain per hour blown by 40 mile-per-hour horizontal wind. Each of the four sides of the truck shall be tested individually for 30 minutes with the side of the truck being tested positioned perpendicular to the blowing rain. Following testing of each side, the truck shall be inspected to confirm water has not: 1) Pooled on the truck's exterior or on internal or component surface. 2) Entered in hydraulic system or gauges/instruments.

3.22 Reliability.

Truck shall complete a reliability demonstration test as detailed in NAVSUP WSS TE-WEP paragraph 3.4.4, with 1000 cycles on the test course specified in [Test Method No. 1](#)

3.22.1 Power Consumption.

The pallet truck shall comply with the reliability test requirements and cycle continuously on the test course, as specified in TE-WEP, for 8 hours on one (1) full battery charge.

NOTE

NAVSUP WSS SOW-WEP

It is not allowed that plastic body filler compounds be used to cosmetically improve the exterior surface of the truck before applying paint or corrosion preventative coating.

3.23 Paint and Coatings.

All surfaces that are not corrosion resistant shall undergo proper surface treatment, pre-treatment and top coating to provide adequate corrosion protection for use within a marine/salt air environment. Bare and untreated surfaces containing minor smoothness imperfections are acceptable as long as such imperfections do not compromise the integrity and durability of the corrosion protective coating system applied over that area. In their proposal, the contractor shall describe in detail their coating materials and process from surface prep of bare metals to acceptance inspection of the finish-coated components. Metal surfaces, when sufficiently durable, shall be pretreated by abrasive blasting. All abrasive blasting residues shall be removed from surfaces prior to applying the corrosion resistant coating.

3.23.1 Primer and Topcoat Paint Systems.

Corrosion protective paint coatings shall consist of a minimum two-step process, primer and topcoat system, and shall utilize lead and chromate free products that are specifically formulated for continuous exposure in a marine, salt air environment. It is recommended that the primer coat be a corrosion inhibiting catalyzed epoxy. Similarly, top or finish coat shall be compatible with the base/primer coating and is recommended to be an impact and abrasion high-performance gloss urethane. Both primer and top coat shall be applied in uniformly to a total thickness of not less than 6 mils.

3.23.2 Powder Coat System.

Powder coating is an acceptable alternative to conventional spray painting. Powder coat shall consist of a primer and topcoat to obtain the necessary durability. Film build of each layer shall be two (2) to three (3) mils.

3.23.3 Pre-treatments and Additional Topcoats.

The contractor may use additional pretreatments or topcoats to maximize corrosion resistance. Detailed information identifying the type, name, manufacture and characteristic/benefits of pre-treatments or additional coatings shall be included in the contractor's proposal. Total paint thickness requirement shall be adjusted to account for each additional layer.

3.23.4 Coverage and Color.

The finish color shall be 13538 in accordance with SAE AMS-STD-595.

Gauges/instruments, switches, seals, tires, hydraulic cylinder rods, wiring harnesses, rollers, plastics, fabric hoses, etc. shall not be painted. Paint shall be kept off working surfaces where the coating may interfere with working parts or would affect the function/performance of the truck. Motors, pumps, gear case, etc., that are adequately coated by their original manufacturer and have passed the required salt fog testing, need not be repainted to match the color of the truck but shall be properly mask during adjacent painting to prevent overspray. Paint application shall meet applicable standard

NAVSUP WSS SOW-WEP

listed for either urethane or powder coated type application (ASTM D7803, ASTM A153, or urethane paint manufacturer's recommended procedures).

3.23.5 Cadmium Plating.

The use of cadmium plating is prohibited.

3.23.5.1 Exterior Component Alternate Coating and/or Color.

Exterior components (hydraulic cylinders, excluding the frame, body panels, and forks) may come from an OEM/supplier already painted in other coatings and colors than that required above and used by the contractor. Such items need not be repainted to the above finish specifications and color if the OEM paint provides equivalent or better protection and is capable of passing the required resistance to saline atmosphere testing as described in paragraph 3.18. The contractor shall submit a formal request to NAVSUP WSS identifying each external component/item for which the "as purchased" finish paint coating will be use in place of the paint requirements above.

3.23.5.1.1 High Contrast Marking.

Should mandatory markings (see paragraph 3.25) be positioned on exterior component painted a color other than yellow, and result in black lettering being difficult to read, then the lettering color shall be changed to white for better visual contrast.

3.24 Information Plates.

The truck shall be equipped with the following information plates conforming to MIL-STD-130. Plates shall be furnished and installed by the contractor.

3.24.1 Identification Plate.

The pallet truck shall be equipped with an identification plate that is in accordance with ANSI/ITSDF B56.1. Information on this ID plate shall include: pallet truck nomenclature such as, "TRUCK, PALLET, POWERED, ELECTRIC, WALKIE TYPE, SHIPBOARD ", contract number, lifting capacity, lift height, USN registration number, shipping weight, cube dimension, technical manual stock number, warranty expiration date and manufacturer's name and address.

3.24.2 Shipping Data Plate.

The truck shall be equipped with a shipping data plate illustrating the silhouette of the truck in transport position. The data plate shall indicate the truck's center of gravity location and the capacity of the lifting and tie down points and rigging hardware and sling recommendations.

3.24.3 Instruction, Warning and Caution Plates.

The truck shall be equipped with instructions, warnings, caution plates and diagrams describing special or important procedures to be followed in assembling, operating or servicing the truck. Commercially proven decals may be substituted for these instruction plates.

3.24.4 Wheel Loading Plate.

The truck shall be equipped with a wheel loading plate to show wheel loadings on each steer and load wheel on truck with and without rated load. Deck loading values shall be those determined during FAT. Refer to paragraph 4.17.

3.24.5 UL Fire Safety Accreditation Plate.

The truck shall be equipped with a safety accreditation plate that shows the manufacturer's name, truck model number, Type EE safety designation, the accredited independent testing laboratory's name, and registration or index number assigned to the inspected truck, and the date and location of the independent laboratory's inspection.

3.24.6 Lubrication Plate.

The truck shall be equipped with a lubricant/fluid placard installed in a visible location. The information on this plate shall indicate the recommended lubricants and their specific application points. The lubricants shall be listed by both their commercial designation and their military equivalent, if applicable.

3.24.7 Battery Information Plate.

The truck shall be equipped with a battery plate to show the battery weight, dimensions, ampere-hour capacity at 6-hour rate, voltage, number of cells, number of plates, cable lead length and position.

3.25 Vehicle Marking.

The truck shall have the following marking in black block letters. Markings shall be either painted on stencils or adhesive backed vinyl labels unless otherwise stated:

3.25.1 U.S. Navy (USN) Registration (Serial) Number.

With each delivery order, NAVSUP WSS will provide a series of USN registration numbers. One USN number shall be assigned to each production truck.

3.25.1.1 Exterior USN Marking.

The assigned USN registration number shall be marked in block numbers on each side of the truck (Example: 1610-12345). Height of characters shall be between 1.0-3.0 inches and sized based on space available for USN to be printed in a single line.

3.25.1.2 Metal Stamped Body Marking.

The truck shall have the USN number indelibly stamped into fixed, non-removable plate in a location that can be easily viewed on the fully assembled truck and provides protection from damage during routine use. Removal of existing cover panels is acceptable for gaining access to the stamped USN number. The USN number shall be 0.25 in high block characters.

3.25.2 Vehicle Weight.

The truck shall be marked with the letters "VW" followed by the truck's unloaded, empty weight (including battery) on each side of the truck in characters 2.0 inches high. (Example: VW 10500 LBS)

3.25.3 Safe Working Load.

The truck shall be marked with the letters "SWL" followed by the truck's rated lifting capacity on each side of the truck in a minimum size of 2.0 inch high characters. (Example: SWL 6000 LBS)

3.25.4 UL Type Safety Designation.

The safety designation "EE" shall be located on each side and the rear of the truck, sized and positioned in accordance with the marking requirements of UL 583.

3.25.5 Lifting and Tie-down.

Lifting points shall be marked with the terms "LIFT" or "LIFT HERE" dependent on space available. Tiedown points shall be marked with the term "TIEDOWN". Both markings shall be in 0.75 inch high letters.

3.25.6 Shipboard use.

The truck shall be marked with the words "SHIPBOARD USE APPROVED" in not less than 0.75 inch high letters on each side of the truck. Batteries shall be marked with the words "SHIPBOARD CERTIFIED" in a conspicuous place on the battery case in a minimum of 0.75 inch high letters.

3.26 Special tools and equipment.

The manufacturer shall provide a listing of special tools and equipment required for the Navy to perform routine maintenance, diagnose deficiencies and repairs of the truck (See CDRL A003 titled: Special Equipment Tools and Test Equipment List, and see para 5.4). This does not include tools used to perform extensive depot-level overhaul of components (motors, hydraulics cylinders, etc.). Technical manual shall include details on how and when each special tool is used. (See para 5.1). Technical data and a source of supply for each special tool and equipment shall be included in the engineering data for provisioning provided by the contractor IAW para 5.2.2.

3.27 Diagnostics.

Start-up and run diagnostics shall be provided. A built-in display or plug-in handheld device shall be included that allows the Navy full access to status, fault and malfunction codes for troubleshooting and maintenance. Diagnostics shall not rely on additional/separate independent computers for interpretation of data. Prior to first article testing, programmable performance parameters shall be set to comply with the requirements of this Statement of Work. Adjustable parameters shall not be changed for the duration of FAT unless approved in advance by the Navy. The factory values of settings shall be recorded and documented in the first article test report.

3.27.1 Diagnostic Description.

In their solicitation proposal, the contractor shall provide a detailed description, specifications and instruction regarding diagnostic components, tools, and equipment that shall be provided either integral within the truck or as a hand-held tool.

3.27.2 Hand Held Diagnostic Devices.

Hand-held diagnostic devices, if required, shall be shipped separately from the trucks. The quantity and shipping addresses for devices shall be identified in the contract delivery order.

3.27.3 Cyber Security.

To comply with Navy cyber security requirements, diagnostic system interface connectors/ports built into the truck shall be physically secured to prevent access by unauthorized personnel. This includes, but is not be limited to, mechanical locks on access doors or lockable cap on the diagnostic computer's access ports. Handheld diagnostic devices do not require mechanical locks but shall include software security provisions (passwords) to control access to functions that modify the truck's original factory settings.

3.27.3.1 Access Control.

Trucks with operating parameters that can be tailored by the user shall include safeguards (security codes, passwords, etc.) to protect against unauthorized access, modification, and deletion of the operational capability and characteristics to the truck.

3.27.3.1.1 Full/Open/Unrestricted Access.

User access shall be limited to reading and clearing fault codes or resetting of service reminders.

3.27.3.1.2 Restricted Access.

Access to truck parameter that could disable the truck, limit performance or potentially create a safety hazard shall be controlled.

3.27.4 Diagnostics during FAT.

Prior to beginning FAT, the contractor shall brief Navy personnel witnessing testing on the use of the diagnostic system.

3.27.5 Pre-test Inspection.

Prior to each first article test, fault codes and self-diagnostics shall be checked. Deficiencies detected/recorded shall be investigated and resolved before initiating testing. Contractor shall assess faults and those that have an impact on the test scheduled shall be reported to NAVSUP within 24 hours of discovery.

4.0 REGULATORY REQUIREMENTS**4.1 Recovered materials.**

The contractor is encouraged to use recovered materials to the maximum extent practicable in accordance with subpart 23.403 of the Federal Acquisition Regulation (FAR). However, used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the truck.

4.2 Hazardous Materials.

In fabricating, manufacturing, testing, operating, maintaining forms of pollution shall be prevented or reduced whenever feasible. A Hazardous Material (HM) is material that due to

NAVSUP WSS SOW-WEP

its chemical, physical, or biological nature causes safety, public health, or environmental concerns. Aerospace Industries Association National Aerospace Standard (AIA-NAS) 411-1 Hazardous Materials Target List shall be used as guidance in identifying Prohibited, Targeted and Tracked Chemicals.

5.0 DOCUMENTATION

5.1 Technical Manuals.

The technical manual shall be developed based on Purchase Description NAVSUP WSS PD-21861, Technical Manual, Material Handling Equipment.

5.1.1 Technical Manual Verification Review.

Technical manual verification review (See CDRL A004 titled: Technical Manual Verification Review) shall be conducted by the government (MHE ISEA) to verify the truck's preliminary technical manual represents a near 100% complete document and accurately reflects the truck configuration, general information, operating instructions, safety rating, preventative maintenance, repair and overhaul, illustrated parts breakdown and parts list index. Although reviews of preliminary copies of the tech manual may be conducted as often as necessary, the final government manual verification review shall be scheduled after successful completion of first article testing. A truck representing as close to production configuration as possible shall be available for this review which shall last for a period of no more than fourteen consecutive calendar days. This government review shall be conducted at the manufacturer's facility. The truck shall be operated only to the extent required to ensure that each section of the manual is accurate. No repair or overhaul operations shall be conducted, but this documentation shall be reviewed for clarity. The illustrated parts breakdown and parts list index shall be reviewed to the extent possible without major disassembly of the truck. The contractor shall compile a written summary of discrepancies identified during this review that shall be included in the technical manual verification review minute to be provided within 14 days after the end of the review meeting.

5.2 Provisioning.

NOTE

The description provided in paragraph 5.2.1 is to assist the contractor in estimating the scope of documentation required under Engineering Data for Provisioning in para 5.2.2.

5.2.1 Critical Spares and Allowance Parts Lists.

An Allowance Parts List (APL) is the Navy's primary document identifying parts that have been provisioned and are available within the National Stock System. The APL is derived from a list of parts identified by the Navy as critical spares or those forecasted as necessary to resolve anticipated maintenance and common repairs to the truck. The critical parts list does not include common sized hardware (nuts, bolts, screws, washer, etc.) or major assemblies, but shall include routine wear items (brake pads, belts, tires, etc.), sub-assemblies (starter, pumps, alternator, hose assemblies, etc.) and components (relays, starter switch, etc.) with a historical demand that can impact the

NAVSUP WSS SOW-WEP

readiness and availability of the truck. Components on the APL shall require engineering data documentation per para 5.2.2. The critical parts list and APL shall be developed by the Navy's MHE ISEA and logistic specialists based on the parts breakdown information in the final/approved technical manual (see para 5.1.1). The critical parts list shall be provided to the contractor within 60 days following acceptance of the completed technical manual. The contractor may review the critical parts list and provide to the MHE ISEA recommendations on additional critical parts.

5.2.2 Engineering Data for Provisioning (EDFP).

An approved EDFP is required for systems or equipment that are acquired for Navy use and for which Provisioning Technical Documentation (PTD) is being acquired (See CDRL A005 titled: Engineering Data for Provisioning). This includes components replaced during scheduled maintenance, common wear items, and parts identified by the Navy as critical spares. EDFP is the technical data that provides definitive identification of dimensional, material, mechanical, electrical, or other characteristics adequate for provisioning of the support items of the end article(s) on contract. EDFP consists of but is not limited to data such as specifications, standards, drawings, photographs, sketches and descriptions, and the necessary assembly and general arrangement drawings, schematics, drawings, schematic diagrams, wiring and cable diagrams, etc., or what is sometimes referred to as form, fit and function. This data is necessary for the assignment of Source, Maintenance, and Recoverability (SMR) codes, for assignment of Item Management Codes, prevention of proliferation of identical items in the Government inventory, maintenance decisions, and item identification necessary for the assignment of a National Stock Number (NSN). EDFP format and content must be prepared in accordance with the latest industry standards and must be reproducible, as outlined below. Approved EDFP shall contain appropriate annotations, i.e., proper Distribution Statements, Military Critical Technology markings, etc. Each item listed on the EDFP shall identify the actual OEM in accordance with DOD 4100.39-M, Volume 1, paragraph 1.1.7 (f) (3).

5.2.3 Non-NSN Items.

For items without an NSN, recognized industry standard or government specification or standard, the following order of precedence is required for EDFP provided by the contractor:

- a) Technical Data equivalent to approved Product Engineering Drawings as defined in MIL-STD-31000
- b) Commercial drawings
- c) Commercial manuals, catalogs or catalog descriptions
- d) Sketches or photographs with a brief description of dimensional, material, mechanical, electrical or other characteristics.

5.2.3.1 Drawings.

Drawings required to support provisioning shall be assembly drawings with a complete bill of material identifying parts. If subassemblies listed on a drawing are not

NAVSUP WSS SOW-WEP

broken down, drawings for the subassemblies are required as part of the drawing package. Assemblies and subassemblies shall have drawings that fully identify parts that are encompassed within a component, sub-system, and system.

5.2.3.1.1 **Supplemental Provisioning Technical Documentation (SPTD).**

If the actual OEM is not identified in the bill of material, SPTD in the form of catalog sheets, correspondence from the OEM (OEM letterhead), email, etc. shall be submitted to identify the OEM.

5.2.3.1.2 **Proprietary Rights.**

A company's declaration of Proprietary Rights for their equipment does not negate the requirements of EDFP. Drawings are stored in a secure repository. A Proprietary Rights Statement shall be clearly included within the field of the drawing. Military critical or proprietary drawings are coded as such and access is restricted in a manner prohibiting contractors from being able to access, view, print, or obtain these proprietary drawings. Shall contractor access be required it is limited to contractors working for DOD that have been vested with current active Non-Disclosure letters on file.

5.2.4 **Commercial and Government Entity (CAGE) Code.**

CAGE code reference numbers and units of measure/units of measure price (UI/UM PRICE) are required in order to generate national stock numbers (NSNs).

5.3 **MIP/MRC.**

The contractor shall develop and deliver Maintenance Index Pages (MIPs) and Maintenance Requirement Cards (MRCs) in accordance with MIL-STD-3034 and MIL-P-24534 (See CDRLs A006 and A007 titled: Planned Maintenance System Maintenance Index Pages and Planned Maintenance System Maintenance Requirement Card). Delivery for approval shall be in electronic format [New PMS Editor (NPE)] to the ISEA address listed below. Developers for the MIPs/MRCs are to be (minimum) Level 2 certified. MIP/MRC must be acquired under separate contract line item in the contract.

ISEA:
Director
Naval Surface Warfare Center
Indian Head Division Detachment Picatinny
Building 458, Whittemore Ave.
Picatinny Arsenal, New Jersey 07806-5000
Attn: Andrew Heinrichs

5.3.1 **Recommended MIP/MRC developers.**

The following recommended developers that may be contacted for assistance with development of MIPs/MRCs.

Asystek Solutions Group	QED Systems, Inc.
-------------------------	-------------------

(888) 659-6499 info@asysteksq.com	(757) 490-5000 info@qedsysinc.com
--	--

5.4 **Special Tools and Equipment.**

Special tools and equipment, as defined in paragraph 3.26, shall be acquired under a separate contract.

5.5 **Training.**

The contractor shall provide a one-time training course developed to provide Navy training personnel sufficient knowledge and hands-on experience in order for them to provide training to Navy truck operators and maintenance personnel. Commonly referred to as "Train the trainers", this class shall be scheduled to occur after the completion of FAT and prior to the first production deliveries.

5.5.1 **Class Size.**

No more than eight (8) students shall be scheduled for this class.

5.5.2 **Instructor.**

The vendor shall provide a qualified training instructor, an appropriately sized and furnished classroom, an open area for truck operation and other related hardware or supplies required for this training.

5.5.3 **Teaching Aids.**

Students shall be furnished with copies of teaching aids and documents necessary to conduct future classes to educate Navy operating and maintenance personnel. Copies of printed documents shall be provided in a CD/DVD format.

5.5.4 **Scheduling.**

Training shall be conducted after successful completion of FAT but no later than 30 days prior to the first shipment of a production unit to the Navy.

5.5.5 **Length of Course.**

Contractor shall determine the appropriate length of time for this class so that students receive a combination of classroom and hands-on training. Upon completing this course each student shall have:

- (a) A complete and detailed understanding of all truck systems.
- (b) Thorough understanding of safe the operations and potential safety hazards.
- (c) Detailed knowledge of routine scheduled maintenance.
- (d) Sufficient hands-on experience to safely and proficiently operate the truck.
- (e) Detailed knowledge on the use of the diagnostic tool (refer to paragraph 3.27 - Diagnostics).

5.5.6 Syllabus.

Not less than 14 days prior to the start date of training, a syllabus shall be provided (See CDRL A008 titled Syllabus - Factory Training). Syllabus shall include at a minimum the following:

- (a) Course location and start & finish date.
- (b) Course description and training strategy, including a daily agenda.
- (c) Training elements and sequence of events
- (d) List of training materials and documents provided to students
- (e) List of personal protective equipment/clothing which students must bring

5.5.7 Training Certificate.

A certificate of proficiency and completion of training shall be provided to each student upon successful completion of this class.

6.0 PROGRAM MANAGEMENT**6.1 Contractor Responsibility.**

The Contractor is responsible for maintaining their Systems Engineering and Program Management policies and procedures to accomplish the tasks identified herein. The Contractor is responsible for planning, organizing, and managing the effort throughout the life of this contract. The Contractor is responsible for monitoring program costs, performance, and schedule to ensure requirements are being met, and to provide early notification of problems to resolve and reduce risk.

6.2 Conference Meetings.

Contractor shall arrange meetings (See CDRL A009 titled: Conferences/Meetings Agenda and Minutes) and provide Agenda, Minutes, and Action Items List. The following meetings are required at a minimum:

6.2.1 Post-award Guidance Conference.

This meeting shall occur not later than 30 days after award (See CDRL A009 titled: Conferences/Meetings Agenda and Minutes). This meeting shall be held via teleconference. Contractor shall present:

6.2.1.1 Overview.

Overview of the specifications and performance of the truck as listed in their proposal. Explaining how each paragraph in the Statement of Work shall be met.

6.2.1.2 Schedule.

Present a schedule of key events from contract award to the delivery of technical manuals following the completion of FAT. This schedule shall include, but is not limited to: Pre-FAT testing performed by the contractor, estimated completion of build of FAT test unit(s), a basic schedule of FAT events, their order of occurrence and locations and the planned delivery of CDRLs during this time period.

NAVSUP WSS SOW-WEP

6.2.1.3 Updates.

Present updates to the proposed truck that may be realized after proposal acceptance/contract award.

6.2.1.4 Risk Potential.

Identify where in the program risks are involved that may negatively impact the schedule.

6.2.2 Test Readiness Review.

Test readiness review provides a detailed review of the contractor's readiness to enter test with a high confidence that the equipment shall successfully complete the testing. This meeting shall be scheduled not less than 30 days prior to the start of FAT (See CDRL A009 titled: Conferences/Meetings Agenda and Minutes). The contractor shall:

6.2.2.1 Test Schedule.

Present a detailed test schedule referencing each test events required by this SOW and NAVSUP WSS TE-WEP.

6.2.2.2 Updates.

Present design or performance changes incorporated since the post-award briefing.

6.2.2.3 Status/Demonstration.

Provide a functional and operational demonstration of the truck or display current progress of manufacturing of the FAT unit(s).

6.2.2.4 FAT Risk Review.

Identify and risks during FAT and how they can be mitigated to prevent or minimize the effect on the testing and production schedules.

6.2.2.5 Logistics Updates.

Present the current state of development of the technical manual and MIPS/MRC.

7.0 QUALITY ASSURANCE PROVISIONS**7.1 Contractor Certification.****7.1.1 Equipment conformance.**

The contractor shall certify and maintain substantiating evidence that the product offered meets the characteristics of this Purchase Description and conforms to the contractor's drawings, specifications, standards and quality assurance practices. In addition, the item delivered is substantially the same product offered for sale in the commercial marketplace or is the same product that has been delivered to the government on a previous contract or purchase order. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

7.1.2 Quality Assurance Program Plan.

The contractor shall establish, implement, document and maintain a quality system that ensures conformance to contractual requirements. The contractor shall implement the requirements of ANSI/ASQC Q9001, ISO 9001 or an equivalent quality system model: No third party certification is required. The contractor shall make their quality assurance program plan or quality manual (development of a Government unique document is not required) available for Government review at their facility as required. The contractor shall officially notify the Government when they update their plan or manual throughout the contract period of performance.

7.1.3 Warranty.

Unless otherwise specified in the contract or purchase order, the manufacturer's standard commercial warranty shall apply.

7.1.4 Interchangeability.

Upon successful completion of testing and Navy concurrence FAT requirements have been met, the production configuration of the truck is considered to be frozen. Hardware, material, components and assemblies incorporated in the truck shall be identical for every production truck under this contract. Shall the contractor determine a configuration change is necessary during production, that change shall require prior government approval before production units can be altered. The contractor shall provide information and formally request the Navy's approval by submitting an Engineering Change Proposals (ECP). The ECP shall include related changes to technical manuals (see paragraph 5.1), MIPs/MRCs (see paragraph 5.3) and provisioning data (see paragraph 5.2).

7.1.4.1 Engineering Change Proposals (ECP).

ECPs are prepared and submitted to the Contracting Officer in accordance with the configuration management requirements of associated Contract Data Requirements List (CDRL), DD Form 1423 (See CDRL A010 titled: Engineering Change Proposal during production).

8.0 PREPARATION FOR DELIVERY**8.1 Packaging & Shipment.****8.1.1 Packaging.**

Preservation, packaging, packing and marking for shipment shall be in accordance with the manufacturer's standard commercial practice.

8.1.2 Freight on Board.

Destination.

8.1.3 Transportation.

The pallet truck shall be shipped in enclosed type motor vehicles. If transportation terminals (way stations) are used, the truck shall be stored inside.

8.1.4 Reassembly and Testing.

If the truck's mast is removed for transportation, the manufacturer shall be responsible for the reassembly of the mast to the truck at the final destination and then performing a weight test to certify the re-assembled truck. Manufacturer is responsible for providing necessary tools, personnel and supporting equipment required to perform the above tasks.

8.1.5 Spray-on Protective Coatings.

Sprayed-on coatings, applied to the fully assembled truck and used as additional and temporary protection during shipment, shall not be used.

Intentionally Left Blank

TEST & EVALUATION REQUIREMENTS

TRUCK, PALLET, POWERED, ELETRIC, NON-TIERING, WALKIE TYPE, SHIPBOARD

1.0 First Article Testing (FAT).

FAT shall be performed on operational, complete and production ready truck(s) hereafter referred to as "truck". This document shall be used in conjunction with Statement of Work (SOW), NAVSUP WSS SOW-WEP for inspections (I), demonstrations (D) and tests (T) identified in [Table TE-1](#).

NOTE

FAT shall only be conducted utilizing the truck configured with a fork length of 42 inch. Results of this testing will then be used to approve/certify the 36 inch fork length configuration by extension.

1.1 Units Under Test (UUT).

To successfully complete FAT in the allotted time, the manufacturer shall decide the number of trucks to produce for testing. The FAT test plan (see paragraph 0) shall clearly state the number of test trucks, referred to as UUTs, and shall identify the test(s) that each truck shall undergo.

1.1.1 Disposition of UUT

Upon completion of FAT, the UUT(s) shall not be reconditioned and/or used for deliverable line items (production units). The contractor shall determine and carry-out the method for disposal of the UUT(s) unless otherwise instructed in the contract.

1.2 Test Facilities, Equipment and Personnel.

Unless specifically stated otherwise in this document or NAVSUP WSS SOW WEP, the contractor is responsible for determining and arranging the facilities, equipment and personnel necessary to conduct the required testing.

2.0 Production quality conformance testing.

All production trucks, prior to submittal for acceptance by the Navy, shall be subjected to the production performance tests marked "T", "I", or "D" as specified in the Production Quality Conformance column (column 2) of [Table TE-1](#).

3.0 Test terms and conditions.

Test conditions and schedule shall be as follows:

3.1 Environmental conditions.

Unless otherwise specified, tests shall be conducted at ambient temperature and climatic conditions existing at the place of test. Ambient conditions shall be recorded prior to each test.

3.2 Surface conditions.

The test surface, unless specified within the tests procedures, shall be smooth, dry and level (within 1 degree) surface. The surface shall also be free of debris, sand, gravel, etc.

3.3 **Authorized maintenance.**

Only maintenance established by the contractor as the established routine scheduled maintenance and submitted prior to commencement of testing shall be performed during FAT and Production Quality Conformance tests.

3.4 **Test Priority Recommendations.**

Tests shall be in accordance with the requirements within this document and may be conducted in order or combination as desired with the following exceptions:

3.4.1 **Truck Dimensions.**

It is recommended that inspections for truck and component dimensional requirement (refer to [Table SOW-1](#)) be conducted before testing involving truck performance.

3.4.2 **Lift and Tiedown Testing.**

Lift and tiedown testing shall be successfully completed prior to conducting HI-Shock testing.

3.4.3 **Paint Inspection.**

Inspection of paint for compliance to requirements, para [4.24](#), shall be conducted before environmental tests (rain, temperature, and saline resistance) and before performance testing so as to avoid damage caused during testing and related paint repairs/repainting.

3.4.4 **Reliability Demonstration Test.**

Reliability shall be the last FAT initiated and completed. Modifications identified as required to pass the previously completed test in the FAT program, shall be incorporated into the truck used for reliability testing.

3.4.5 **Production Quality Conformance.**

Production Quality Conformance tests are conducted on production trucks and shall be witnessed and/or results confirmed by a designated Government representative.

3.4.5.1 **Production Readiness.**

Production of assembly trucks shall not be initiated until the contractor receives acknowledgement from the contracting officer stating:

- (a). The Navy has accepted the testing results from FAT as summarized in the FAT final report (paragraph [4.1.3](#)). This Navy acceptance then formally ends FAT and establishes the approved configuration of production truck.
- (b). The Navy concurs the technical manual is complete and is acceptable.

3.5 **Test Loads.**

All loads necessary to perform the testing required by this document shall be an unrestrained cube with overall dimensions of twice the load center dimension and whose center of gravity is located at the geometric center of the cube. The tolerance for weight of the test load shall be +2 percent, -0 percent.

3.6 Tests, Inspections and Demonstrations.

The UUT(s) used during FAT shall be subjected to testing, inspections and/or demonstrations as indicated by either a "T", "I" or "D", respectively, in Column 1 of [Table TE-1](#). Successful completion of FAT does not influence the tests requirements for production units as noted in column 2 of [Table TE-1](#).

4.0 First Article Testing (FAT)

4.1 General Requirements.

4.1.1 FAT Scheduling.

The contractor shall develop the schedule for FAT. FAT testing shall be completed and the FAT test report summary (See CDRL 013 titled: Test/Inspection Report) shall be submitted for Navy review within 240 days from the initiation of FAT testing. Fourteen days prior to the start of each first article test described herein, the contractor shall notify the Navy of the date, time, and location of the planned test. In response NAVSUP WSS shall confirm whether a Navy MHE Program Office representative will attend. (See CDRL A012 titled: Notification of First Article Test).

4.1.2 FAT Test Plan.

Prior to testing, inspections or demonstrations described in this document, the contractor shall submit comprehensive test plan for the truck (See CDRL A011 entitled: Test Plan for First Article Testing). These plans shall be a compilation of the test procedures to be followed for each test identified in [Table TE-1](#), column 1. Accompanying each test plan shall be a test schedule detailing the anticipated start and completion dates for tests. This test plan shall be submitted for Navy review not later than 14 days prior to the date of the test readiness review meeting (refer to paragraph [6.2.2](#) in the statement of work). Details within the test procedures shall include (but are not limited to).

- Number of trucks used for FAT and on which test each truck shall be used.
- Identification of applicable documents,
- Test equipment and facility requirements
- Definition of test failure,
- Detailed step-by-step description of testing,
- Pre-test set-up and preparations of the truck undergoing test,
- Pre and post-test inspections and evaluation methods.

During FAT, changes to test procedures or schedule shall be documented in a revision to the FAT test plan and a copy provided to the Navy.

4.1.2.1 Navy's Technical Warrant Holder (TWH) Review.

MIL-STD-461 electromagnetic interference (EMI) and MIL-DTL-901 High Impact (HI) Shock test plans, must be reviewed separately by the Navy's technical warrant holders (TWH) for these technical fields. Within 60 days from receipt, the TWHs shall reply individually with comments, corrections and recommendations. The contractor shall incorporate this information into the test plan and resubmit a revised test plan for approval. Only once the test plan is approved can either EMI or HI-Shock testing be

NAVSUP WSS TE-WEP

initiated. Submit test plans to NAVSUP WSS who shall coordinate efforts with the appropriate Navy TWHs.

4.1.3 FAT Report Summary.

Upon completion of testing the contractor shall compile FAT information and results into a comprehensive final report summary (See CDRL A013 titled: Test/Inspection Report). The FAT report summary shall compile the testing results from the FAT program and should include:

- The original test plan.
- All approved variances/deviations/waivers that impact FAT. (See CDRL 018 titled: Request for Variance/Deviation/Waiver Pre-production).
- Details descriptions, investigation results, and corrective action taken on failures, discrepancies, non-conformances.
- Description of equipment modifications developed and incorporated.
- Listing of personnel who witnessed each testing.

This test report summary shall be submitted for government approval within 30 days after completion of FAT.

4.1.3.1 Navy's TWH Review of Findings.

MIL-STD-461 EMI and MIL-DTL-901 HI Shock FAT test results must be reviewed and approved by the appropriate Navy TWH. The TWHs shall require 45 days to perform their review, and provide approval and/or recommendations. Should the truck fail to meet test requirements the contractor is responsible for related redesign, incorporation of equipment changes, retesting and submission of an updated FAT test report. Only once the test results and report are approved by the Navy will these tests be considered completed. Submit test plans to NAVSUP WSS who shall coordinate review and approval efforts with the appropriate Navy THWs.

NOTE

During test requiring the UUT to be operating, systems shall be monitored to verify that critical values (oil pressure, oil temperature, hydraulic temperature, coolant temp, voltage, etc.) remain within their designated normal operational range. How systems shall be monitored and recorded during the test shall be explained within the contractor's test plan (para 0 above). Deviations of any reading from the expected norm shall be noted and explained in the test results. Should critical parameters stray outside of the expected normal range to trigger a fault code, warning or failure light, automatic shutdown or reduction of performance, it shall be considered as a test failure and the test shall immediately be concluded.

4.2 Pre-test Inspections.

Prior to the start of FAT, the following inspections shall be performed:

4.2.1 Wheel and Tire Inspection.

All wheels and tires shall be inspected to confirm compliance with the requirements in the SOW, paragraph 3.11. The contractor shall provide information to confirm material specification. Failure to meet material and/or size requirements constitutes a failure of this inspection.

4.2.2 Inspection of Truck and Component Dimensions.

All dimensions specified in Table SOW-1 shall be measured and verified to be in compliance. Dimensions that do not comply shall be documented and reported to NAVSUP. FAT cannot proceed until dimensional discrepancies are resolved.

4.2.3 UL Fire Safety.

The contractor shall provide documentation verifying the truck conforms to an "EE" rating per UL 583 and has been properly/officially inspected and certified. Failure to provide verification of UL approval and certification shall constitute a failure of this inspection.

4.2.4 Hydraulic Hoses.

The truck shall be inspected or the contractor shall provide the specifications of hoses used to confirm the requirements of paragraph 3.6.2 in the SOW are met. Non-conforming hoses shall be identified and corrective action completed to replace the identified hoses before FAT can be initiated.

4.2.5 Battery.

The battery and its connections shall be inspected to confirm they meet the requirements as described in the SOW, paragraph 3.5 (including subparagraphs).

4.2.5.1 Battery Handling Beam Compatibility.

Contractor shall confirm the battery is compatible with the specified Navy handling beam by conducting a demonstration and removing the battery using the Mk 18, Mod 2 handling beam. Inability to properly attach the handling beam and remove the battery constitute a failure of this demonstration.

4.2.6 Lubricants and Fluids.

Contractor shall provide documentation to verify lubricants and fluid used on the UUT are in compliance to para 3.7 in the SOW. Discrepancies shall be corrected before the UUT can proceed with FAT.

4.2.7 Serviceability.

UUT shall be inspected to confirm fluid reservoirs and lubrication points are easily accessible and recommended fluid levels are clearly marked on reservoirs as required in paragraph 3.7 in the SOW. Discrepancies shall be corrected before the truck can proceed with FAT.

4.2.8 Controls, Gauges, Switches Indicators.

Before each mandatory test the truck shall undergo a pre-operational inspection in part to determine controls, gauges, indicators, and switches are functioning properly. Discrepancies shall be corrected before testing begin.

4.2.9 Markings and Information Plates.

The truck shall be inspected to verify required markings and information plates are installed as required by the SOW paragraphs 3.24 and 3.25. Missing markings shall be documented. Testing may be initiated even when marking or placarding deficiencies are identified however the truck shall not receive final accepted by the Navy without required marking/plate installed.

4.2.10 Diagnostic Tool.

Contractor shall explain and demonstrate the function and operation of the diagnostic software/tool to the Navy's representatives witnessing FAT testing. Diagnostic demonstration shall include the verification that no error codes are present on the UUT before testing is initiated.

4.3 Reliability.

The truck shall be tested in accordance with [Test Method No. 1](#)

4.3.1 Failures and Discrepancies During Test.

Test failures shall be reported to the contracting officer within 24 hours (See CDRL A017 titled: Failure Analysis and Corrective Action Report). Discrepancies that can be corrected with an adjustment or component replacement within one (1) man-hour of repair time can be performed without prior Navy approval and the reliability demonstration testing continued from where it was stopped. Details of these failures and corrective action performed shall be documented on daily logs and included in the FAT test report. Discrepancies that cannot be corrected within these limitations shall cause a cessation of the reliability demonstration testing and the contractor shall initiate an investigation to determine the root cause of the problem. The contractor shall provide a report of their findings and recommended corrective action to the contracting officer within 5 days. Due to their severity, these discrepancies shall require reliability demonstration testing to be re-initiated (starting over at zero test laps run). Examples of discrepancies requiring a failure analysis would include:

- Failure to commence operation, cessation of operation, or degradation of performance capabilities of the UUT.
- Issues that shall cause serious damage to the UUT by continued operation.
- Discrepancies that affect safety of personnel or may create an environmental hazard, or impact UL safety rating.
- The repeat occurrence of a discrepancy initially categorized as minor.

4.4 Floating Caster Strength.

Before the floating casters are assembled to the trucks, the casters shall be subjected to a compressive load)(load shall act on the caster same as during normal operation of the truck) of 2,000 pounds by means of weights or a press for a period of 1 minute. The load

NAVSUP WSS TE-WEP

shall then be removed, and the casters examined for conformance to damage. Nonconformance to 3.27 shall constitute failure of the test.

4.5 Steering Test and Inspection.

Steering systems ability to control the directional movement of the UUT as noted in paragraph 3.12 in the SOW is demonstrated throughout FAT and therefore has no separate testing required. Degradation or failure of the steering system to control the truck during part of FAT shall constitute as a failure to meet the steering requirement.

4.6 Turning Radius.

Test the truck and measure the outside turning radius. Failure to conform to the requirements listed in [Table SOW-1](#) shall constitute a failure of this test.

4.7 Brakes.

With rated load tied down securely on the forks, the UUT service and parking/deadman brake systems shall be tested in accordance with the performance requirements and procedures within ANSI B56.1. The dead-man brake shall hold the UUT with rated load on a 10-degree slope with the steering handle in operating position for a 1-hour period with no loss of braking capability. This test shall be conducted with the truck parked fully on the ramp and facing forwards (load on uphill side). Nonconformance with the service, parking or dead-man brake system shall constitute failure of this test.

4.7.1 Production Quality Performance Brake Testing.

For brake quality, testing of production units each truck shall:

4.7.1.1 Brake Test.

Brake testing shall be performed with the truck loaded with a maximum rated load and driven on to a 10-degree slope. Service, parking and deadman braking systems shall be checked individually by applying each brake for 2 minutes and ensuring the pallet truck does not move during that time. Failure to hold the truck during brake test shall constitute a failure of the test

4.8 Travel Speed.

The UUT's maximum travel speed in both forward and reverse directions and in both a loaded and unloaded configuration shall be measured. This testing shall be based on the averages from paired runs in opposite directions to eliminate the effect from slope to the test area. Each drive direction (forward and reverse) and load configuration (loaded and unloaded) shall be tested using at a minimum 2 pairs of runs for each condition for a total of not less than 8 pairs of runs. Average travel speed falling outside of the requirement listed in NAVSUP SOW WEP, [Table SOW-1](#) shall be considered a failure of this test.

4.9 Slope Ascension, Approach, Departure and Underclearance

With rated load tied securely atop the forks, the UUT shall be accelerated along a horizontal approach and onto a 7-degree slope having a minimum length of 20 feet. During the transition onto the ramp and while ascending the slope there shall be no deviation to the right or left in the line of travel of the UUT. The UUT shall be brought to a dead stop once wheels are on the slope. The UUT shall then be accelerated up the slope and on to a

NAVSUP WSS TE-WEP

second horizontal surface. When transitioning from a level surface to the sloped surface and vice versa, no part of the UTT shall contact the operating surface. The slope ascension test shall be performed in both the forward and reverse directions. (NOTE: UUT shall only be carrying the test load when tested in a direction of travel when the load is on the uphill side.)

On a level surface with a rated load raised, the underclearance of the truck shall be measured and shall comply with the requirement in [Table SOW-1](#).

Failure to meet SOW paragraph [3.16](#) and [3.16.1](#) and to complete a run, maintain a straight course, have contact between the UUT and the surface of the test area, or insufficient underclearance, shall constitute failure of this test.

Table TE-1 Test, Inspection & Demonstration Requirements

First Article	Production Quality Conformance	Test	Test Para.	Requirements Paragraph*	Test No.
T		Reliability, Battery, Power Consumption	4.3	3.5, 3.22, 3.22.1	1
T		Floating Caster Strength	4.4	3.11.3	
T, I		Steering	4.5	3.12	
T		Turning Radius	4.6	Table SOW-1	
T	T	Brakes & Travel Disconnect	4.7	3.8	
T	T	Travel Speed	4.8	Table SOW-1	
T		Structural Testing	4.26	3.14	
T		Pallet Compatibility	4.11	3.9	
T		Slope Ascension, Approach, Departure and Underclearance	4.9	Table SOW-1, 3.16 & 3.16.1	
T	T	Lift/Lowering Speed	4.10	Table SOW-1	
T		Resistance to Saline atmosphere	4.12	3.18	
T		HI Shock	4.13	3.19	
* Requirement paragraphs and table are in NAVSUP WSS SOW WEP.					

NAVSUP WSS TE-WEP

TABLE TE-1. TEST, INSPECTION & DEMONSTRATION REQUIREMENTS (Continued)					
First Article	Production Quality Conformance	Test	Test Para.	Requirements Paragraph*	Test No.
T		Electromagnetic Interference & Vulnerability	4.14	3.20	
T		Rain	4.15	3.21	2
T		Lifting and Tie down Points	4.16	3.15	
T		Weight & Deck Loading	4.17	3.11.1	
T		Operational Temperature	4.28	3.17	
I		Dimensional Verification	4.18	Table SOW-1 & 3.10	
I		UL Fire Safety	4.19	3.3.1	
I		Load & Drive Tire Material & Size	4.2.1	3.11.2 & 3.11.4	
I		Hydraulic Hoses, Fittings and Cylinders	4.20	3.6	
I		Maintainability & Serviceability	4.21	3.7	
I		Lubricants and Fluids	4.22	3.7.1	
I, D	I (Correct function only)	Operator's Controls/Instruments, and Master Switch	4.23	3.13	
I	I (Coverage & Damage)	Paint & Coatings	4.24	3.23	
I	I	Information Plates & Vehicle Markings	4.25	3.24, 3.25	
D	I (No error codes)	Diagnostics & Cybersecurity	4.27	3.27	
* Requirement paragraphs and table are in NAVSUP WSS SOW WEP.					

4.10 Lifting and Lowering Speed.

With a rated load, the lift control shall be actuated and the load lifted from ground level to maximum lift height with the time to complete this lift recorded. The load shall then be lowered from max height to ground level with the time taken to complete this lowering recorded. This test shall be repeated at least five times and the average lifting and lowering times calculated. Nonconformance to time required in [Table SOW-1](#) shall constitute a failure of the test.

4.11 Pallet Compatibility.

Empty, double-faced pallet conforming to MIL-DTL-23312 shall be placed with their front edges on a reference line marked in the test area. The forks of the UUT shall be fully engaged into the pallet (an end view of pallet). The distance from the reference line to same reference point on the pallet edge shall be measured. This test shall be repeated 10 times with the pallet fully engaged into the pallet. Forks shall be raised to maximum lift height and then lowered completely. The forks shall be withdrawn from the pallet. The distance from the reference line to the same reference point on the pallet edge shall be measured. The test shall be repeated 10 times for each pallet. The average distance through which the pallet moves either in a forward or backward direction shall be calculated to determine conformance to applicable requirement. Nonconformance to these requirements shall constitute failure of the test.

4.12 Resistance to Saline Atmosphere.

The UUT shall be tested fully assembled and in accordance with MIL-STD-810, Test Method 509.7, Salt Fog. Upon completion of the testing a final test report shall be prepared and submitted (See CDRL A014 titled: Salt Fog Test Report). This report shall be reviewed by NAVSUP, MHE Program Office engineering team. The results of this test can be subjective. Discussions on the test's final results, conclusions, and deficiency mitigation are necessary and may result in revisions to the final report or some level of re-testing before NAVSUP WSS can provide concurrence and acceptance.

4.12.1 Details.

Pursuant to paragraph 3.1 of Method 509.7, the following test information is given:

4.12.1.1 Exposure.

Duration shall be alternating 24-hour periods of salt fog exposure and drying conditions for four 24-hour periods (two wet and two dry). During testing the truck shall not be washed or operated until exposure and drying periods have been completed.

4.12.1.2 Salt Solution.

Salt concentration shall be 5 percent.

4.12.2 Additional Guidelines:**4.12.2.1 Inspection.**

Visual inspection after 48 and 96 hours exposure, but no washing or operation until after exposure and drying periods are complete. Corrosion detected shall be

NAVSUP WSS TE-WEP

documented and photographed so that the extent of corrosion damage and its location on the truck is clearly identified.

4.12.2.1.1 Navy Witness.

A representative of the Navy shall be invited to inspect the truck immediately following the completion of this test while the truck is still at the test facility.

Contractor shall provide the Navy, at a minimum, two weeks advance notification of this date for test completion for travel arrangements to be made.

4.12.2.2 Evaluation.

Evaluation shall be based on the guidelines of MIL-STD-810, Test Method 509.7, paragraph 5.

4.13 Heavyweight High-Impact (HI) Shock Test.

The UUT, with a fully charged battery, shall be tested by the contractor in accordance with MIL-DTL-901. The contractor shall locate a non-government shock test facility, arrange the test, and ensure proper tiedown assemblies are utilized. The contractor is responsible for all related costs of this test.

4.13.1 H.I. Shock Test Plan.

Sixty (60) days prior to testing, the contractor shall submit a formal test plan for approval by the Navy HI-Shock technical warrant holder (See CDRL A015 titled: High-Impact Shock Test Procedures). This plan shall follow the requirements listed in the SOW, paragraph 3.19, and include a list of documents referenced, description of test requirements and procedures, description of test equipment, fixtures and instrumentation, drawing of tiedown configuration, inspections and operational test prior to, between shock events and following testing completion, methods for identifying and evaluation of damage, definition of failure.

4.13.2 HI-Shock Final Test Report.

Upon completion of testing a report shall be compiled following the outline of the approved test plan and include data and results from testing (See CDRL A016 titled: High-Impact Shock Test Report). This report shall include a detailed description of the ability of the unit under test to meet HI-Shock requirements, discrepancies or induced failures identified during testing and post-test evaluation findings both at the test facility and during the teardown inspection by the contractor in accordance with the requirements of MIL-DTL-901. Final report shall be submitted to NAVSUP for review and concurrence not later than 30 days after completion of testing.

4.14 Electromagnetic interference characteristics.

The UUT shall be tested as specified herein and in accordance with MIL-STD-461 and MIL-STD-464.

4.14.1 MIL-STD-461.

The tests as specified in MIL-STD-461 shall be tailored such that only the following are performed:

NAVSUP WSS TE-WEP

4.14.1.1 RE101:

Radiated emissions, magnetic field, procedure RE101 need not be performed as the equipment shall not operate within close proximity to magnetically sensitive devices or component emitting a magnetic field would not be anticipated to be positioned near the perimeter of the UUT.

4.14.1.2 RE102:

For radiated emissions, electric field, procedure RE102 shall be used with limit for surface ship applications. Test should be through at least 1 GHz and may be required as high as 18 GHz, depending on installed equipment. Test laboratory shall review truck design and provide an explanation of the range selected in the test plan. The Navy's EMI Technical Warrant Holder (TWH) shall review this test plan for approval with comments/revisions provided in response as necessary.

4.14.1.3 RS103:

For radiated susceptibility, electric field, procedure RS103 shall apply with a frequency range from 2MHz to 18GHz at a limit level of 200 volts/meter.

4.14.1.4 RS101:

For radiated susceptibility, magnetic field, procedure RS101 shall not be tested as these trucks are not intended to operate closely to equipment generating large magnetic fields or susceptible components would not be positioned near the perimeter of the UUT.

4.14.1.5 CE101, CE102, CS101, CS114, and CS116:

This series of tests shall not be performed.

4.14.1.6 General.

Operating Modes are specified as the UUT turned on/running with lights on. For these emissions and susceptibility testing the engine shall be on to capture of its emissions and verify that of the vehicle performance or controls are not affected by the susceptibility stimulus.

4.14.1.7 MIL-STD-461 Test Plan.

Prior to start of MIL-STD-461 testing, the contractor shall submit, for Navy approval, a formal test plan/procedure (See CDRL A001 titled: Electromagnetic Interference Test Procedures). This plan shall indicate applicable documents, test requirements, description of tests, hardware configuration, preparation testing, initial visual and operational tests, evaluation methods for test failures and related damage if applicable, final test report development and delivery deadlines, definition of failure, and reasons for rejection. NAVSUP WSS shall coordinate the review by Navy TWH for concurrence that testing may proceed. Testing shall not begin without acknowledgement from NAVSUP WSS that test plan has been reviewed and concluded to be acceptable.

NAVSUP WSS TE-WEP

4.14.1.8 MIL-STD-461 Testing Final Report.

Upon completion of MIL-STD-461 EMI testing a final test report (See CDRL A002 titled Electromagnetic Interference Test Report) shall be submitted to NAVSUP WSS for review and approval by the Navy' EMI technical warrant holder (TWH). Testing data that is documented in graphical form shall have a resolution of 1 dB. NAVSUP WSS shall coordinate the review of this report with the Navy's TWH. Upon completion or TWH review, NAVSUP WSS shall advise if results are acceptable and what, if any, mitigation is recommended.

4.14.2 MIL-STD-464.

UUT shall be able to safely execute its mission while exposed to the flight deck electric field environment from Table 1 of MIL-STD-464. This test is performed and paid for by the Navy. The manufacturer shall be invited to witness this test and shall be responsible for transportation design, development, parts and installation costs necessary to complete and pass this test. See WEP SOW paragraph 3.20.2 for testing location and test engineer contact information.

4.15 Rain Test.

Test the UUT in accordance with [TEST METHOD NO. 2](#) Non-conformance to of the rain test requirements shall constitute failure of this test. This includes failure to be fully operational after each test segment, physical damage to the UUT from wind or water and the intrusion of water into the fluid reservoir, or significant infiltration of the motor and hydraulic system.

4.16 Lifting and Tie-Down Points.

Design and testing of lift and tiedown points on the UUT shall comply with the requirements of SOW paragraph 3.15 and MIL-STD-209, type 1 (excluding air transport and Helicopter Sling Lift (HSL) requirements). Failure to conform to these requirements shall constitute failure of this test.

4.17 Deck Loading.

Test the UUT to determine the unloaded weight and the loading applied to the ground (deck of the ship) in accordance with the requirements of paragraph 3.11.1 and [Table SOW-1](#) in the SOW. The deck loading shall be calculated by loading the truck to its maximum rated load, measuring the weight and contact area at each steer and load wheel.

4.18 Characteristics Inspection.

Measure the external characteristics of the UUT as specified in [Table SOW-1](#) and paragraph 3.12. Measurements that do not comply with these requirements shall constitute a failure of this inspection.

- A) Fork length.
- B) Maximum overall length.
- C) Maximum lowered height.
- D) Minimum raised height.

NAVSUP WSS TE-WEP

- E) Maximum width across forks.
- F) Minimum distance between forks.
- G) Minimum under clearance w/ forks lowered.
- H) Degrees of rotation of steering handle from stop to stop.
- I) Steering Handle height when vertical.

4.19 UL Fire Safety Compliance Inspection.

The contractor shall provide documentation for review that proves the UUT conforms to an “EE” rating per UL 583 and has been properly/officially inspected and certified. Failure to provide adequate proof of UL approval and certification shall constitute a failure of this inspection.

4.19.1 UL Labeling.

Inspection of UUT shall confirm proper EE labels are applied.

NOTE

Corrosion of hydraulic components is tested under the resistance to saline requirement, paragraph [4.12](#).

4.20 Hydraulic Hoses and Cylinders Inspection.

The hydraulic system shall be inspected (visually and/or from design data) to confirm that hoses are not a thermoplastic material as prohibited in para [3.6.3](#) in the SOW and each hydraulic cylinder is constructed from either seamless steel tubing, or welded and redrawn tubing. The use of prohibited materials shall constitute a failure of this inspection.

4.21 Serviceability Inspection.

Inspect reservoirs and lubrication points for compliance to the requirements in para. [3.7](#) of the SOW. Service points that are not easily accessible or that have reservoir levels that cannot be clearly identified shall constitute as a failure of this inspection.

4.22 Lubricants and Fluids Inspection.

Prior to initiating/conducting performance testing under FAT, the contractor shall provide information cross-referencing fluids and lubricants used in the UUT to those identified in MIL-HDBK-267.

4.22.1 Brand/Type.

All FAT tests shall be conducted using the same brand and type of fluids and lubricants. During FAT, should the contractor require changes to the source or type of fluids/lubricants used, this change must be reported to and approved by NAVSUP WSS Mech, Code N964, prior to being incorporated.

4.22.2 Post-Test.

After each test (refer to para 3.7.1.1 of SOW), if the post-test inspection of fluids or lubricants finds a discrepancy (i.e. contaminated, below recommended capacities/high consumption, breaking down, burnt, etc.) the test shall be considered a failure regardless of performance results.

4.23 Control and Master Switch Inspection and Demonstration.

The operator's controls and master switch shall be inspected and demonstrated as required to verify compliance to the requirements in para 3.13 of the SOW. Nonconformance to the requirements shall constitute failure of this test.

4.24 Paint & Coatings Inspection.

The paint thickness shall be measured in several locations to verify it has been applied evenly and complies with the paint requirements of para 3.23 in the SOW. There shall be no significant overspray on to non-painted components or components painted in different colors. Panels, covers and components painted the same color (yellow) shall not significantly vary in appearance (hue, lightness, brightness, gloss, etc.). Nonconformance to these requirements shall constitute the failure of this inspection.

4.24.1 Paint Inspection of UUT.

Under FAT, as noted in para 3.4.3, paint inspection shall be conducted before performance or environmental testing.

4.24.2 Paint Inspection for Production Testing.

The paint and coatings on each production UUT shall be inspected. Defects or damage (chips, scratches, peeling, etc.) shall be documented, reported and shall be corrected by the contractor before the UUT is acceptable and approved for shipment.

4.25 Information Plates and Vehicle Markings Inspection.

The UUT and each production units shall be inspected to verify that the required information plates and marking as noted in paragraphs 3.24 and 3.25 in the SOW are installed. Nonconformance to these requirements shall constitute the failure of this inspection.

4.26 Structural Testing.

Test the truck to verify the ability to support the required overload condition as specified in paragraph 3.14 of this Statement of Work.

4.26.1 Guidelines for Structural testing.

- Structural test shall be performed in a static condition. Hydraulic fluid shall be at normal operating temperature for this test.
- Truck shall be in a normal operational configuration. Blocking for axles/frame is not allowed.
- Secure truck as necessary with safety cables.
- Raise forks to a typical height for travel.

NAVSUP WSS TE-WEP

- No external lock on lift cylinders may be installed.
- For FAT the 200% load may be added to the raised forks as one load or in increments (ex 100%, 200% rated capacity) checking hydraulic system after each load is added.
- For production units it is recommended that a single test using a load of 100% of the rated load be conducted.

Initiate the required 10-minute load holding duration only once the maximum overload weight for the test has been applied.

- Remove Load and inspect as follows:
 - FAT Structural/load Test: Inspect truck structure, frame and mast assembly for evidence of deformation, fractures, broken welds etc. Inspect leakage in the hydraulic system. Verify suspected cracks by magnetic particle or dye penetrant method.
 - Production Structural/Load Test: Visually inspected truck for deformation broken welds or other damage of load bearing components. Inspect hydraulic system for leaks. Verify suspected cracks by magnetic particle or dye penetrant method.

Discrepancies identified by these inspections shall constitute failure of the test.

4.27 Diagnostics and Cyber Security.

Diagnostic equipment shall:

4.27.1 Cyber Security Demonstration.

The contractor shall demonstrate the truck complies with cyber security requirements of paragraph 3.27.3 in the SOW. Nonconformance to these requirements shall constitute the failure of this demonstration.

4.27.2 Diagnostic Check of FAT Unit.

Diagnostics be used prior to and following each test to:

- a) Verify no faults are active prior to the start of a test. Faults recorded shall be corrected prior to initiating a test.
- b) To identify faults recorded during a test. Faults must be investigated and corrected in order to pass testing.

4.27.3 Production Truck.

For production quality performance testing, the diagnostic system shall be accessible to verify no faults are active or recorded on the UUT prior to acceptance by the Navy.

4.28 Ambient Operational Temperature.

The UUT shall be tested with MIL-STD-810 for high and low temperature operation as follows:

4.28.1 High Temperature.

Conducted high temperature testing following MIL-STD-810, test method 501.7 utilizing the requirements of Procedure II (Operation). UUT shall be operated only during the period of maximum response (highest item temperature). Testing shall consist of three 24 hour cycles performed under the climatic category A1 - Hot Dry as described in test method 501.7, Tables 501.7- I and 501.7-III. During operational testing for each cycle, the UUT shall:

NOTE

Tests performed in steps 4.28.1.1 thru 4.28.1.2 shall be performed based on the confines of the test chamber. Load shall only be lifted a height to sufficiently test, forward and reverse travel, and steering capability.

4.28.1.1 Steering and Drivetrain.

Demonstrate that the UUT can move and steer in both forward and reverse direction while lifting maximum rated load.

4.28.1.2 Maximum Lift.

Demonstrate that maximum rated load can be lifted to the maximum height allowed within the test chamber.

4.28.2 Low Temperature.

Low temperature testing shall be conducted following MIL-STD-810, test method 502.7 utilizing the requirement of Procedure II – Operation, at an ambient air temperature of 0 degrees Fahrenheit. UUT shall be exposed to this low temperature for a period of 4 hours following temperature stabilization. After this 4 hour period, the UUT shall be operationally tested. The requirements for this operational test are the same as listed in paragraph 4.28.1.1 thru 4.28.1.2 above.

4.29 Serviceability Inspection.

Inspect all reservoirs and lubrication points for compliance with the requirements in para. 3.7 of the SOW. Service points that are not easily accessible or that have reservoir levels that cannot be clearly identified shall constitute as a failure of this inspection.

4.30 Production Quality Conformance Testing.

Each production trucks shall undergo the Production Quality Conformance testing, demonstration and inspections indicated in column 2 of Table TE-1. Non-conformances identified during this process shall result in a rejection/non-acceptance of the unit. Non-conformances must be investigated to identify its root cause and changes to production identified and enacted to prevent reoccurrence. Once discrepancies are corrected, the truck shall be resubmitted for production quality performance testing and acceptance. The WEP Production Quality Checklist Figure TE-1. shall be completed during testing and inspection of production trucks and once complete shall be reviewed and signed with a copy included with documents shipped with the truck.

4.31 Production Quality Conformance (QC) Inspection and Testing.

NAVSUP WSS TE-WEP

All production trucks shall undergo the production quality conformance inspection and testing indicated in column 2 of [Table TE-1](#). The specific requirements for production QC inspections and testing is defined in [Table TE-2](#) and [Table TE-3](#). The results of this inspection shall be documented by the contractor in the production checklist provided in [Figure TE-1](#). A copy of the completed and signed checklist shall be provided with each production truck and a second (digital) copy shall be sent to the MHE Program Office, NAVSUP WSS, code N964.

4.31.1 Incremental Production Inspections and Testing.

The contractor may utilize quality tests and inspections conducted during the assembly of the truck to satisfy the mandatory production quality conformance inspections and testing. Documentation of inspections and test performed during assembly shall be compiled and provided along with [Figure TE-1](#) for review when a truck is presented for Government acceptance. Inspections done during assembly shall be compiled into one comprehensive listing to accompany the truck when submitted for Government acceptance.

4.31.2 Inspection.

Each production truck shall be inspected by the Government for the defects listed in [Table TE-2](#). Presence of defects shall be cause for rejection.

4.31.3 Testing.

Each production truck shall undergo testing as listed in [Table TE-1](#) and [Table TE-3](#). Failure to meet requirements of this test shall result in non-acceptance of the tested truck.

NAVSUP WSS TE-WEP

Table TE-2 - Production Quality Conformance Inspection List

<u>Deficiency</u>	<u>Requirement Paragraph</u> (See SOW)
Paint coating surface treatment not as specified	3.23*
(* Inspect paint for damage, excessive overspray, even thickness, uniformity of gloss and color)	
Truck marking not as specified	3.25**
(**All markings are the correct size and in the correct location)	
Identification plates not as specified	3.24
Copy of technical manual missing.	5.1
Fault/fault codes still recorded in diagnostic system	3.27

NAVSUP WSS TE-WEP

Table TE-3 - Production Quality Conformance Testing

Test	Test Method
All material handling features operate correctly/as commanded.	Activate controls separately to verify proper operation. Raise forks, etc.
Service Parking Brakes and deadman/travel disconnect.	Verify service parking brake engages when required and deadman system functions properly
Travel and steering	Truck travels forward and reverse. Steering functions as required.
Load Test /Structural Test	100% rated load lifted to max height and held for 10 min. Refer to paragraph 3.14

Figure TE-1. Production Quality Conformance Testing and Inspection Checklist

6K Shipboard Walkie Electric Pallet Truck Production Quality Conformance Testing and Inspection Checklist		
Contract Number:	Manufacturer:	
Truck Model:	Navy USN:	
Task	Test Result (Circle One)	Tested/Inspected By: (Initials)
Brakes & Travel Disconnect		
Service and Parking Brakes: Functioning normally	Pass Fail	
Deadman Brake/Travel Disconnect: Activates automatically as designed	Pass Fail	
<i>Comments:</i>		
Operational Weight Testing		
100% rated load held for two (10) minutes (para 4.26)	Pass Fail	
<i>Comments:</i>		
Controls, Gauges, Warning Lights, Horn		
All gauges, meters, warning lights and other components function as required	Pass Fail	
<i>Comments:</i>		
Paint & Coatings		
Inspect paint for damage, overspray, thickness, uniformity of color and gloss	Pass Fail	
<i>Comments:</i>		
Information Plates & Vehicle Markings		
Identification Plate	Pass Fail	
Shipping Data Plate	Pass Fail	
Instruction, Warning and Caution Plates	Pass Fail	
Wheel Loading Plate	Pass Fail	
Page 1 of 2		

NAVSUP WSS TE-WEP

Information Plates & Vehicle Markings (continued)			
UL Fire Safety Accreditation Plate	Pass	Fail	
Battery Information Plate	Pass	Fail	
US Navy (USN) Registration (Serial) Number Metal stamped and exterior stencils/labels	Pass	Fail	
Vehicle Weight	Pass	Fail	
Safe Working Load	Pass	Fail	
UL Type Designation	Pass	Fail	
Lifting and Tie-Down	Pass	Fail	
Shipboard Use	Pass	Fail	
<i>Comments:</i>			
Fluid Check			
Inspect fluids are serviced to the recommended level	Pass	Fail	
Diagnostics			
No saved or active fault code	Pass	Fail	
General Condition			
No visible fluid leaks	Pass	Fail	
QA Inspector: Recorded data accurately describes the condition and operational status of the truck.			
Name (Print):		Date Completed:	
QA Inspector Signature:			
Page 2 of 2			

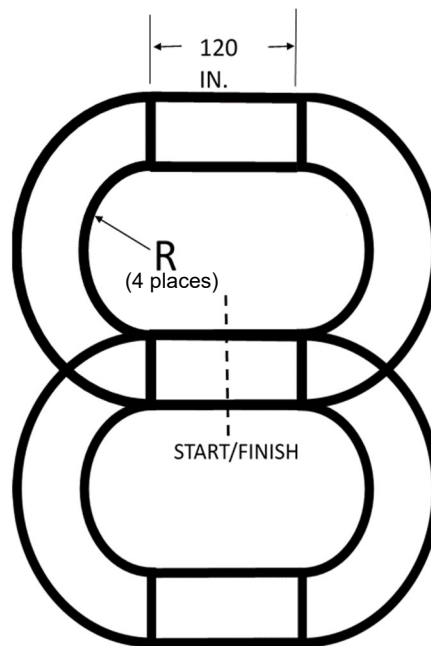
NAVSUP WSS TE-WEP

Test Method No. 1
RELIABILITY DEMONSTRATION TEST**1.0 Test Course:**

- (a) Level, flat surface.
- (b) Layout - See FIGURE TM-1.1

2.0 Test Procedure:

- (a) The pallet truck shall be subjected to a reliability test consisting of 1000 cycles. It shall perform an equal number (500) of the required cycles in a forward and reverse travel direction. The direction of travel shall not change within an individual cycle and no more than 25 consecutive cycles shall be performed before changing the direction of travel. One cycle shall be as follows:

**Figure TM-1.1. Reliability Test Course**

- (i) The pallet truck shall lift a rated load to maximum height, and be operated in a clockwise direction in an oval path consisting of two 120-inch radius (R) turn of 180 degrees and two connecting straight sections of a length of 120 inches.
- (ii) Then the brakes shall be applied.
- (iii) The load shall then be lowered, raised again, and the pallet truck propelled in the same travel direction in an oval path in a

NAVSUP WSS TE-WEP

counterclockwise direction.

- (iv) At the start point, the brakes shall again be applied and load lowered to end one cycle.
 - (v) A 5-minute rest period may be allowed between each 25 cycles completed.
 - (vi) The contractor test plan shall specify when cycles shall transition from forward to reverse travel direction to meet the requirements of 2(a) above.
- (b)** During this endurance test, it shall be demonstrated that one (1) battery charge shall last for a period of not less than 8 hours.
- (c)** At the end of 1000 cycles, the rated load shall be lifted to maximum lift height and held for a period of 5 minutes to determine conformance to the drift allowance (1/2 inch).
- (d)** After completion of the above reliability tests, the hydraulic system shall be inspected for leaks. In addition, wheels and wheel bearings shall be inspected for accelerated wear, failures or permanent deformation.
- (e)** Inability of the pallet truck to be fully operational after completion of the test shall constitute failure of this test.

NAVSUP WSS TE-WEP

TEST METHOD NO. 2
RAIN TEST**1.0 Test Course:**

- (a) Timing device.
- (b) Measuring device (U.S. Weather Bureau type preferred).
- (c) Spray fixture (capable of producing droplets having a diameter range predominantly between 1.5 mm and 3.4 mm, with an appropriate raindrop concentration per cubic meter of approximately 600 drops/cu-m to 100 drops/cu-m, respectively).

2.0 Test Procedure:

- (a) Subject the truck to a simulated rainfall of not less than 4 inches per hour. MIL-STD-810, Test Method 506.6, Procedure 1 shall be used as guidance for test setup and procedures. The simulated rainfall shall impinge on the crane at an angle of 45 degrees, ± 5 degrees, with a force equivalent to a 40-mph wind. The simulated rainfall shall disperse uniformly over the surfaces of the crane.
- (b) Expose the top and left side of the crane to the rain described above for a period of 30 minutes with engine off. With rain still flowing, start engine and allow engine to idle for 10 minutes.
- (c) Repeat (2b) with the top and front exposed.
- (d) Repeat (2b) with top and right exposed.
- (e) Repeat (2b) with top and rear exposed.
- (f) Stop the rainfall and allow the crane to stand for not less than 30 minutes with the engine off. Drain a small quantity of fluid from each fluid reservoir (except cooling system) and examine for presence of water. Measure and document free water found inside the protected areas of the test item.
- (g) Check electrical components, gages, cab, and the air cleaner for water entry and damage. Measure and document free water found inside the protected areas of the test item.
- (h) Record results.

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188								
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.														
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER _____ EMITP										
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR									
1. DATA ITEM NO. A001	2. TITLE OF DATA ITEM Electromagnetic Interference Test Procedures (EMITP)				3. SUBTITLE									
4. AUTHORITY (Data Acquisition Document No.) DI-EMCS-80201C			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964									
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED A	10. FREQUENCY 1		12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION								
8. APP CODE A		11. AS OF DATE N/A		13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE		b. COPIES						
16. REMARKS 1. The Electromagnetic Interference (EMI) test procedures/plans shall be submitted to NAVSUP WSS for review and approval. 2. Block 5. Contract References: NAVSUP WSS TE-WEP, para 4.14.1.7. 3. Block 12. Not later than 30 days prior to start of EMI testing (MIL-STD-461) or prior to 380 DADC which ever occurs first. 4. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM/DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 3.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411						Draft		Final						
						Reg		Repro						
						NAVSUP WSS, MHE		0	0	1				
						NAVSUP WSS, PCO		0	0	1				
						15. TOTAL →						0	0	2
						G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE	

17. PRICE GROUP

18. ESTIMATED
TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188								
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.														
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER Testing - FAT Test Plan										
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR									
1. DATA ITEM NO. A011	2. TITLE OF DATA ITEM Test Plan for First Artical Testing (FAT)				3. SUBTITLE									
4. AUTHORITY (Data Acquisition Document No.) DI-NDTI-80566A			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964									
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED	10. FREQUENCY 1		12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION								
8. APP CODE A	A	11. AS OF DATE N/A		13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE		b. COPIES						
					Draft	Final Reg Repro								
16. REMARKS 1.The test plan covering all testing within First Article Testing (FAT) shall be completed and delivered for NAVSUP WSS review prior to the Test Readiness review (Refer to the Statement of Work NAVSUP WSS SOW-WEP, para 6.2.2). 2. Block 5 Contract References: Statement of Work, NAVSUP WSS TE-WEP, para 4.1.2. 3. Block 12. The test plan covering all of FAT shall be submitted not later than 14 days prior to the test readiness review or 136 DADC whichever occurs first. 4.a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 3.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlislle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411						NAVSUP WSS, MHE		0	0	1				
						NAVSUP WSS, PCO		0	0	1				
						15. TOTAL						0	0	2
						G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE	

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188			
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.									
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER <u>Notification of First Article Test</u>					
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR				
1. DATA ITEM NO. A012	2. TITLE OF DATA ITEM Notification of First Article Test				3. SUBTITLE				
4. AUTHORITY (Data Acquisition Document No.) DI-MISC-81624			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964				
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED A	10. FREQUENCY SEE BLOCK 16		12. DATE OF FIRST SUBMISSION ASREQ		14. DISTRIBUTION			
8. APP CODE A		11. AS OF DATE N/A		13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE	b. COPIES		
						Draft	Final		
							Reg	Repro	
16. REMARKS 1. The Government shall be notified: 1a. Not less than 14 days prior to the start of each test required within FAT, unless otherwise stated in the CDRL specific to an individual test. 1b. All notifications shall include the description of the test to be conducted and the related test plan, proposed dates and times, and the event location. 2. Block 5. Contract References; Test and Evaluation Requirements, NAVSUP WSS TE-WEP, paragraph 4.1.1 3. Block 12. The overall FAT test schedule and initial test event shall be reviewed and discussed during the test readiness review held at 150 DADC. (All following tests will utilize the notification deadline as noted in item 1a. above. 4.a. Block 14.a NAVSUP WSS MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411 4.c. Block 14.a MHE ISEA NSWC address as follows: Attn: Andrew Heinrichs MHE ISEA Naval Surface Warfare Center Indian Head Division – Detachment Picatinny Bldg 458, Whittemore Avenue Picatinny Arsenal, NJ 07806-5000						NAVSUP WSS, MHE	0	0	1
						NAVSUP WSS, PCO	0	0	1
						MHE ISEA, NSWC	0	0	1
15. TOTAL						0	0	3	
G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE		

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188							
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.													
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER <u>FAT Final Test Report</u>									
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR								
1. DATA ITEM NO. A013	2. TITLE OF DATA ITEM Test/Inspection Report (FAT)				3. SUBTITLE								
4. AUTHORITY (Data Acquisition Document No.) DI-NDTI-80809B			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964								
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED	10. FREQUENCY 1	12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION								
8. APP CODE A	A	11. AS OF DATE N/A	13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE		b. COPIES						
					Draft	Final Reg Repro							
1. First Article Test (FAT) final report shall summarize all testing, results, deficiencies, corrective action and explanation why test completion/approval is recommended. 2. Block 5 Contract References: NAVSUP WSS TE-WEP, para 4.1.3. 3. Block 12: Final test report shall be submitted for review and approval within 30 days after completion of FAT or not later than 450 DADC whichever occurs first. 4a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411					NAVSUP WSS, MHE	0	0	1					
					NAVSUP WSS, PCO	0	0	1					
					15. TOTAL →					0	0	2	
					G. PREPARED BY		H. DATE		I. APPROVED BY		J. DATE		

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)					Form Approved OMB No. 0704-0188		
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.							
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER _____ Salt Fog Test Report			
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR		
1. DATA ITEM NO. A014	2. TITLE OF DATA ITEM Salt Fog Test Report			3. SUBTITLE			
4. AUTHORITY (Data Acquisition Document No.) MIL-STD-810, Test Method 509.7		5. CONTRACT REFERENCE SEE BLOCK 16			6. REQUIRING OFFICE NAVSUP WSS, Code N964		
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED A	10. FREQUENCY 1	12. DATE OF FIRST SUBMISSION SEE BLOCK 16	14. DISTRIBUTION			
8. APP CODE A		11. AS OF DATE N/A	13. DATE OF SUBSEQUENT SUBMISSION N/A	a. ADDRESSEE	b. COPIES		
					Draft	Final	
						Reg	Repro
1. Following the completion of Salt fog testing, a final test report shall be provided for review and approval to NAVSUP WSS. Report shall be in contractor format. 2. Block 5. Contract References: NAVSUP WSS TE-WEP, para 4.12. 3. Block 12. The test report shall be submitted within 30 days following the completion of salt fog testing or not later than 390 DADC whichever occurs first. 4a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411				NAVSUP WSS, MHE	0	0	1
				NAVSUP WSS, PCO	0	0	1
15. TOTAL				0	0	2	
G. PREPARED BY		H. DATE		I. APPROVED BY		J. DATE	

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)					Form Approved OMB No. 0704-0188		
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.							
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER <u>High Impact Shock Test Plan</u>			
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck		E. CONTRACT/PR NO.		F. CONTRACTOR			
1. DATA ITEM NO. A015	2. TITLE OF DATA ITEM High-Impact (HI) Shock Test Procedures			3. SUBTITLE			
4. AUTHORITY (Data Acquisition Document No.) DI-ENVR-80709		5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964			
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED	10. FREQUENCY 1	12. DATE OF FIRST SUBMISSION SEE BLOCK 16	14. DISTRIBUTION			
8. APP CODE A	A	11. AS OF DATE N/A	13. DATE OF SUBSEQUENT SUBMISSION N/A	a. ADDRESSEE	b. COPIES		
					Draft	Final	
						Reg	Repro
1. A test plan shall be developed in accordance with MIL-DTL-901 and submitted to NAVSUP WSS for review and approval by the HI-Shock Technical Warrant Holder. Testing shall not commence prior to receiving this approval. Test plan shall be in contractor format. 2. Block 5. Contract References; Test and Evaluation Requirements, NAVSUP WSS TE-WEP, para 4.13.1. 3. Block 12: The test plan shall be completed and submitted to NAVSUP WSS not later than 60 days prior to the planned start date of this testing or not later than 293 DADC whichever occurs first. 4a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletz) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411				NAVSUP WSS, MHE	0	0	1
				NAVSUP WSS, PCO	0	0	1
				15. TOTAL			
G. PREPARED BY		H. DATE		I. APPROVED BY		J. DATE	

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188			
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.									
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER <u>EMI Test Report</u>					
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR				
1. DATA ITEM NO. A002	2. TITLE OF DATA ITEM Electromagnetic Interference (EMI) Test Report				3. SUBTITLE				
4. AUTHORITY (Data Acquisition Document No.) DI-EMCS-80200C			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964				
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED	10. FREQUENCY 1		12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION			
8. APP CODE A	A	11. AS OF DATE N/A		13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE		b. COPIES	
						Draft	Final		
							Reg	Repro	
16. REMARKS 1.EMI (MIL-STD-461) test final report shall compile and summarize all test procedures, data, results, failure, corrective action, configuration and design changes, and other related testing information to provide a clear description supporting the conclusion that the unit under test has successfully passed all required EMI tests. This report shall be in a contractor defined format and be submitted for review and approval 2. Block 5. Contract References: NAVSUP WSS TE-WEP, para 4.14.1.8 3. Block 12: Not later than 30 days after the completion of testing or prior to 380 DADC which ever occurs first. 4a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411						NAVSUP WSS, MHE	0	0	1
						NAVSUP WSS, PCO	0	0	1
						15. TOTAL			
G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE		

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188								
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.														
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER <u>Provisioning</u>										
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR									
1. DATA ITEM NO. A005	2. TITLE OF DATA ITEM Engineering Data for Provisioning (EDFP)				3. SUBTITLE									
4. AUTHORITY (Data Acquisition Document No.)			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964									
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED A	10. FREQUENCY ASREQ		12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION								
8. APP CODE A		11. AS OF DATE N/A		13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE		b. COPIES						
16. REMARKS 1. Compile and deliver for review the engineering data necessary for establishing stock numbers for the spare parts required to support this truck. EDFP shall not be provided until after the tech manual is approved and the critical spare parts list has been provided by MHE ISEA. 2. Block 5. Contract References: Statement of Work, NAVSUP WSS SOW-WEP, para 5.2.2 thru 5.2.4. 3. Block 12. Not later than 510 DADC. 4a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: FRANK COLVIN) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411						Draft		Final						
						NAVSUP WSS, MHE		0	0	1				
						NAVSUP WSS, PCO		0	0	1				
						15. TOTAL						0	0	2
						G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE	

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188		
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.								
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM ☒ OTHER _____				
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR			
1. DATA ITEM NO. A007	2. TITLE OF DATA ITEM Planned Maintenance System (PMS) Maintenance Requirement Card (MRC)				3. SUBTITLE			
4. AUTHORITY (Data Acquisition Document No.) DI-PSSS-80991B			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964			
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED A	10. FREQUENCY 1	12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION			
8. APP CODE A		11. AS OF DATE N/A	13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE	Draft	b. COPIES Final Reg Repro	
16. REMARKS 1. Develop MRCs and provide for review and approval by the NAVSUP Program Office. 2. Block 5. Contract References: Statement of Work, NAVSUP WSS SOW-WEP, para 5.3 and 5.3.1. 3. Not less than 14 days prior to technical manual review or 436 DADC whichever occurs first. 4a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: FRANK COLVIN) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4.b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletz) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411					NAVSUP WSS, MHE	0	0	1
					NAVSUP WSS, PCO	0	0	1
15. TOTAL					0	0	2	
G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE	

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST (1 Data Item)						Form Approved OMB No. 0704-0188						
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.												
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER <u>Training</u>								
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR							
1. DATA ITEM NO. A008	2. TITLE OF DATA ITEM Syllabus - Factory Training				3. SUBTITLE							
4. AUTHORITY (Data Acquisition Document No.) DI-MISC-81459			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964							
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED A	10. FREQUENCY 1	12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION							
8. APP CODE A		11. AS OF DATE N/A	13. DATE OF SUBSEQUENT SUBMISSION N/A		a. ADDRESSEE		b. COPIES					
					Draft	Final Reg Repro						
16. REMARKS 1. Provide a syllabus for the Train-the-trainer course which will be conducted at the manufacturer's facility and cover both operator and maintenance training. Syllabus shall be in contractor format and should include the following information: a. Course location and start & finish date. b. Course description and training strategy with breakdown of daily agenda. c. Training elements and sequence of events d. List of training materials and documents provided to students e. List of personal protective equipment/clothing which students should bring 2. Block 5: Contract References: Statement of Work, NAVSUP WSS SOW-WEP, paragraph 5.5.6. 3. Block 12: Syllabus shall be provided not less than 14 days prior to starting date of training class or 556 DADC whichever occurs first 4a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 4b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletz) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411					NAVSUP WSS, MHE		0	0	1			
					NAVSUP WSS, PCO		0	0	1			
					15. TOTAL					0	0	2
					G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

CONTRACT DATA REQUIREMENTS LIST <i>(1 Data Item)</i>						Form Approved OMB No. 0704-0188								
The public reporting burden for this collection of information is estimated to average 110 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to the Department of Defense, Executive Services and Communications Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. Please do not return your form to the above organization. Send completed form to the Government Issuing Contracting Officer for the Contract/PR No. listed in Block E.														
A. CONTRACT LINE ITEM NO.		B. EXHIBIT A		C. CATEGORY: TDP _____ TM _____ OTHER <u>Review Meetings</u>										
D. SYSTEM/ITEM 6K Walkie Electric Pallet Truck			E. CONTRACT/PR NO.		F. CONTRACTOR									
1. DATA ITEM NO. A009	2. TITLE OF DATA ITEM Conferences/Meetings Agenda and Minutes				3. SUBTITLE									
4. AUTHORITY <i>(Data Acquisition Document No.)</i> DI-ADMN-81249A			5. CONTRACT REFERENCE SEE BLOCK 16		6. REQUIRING OFFICE NAVSUP WSS, Code N964									
7. DD 250 REQ DD	9. DIST STATEMENT REQUIRED A	10. FREQUENCY ASREQ		12. DATE OF FIRST SUBMISSION SEE BLOCK 16		14. DISTRIBUTION								
8. APP CODE A		11. AS OF DATE N/A		13. DATE OF SUBSEQUENT SUBMISSION SEE BLOCK 16		a. ADDRESSEE	b. COPIES							
							Draft	Final Reg Repro						
16. REMARKS 1. Block 5: Contract References: Statement of Work, NAVSUP WSS SOW-WEP, paragraph 6.2. 2. Block 12 &13. Agenda shall be provided seven business days prior to the meeting/review as required. Minutes shall be recorded and delivered within seven business days after a meeting. An Action Items list shall be developed and maintained throughout the program. a) Post award guidance meeting shall be held not more than 30 DADC. b) Test Readiness review shall be held not less than 30 days prior to the start of FAT or NLT 150 DADC. 3a. Block 14.a NAVSUP WSS, MHE address as follows: DEPARTMENT OF THE NAVY CODE N964 (ATTN: NAM PHAM / DAYMIAN SHOOP) NAVSUP WSS 5450 CARLISLE PIKE SUITE 410-WSA-12 MECHANICSBURG, PA 17050-2411 3b. Block 14.a. NAVSUP WSS, PCO address as follows: Department of the Navy Code N744.1 (Attn: Brittany Langletzt) NAVSUP WSS 5450 Carlisle Pike Bldg. 311 Bay B17 Mechanicsburg, PA 17050-2411 4. Block 14b. Copies shall be distributed in electronic format.						NAVSUP WSS, MHE	0	1	0					
						NAVSUP WSS, PCO	0	1	0					
						15. TOTAL →						0	0	2
						G. PREPARED BY			H. DATE		I. APPROVED BY		J. DATE	

17. PRICE GROUP
18. ESTIMATED TOTAL PRICE

INSTRUCTIONS FOR COMPLETING DD FORM 1423

(See DoD 5010.12-M for detailed instructions.)

FOR GOVERNMENT PERSONNEL

Item A. Self-explanatory.

Item B. Self-explanatory.

Item C. Mark (X) appropriate category: TDP - Technical Data Package; TM - Technical Manual; Other - other category of data, such as "Provisioning," "Configuration Management," etc.

Item D. Enter name of system/item being acquired that data will support.

Item E. Self-explanatory (to be filled in after contract award).

Item F. Self-explanatory (to be filled in after contract award).

Item G. Signature of preparer of CDRL.

Item H. Date CDRL was prepared.

Item I. Signature of CDRL approval authority.

Item J. Date CDRL was approved.

Item 1. See DoD FAR Supplement Subpart 4.71 for proper numbering.

Item 2. Enter title as it appears on data acquisition document cited in Item 4.

Item 3. Enter subtitle of data item for further definition of data item (optional entry).

Item 4. Enter Data Item Description (DID) number, military specification number, or military standard number listed in DoD 5010.12-L (AMSDL), or one-time DID number, that defines data content and format requirements.

Item 5. Enter reference to tasking in contract that generates requirement for the data item (e.g., Statement of Work paragraph number).

Item 6. Enter technical office responsible for ensuring adequacy of the data item.

Item 7. Specify requirement for inspection/acceptance of the data item by the Government.

Item 8. Specify requirement for approval of a draft before preparation of the final data item.

Item 9. For technical data, specify requirement for contractor to mark the appropriate distribution statement on the data (ref. DoDD 5230.24).

Item 10. Specify number of times data items are to be delivered.

Item 11. Specify as-of date of data item, when applicable.

Item 12. Specify when first submittal is required.

Item 13. Specify when subsequent submittals are required, when applicable.

Item 14. Enter addressees and number of draft/final copies to be delivered to each addressee. Explain reproducible copies in Item 16.

Item 15. Enter total number of draft/final copies to be delivered.

Item 16. Use for additional/clarifying information for Items 1 through 15. Examples are: Tailoring of documents cited in Item 4; Clarification of submittal dates in Items 12 and 13; Explanation of reproducible copies in Item 14.; Desired medium for delivery of the data item.

FOR THE CONTRACTOR

Item 17. Specify appropriate price group from one of the following groups of effort in developing estimated prices for each data item listed on the DD Form 1423.

a. Group I. Definition - Data which is not otherwise essential to the contractor's performance of the primary contracted effort (production, development, testing, and administration) but which is required by DD Form 1423.

Estimated Price - Costs to be included under Group I are those applicable to preparing and assembling the data item in conformance with Government requirements, and the administration and other expenses related to reproducing and delivering such data items to the Government.

b. Group II. Definition - Data which is essential to the performance of the primary contracted effort but the contractor is required to perform additional work to conform to Government requirements with regard to depth of content, format, frequency of submittal, preparation, control, or quality of the data item.

Estimated Price - Costs to be included under Group II are those incurred over and above the cost of the essential data item without conforming to Government requirements, and the administrative and other expenses related to reproducing and delivering such data item to the Government.

c. Group III. Definition - Data which the contractor must develop for his internal use in performance of the primary contracted effort and does not require any substantial change to conform to Government requirements with regard to depth of content, format, frequency of submittal, preparation, control, and quality of the data item.

Estimated Price - Costs to be included under Group III are the administrative and other expenses related to reproducing and delivering such data item to the Government.

d. Group IV. Definition - Data which is developed by the contractor as part of his normal operating procedures and his effort in supplying these data to the Government is minimal.

Estimated Price - Group IV items should normally be shown on the DD Form 1423 at no cost.

Item 18. For each data item, enter an amount equal to that portion of the total price which is estimated to be attributable to the production or development for the Government of that item of data.

These estimated data prices shall be developed only from those costs which will be incurred as a direct result of the requirement to supply the data, over and above those costs which would otherwise be incurred in performance of the contract if no data were required. The estimated data prices shall not include any amount for rights in data. The Government's right to use the data shall be governed by the pertinent provisions of the contract.