


CAM-LOK RECEPTACLE AND COVER DETAIL


MALE RECEPTACLE 3/4" STUD

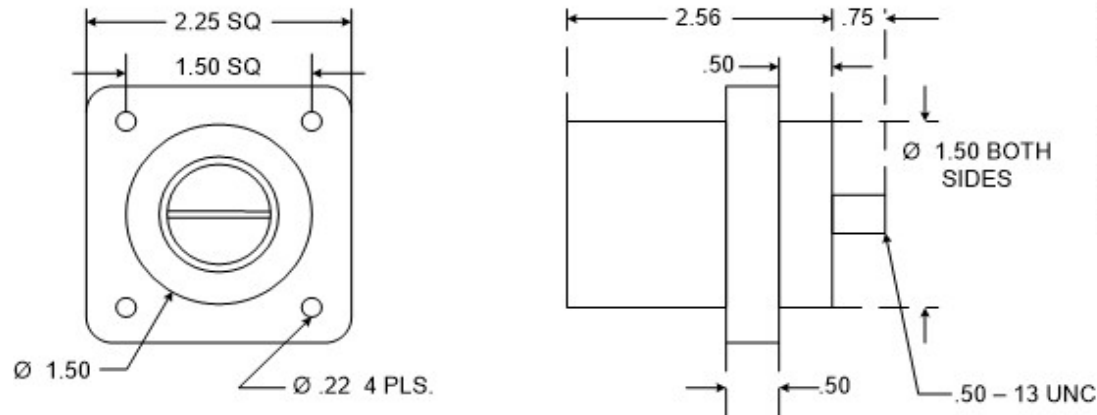

NOTES:

1. RATINGS: 600 VOLTS UP TO 400 AMPS CONTINUOUS
2. CABLE SIZE: #6 - 250 MCM
3. RECEPTACLE BODY: TPE
4. CONTACT: BRASS
5. UL LISTED; CSA CERTIFIED; NEMA 3R ENVIRONMENTAL RATING


SNAPBACK ENCLOSURE ASSEMBLY

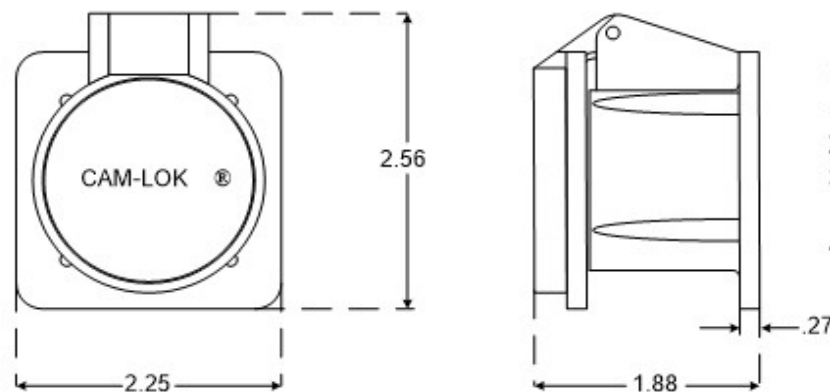

NOTES:


1. NEMA 3R RATED ENVIRONMENTAL SEAL
2. ALL STAINLESS STEEL HARDWARE
3. HIGH IMPACT RESISTANT THERMOPLASTIC COVERS AND BODIES.
4. E1016 #10; MAXIMUM HEAD DIAMETER .390"

Single Phase 480V - 15 KVA Transformer
Temporary Structure Feed
FED FROM X99 CAMLOCKS 480V, 100A CKT

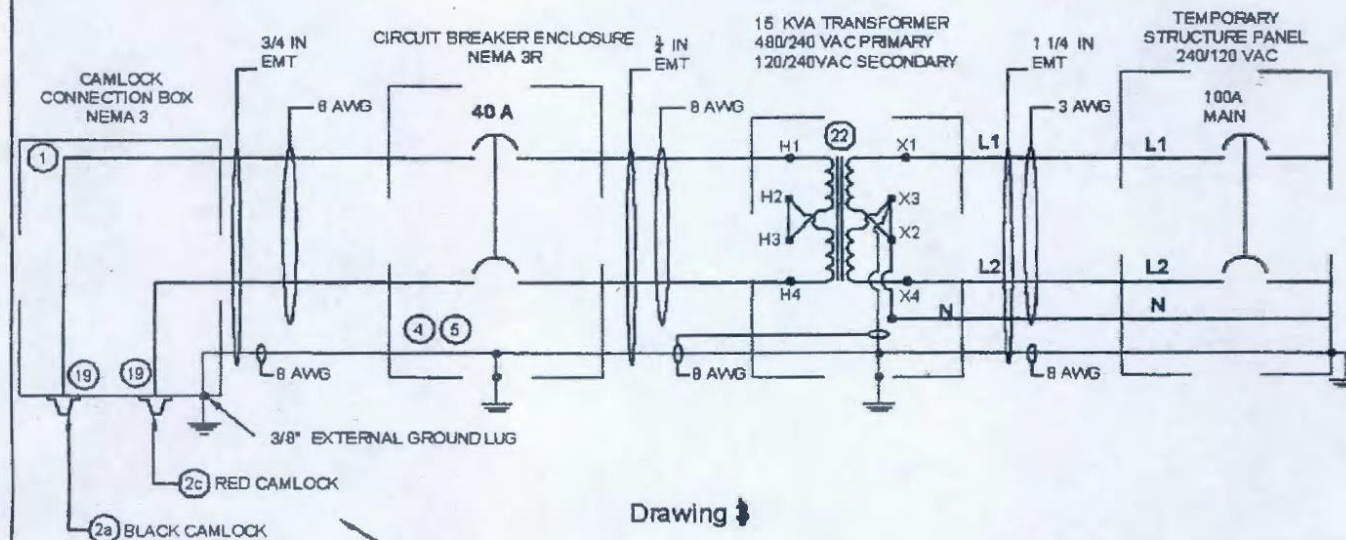

Drawing 3

Single Phase 480V - 15 KVA Transformer
Temporary Structure Feed
FED FROM X99 CAMLOCKS 480V, 100A CKT

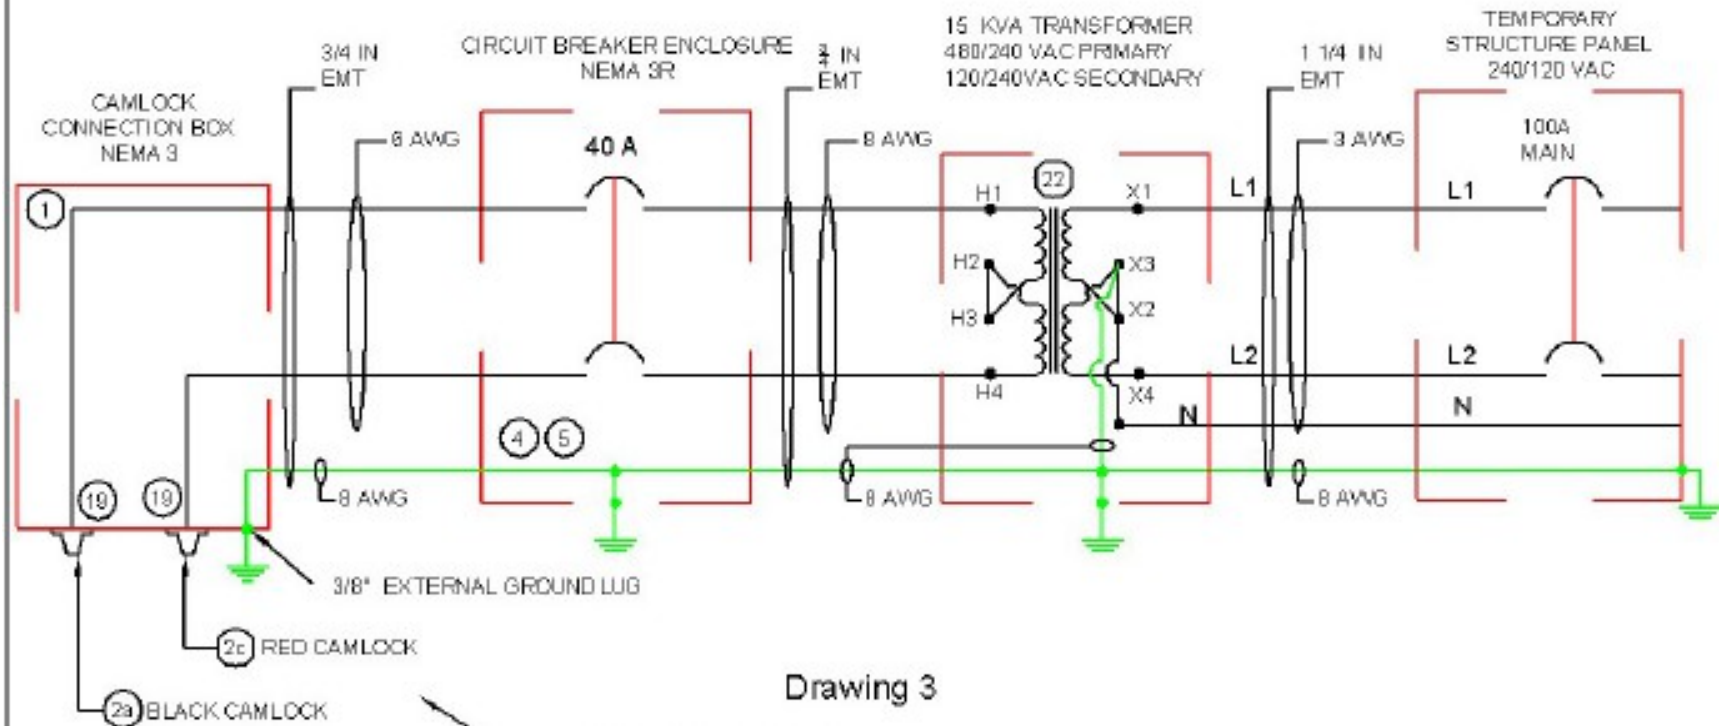

SUGGESTED EXTERIOR MATERIAL LIST

SUGGESTED EXTERIOR MATERIAL LIST				
PC #		ITEM/DESCRIPTION		

1		WIEGMANN ENCLOSURE, 12" X 12" X 6", NEMA 3R JUNCTION BOX, GALVANIZED, 16 GAUGE, WITH NO KNOCKOUTS. GRAINGER ITEM # 6JYT1.
2A		CAMLOK, PANEL MOUNT BLACK MALE RECEPTACLE. CROUSE HINDS P/N: E1016-1600.
2C		CAMLOK, PANEL MOUNT RED MALE RECEPTACLE. CROUSE HINDS P/N: E1016-1602.
4		SQUARE D CIRCUIT BREAKER ENCLOSURE. VOLTAGE RATING 480/600V, CURRENT RATING 15-100 AMPS, FOR FAL TYPE BREAKERS. NEMA 3R RATED. GRAINGER ITEM # 1H906.
5		SQUARE D FAL TYPE CIRCUIT BREAKER, 600 VOLT, 40 AMP. 2-POLE MOLDED CASE. GRAINGER ITEM # 5B825.
22		ACME ELECTRIC TRANSFORMER, 480/240V PRIMARY, 240/120V SECONDARY. 15KVA, GENERAL PURPOSE, SINGLE PHASE. WALL MOUNT ENCLOSURE, NEMA 3R RATED. 16.94" X 11.59" X 14.12". GRAINGER ITEM # 4WUC3.