


B

B

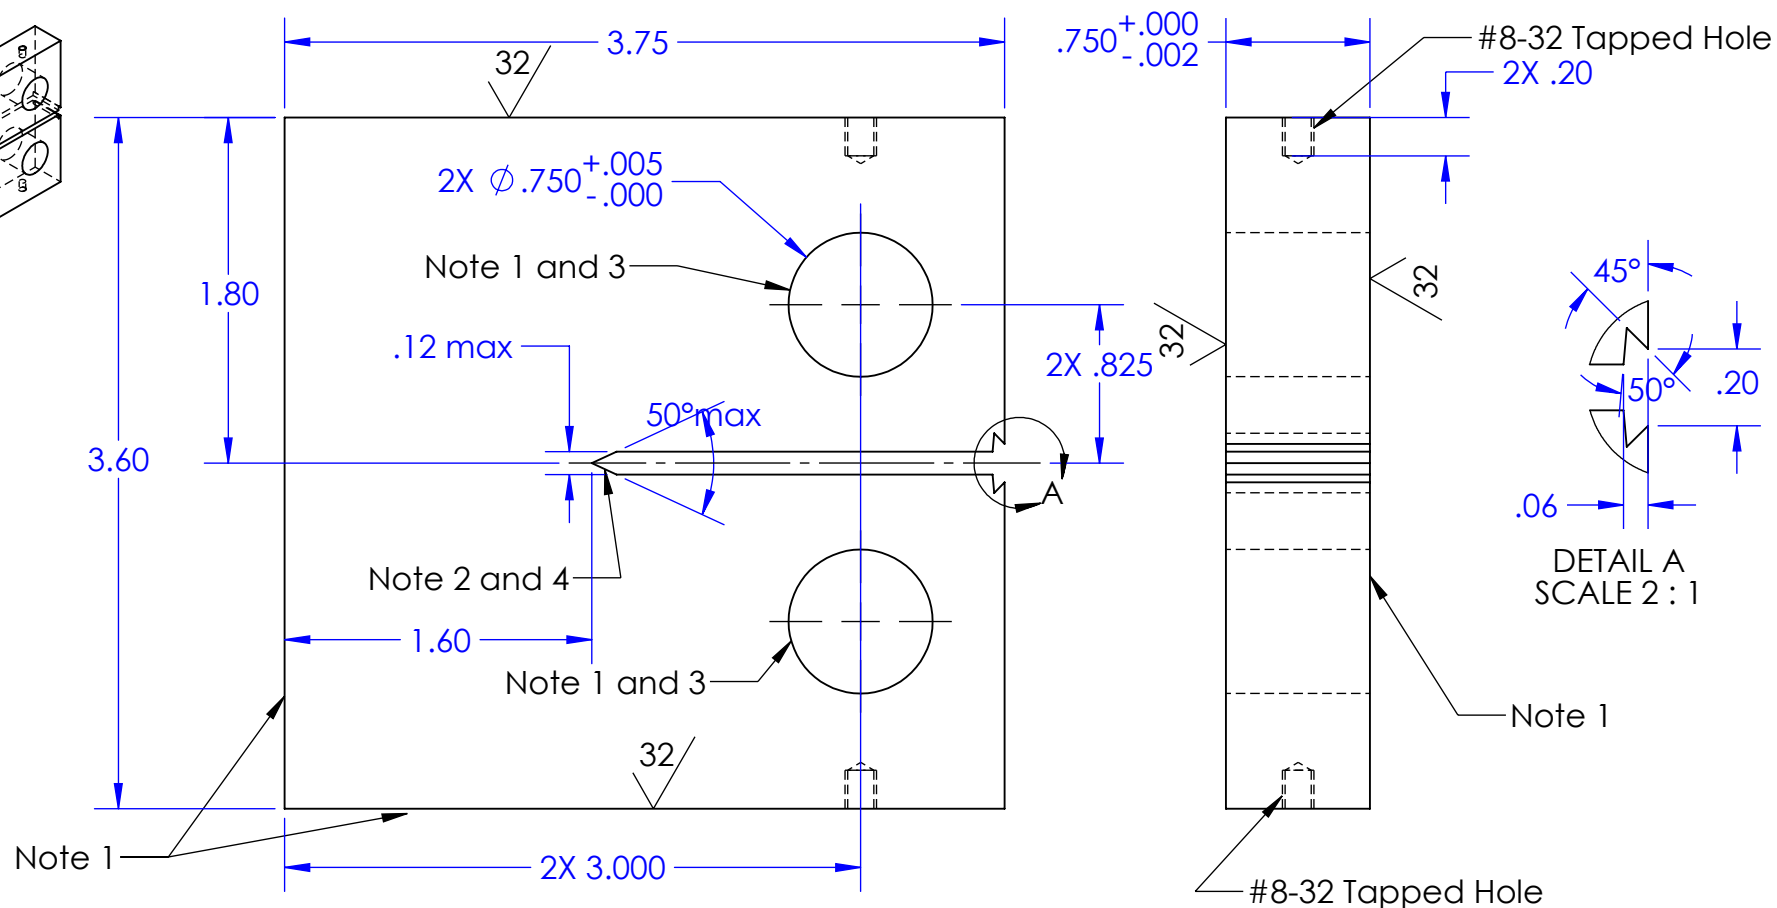

NOTES:

1. SURFACES SHALL BE PERPENDICULAR AND PARALLEL AS APPLICABLE TO WITHIN ± 0.004 , TIR
2. THE INTERSECTION OF THE TIPS OF THE MACHINED NOTCH WITH THE SPECIMEN FACES SHALL BE EQUALLY DISTANT FROM THE TOP AND BOTTOM OF THE SPECIMEN WITHIN 0.01
3. SURFACE FINISH INCLUDING HOLES SHALL BE 32 OR BETTER
4. NOTCH PREPARATION AS DESCRIBED IN ASTM E647 paragraph 7.3

TOLERANCES AND INSPECTION:

1. THIS DRAWING TO BE INTERPRETED IAW ASME Y14.5-2009
2. TOLERANCES ARE SHOWN IN THE TOLERANCE BLOCK UNLESS OTHERWISE SPECIFIED

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NRL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NRL IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: MACH ± 5
TWO PLACE DECIMAL ± 0.02
THREE PLACE DECIMAL ± 0.002

INTERPRET GEOM. TOLERANCING
PER: ASME Y 14.5 2009

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN		
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		

TITLE:

CT Sample Cast NAB

SIZE

A

DWG. NO.

CT-NAB

REV

SCALE: 1:2

WEIGHT:

SHEET 1 OF 1

A

2

1