

Features and Benefits

Edge-To-Edge Cooktop – A large cooking surface gives you extra room for pots and pans of all sizes and lets cookware move easily from burner to burner.

Extra-Large Integrated Griddle – Cook up to six grilled cheeses at once on the industry's largest integrated griddle.

15,000 BTU Power Boil Burner – Delivers high heat for fast boiling.

Center Oval Burner – Large oval fifth burner is ideal for griddle cooking.

Steam Clean – Save time and effort by steam-cleaning the oven after cooking. No special water, kits or extra steps required.

Precise Simmer Burner – Delicate foods don't burn with low, even heat.

Heavy Duty, Dishwasher-Safe Grates – Easily and safely clean grates in the dishwasher.


5.0 Cu. Ft. Oven Capacity – Cook more dishes at once.

Sealed Cooktop Burners – Contain spills and make cleaning quick and easy.

Deep-Recessed Cooktop – Contains spills for quick and easy cleaning.

Model JGBS66DEKWW – White on White


Model JGBS66DEKBB – Black on Black

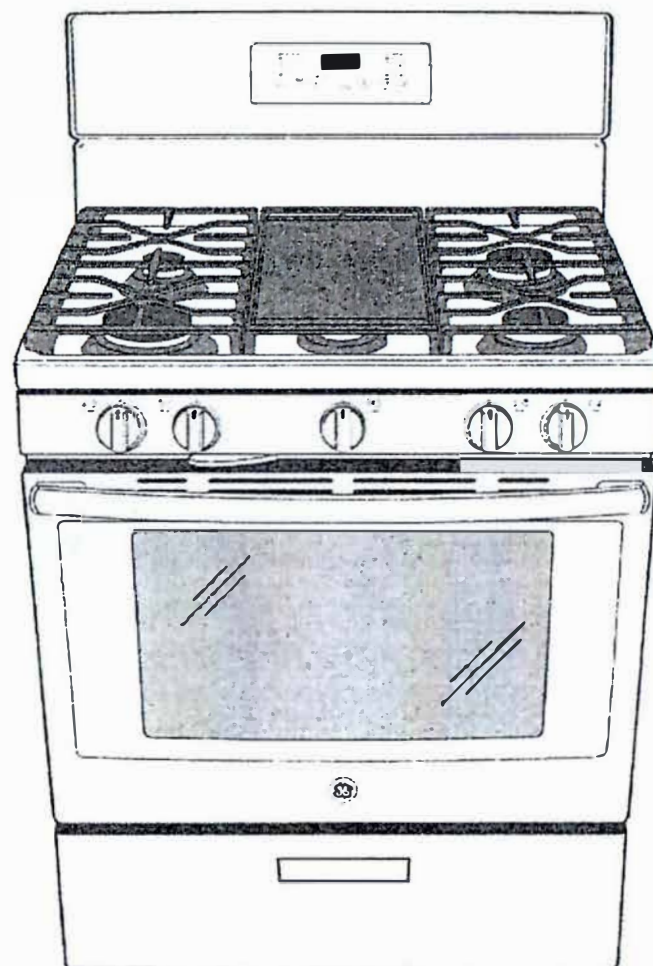

Dimensions and Installation Information (in Inches)

Electrical Rating: 120V, 60Hz, 15A



Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

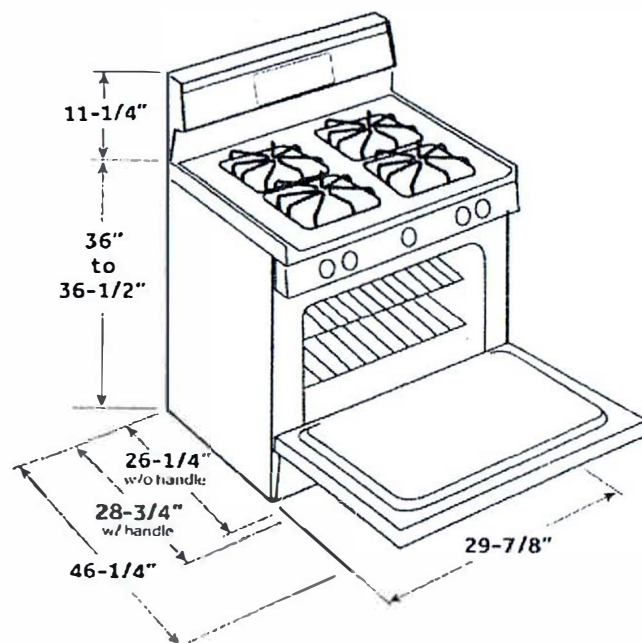

Gas Pipe And Electrical Outlet Locations

Recommended area for 120V outlet on rear wall and area for through-the-wall connection of pipe stub and shut-off valve.

Recommended area for through-the-floor connection of pipe stub and shut-off valve.

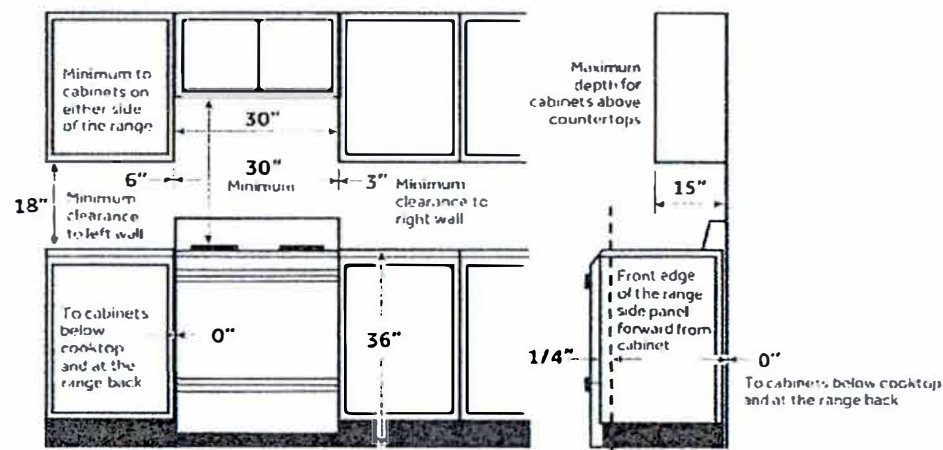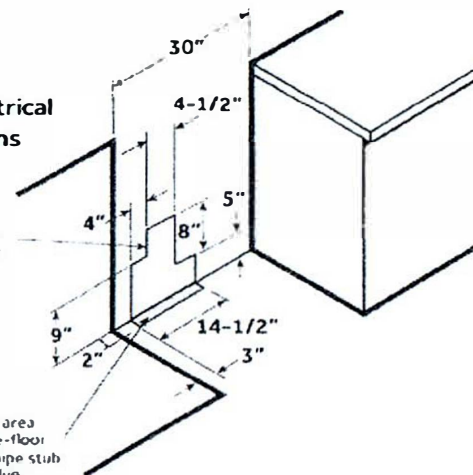

Read and follow all instructions and warnings in the installation manual before installing the range.

21.1 Cu. Ft. Top-Freezer Refrigerator



FEATURES

Temperature Management Features	Air Tower in Freezer
Control Type	Upfront Temperature Controls
Icemaker	Optional (IM4D Ready)
Freezer Cabinet Shelves	1 Adjustable 1 Full-Width 1 Total
Performance Features	Easily Removable Door Gaskets Never Clean Condenser
Freezer Door Bins	2 Full-Width 2 Total Fixed
Defrost Type	Frost Free
Fresh Food Door Features	Dairy Compartment Gallon Storage
Leveling System	Leveling Legs
Fresh Food Cabinet Shelves	2 Adjustable 2 Full-Width 2 Total - Glass Spill-Resistant
Fresh Food Door Bins	2 with Gallon Storage 3 Total
Freezer Features	Spillproof Freezer Floor
Exterior Style	Free-Standing
Fresh Food Features	
Fresh Food Cabinet Drawers	1 Snack Drawer 2 Adjustable Humidity Drawers 3 Total Clear
Product Type	Top Freezer Refrigerator

- #1 in Quality and Dependability - Among 16-22 cu. ft. refrigerators based on an independent study of property maintenance personnel. Source: The Stevenson Company, 2020—Market research company with over 20 years of experience in the appliance industry
- 32-7/8" wide
- Upfront temperature controls - Easy-to-use controls regulate both fresh food and freezer sections
- Adjustable spill-resistant glass shelves - Designed to contain spills for easy cleaning
- Snack drawer - Conveniently stores favorite foods and allows for quick, easy access
- Adjustable-humidity drawers - Controls helps food stay fresh
- Large door bins - Deep bins handle large containers in the door and free up valuable shelf space
- Wire freezer shelf - Better organization for the freezer
- Spillproof freezer floor - Seamless design of the freezer floor wipes up easily for quick cleanup

Have more questions? Please contact 1-800-626-2000

21.1 Cu. Ft. Top-Freezer Refrigerator

APPROXIMATE DIMENSIONS(HxDxW)

- 66 3/4 H x 32 7/8 W x 34 D

CAPACITY

- Fresh Food Capacity - 15.1cu ft
- Total Capacity (cubic feet) - 21.10cu ft
- Freezer Capacity - 6.04cu ft

APPEARANCE

- Exterior Design - Textured Rounded Doors
- Door Stops - Yes
- Textured Steel Case - Color Matched
- Handle Color - White
- Door Swing - Reversible Door
- Coil-Free Back - Yes
- Color Appearance - White

WEIGHTS & DIMENSIONS

- Overall Depth (in) - 34in
- Height to Top of Hinge (in) - 66 3/4in
- Overall Width (in) - 32 7/8in
- Net Weight (lb) - 214lb
- Back Air Clearances (in) - 1in
- Approximate Shipping Weight (lb) - 238lb
- Depth with Door Open 90° (in) - 62 3/4in
- Width w/Door Open 90 Degrees Incl. Handle (in) - 35 1/2in
- Case Depth Without Door (in) - 29in
- Top Air Clearances (in) - 0 1/8in
- Side Air Clearances (in) - 0 1/8in
- Depth Without Handle (in) - 32 1/4in
- Height to Top of Case (in) - 66 1/4in
- Overall Height (in) - 66 3/4in

POWER / RATINGS

- Volts/Hertz/Amps - 120v; 60Hz; 15A

ACCESSORIES

- Optional Icemaker Kit - IM4D, IM4LED

WARRANTY

- Warranty Notes - See written warranty for full details
- Labor Warranty - Limited 1-year entire appliance
- Parts Warranty - Limited 1-year entire appliance

CERTIFICATIONS

- Claims & Certifications - ADA Compliant
- ENERGY STAR® Qualified
- California Prop 65
- California AB-100 Compliant

1.6 cu. ft. Over-the-Range Microwave Oven with Recirculating Venting

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


NOTE: Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above microwave oven. No additional wiring, venting or cabinet rebuilding necessary in many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with the microwave oven.

IMPORTANT INFORMATION: When installing the microwave oven over a range, allow minimum of 2" from bottom of microwave oven to top of range backguard to allow for removal of light covers.

VENTILATION OPTIONS: The Spacemaker microwave ovens are designed for adaptation to the following three types of ventilation:

- Outside exhaust (vertical – as shown)
- Outside exhaust (horizontal)
- Recirculating (non-vented ductless – see Filter Kit drawing)

INSTALLATION INFORMATION: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

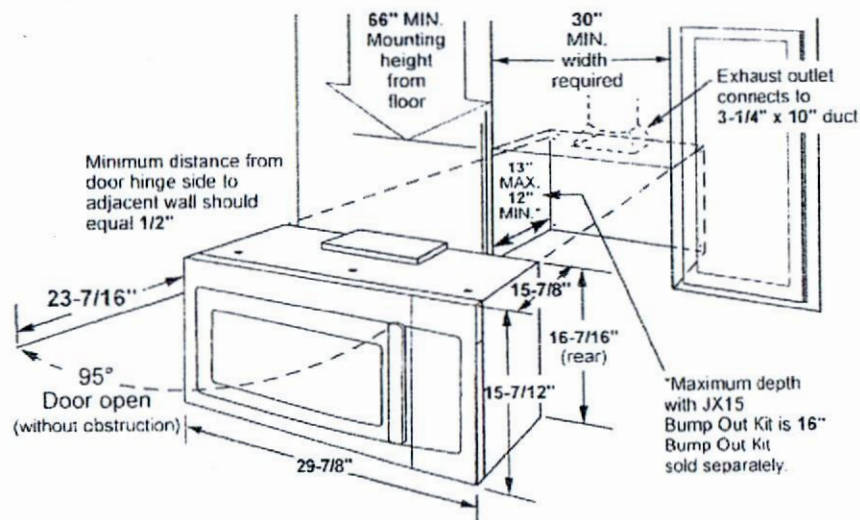

1.6 cu. ft. Over-the-Range Microwave Oven with Recirculating Venting

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

HOOD EXHAUST DUCT: Outside ventilation requires a **HOOD EXHAUST DUCT**. Read the following carefully.

EXHAUST CONNECTION: The hood exhaust has been designed to mate with a standard 3-1/4" x 10" rectangular duct. If a round duct is required, a rectangular-to-round transition adaptor must be used. Do not use less than a 6" diameter duct.


REAR EXHAUST: If a rear or horizontal exhaust is to be used, care should be taken to align exhaust with space between studs, or wall should be prepared at the time it is constructed by leaving enough space between the wall studs to accommodate exhaust.

MAXIMUM DUCT LENGTH: For satisfactory air movement, the total duct length of 3-1/4" x 10" rectangular or 6" diameter round duct should not exceed 120 equivalent feet.

ELBOWS, TRANSITIONS, WALL AND ROOF CAPS, etc., present additional resistance to airflow and are equivalent to a section of straight duct which is longer than their actual physical size. When calculating the total duct length, add the equivalent length of all transitions and adaptors plus the lengths of all straight duct sections. The chart below shows the approximate feet of equivalent length of some typical ducts.

DUCT	EQUIVALENT FEET
A. Rectangular-To-round Transition Adaptor	5 ft.
B. Wall Cap	40 ft.
C. 90° Elbow	10 ft.
D. 45° Elbow	5 ft.
E. 90° Elbow	25 ft.
F. 45° Elbow	5 ft.
G. Roof Cap	24 ft.

OPTIONAL ACCESSORIES (AVAILABLE AT ADDITIONAL COST)

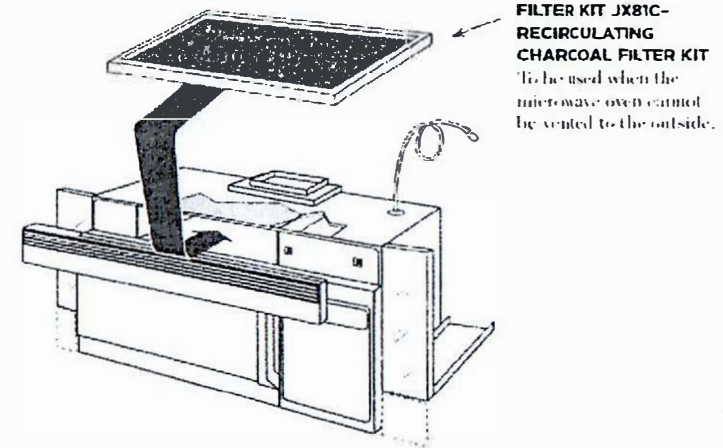

Specification Revised 3/18

1.6 cu. ft. Over-the-Range Microwave Oven with Recirculating Venting

FEATURES AND BENEFITS

1.6 cu. ft. capacity - 950 Watts (IEC-705 test procedure)

Convenience cooking controls - Operating made quick and easy

Auto and time defrost - Defrosting times and power levels are programmed automatically or manually for optimal results

Turntable on/off - Controls turntable operation


Two-speed, 300-CFM venting system - Removes smoke, steam and odors

"Add 30 seconds" button - Add 30 seconds of microwave cooking time

10 power levels - Multiple power levels offer cooking flexibility

Model JNM3163DJBB - Black

Model JNM3163DJWW - White

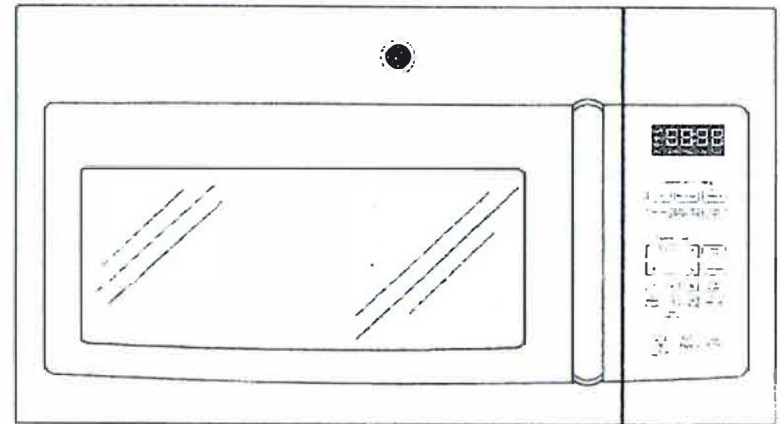

Specification Revised 5/18