

NOTES

- 1. SILKSCREEN TO BE CROPPED FROM PANS WHEN REQUIRED.
- 2. IPC CLASS 2
- 3. ASSEMBLY TO USE LEADED SOLDER AND CLEAN TYPE FLUX, ALL COMPONENTS CAN BE WASHED.

Symbol	Count	Hole Size	Plated	Hole Type	Drill	Layer Pair	Uia/Pad	Pad Shape	Template	Description	Hole Tolerance (+)	Hole Tolerance (-)	Hole Tolerance (+/-)
Ø	4	51.00mil (1.295mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl30nrl30d132hdp194				
Ø	8	60.69mil (1.550mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl35nrl35hdp162				
Ø	9	35.00mil (0.891mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	16	35.00mil (0.891mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	21	30.00mil (0.762mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	62	70.87mil (1.802mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	115	43.00mil (1.092mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
	238	Total											

- [1] Top Layer

[2] CHS_GND1

[3] 3PRTN_400

[4] PHA_400

[5] PHB_400

[6] PHC_400

[7] SP_400

[8] SPRTN_400

[9] SP_60

[10] SPRTN_60

[11] INV_60

[12] INVRTN_60

[13] CHS_GND2

[14] Bottom Layer
- Mechanical 1

Board Outline


Mechanical 13

Mechanical 15

Top Overlay

Bottom Overlay

Drill Drawing

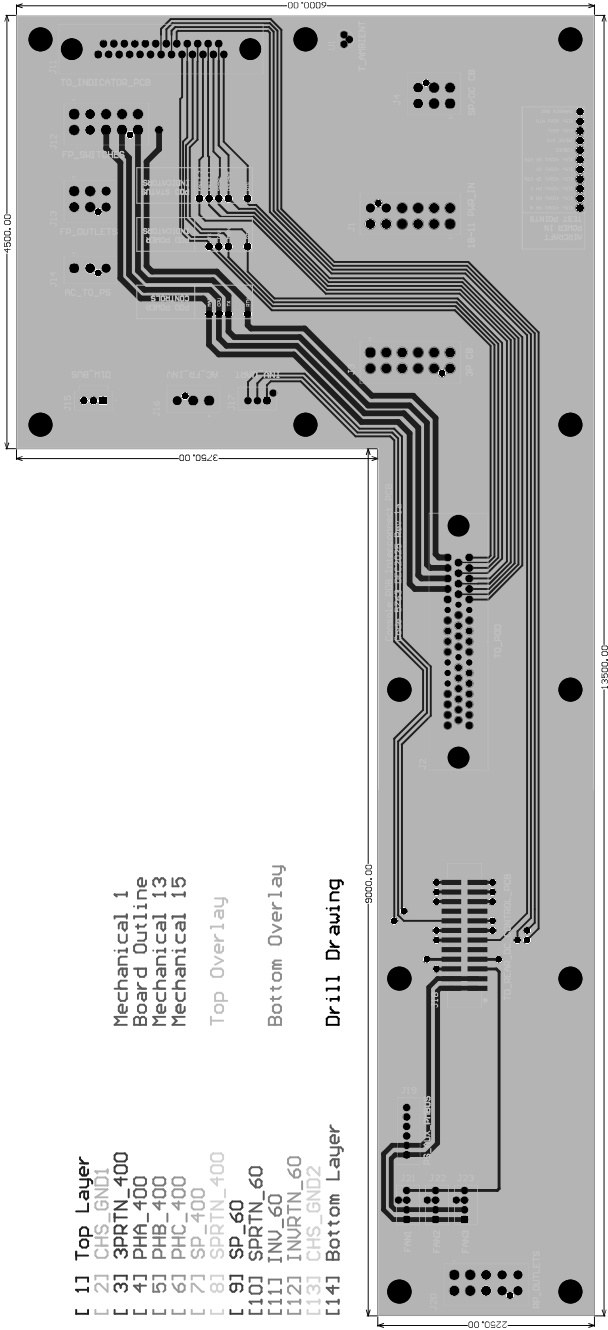

Board Profile	File Name
Solder Resist	Console_pwr_HUG2
1/1 Top Layer	Console_pwr_HUG3
1/2 CHS_GND1	Console_pwr_HUG4
1/3 PHA_400	Console_pwr_HUG5
1/4 PHB_400	Console_pwr_HUG6
1/5 PHC_400	Console_pwr_HUG7
1/6 SP_400	Console_pwr_HUG8
1/7 SP_60	Console_pwr_HUG9
1/8 SPRTN_60	Console_pwr_HUG10
1/9 INV_60	Console_pwr_HUG11
1/10 INVRTN_60	Console_pwr_HUG12
1/11 CHS_GND2	Console_pwr_HUG13
1/12 Bottom Layer	Console_pwr_HUG14
Solder Resist	Console_pwr_HUG15
Solder Paste	Console_pwr_HUG16

2oz copper on OUTER LAYERS
2oz copper on INNER LAYERS
93mil INSIDE PANEL THICKNESS

Board Info	Board Info
Minimum Track	2mil
Minimum Gap	2mil
Minimum Pad Size	2mil
SMD Pad Size	2mil
SMD Pad Bottom	2mil
Gold Fingers Total	0

MATERIAL:-
EPOXY GLASS LAMINATE TO
PC 4101/24 (Vimium)
E265410/S4203704R or Equiv
1250 30 Milses Plus
FINISHED PANEL THICKNESS
TO BE 93mil
PC TO 6070 CLASS 2
PC 6072 CLASS 2

BOARD FINISH:-
1. IMERSION Au/ELECTROLESS Ni
0.05 - 0.12 um GOLD
3 - 6 um NICKEL
2. IMERSION Silver
0.2 - 0.4 um
TO PC-4055
0.8 - 1.2 um
TO PC-4054

GOLD SPEC:-
FINISH CONNECTOR REQUIRES
ELECTROPLATING GOLD PLATING
THICKNESS 3 - 5 um

SOLDER RESIST:-
APPLY TO BOTH SIDES
COLOUR - BLUE
PROCESS - PHOTO IMAGABLE
COMPONENT DENT:-
COLOUR TO BE WHITE
BOTTOM SIDE - WHITE
PROCESS - PHOTO IMAGABLE

TOLERANCES:-
BOARD THICKNESS +/- 10%
PLATED HOLES +/- 0.075mm
NON PLATED HOLES +/- 0.05mm
HOLE CENTRES +/- 0.10mm
OVERALL DIMENSIONS +/- 0.20mm
UNLESS OTHERWISE STATED

Console_pwr_int (interconnect)
Issue 1a
MANUFACTURING DRAWING

US Naval Research Laboratory
4555 Overlook Avenue
SW Washington
USA
DC 20375