

NOTES


- 1. SILSCREEN TO BE CROPPED FROM PANS WHERE REQUIRED.
- 2. IPC CLASS 2
- 3. ASSEMBLY TO USE LEADED SOLDER AND CLEAN TYPE FLUX, ALL COMPONENTS CAN BE WASHED.

Symbol	Count	Hole Size	Plated	Hole Type	Drill	Layer Pair	UtarPad	Pad Shape	Template	Description	Hole Tolerance (+)	Hole Tolerance (-)	Hole Tolerance (+/-)
Ø	4	51.00x1 (1.259mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl30nrl30d132edp194				
Ø	8	66.69x1 (1.679mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl35nrl54d162				
Ø	9	35.00x1 (0.914mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	16	35.00x1 (0.914mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	26	30.00x1 (0.762mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	62	70.87x1 (1.802mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	119	43.00x1 (1.092mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
	239	Total											

[1] Top Layer

Mechanical 1
Board Outline
Mechanical 13

Drill Drawing

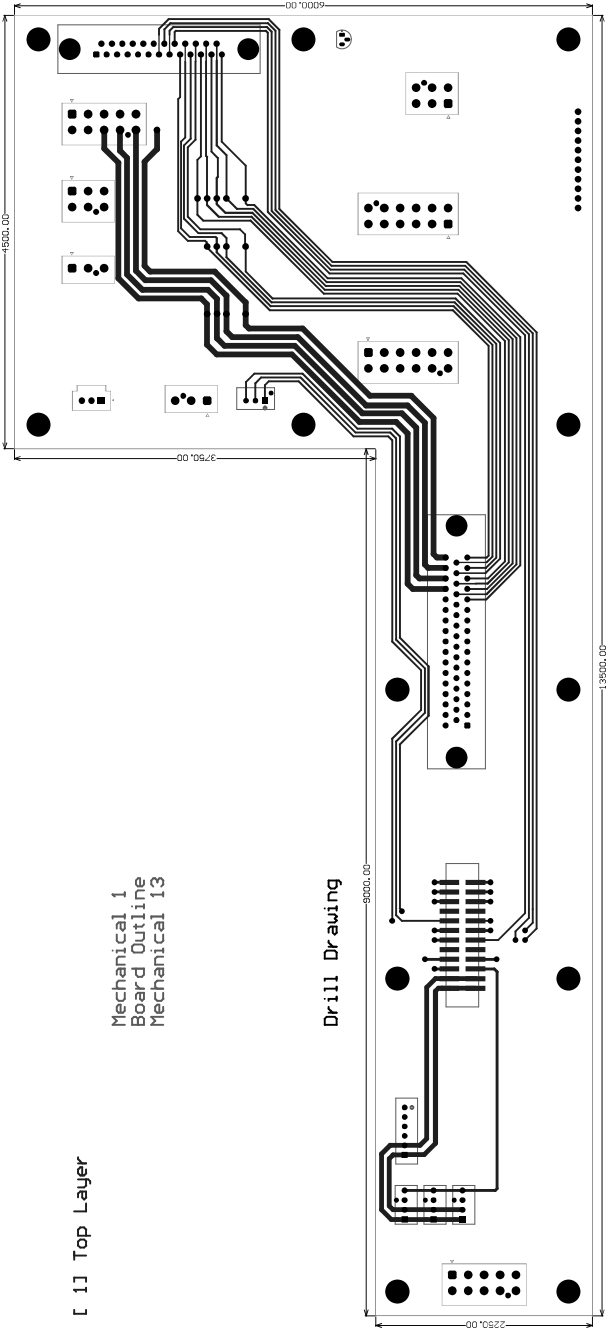

File Name	Board Profile
Console_pwr_int02	Solder Resist
Console_pwr_int03	Solder Resist
Console_pwr_int04	Solder Resist
Console_pwr_int05	Solder Resist
Console_pwr_int06	Solder Resist
Console_pwr_int07	Solder Resist
Console_pwr_int08	Solder Resist
Console_pwr_int09	Solder Resist
Console_pwr_int10	Solder Resist
Console_pwr_int11	Solder Resist
Console_pwr_int12	Solder Resist
Console_pwr_int13	Solder Resist
Console_pwr_int14	Solder Resist
Console_pwr_int15	Solder Resist
Console_pwr_int16	Solder Resist
Console_pwr_int17	Solder Resist
Console_pwr_int18	Solder Resist
Console_pwr_int19	Solder Resist
Console_pwr_int20	Solder Resist
Console_pwr_int21	Solder Resist
Console_pwr_int22	Solder Resist
Console_pwr_int23	Solder Resist
Console_pwr_int24	Solder Resist
Console_pwr_int25	Solder Resist
Console_pwr_int26	Solder Resist
Console_pwr_int27	Solder Resist
Console_pwr_int28	Solder Resist
Console_pwr_int29	Solder Resist
Console_pwr_int30	Solder Resist
Console_pwr_int31	Solder Resist
Console_pwr_int32	Solder Resist
Console_pwr_int33	Solder Resist
Console_pwr_int34	Solder Resist
Console_pwr_int35	Solder Resist
Console_pwr_int36	Solder Resist
Console_pwr_int37	Solder Resist
Console_pwr_int38	Solder Resist
Console_pwr_int39	Solder Resist
Console_pwr_int40	Solder Resist
Console_pwr_int41	Solder Resist
Console_pwr_int42	Solder Resist
Console_pwr_int43	Solder Resist
Console_pwr_int44	Solder Resist
Console_pwr_int45	Solder Resist
Console_pwr_int46	Solder Resist
Console_pwr_int47	Solder Resist
Console_pwr_int48	Solder Resist
Console_pwr_int49	Solder Resist
Console_pwr_int50	Solder Resist
Console_pwr_int51	Solder Resist
Console_pwr_int52	Solder Resist
Console_pwr_int53	Solder Resist
Console_pwr_int54	Solder Resist
Console_pwr_int55	Solder Resist
Console_pwr_int56	Solder Resist
Console_pwr_int57	Solder Resist
Console_pwr_int58	Solder Resist
Console_pwr_int59	Solder Resist
Console_pwr_int60	Solder Resist
Console_pwr_int61	Solder Resist
Console_pwr_int62	Solder Resist
Console_pwr_int63	Solder Resist
Console_pwr_int64	Solder Resist
Console_pwr_int65	Solder Resist
Console_pwr_int66	Solder Resist
Console_pwr_int67	Solder Resist
Console_pwr_int68	Solder Resist
Console_pwr_int69	Solder Resist
Console_pwr_int70	Solder Resist
Console_pwr_int71	Solder Resist
Console_pwr_int72	Solder Resist
Console_pwr_int73	Solder Resist
Console_pwr_int74	Solder Resist
Console_pwr_int75	Solder Resist
Console_pwr_int76	Solder Resist
Console_pwr_int77	Solder Resist
Console_pwr_int78	Solder Resist
Console_pwr_int79	Solder Resist
Console_pwr_int80	Solder Resist
Console_pwr_int81	Solder Resist
Console_pwr_int82	Solder Resist
Console_pwr_int83	Solder Resist
Console_pwr_int84	Solder Resist
Console_pwr_int85	Solder Resist
Console_pwr_int86	Solder Resist
Console_pwr_int87	Solder Resist
Console_pwr_int88	Solder Resist
Console_pwr_int89	Solder Resist
Console_pwr_int90	Solder Resist
Console_pwr_int91	Solder Resist
Console_pwr_int92	Solder Resist
Console_pwr_int93	Solder Resist
Console_pwr_int94	Solder Resist
Console_pwr_int95	Solder Resist
Console_pwr_int96	Solder Resist
Console_pwr_int97	Solder Resist
Console_pwr_int98	Solder Resist
Console_pwr_int99	Solder Resist
Console_pwr_int100	Solder Resist

Board Info	File Name
Minimum Track	2mil
Minimum Gap	2mil
Minimum Pad Size	2mil
SMD Pad Size	2mil
SMD Pad Bottom	2mil
Gold Fingers Total	0

MATERIAL:-
EPOXY GLASS LAMINATE TO
PC 4101/24 (Winnert)
E66410/2423704R of Equiv
1295 30 Milles Plus
FINISHED PANEL THICKNESS
TO BE 93mil
PC TO 607 CLASS 2
PC 6072 CLASS 2

BOARD FINISH:-
1. IMERSION Au/ELECTROLESS Ni
0.05 - 0.12 um GOLD
3 - 6 um NICKEL
2. IMERSION Silver
0.2 - 0.4 um
TO PC-4555
3. IMERSION Tin
0.8 - 1.2 um
TO PC-4554

GOLD SPEC:-
FINGER CONNECTOR REQUIRES
ELECTROPLATING GOLD PLATING
THICKNESS 3 - 5 um

SOLDER RESIST:-
APPLY TO BOTH SIDES
COLOUR - BLUE
PROCESS - PHOTO IMAGABLE
COMPONENT DENT:-
COLOUR TO BE WHITE
BOTTOM SIDE - WHITE
PROCESS - PHOTO IMAGABLE

TOLERANCES:-
BOARD THICKNESS +/- 10%
PLATED HOLES +/- 0.075mm
NON PLATED HOLES +/- 0.05mm
HOLE CENTRES +/- 0.10mm
OVERALL DIMENSIONS +/- 0.20mm
UNLESS OTHERWISE STATED

Console_pwr_int (interconnect)
Issue 1a
MANUFACTURING DRAWING

US Naval Research Laboratory
4555 Overlook Avenue
SW Washington
USA
DC 20375

NOTES


- 1. SILKSCREEN TO BE CROPPED FROM PANS WHERE REQUIRED.
- 2. IPC CLASS 2
- 3. ASSEMBLY TO USE LEADED SOLDER AND CLEAN TYPE FLUX, ALL COMPONENTS CAN BE WASHED.

Symbol	Count	Hole Size	Plated	Hole Type	Drill	Layer Pair	UtarPad	Pad Shape	Template	Description	Hole Tolerance (+)	Hole Tolerance (-)	Hole Tolerance (+/-)
Ø	4	51.00x1 (1.29mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl30ncl30d132edp194				
Ø	8	66.69x1 (1.69mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl35ncl35d164.62				
Ø	9	38.00x1 (0.95mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	16	38.00x1 (0.95mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	26	38.00x1 (0.95mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	62	70.87x1 (1.80mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
Ø	119	43.00x1 (1.09mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)				
	238	Total											

File Name	Board Profile
Console_pwr_HUG2	Solder Paste
Console_pwr_HUG3	Solder Paste
Console_pwr_HUG4	Solder Paste
Console_pwr_HUG5	Solder Paste
Console_pwr_HUG6	Solder Paste
Console_pwr_HUG7	Solder Paste
Console_pwr_HUG8	Solder Paste
Console_pwr_HUG9	Solder Paste
Console_pwr_HUG10	Solder Paste
Console_pwr_HUG11	Solder Paste
Console_pwr_HUG12	Solder Paste
Console_pwr_HUG13	Solder Paste
Console_pwr_HUG14	Solder Paste
Console_pwr_HUG15	Solder Paste
Console_pwr_HUG16	Solder Paste
Console_pwr_HUG17	Solder Paste
Console_pwr_HUG18	Solder Paste
Console_pwr_HUG19	Solder Paste
Console_pwr_HUG20	Solder Paste
Console_pwr_HUG21	Solder Paste
Console_pwr_HUG22	Solder Paste
Console_pwr_HUG23	Solder Paste
Console_pwr_HUG24	Solder Paste
Console_pwr_HUG25	Solder Paste
Console_pwr_HUG26	Solder Paste
Console_pwr_HUG27	Solder Paste
Console_pwr_HUG28	Solder Paste
Console_pwr_HUG29	Solder Paste
Console_pwr_HUG30	Solder Paste
Console_pwr_HUG31	Solder Paste
Console_pwr_HUG32	Solder Paste
Console_pwr_HUG33	Solder Paste
Console_pwr_HUG34	Solder Paste
Console_pwr_HUG35	Solder Paste
Console_pwr_HUG36	Solder Paste
Console_pwr_HUG37	Solder Paste
Console_pwr_HUG38	Solder Paste
Console_pwr_HUG39	Solder Paste
Console_pwr_HUG40	Solder Paste
Console_pwr_HUG41	Solder Paste
Console_pwr_HUG42	Solder Paste
Console_pwr_HUG43	Solder Paste
Console_pwr_HUG44	Solder Paste
Console_pwr_HUG45	Solder Paste
Console_pwr_HUG46	Solder Paste
Console_pwr_HUG47	Solder Paste
Console_pwr_HUG48	Solder Paste
Console_pwr_HUG49	Solder Paste
Console_pwr_HUG50	Solder Paste
Console_pwr_HUG51	Solder Paste
Console_pwr_HUG52	Solder Paste
Console_pwr_HUG53	Solder Paste
Console_pwr_HUG54	Solder Paste
Console_pwr_HUG55	Solder Paste
Console_pwr_HUG56	Solder Paste
Console_pwr_HUG57	Solder Paste
Console_pwr_HUG58	Solder Paste
Console_pwr_HUG59	Solder Paste
Console_pwr_HUG60	Solder Paste
Console_pwr_HUG61	Solder Paste
Console_pwr_HUG62	Solder Paste
Console_pwr_HUG63	Solder Paste
Console_pwr_HUG64	Solder Paste
Console_pwr_HUG65	Solder Paste
Console_pwr_HUG66	Solder Paste
Console_pwr_HUG67	Solder Paste
Console_pwr_HUG68	Solder Paste
Console_pwr_HUG69	Solder Paste
Console_pwr_HUG70	Solder Paste
Console_pwr_HUG71	Solder Paste
Console_pwr_HUG72	Solder Paste
Console_pwr_HUG73	Solder Paste
Console_pwr_HUG74	Solder Paste
Console_pwr_HUG75	Solder Paste
Console_pwr_HUG76	Solder Paste
Console_pwr_HUG77	Solder Paste
Console_pwr_HUG78	Solder Paste
Console_pwr_HUG79	Solder Paste
Console_pwr_HUG80	Solder Paste
Console_pwr_HUG81	Solder Paste
Console_pwr_HUG82	Solder Paste
Console_pwr_HUG83	Solder Paste
Console_pwr_HUG84	Solder Paste
Console_pwr_HUG85	Solder Paste
Console_pwr_HUG86	Solder Paste
Console_pwr_HUG87	Solder Paste
Console_pwr_HUG88	Solder Paste
Console_pwr_HUG89	Solder Paste
Console_pwr_HUG90	Solder Paste
Console_pwr_HUG91	Solder Paste
Console_pwr_HUG92	Solder Paste
Console_pwr_HUG93	Solder Paste
Console_pwr_HUG94	Solder Paste
Console_pwr_HUG95	Solder Paste
Console_pwr_HUG96	Solder Paste
Console_pwr_HUG97	Solder Paste
Console_pwr_HUG98	Solder Paste
Console_pwr_HUG99	Solder Paste
Console_pwr_HUG100	Solder Paste

2oz copper on OUTER LAYERS
2oz copper on INNER LAYERS
94mi FINISH PANEL THICKNESS

Board Info	File Name
Minimum Track	2mi
Minimum Gap	2mi
Minimum Pad Size	2mi
SMD Pad Size	2mi
SMD Pad Bottom	2mi
Gold Fingers Total	0

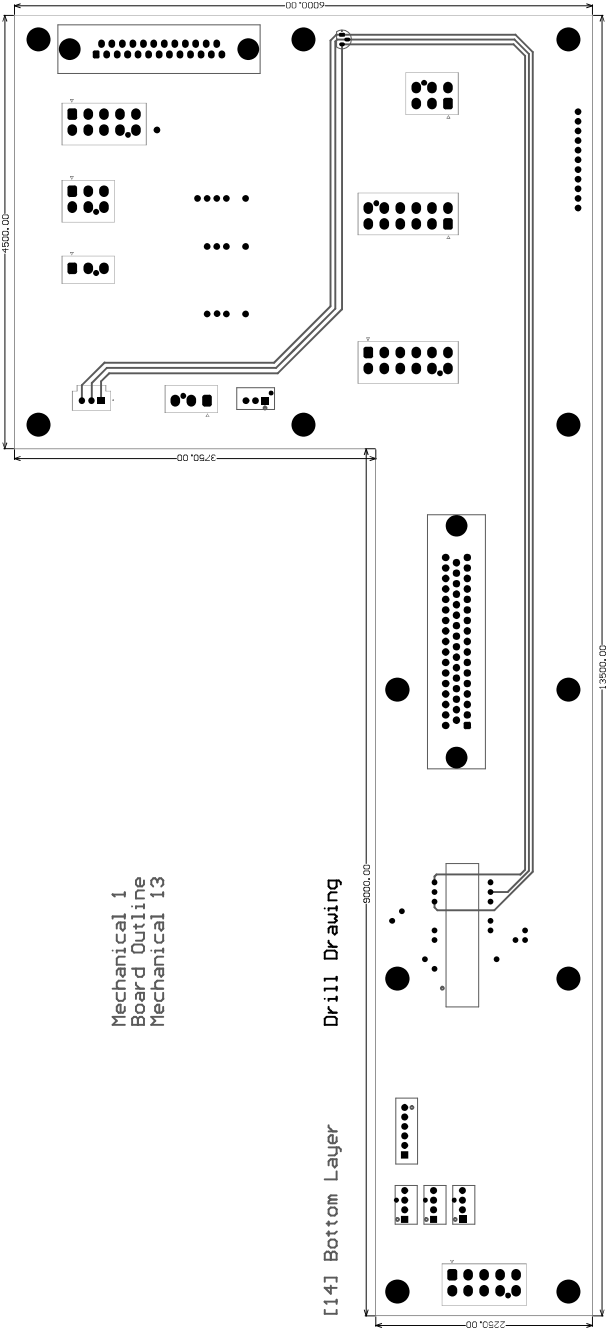

MATERIAL:-
EPOXY GLASS LAMINATE TO
PC 4101/24 (Winnert)
E66410/24/23704R of Equiv
1295 30 Mils Thick (10) =
TO BE 93mi
PC TO 607 CLASS 2
PC 607.2 CLASS 2

BOARD FINISH:-
1. IMERSION Au/ELECTROLESS Ni
0.05 - 0.12 um GOLD
3 - 6 um NICKEL
2. IMERSION Silver
0.2 - 0.4 um
TO PC-4555
08 - 14 um
PC-FC-4554

GOLD SPEC:-
FINGER CONNECTOR REQUIRES
ELECTROPLATING GOLD PLATING
THICKNESS 3 - 5 um

SOLDER RESIST:-
APPLY TO BOTH SIDES
COLOUR - BLUE
PROCESS - PHOTO IMAGABLE
COMPONENT DENT:-
COLOUR TO BE WHITE
BOTTOM SIDE - WHITE
PROCESS - PHOTO IMAGABLE

TOLERANCES:-
BOARD THICKNESS +/- 10%
PLATED HOLES +/- 0.075mm
NON PLATED HOLES +/- 0.05mm
HOLE CENTRES +/- 0.10mm
OVERALL DIMENSIONS +/- 0.20mm
UNLESS OTHERWISE STATED

Console_pwr_int (interconnect)
Issue 1a
MANUFACTURING DRAWING

US Naval Research Laboratory
4555 Overlook Avenue
SW Washington
USA
DC 20375

NOTES


- 1. SILKSCREEN TO BE CROPPED FROM PANS WHERE REQUIRED.
- 2. IPC CLASS 2
- 3. ASSEMBLY TO USE LEADED SOLDER AND CLEAN TYPE FLUX, ALL COMPONENTS CAN BE WASHED.

Symbol	Count	Hole Size	Plated	Hole Type	Drill	Layer Pair	UlarPad	Pad Shape	Template	Description	Hole Tolerance (<=)	Hole Tolerance (<=)
Ø	4	51.00x11 (1.299mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl30nrl30d132edp194			
Ø	8	60.69x11 (1.550mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl35nrl35d1462			
Ø	9	60.69x11 (1.550mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	16	38.10x11 (0.958mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	26	38.10x11 (0.958mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	62	70.87x11 (1.802mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	119	43.00x11 (1.092mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
	238	Total										

File Name	Board Profile
Console_pwr_int02	Solder Paste
Console_pwr_int03	Solder Paste
Console_pwr_int04	Solder Paste
Console_pwr_int05	Solder Paste
Console_pwr_int06	Solder Paste
Console_pwr_int07	Solder Paste
Console_pwr_int08	Solder Paste
Console_pwr_int09	Solder Paste
Console_pwr_int10	Solder Paste
Console_pwr_int11	Solder Paste
Console_pwr_int12	Solder Paste
Console_pwr_int13	Solder Paste
Console_pwr_int14	Solder Paste
Console_pwr_int15	Solder Paste
Console_pwr_int16	Solder Paste
Console_pwr_int17	Solder Paste
Console_pwr_int18	Solder Paste
Console_pwr_int19	Solder Paste
Console_pwr_int20	Solder Paste
Console_pwr_int21	Solder Paste
Console_pwr_int22	Solder Paste
Console_pwr_int23	Solder Paste
Console_pwr_int24	Solder Paste
Console_pwr_int25	Solder Paste
Console_pwr_int26	Solder Paste
Console_pwr_int27	Solder Paste
Console_pwr_int28	Solder Paste
Console_pwr_int29	Solder Paste
Console_pwr_int30	Solder Paste
Console_pwr_int31	Solder Paste
Console_pwr_int32	Solder Paste
Console_pwr_int33	Solder Paste
Console_pwr_int34	Solder Paste
Console_pwr_int35	Solder Paste
Console_pwr_int36	Solder Paste
Console_pwr_int37	Solder Paste
Console_pwr_int38	Solder Paste
Console_pwr_int39	Solder Paste
Console_pwr_int40	Solder Paste
Console_pwr_int41	Solder Paste
Console_pwr_int42	Solder Paste
Console_pwr_int43	Solder Paste
Console_pwr_int44	Solder Paste
Console_pwr_int45	Solder Paste
Console_pwr_int46	Solder Paste
Console_pwr_int47	Solder Paste
Console_pwr_int48	Solder Paste
Console_pwr_int49	Solder Paste
Console_pwr_int50	Solder Paste
Console_pwr_int51	Solder Paste
Console_pwr_int52	Solder Paste
Console_pwr_int53	Solder Paste
Console_pwr_int54	Solder Paste
Console_pwr_int55	Solder Paste
Console_pwr_int56	Solder Paste
Console_pwr_int57	Solder Paste
Console_pwr_int58	Solder Paste
Console_pwr_int59	Solder Paste
Console_pwr_int60	Solder Paste
Console_pwr_int61	Solder Paste
Console_pwr_int62	Solder Paste
Console_pwr_int63	Solder Paste
Console_pwr_int64	Solder Paste
Console_pwr_int65	Solder Paste
Console_pwr_int66	Solder Paste
Console_pwr_int67	Solder Paste
Console_pwr_int68	Solder Paste
Console_pwr_int69	Solder Paste
Console_pwr_int70	Solder Paste
Console_pwr_int71	Solder Paste
Console_pwr_int72	Solder Paste
Console_pwr_int73	Solder Paste
Console_pwr_int74	Solder Paste
Console_pwr_int75	Solder Paste
Console_pwr_int76	Solder Paste
Console_pwr_int77	Solder Paste
Console_pwr_int78	Solder Paste
Console_pwr_int79	Solder Paste
Console_pwr_int80	Solder Paste
Console_pwr_int81	Solder Paste
Console_pwr_int82	Solder Paste
Console_pwr_int83	Solder Paste
Console_pwr_int84	Solder Paste
Console_pwr_int85	Solder Paste
Console_pwr_int86	Solder Paste
Console_pwr_int87	Solder Paste
Console_pwr_int88	Solder Paste
Console_pwr_int89	Solder Paste
Console_pwr_int90	Solder Paste
Console_pwr_int91	Solder Paste
Console_pwr_int92	Solder Paste
Console_pwr_int93	Solder Paste
Console_pwr_int94	Solder Paste
Console_pwr_int95	Solder Paste
Console_pwr_int96	Solder Paste
Console_pwr_int97	Solder Paste
Console_pwr_int98	Solder Paste
Console_pwr_int99	Solder Paste
Console_pwr_int100	Solder Paste

2oz copper on OUTER LAYERS
2oz copper on INNER LAYERS
94mi FINISHED PANEL THICKNESS

Board Info	File Name
Minimum Track	2mi
Minimum Gap	2mi
Minimum Pad Size	2mi
SMD Pad Size	2mi
SMD Pad Bottom	2mi
Gold Fingers Total	0

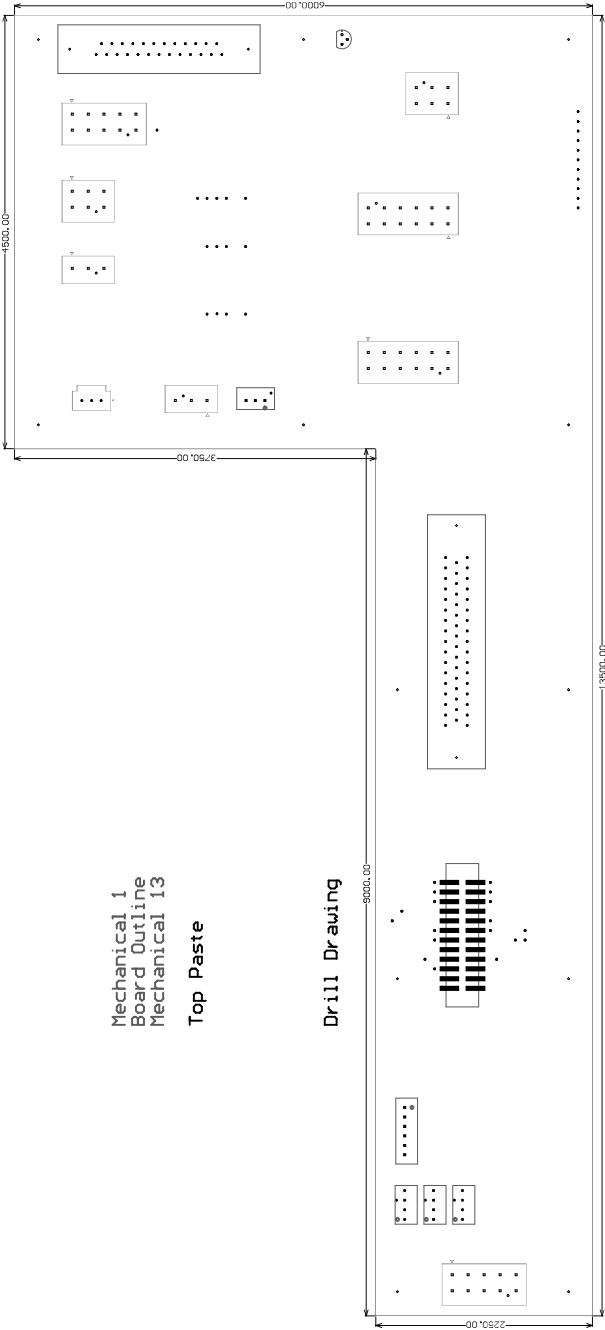

MATERIAL:-
EPOXY GLASS LAMINATE TO
PC 4101/24 (Wirtum)
E565410/5420/3704R of Equiv
1295 30 Mil Thick (10) =
1295 30 Mil Thick
FINISHED PANEL THICKNESS
TO BE 94mi
PC 4101/24 CLASS 2
PC 6012 CLASS 2

BOARD FINISH:-
1. IMPERSONAL ELECTROLESS Ni
0.05 - 0.12 um GOLD
3 - 6 um NICKEL
2. IMPERSONAL Silver
0.2 - 0.4 um
TO BE PC-4555
08 - 0.4 um
PC-4555

GOLD SPEC:-
FINGER CONNECTOR REQUIRES
ELECTROPLATING GOLD PLATING
THICKNESS 3 - 5 um

SOLDER RESIST:-
APPLY TO BOTH SIDES
COLOUR - BLUE
PROCESS - PHOTO IMAGABLE
COMPONENT DENT:-
COLOUR TO BE WHITE
BOTTOM SIDE - WHITE
PROCESS - PHOTO IMAGABLE

TOLERANCES:-
BOARD THICKNESS +/- 10%
PLATED HOLES +/- 0.075mm
NON PLATED HOLES +/- 0.05mm
HOLE CENTRES +/- 0.10mm
OVERALL DIMENSIONS +/- 0.20mm
UNLESS OTHERWISE STATED

Console_pwr_int (interconnect)
Issue 1a
MANUFACTURING DRAWING

US Naval Research Laboratory
4555 Overlook Avenue
SW Washington
USA
DC 20375

NOTES


- 1. SILKSCREEN TO BE CROPPED FROM PANS WHERE REQUIRED.
- 2. IPC CLASS 2
- 3. ASSEMBLY TO USE LEADED SOLDER AND CLEAN TYPE FLUX, ALL COMPONENTS CAN BE WASHED.

Symbol	Count	Hole Size	Plated	Hole Type	Drill	Layer Pair	UlarPad	Pad Shape	Template	Description	Hole Tolerance (<=)	Hole Tolerance (<=)
Ø	4	51.00mil (1.295mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl30nrl30d132edp194			
Ø	8	60.63mil (1.550mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl35nrl35d1462			
Ø	9	60.63mil (1.550mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	16	30.00mil (0.762mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	26	30.00mil (0.762mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	62	70.87mil (1.802mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
Ø	119	43.00mil (1.092mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
	238	Total										

File Name	Board Profile
Console_pwr_int02	Solder Paste
Console_pwr_int03	Solder Paste
Console_pwr_int04	Solder Paste
Console_pwr_int05	Solder Paste
Console_pwr_int06	Solder Paste
Console_pwr_int07	Solder Paste
Console_pwr_int08	Solder Paste
Console_pwr_int09	Solder Paste
Console_pwr_int10	Solder Paste
Console_pwr_int11	Solder Paste
Console_pwr_int12	Solder Paste
Console_pwr_int13	Solder Paste
Console_pwr_int14	Solder Paste
Console_pwr_int15	Solder Paste
Console_pwr_int16	Solder Paste
Console_pwr_int17	Solder Paste
Console_pwr_int18	Solder Paste
Console_pwr_int19	Solder Paste
Console_pwr_int20	Solder Paste
Console_pwr_int21	Solder Paste
Console_pwr_int22	Solder Paste
Console_pwr_int23	Solder Paste
Console_pwr_int24	Solder Paste
Console_pwr_int25	Solder Paste
Console_pwr_int26	Solder Paste
Console_pwr_int27	Solder Paste
Console_pwr_int28	Solder Paste
Console_pwr_int29	Solder Paste
Console_pwr_int30	Solder Paste
Console_pwr_int31	Solder Paste
Console_pwr_int32	Solder Paste
Console_pwr_int33	Solder Paste
Console_pwr_int34	Solder Paste
Console_pwr_int35	Solder Paste
Console_pwr_int36	Solder Paste
Console_pwr_int37	Solder Paste
Console_pwr_int38	Solder Paste
Console_pwr_int39	Solder Paste
Console_pwr_int40	Solder Paste
Console_pwr_int41	Solder Paste
Console_pwr_int42	Solder Paste
Console_pwr_int43	Solder Paste
Console_pwr_int44	Solder Paste
Console_pwr_int45	Solder Paste
Console_pwr_int46	Solder Paste
Console_pwr_int47	Solder Paste
Console_pwr_int48	Solder Paste
Console_pwr_int49	Solder Paste
Console_pwr_int50	Solder Paste
Console_pwr_int51	Solder Paste
Console_pwr_int52	Solder Paste
Console_pwr_int53	Solder Paste
Console_pwr_int54	Solder Paste
Console_pwr_int55	Solder Paste
Console_pwr_int56	Solder Paste
Console_pwr_int57	Solder Paste
Console_pwr_int58	Solder Paste
Console_pwr_int59	Solder Paste
Console_pwr_int60	Solder Paste
Console_pwr_int61	Solder Paste
Console_pwr_int62	Solder Paste
Console_pwr_int63	Solder Paste
Console_pwr_int64	Solder Paste
Console_pwr_int65	Solder Paste
Console_pwr_int66	Solder Paste
Console_pwr_int67	Solder Paste
Console_pwr_int68	Solder Paste
Console_pwr_int69	Solder Paste
Console_pwr_int70	Solder Paste
Console_pwr_int71	Solder Paste
Console_pwr_int72	Solder Paste
Console_pwr_int73	Solder Paste
Console_pwr_int74	Solder Paste
Console_pwr_int75	Solder Paste
Console_pwr_int76	Solder Paste
Console_pwr_int77	Solder Paste
Console_pwr_int78	Solder Paste
Console_pwr_int79	Solder Paste
Console_pwr_int80	Solder Paste
Console_pwr_int81	Solder Paste
Console_pwr_int82	Solder Paste
Console_pwr_int83	Solder Paste
Console_pwr_int84	Solder Paste
Console_pwr_int85	Solder Paste
Console_pwr_int86	Solder Paste
Console_pwr_int87	Solder Paste
Console_pwr_int88	Solder Paste
Console_pwr_int89	Solder Paste
Console_pwr_int90	Solder Paste
Console_pwr_int91	Solder Paste
Console_pwr_int92	Solder Paste
Console_pwr_int93	Solder Paste
Console_pwr_int94	Solder Paste
Console_pwr_int95	Solder Paste
Console_pwr_int96	Solder Paste
Console_pwr_int97	Solder Paste
Console_pwr_int98	Solder Paste
Console_pwr_int99	Solder Paste
Console_pwr_int100	Solder Paste

2oz copper on OUTER LAYERS
2oz copper on INNER LAYERS
93mil FINISHED PANEL THICKNESS

Board Info	File Name
Minimum Track	2mil
Minimum Gap	2mil
Minimum Pad Size	2mil
SMD Pad Size	2mil
SMD Pad Bottom	2mil
Gold Fingers Total	0

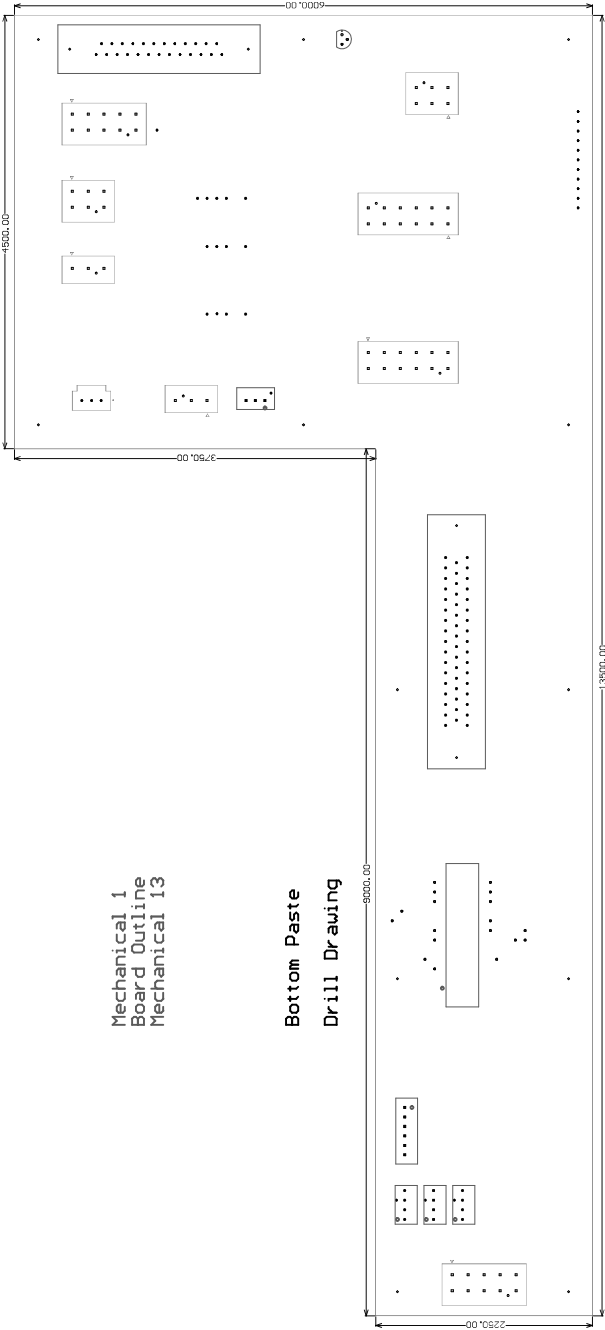

MATERIAL:-
EPOXY GLASS LAMINATE TO
PC 4101/24 (Wirtum)
E665410/2423704R of Equiv
1295 30 Mil Thick (10) =
1295 30 Mil Thick (10) =
FINISHED PANEL THICKNESS
TO BE 93mil
PC 4101/24 CLASS 2
PC 6012 CLASS 2

BOARD FINISH:-
1. IMPESSION Au/ELECTROLESS Ni
0.05 - 0.12 um GOLD
3 - 6 um NICKEL
2. IMPESSION Silver
0.2 - 0.4 um
TO BE PC-4555
08 - 0.4 um
PC-4555

GOLD SPEC:-
FINGER CONNECTOR REQUIRES
ELECTROPLATING GOLD PLATING
THICKNESS 3 - 5 um

SOLDER RESIST:-
APPLY TO BOTH SIDES
COLOUR - BLUE
PROCESS - PHOTO IMAGABLE
COMPONENT DENT:-
COLOUR TO BE WHITE
BOTTOM SIDE - WHITE
PROCESS - PHOTO IMAGABLE

TOLERANCES:-
BOARD THICKNESS +/- 10%
PLATED HOLES +/- 0.075mm
NON PLATED HOLES +/- 0.05mm
HOLE CENTRES +/- 0.10mm
OVERALL DIMENSIONS +/- 0.20mm
UNLESS OTHERWISE STATED


Console_pwr_int (interconnect)
Issue 1a
MANUFACTURING DRAWING

US Naval Research Laboratory
4555 Overlook Avenue
SW Washington
USA
DC 20375

1. SILKSCREEN TO BE CROPPED FROM PADS WHERE REQUIRED.
2. IPC CLASS 2
3. ASSEMBLY TO USE LEADED SOLDER AND CLEAN TYPE FLUX

Mechanical 1
Board Outline
Mechanical 13

Drill Drawing

[illegible]

2oz copper on OUTER LAYERS
2oz copper on INNER LAYERS
9.3mil FINISHED PANEL THICKNESS

US Naval Research Laboratory
4555 Overlook Avenue
SW Washington
USA DC 20375

Console_pwr_int (interconnect)

Issue 1a

MANUFACTURING DRAWING

TOLERANCES:-	
BOARD THICKNESS	+/- 10%
PLATED HOLES	+/- 0.075mm
NON PLATED HOLES	+/- 0.05mm
HOLE CENTRES	+/- 0.10mm
OVERALL DIMENSIONS	+/- 0.20mm

UNLESS OTHERWISE STATED

SOLDER RESIST:-
 APPLY TO BOTH SDES
 COLOUR - BLUE
 PROCESS - PHOTO IMAGABLE

COMPONENT IDENT:-
 COLOUR TO BE
 TOP SIDE - WHITE
 BOTTOM SIDE - WHITE
 PROCESS - PHOTO IMAGABLE

~~GOLD SPEC.:—
FINGER-CONNECTOR REQUIRES
ELECTROLYTIC GOLD PLATING
THICKNESS 3 —5 μ m.~~

BOARD FINISH:—

1. IMMERSION Au/ELECTROLESS Ni
0.05 – 0.12 μ m GOLD
3 – 6 μ m NICKEL
TO IPC-4552
2. ~~IMMERSION Silver~~
~~0.2 – 0.4 μ m~~
~~TO IPC-4553~~
3. ~~IMMERSION Tin~~
~~0.8 – 1.2 μ m~~
~~TO IPC-4554~~

MATERIAL:—
EPOXY GLASS LAMINATE TO
IPC 4101/24 (Minimum)
E.G.S40, S5420, 370HR or Equiv
Time to Destruction (TD) =
T260 30 Minutes Plus
FINISHED PANEL THICKNESS
TO BE 9mil
PCB TO:—
IPC-A-600 CLASS 2
IPC-6012 CLASS 2

