

NOTES


- 1. SILSCREEN TO BE CROPPED FROM PANS WHERE REQUIRED.
- 2. IPC CLASS 2
- 3. ASSEMBLY TO USE LEADED SOLDER AND CLEAN TYPE FLUX, ALL COMPONENTS CAN BE WASHED.

Symbol	Count	Hole Size	Plated	Hole Type	Drill	Layer Pair	UlarPad	Pad Shape	Template	Description	Hole Tolerance (<=)	Hole Tolerance (<=)
Ø	4	51.00x11 (1.295mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl30nrl30d132edp194			
Ø	8	60.69x11 (1.550mm)	NPTH	Round		Top Layer - Bottom Layer	Pad	Rounded	cl35nrl35d142			
□	9	38.00x11 (0.951mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
□	16	38.00x11 (0.951mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
□	21	38.00x11 (0.951mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
□	62	70.87x11 (1.802mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
□	119	43.00x11 (1.092mm)	PTH	Round		Top Layer - Bottom Layer	Pad	Rounded	(fl,ved)			
	238	Total										

File Name	Board Profile
Console_pwr_int02	Solder Paste
Console_pwr_int03	Solder Paste
Console_pwr_int04	Solder Paste
Console_pwr_int05	Solder Paste
Console_pwr_int06	Solder Paste
Console_pwr_int07	Solder Paste
Console_pwr_int08	Solder Paste
Console_pwr_int09	Solder Paste
Console_pwr_int10	Solder Paste
Console_pwr_int11	Solder Paste
Console_pwr_int12	Solder Paste
Console_pwr_int13	Solder Paste
Console_pwr_int14	Solder Paste
Console_pwr_int15	Solder Paste
Console_pwr_int16	Solder Paste
Console_pwr_int17	Solder Paste
Console_pwr_int18	Solder Paste
Console_pwr_int19	Solder Paste
Console_pwr_int20	Solder Paste
Console_pwr_int21	Solder Paste
Console_pwr_int22	Solder Paste
Console_pwr_int23	Solder Paste
Console_pwr_int24	Solder Paste
Console_pwr_int25	Solder Paste
Console_pwr_int26	Solder Paste
Console_pwr_int27	Solder Paste
Console_pwr_int28	Solder Paste
Console_pwr_int29	Solder Paste
Console_pwr_int30	Solder Paste
Console_pwr_int31	Solder Paste
Console_pwr_int32	Solder Paste
Console_pwr_int33	Solder Paste
Console_pwr_int34	Solder Paste
Console_pwr_int35	Solder Paste
Console_pwr_int36	Solder Paste
Console_pwr_int37	Solder Paste
Console_pwr_int38	Solder Paste
Console_pwr_int39	Solder Paste
Console_pwr_int40	Solder Paste
Console_pwr_int41	Solder Paste
Console_pwr_int42	Solder Paste
Console_pwr_int43	Solder Paste
Console_pwr_int44	Solder Paste
Console_pwr_int45	Solder Paste
Console_pwr_int46	Solder Paste
Console_pwr_int47	Solder Paste
Console_pwr_int48	Solder Paste
Console_pwr_int49	Solder Paste
Console_pwr_int50	Solder Paste
Console_pwr_int51	Solder Paste
Console_pwr_int52	Solder Paste
Console_pwr_int53	Solder Paste
Console_pwr_int54	Solder Paste
Console_pwr_int55	Solder Paste
Console_pwr_int56	Solder Paste
Console_pwr_int57	Solder Paste
Console_pwr_int58	Solder Paste
Console_pwr_int59	Solder Paste
Console_pwr_int60	Solder Paste
Console_pwr_int61	Solder Paste
Console_pwr_int62	Solder Paste
Console_pwr_int63	Solder Paste
Console_pwr_int64	Solder Paste
Console_pwr_int65	Solder Paste
Console_pwr_int66	Solder Paste
Console_pwr_int67	Solder Paste
Console_pwr_int68	Solder Paste
Console_pwr_int69	Solder Paste
Console_pwr_int70	Solder Paste
Console_pwr_int71	Solder Paste
Console_pwr_int72	Solder Paste
Console_pwr_int73	Solder Paste
Console_pwr_int74	Solder Paste
Console_pwr_int75	Solder Paste
Console_pwr_int76	Solder Paste
Console_pwr_int77	Solder Paste
Console_pwr_int78	Solder Paste
Console_pwr_int79	Solder Paste
Console_pwr_int80	Solder Paste
Console_pwr_int81	Solder Paste
Console_pwr_int82	Solder Paste
Console_pwr_int83	Solder Paste
Console_pwr_int84	Solder Paste
Console_pwr_int85	Solder Paste
Console_pwr_int86	Solder Paste
Console_pwr_int87	Solder Paste
Console_pwr_int88	Solder Paste
Console_pwr_int89	Solder Paste
Console_pwr_int90	Solder Paste
Console_pwr_int91	Solder Paste
Console_pwr_int92	Solder Paste
Console_pwr_int93	Solder Paste
Console_pwr_int94	Solder Paste
Console_pwr_int95	Solder Paste
Console_pwr_int96	Solder Paste
Console_pwr_int97	Solder Paste
Console_pwr_int98	Solder Paste
Console_pwr_int99	Solder Paste
Console_pwr_int100	Solder Paste

2oz copper on OUTER LAYERS
2oz copper on INNER LAYERS
94um FINISHED PANEL THICKNESS

Board Info	
Minimum Track	7mil
Minimum Gap	7mil
Minimum Pad Size	7mil
SMD Pad Size	7mil
SMD Pad Bottom	7mil
Gold Fingers Total	0

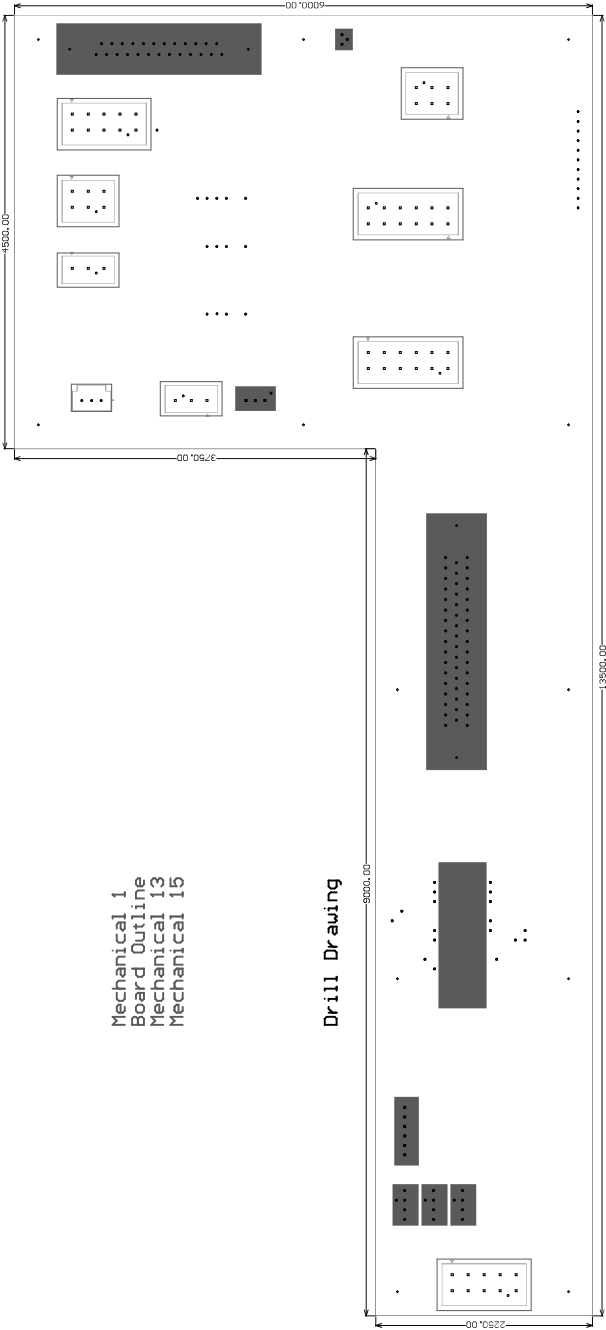

MATERIAL:-
EPOXY GLASS LAMINATE TO
PC 4101/24 (Wilmur)
E565410/5420/3704R or Equiv
1295 30 Mil Thick (10) =
1295 30 Mil Thick
FINISHED PANEL THICKNESS
TO BE 94um
PC 4101/24 CLASS 2
PC 6012 CLASS 2

BOARD FINISH:-
1. IMPERSONAL ELECTROLESS Ni
0.05 - 0.12 um GOLD
3 - 6 um NICKEL
2. IMPERSONAL Silver
0.2 - 0.4 um
3. IMPERSONAL Tin
0.8 - 1.2 um
PC 4101/24
PC 6012

GOLD SPEC:-
FINISH CONNECTOR REQUIRES
ELECTROPLATING GOLD PLATING
THICKNESS 3 - 5 um

SOLDER RESIST:-
APPLY TO BOTH SIDES
COLOUR - BLUE
PROCESS - PHOTO IMAGABLE
COMPONENT DENT:-
COLOUR TO BE WHITE
BOTTOM SIDE - WHITE
PROCESS - PHOTO IMAGABLE

TOLERANCES:-
BOARD THICKNESS +/- 10%
PLATED HOLES +/- 0.075mm
NON PLATED HOLES +/- 0.05mm
HOLE CENTRES +/- 0.10mm
OVERALL DIMENSIONS +/- 0.20mm
UNLESS OTHERWISE STATED

Console_pwr_int (interconnect)
Issue 1a
MANUFACTURING DRAWING

US Naval Research Laboratory
4555 Overlook Avenue
SW Washington
USA
DC 20375

Mechanical 1
Board Outline
Mechanical 13
Mechanical 15

Drill Guide

