


TASK GROUP INSTRUCTION
AIM REV 20.11.4.0 (OCTOBER 2020)

TGI NO.:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CHANGE:
	03 LVL SPY ARRAY DK	AY	A	0	1
SHIP/HULL NO.:	SHIP/HULL NAME:	SYSTEM:	PROJ/WO NO:	CASREP CAT:	
DDG-115	USS RAFAEL PERALTA		K61		
CU PHASE TITLE:					
F/O - ACOMP INSP, RPR, PSV, & REPLT OF PEEL & STICK NONSKID SYS IN 03LVL WEATHER					
PREPARING ACTIVITY:					
PREPARED BY:	CODE	PHONE	DATE		
NAOKI KUROKAWA	231B.	315-243-0108	17-NOV-2025		
APPROVED BY:	CODE	PHONE	DATE		
RYOUTA TAKAGI	231B.	315-243-4502	17-NOV-2025		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
REASON FOR WORK/NEED FOR CHANGE:					
Paragraph 5.12.6 needs to be revised.					
CHANGE INSTRUCTIONS:					
CH1: Revise paragraph 5.12.6 (01/22/2026)					
SPECIAL REQUIREMENTS:					

WORK CERTIFICATION SIGNATURES

COMPLETION OF WORK REVIEW:	BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
ACCEPTANCE OF COMPLETED WORK				
PHYSICAL INSPECTION	PHYSICAL INSPECTION COMPLETED:	BADGE NO.:	SHOP/CODE:	PHONE:
REQUIRED: ☐ YES ☒ NO				
RECORDS REVIEW:	BADGE NO.:	SHOP/CODE:	PHONE:	DATE:



LIST OF EFFECTIVE PAGES									
SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.
1-6									
J1-2									
M1-2									
Sketch (1-4)									

1. SCOPE/PURPOSE

1.1 Title: Replacement of Peel and Stick Nonskid System and Inspection, Repair, and Preservation of 03 Level Weather, Deck Plating; accomplish

1.2 Location of Work:

1.2.1 03 Level Weather, Frames between 163 and 193, Port and Starboard (Stbd)

1.3 Identification:

1.3.1 Quantity (2 EA), Ammunition Stowage Box, 03 Level Weather, Frames between 169 and 174
Remarks: See Sketch Enclosure-01 for location details

1.3.1.1 Quantity (One EA), Ammunition Lifting Stowage Box, Port

1.3.1.2 Quantity (One EA), Ammunition Platform Stowage Box, Stbd

1.3.2 Quantity (2 AY), Liferaill Stanchion Assembly, 03 Level Weather, Frames 163 and 193, Port and Stbd
Material: CRES
Remarks: See Sketch Enclosure-01 for location details

1.3.2.1 Quantity (One EA), Liferaill Stanchion, 03 Level Weather, Frames 192 and 193, Port

1.3.3 Quantity (One EA), J-Bar Davit Socket Foundation, 03 Level Weather, Frames 190 and 192, Port
Material: Steel
Remarks: See Sketch Enclosure-01 for location details

1.3.4 Quantity (6 EA), Drain Trough Cover Plate, 03 Level Weather, Frames between 169 and 174, Port and Stbd [Existing]
Material: CRES
Remarks: See Sketch Enclosure-01 for location details

1.3.5 Quantity (1,050 SF), Deck Plating, 03 Level Weather, Frames between 163 and 193, Port and Stbd, including drain trough and vertical surface up to height of 4 inches from deck in and around peel and stick nonskid deck covering area
Remarks: See Sketch Enclosure-01 for location details

1.3.6 Quantity (One SF), Deck Penetration, Firemain Piping in 03 Level Weather, Frames between 172 and 173, Stbd
Remarks: The area where rubber tile is installed

1.3.7 Quantity (2 SF in Total), Protective Side Plate of Hydrostatic Release Clip Assembly, 03 Level Weather, Frames between 167 and 173, Port
Remarks: The area where rubber tile is installed

2 TGI NO.:

SHIP:

03 LVL SPY ARRAY DK	AY	A	0
DDG-115	CHG/VER:		1/0

1.3.8 Quantity (6 EA), Composite Drain Trough Cover Plate, 03 Level Weather, Frames between 169 and 174, Port and Stbd

Material: Glass Reinforced Plastics

Remarks: See Sketch Enclosure-01 for location details

1.4 Security Classification: None.

1.5 Initial Condition: None.

1.6 Contractor Work start date: 7/27/2026

1.7 Contractor Work completion date: 9/4/2026

2. **REFERENCES:**

REF. NO.	DOCUMENT /DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV	CHG NO.	COPY REQ'D (Y/N)	SOURCE DOC (Y/N)	PARA	SEC	PG	CHP
1	NSI FY-26	NAVSEA Standard Items	-	1	N					
2	LI FY-26	Local Standard Items	-	ORG	N					
3	DWG 600-7026491	INSTL OF HULL OUTFIT, DESIGN ZONE 4330 03 LVLFR 174-199 (WEATHER)	H		Y				SE E N O T E	
4	DWG 612-6567058	DDG51 CLASS LIFELINES RAILS STANCHIONS, AND FAB INSTL OF EXTERIOR	AD		Y				SE E N O T E	
5	DWG 529-8892049	DRAIN TROUGH COVER, GRP, INSTALLATION AND DETAILS	-		Y				AL L	
6	TM SYSTEMS & SPECIFICAT IONS	SSPC Painting Manual Volume 2	-		N					
7	DWG 150-7026717	UNIT STRL ARR DWG ASSY UNIT 4220	P		Y				3-6	
8	DWG 150-7026723	UNIT STRL ARR ASSY UNIT 4320	J		Y				3-18	
9	DWG 711-8724214	MK 38 MOD 3 STABILIZED CHAIN GUN ARR & STRL FDN MODS & ML	A		Y				5,6 ,19	

3. **APPENDICES:**

- 3.1. ~~Appendix "J" TGI Job Summary Information Sheet~~ 1/26/2026 C1209.2 K. YOSHIDA
 3.2. Appendix "M" TGI Material List
 3.3. Appendix "D" Deficiency Form

4. **GENERAL REQUIREMENTS:**

4.1 Not Applicable.

5. **PROCEDURE:**

5.1 Remove and reinstall each stowage box listed in 1.3.1 for preservation work, using 2.3 for guidance.

3 TGI NO.:

SHIP:

03 LVL SPY ARRAY DK	AY	A	0
DDG-115	CHG/VER:		1/0

5.2 Remove each existing liferail stanchion and J-bar davit socket foundation listed in 1.3.2.1 and 1.3.3, using 2.3 and 2.4 for guidance.

5.3 Remove each existing drain trough cover plate listed in 1.3.4, using 2.3 and 2.5 for guidance.

5.4 Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) 23, for each area listed in 1.3.5.

5.4.1 Power tool clean to bare metal for each vertical surface. Accomplish each requirement of Surface Preparation Specification SSPC-SP 11 of 2.6.

5.4.2 Upon completion of surface preparation of each area, accomplish a visual inspection of each deck plating for structural integrity, deterioration, pitting, each crack, and area of damage or distortion, using 2.7 and 2.8 for guidance.

5.4.2.1 Submit one legible copy, in hard copy or approved transferrable media, of a report listing results of the requirements of 5.4.2 to the SUPERVISOR.

5.4.3 Accomplish the requirements of 009-026 of 2.1, including Attachment G, for installation of new peel and stick nonskid deck covering. Application of peel and stick nonskid deck covering must conform to MIL-PRF-24667, Type XI, Composition PS.

5.4.4 Apply each new safety marking in accordance with 2.9.

5.5 Accomplish the following repairs of each deck plating listed in 1.3.5 reported in 5.4.2.1 as designated by the SUPERVISOR, using 2.3, 2.5, 2.7, and 2.8 and for guidance. See 5.12.3 and 5.12.4.

5.5.1 Base metal buildup, a total of 50 square inches.

5.5.1.1 Ensure each base metal buildup area does not exceed 2 inches in diameter.

5.5.1.2 Estimate the base metal buildup to be one quarter inch thick for pricing purposes.

5.5.1.3 Fill each local pit and groove with metal prior to the application of each principal build-up layer.

5.5.1.4 Each surface must be ground smooth to metal.

5.5.2 Remove existing and install new, a total of 30 each of mounting bracket for drain trough cover plate(s).

5.5.3 Chip and grind each surface flush in way of each repair.

5.5.4 Template exact size, configuration, and location from each existing shipboard condition.

5.5.5 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) A and D, Lines One through 7.

5.5.6 Accomplish the requirements of 009-025 of 2.1 for an air hose test of each new weld seam. Allowable leakage: None.

5.6 Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) One, for each liferail stanchion assembly and J-bar davit socket foundation listed in 1.3.2 and 1.3.3.

5.7 Reinstall each liferail stanchion and J-bar davit socket foundation listed in 1.3.2.1 and 1.3.3, using 2.3 and 2.4 for guidance.

5.8 Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) 46, for each area listed in 1.3.6 and 1.3.7.

03 LVL SPY ARRAY DK	AY	A	0
DDG-115	CHG/VER:	1/0	

5.9. Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) 83, for each composite drain trough cover plate listed in 1.3.8.

5.9.1 Stencil on each new composite drain trough cover plate in accordance with General Note 7 of 2.5. The stencil must be 5/8 inch and "BLACK".

5.10 Install each new composite drain trough cover plate listed in 1.3.8 in accordance with 2.5.

5.10.1 Drill 9/32 inch diameter mounting hole(s) on each new composite drain trough cover plate.

5.10.1.1 Template detail from onboard ship for drill mounting hole(s).

5.10.1.2 Shape remaining holes to 82 degrees countersink.

5.10.1.3 Apply epoxy resin adhesive to drilled mounting hole(s).

5.11 Accomplish the requirements of 009-032 of 2.1 for each new and disturbed surface.

5.12 Notes:

5.12.1 Planner: Code 231B N. Kurokawa, 243-0108

5.12.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-6522-9560

5.12.3 Removal and installation of rubber tile on deck penetration and protective side plate will be covered by TGI No(s). 38K6113801U01 and 38K6113801R01 (SRF-JRMC TGI).

5.12.4 Removal and installation of interferences, and gas free operation, preservation of boundary spaces relating to front loading structure repair are not included in this TGI. They will be covered by a DL in the future based on Contractor submitted condition report.

5.12.5 Materials for mounting bracket relating to front loading repair will be provided in the future as a DL based on Contractor submitted condition report.

5.12.6 WPC will copy the following pages in reference.

REF. 2.3: Pages 3B14, 4A, 4B, and 3A21.

REF. 2.4: Pages 5F1, 6C1, and 3M1-34.

5.12.7 JCN CF01-0418 is related to this TGI.

5.13 Government Furnished Material (GFM):

5.13.1 SRF-JRMC will provide GFM listed in Appendix "M".

5.14 SRF-JRMC will provide the following service work: (TGI No. 38K6113801S02).

5.14.1 [C740] Crane and crane rigging service.

5.14.2 [X99E] Utility service, electrical.

5.14.3 [X99M] Utility service, including water supply, steam supply, and low pressure air supply except onboard blasting work.

5.14.4 [C106.1] Safety inspection for SRF-JRMC employees.

03 LVL SPY ARRAY DK	AY	A	0
DDG-115	CHG/VER:		1/0

- 5.14.5 [C106.2] Gas free inspection for SRF-JRMC employees.
- 5.14.6 [C133] QA inspection for (G) symbol(s).
- 5.14.7 [C250] Technical support for front load repair work.

6	TGI NO.:	03 LVL SPY ARRAY DK	AY	A	0
	SHIP:	DDG-115	CHG/VER:		1/0

APPENDIX "M"

TGI MATERIAL LIST

SYSTEM:	PLANT NO.:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CU PH VERSION:	CASREP CAT:
		03 LVL SPY ARRAY DK	AY	A	0	0	

CU PHASE TITLE:

F/O - ACOMP INSP, RPR, PSV, & REPLT OF PEEL & STICK NONSKID SYS IN 03LVL WEATHER

MATERIAL REFERENCES

REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV
------------	----------------------------	------------------------	-----

JOB ORDER:

38K6113801

KEY OP:

A01

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
001			M	COVER, FAUCET HOLE, ORIGINATOR: C231B N. KUOKAWA 243-0108 ORDER FOR KTR	9B 4510 016765240		NA	4	N	53175733	1/SE	
002			M	SCREW, MACHINE, ORIGINATOR: C231B N. KUOKAWA 243-0108 ORDER FOR KTR	9B 5305 014243572		NA	4	N	53175730	80/EA	
003			M	ADHESIVE, ORIGINATOR: C231B N. KUOKAWA 243-0108 ORDER FOR KTR	9B 8040 002646816		NA	4	Y	53175725	2/KT	
004			M	CHEMICAL, ORIGINATOR: C231B N. KUOKAWA 243-0108 ORDER FOR KTR	9B 6850 014504009		NA	4	Y	53175720	2/OZ	
005			M	SCREW, HEX, SELF-LOCK,, SCREW, HEX, SELF-LOCK SIZE: 1/2-13UNC-2A X 1"L MATERIAL: CRES 316 ANNEALED MIL-F-18240 TYPE P, MUL-DTL- 1222 TY I BIW CAT#53847-153 ORIGINATOR: C231B N. KUOKAWA 243-0108 ORDER FOR KTR			NA	4	N		36/EA	

NOTES:

M-1

TGI NO.:	03 LVL SPY ARRAY DK	AY	A	0
SHIP:	DDG-115	CHG/VER:	1/0	

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
006			M	SCREW,CAP,SOCKET HE, ORIGINATOR: C231B N. KUOKAWA 243-0108 ORDER FOR KTR	9B 5305 017241255		NA	4	N	53285102	8/EA	

M-2

TGI NO.:	03 LVL SPY ARRAY DK	AY	A	0
SHIP:	DDG-115	CHG/VER:	1/0	

☐ NUCLEAR☐ NON-NUCLEAR

APPENDIX "D"

DEFICIENCY FORM

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-115			03 LVL SPY ARRAY DK	AY	A	0
4a. ICN:		4b. KEY OP:	5. LOC SPACE/LVL:	FRAME:	P/S/C:	6. CAUSED BY:
38K6113801		A01				

7. DESCRIPTION:

8. ORIGINATOR:	NAME:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
----------------	-------	--------	------------	-------	------------

9. CORRECTIVE ACTION:

10. EVALUATOR:	NAME:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
----------------	-------	--------	------------	-------	------------

FOR NON-NUCLEAR USE ONLY

11. RFD/RFW REQ'D ☐	LAR REQ'D ☐	SRD/PLAN REV REQ'D ☐
ILS MOD REQ'D ☐	DWG NO.: _____ S/A NO.: _____	

12. ISOLATION SATISFACTORY:	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
--------------------------------	-------	--------	------------	-------	------------

13. SUBSAFE OQE RECORD?	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.
YES ☐ NO ☐					

14. CORRECTIVE ACTION COMPLETE:	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.

15. INSPECTION REQ'D?	INSPECTION COMPLETE/SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.
:YES ☐ NO ☐					

16. RECORDS REVIEW COMPLETE (DR ONLY)	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.


DL's ISSUED
(DR ONLY)

☐ NON-NUCLEAR

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-115			03 LVL SPY ARRAY DK	AY	A	0

This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, typical of notebook paper. There are no margins, text, or other markings on the page.

LOCATION DETAIL OF PRESERVE AND REPLACE PEEL & STICK

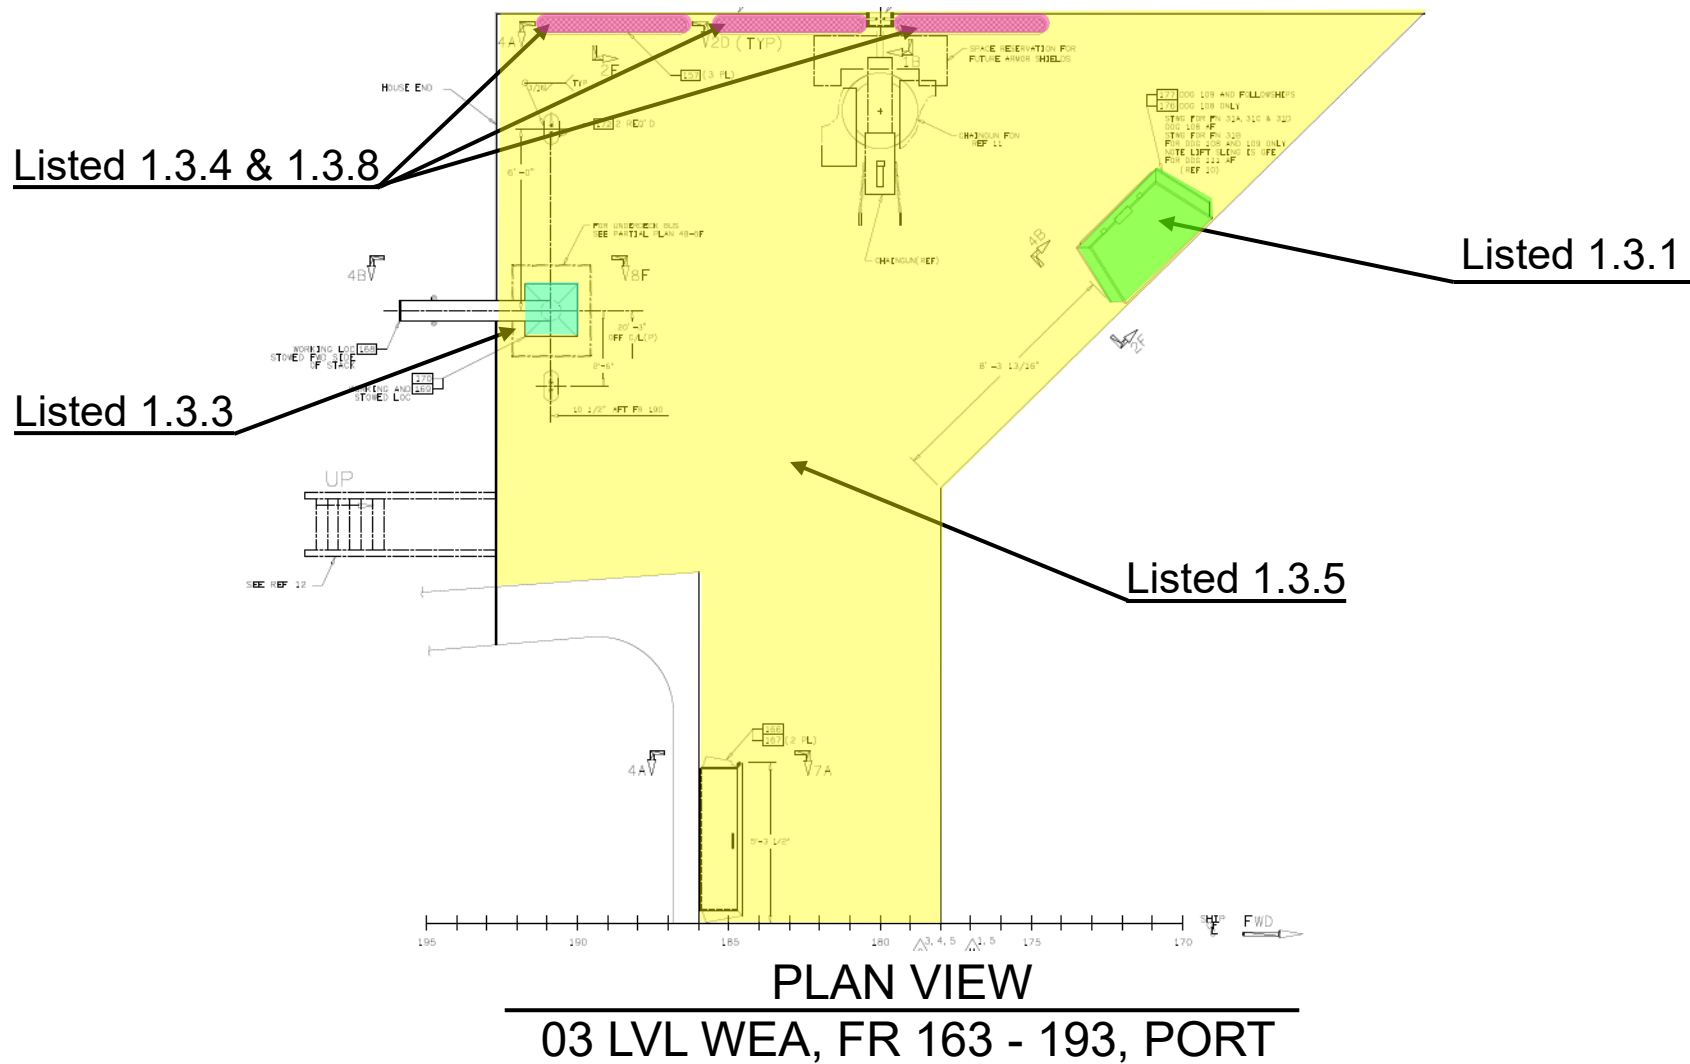


38K6113801A01

SKETCH

Sheet 1 of 4

LOCATION DETAIL OF PRESERVE AND REPLACE PEEL & STICK

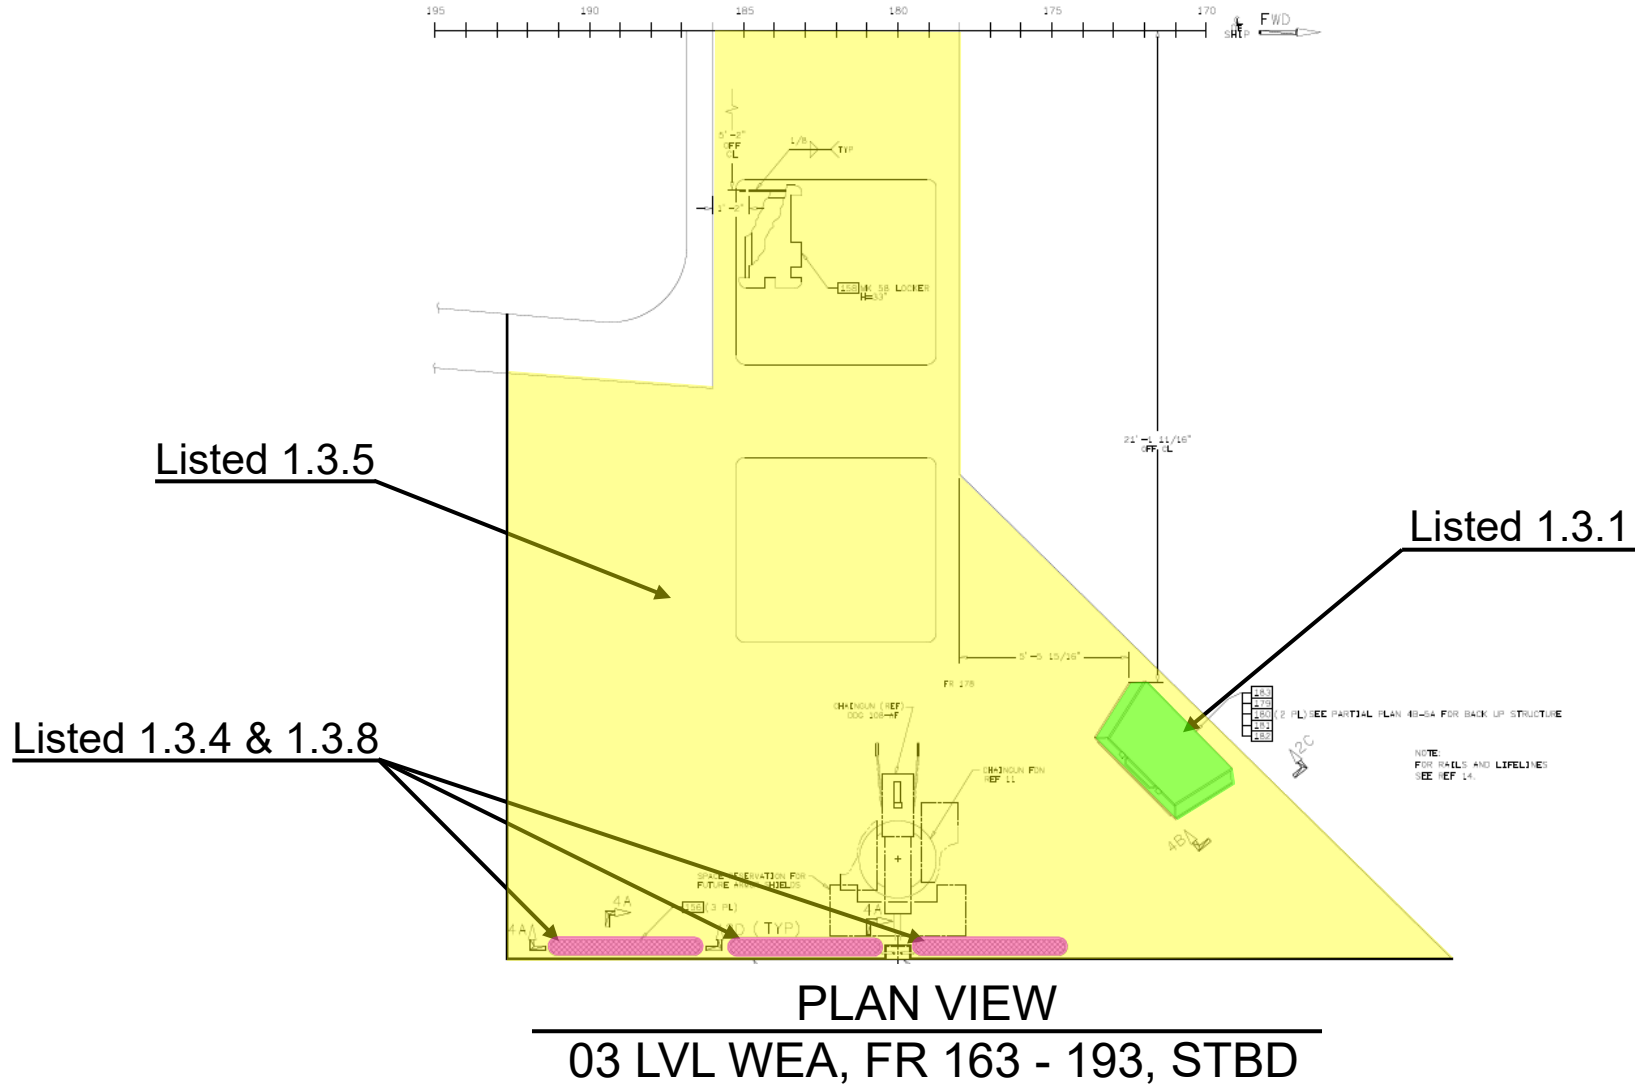

Listed 1.3.2.1


03 LVL WEA, FR 163 - 193, PORT

ENCLOSURE-01

Sheet 3 of 4

LOCATION DETAIL OF PRESERVATION AREA

Listed 1.3.2

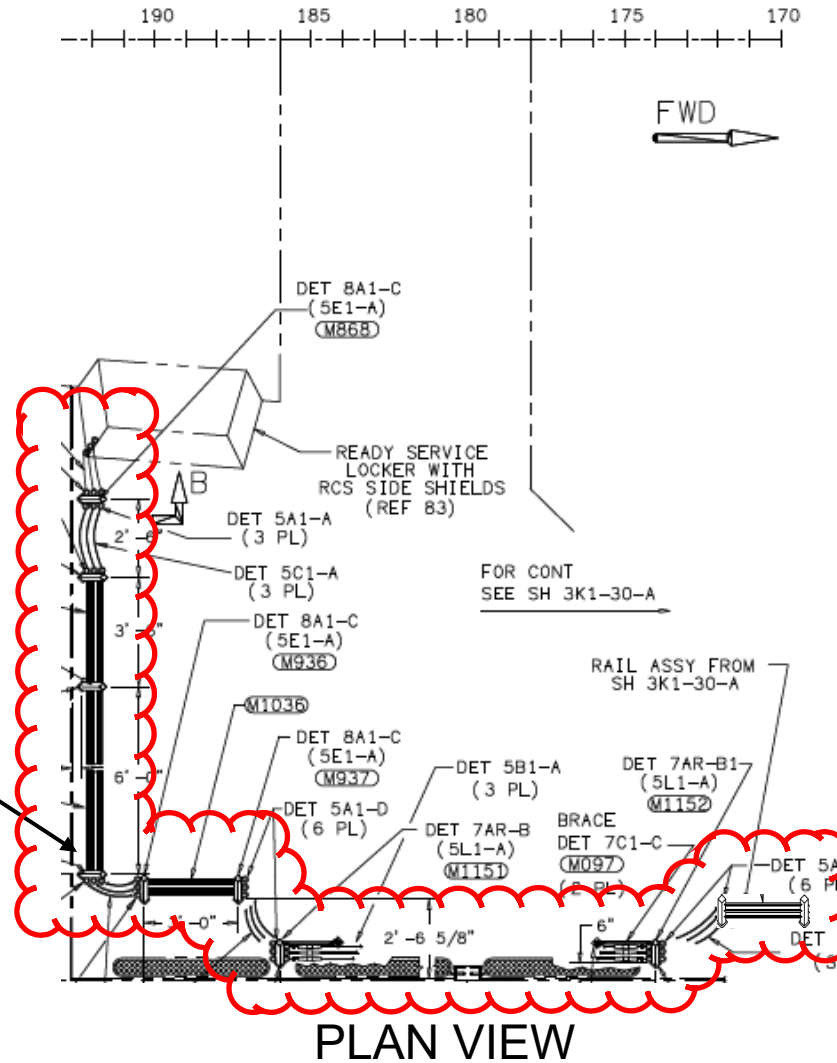

03 LVL WEA, FR 163 - 193, STBD

SKETCH

ENCLOSURE-01