

TASK GROUP INSTRUCTION

AIM REV 20.11.4.0 (OCTOBER 2020)

TGI NO.:	COMPONENT NAME: 02 WEATHER	TYPE: AY	PHASE: A	REPEAT: 0	CHANGE: 0
SHIP/HULL NO.:	SHIP/HULL NAME:	SYSTEM:	PROJ/WO NO:	CASREP CAT:	
DDG-115	USS RAFAEL PERALTA		K61		
CU PHASE TITLE: F/O - ACCOMPLISH REPLT OF NONSKID SYS, PSVTN OF STAN, & INSTL OF EQPT ON 02 LVL					
PREPARING ACTIVITY:					
PREPARED BY:	CODE	PHONE	DATE		
MITSUO MAEDA	231B	315-243-6101	19-NOV-2025		
APPROVED BY:	CODE	PHONE	DATE		
RYOUTA TAKAGI	231B	315-243-4502	19-NOV-2025		
CONCURRED BY:	CODE	PHONE	DATE		
ATSUHIRO KUMAGAYA	294	315-243-5749	19-NOV-2025		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
REASON FOR WORK/NEED FOR CHANGE:					
CHANGE INSTRUCTIONS:					
SPECIAL REQUIREMENTS:					

WORK CERTIFICATION SIGNATURES					
COMPLETION OF WORK REVIEW:		BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
ACCEPTANCE OF COMPLETED WORK					
PHYSICAL INSPECTION REQUIRED: ☐ YES ☒ NO	PHYSICAL INSPECTION COMPLETED:	BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
RECORDS REVIEW:		BADGE NO.:	SHOP/CODE:	PHONE:	DATE:



LIST OF EFFECTIVE PAGES									
SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.
1-6									
J1-2									
M1-3									
Sketch (1-4)									

1. SCOPE/PURPOSE

1.1 Title: Replacement of Nonskid System, Preservation of Stanchion, and Installation of Equipment on 02 Level Weather; accomplish

1.2 Location of Work:

1.2.1 02 Level Weather, Frames between 242 and 396, Port and Starboard (Stbd)

1.2.2 Step Platform Weather, 54 Feet 4 Inches Above Base Line (ABL), Frames between 316 and 320, Port and Stbd

1.2.3 02 1/2 Level Weather, Frames between 370 and 386, Port and Stbd

1.2.4 Ships Service Gas Turbine Generator Exhaust Trunk (1-370-2-Q)

1.2.5 Aviation Storeroom No. 2 (01-370-1-A)

1.2.6 IRS Eductor Secondary Air Inlet Trunk (01-378-2-Q)

1.2.7 Deck Gear Locker (02-370-1-A)

1.3 Identification:

1.3.1 Quantity (One Lot), Fastener of AFT Vertical Launching System (VLS) Drain Trough Cover Plate in 02 Level Weather, Frames between 338 and 370, Port and Stbd

1.3.1.1 Quantity (67 EA), Screw

Material: CRES 316, 5/16-18UNC-2A, x 3/4 Inch Length, Truss Head

Remarks: See Sheet 3B-12 Detail 3B-1F, 3B-5F, and 3B-7G, and Sheet 3C of 2.3 for detail.

1.3.1.2 Quantity (67 EA), Washer

Material: CRES 316

Size: 0.875 Inch Outside Diameter x 0.344 Inch Inside Diameter x 0.063 Inch Thickness

Remarks: See Sheet 3B-12 Detail 3B-1F, 3B-5F, and 3B-7G, and Sheet 3C of 2.3 for detail.

1.3.1.3 Quantity (73 EA), Screw

Material: CRES 316, 3/8-16UNC-2A, x 5/8 Inch Length, Flat Head

Remarks: See Sheet 3B-12 Detail 3B-2F, 3B-5F, and 3B-7G, and Sheet 3C of 2.3 for detail.

1.3.2 Quantity (One Lot), Toggle Pin for Lifeline Stanchion Assembly, including wire rope and compression ferrule in 02 Level Weather, Frames between 255 and 396, Port and Stbd

2 TGI NO.:

SHIP:

02 WEATHER	AY	A	0
DDG-115	CHG/VER:	0/0	

1.3.2.1 Quantity (30 EA), Toggle Pin for Stanchion Brace and Brace Clip, including wire rope and compression ferrule

Remarks: See Sheet 7C1 Detail 7C1-C of 2.4 for detail.

1.3.2.2 Quantity (30 EA), Toggle Pin for Stanchion Brace and Stanchion, including wire rope and compression ferrule

Remarks: See Sheet 7C1 Detail 7C1-C of 2.4 for detail.

1.3.2.3 Quantity (47 EA), Toggle Pin for Stanchion and Stanchion Base, including wire rope and compression ferrule

Remarks: See Sheet 6B1 Detail 6B1-F, Sheet 6B2 Detail 6B2-F, and Sheet 8N1 Detail 8N1-D of 2.4 for detail.

1.3.2.4 Quantity (31 EA), Toggle Pin for Hinge Base, including wire rope and compression ferrule

Remarks: See Sheet 6E5 Detail 6E5-C of 2.4 for detail.

1.3.3 Quantity (14 EA), Toggle Pin for Stanchion and Stanchion Base, including wire rope and compression ferrule in 02 1/2 Level Weather, Frames between 370 and 386, Port and Stbd

Remarks: See Sheet 6B1 Detail 6B1-F of 2.4 for detail.

1.3.4 Quantity (35 AY), Bonding Strap Assembly for Lifeline Stanchion in 02 1/2 Level Weather, Frames between 370 and 386, Port and Stbd

Attachment Method: Method 3 of Figure 11 of 2.6, Welded

Material: CRES 316L

Weld Joint Design: PT1S.1 of MIL-STD-22D

Fillet Weld Size: 1/8 Inch

Remarks: See 2.5 for detail.

1.3.5 Quantity (One Lot), Toggle Pin of Lifeline Stanchion Assembly in 02 Level Weather, Frames between 265 and 396, Port and Stbd

1.3.5.1 Quantity (3 EA), Toggle Pin for Stanchion and Stanchion Base

Remarks: See Sheet 6B1 Detail 6B1-F and Sheet 8N1 Detail 8N1-D of 2.4 for material and detail, and Sketch Enclosure-01 for location detail.

1.3.5.2 Quantity (One EA), Toggle Pin for Brace and Brace Clip

Remarks: See Sheet 7C1 Detail 7C1-C of 2.4 for material and detail, and Sketch Enclosure-01 for location detail.

1.3.5.3 Quantity (One EA), Toggle Pin for Brace and Stanchion

Remarks: See Sheet 7C1 Detail 7C1-C of 2.4 for material and detail, and Sketch Enclosure-01 for location detail.

1.3.5.4 Quantity (5 EA), Toggle Pin for Hinge Base

Remarks: See Sheet 6E5 Detail 6E5-C of 2.4 for material and detail, and Sketch Enclosure-01 for location detail.

02 WEATHER	AY	A	0
DDG-115	CHG/VER:	0/0	

1.3.6 Quantity (One Lot), Toggle Pin for Lifeline Stanchion Assembly, including wire rope and compression ferrule in 02 1/2 Level Weather, Frames between 370 and 386, Port and Stbd

1.3.6.1 Quantity (3 EA), Toggle Pin for Stanchion and Stanchion Base, including wire rope and compression ferrule

Remarks: See Sheet 6B1 Detail 6B1-F of 2.4 for material and detail, and Sketch Enclosure-01 for location detail.

1.3.6.2 Quantity (9 EA), Toggle Pin for Brace and Brace Clip, including wire rope and compression ferrule

Remarks: See Sheet 7C1 Detail 7C1-C of 2.4 for material and detail, and Sketch Enclosure-01 for location detail.

1.3.6.3 Quantity (9 EA), Toggle Pin for Brace and Stanchion, including wire rope and compression ferrule

Remarks: See Sheet 7C1 Detail 7C1-C of 2.4 for material and detail, and Sketch Enclosure-01 for location detail.

1.3.7 Quantity (50 EA), Lifeline Stanchion, 02 Level Weather, Frames between 255 and 396, Port and Stbd

Material: CRES

1.3.7.1 Quantity (31 EA), Stanchion Brace, 02 Level Weather, Frames between 255 and 396, Port and Stbd

Material: CRES

1.3.8 Quantity (17 EA), Lifeline Stanchion, 02 1/2 Level Weather, Frames between 370 and 386, Port and Stbd

Material: CRES

1.3.8.1 Quantity (9 EA), Stanchion Brace, 02 1/2 Level Weather, Frames between 370 and 386, Port and Stbd

Material: CRES

1.3.9 Quantity (5,400 SF), 02 Level Deck Plating, Frames between 242 and 396, including vertical surface up to height of 4 inches from deck in and around nonskid deck area, Port and Stbd

Remarks: The area excepts exterior surface of vertical launching system and where rubber tile is installed.

1.3.10 Quantity (35 SF), Top Surface of Step Platform for Close-In Weapon System, 54 Feet 4 Inches ABL, Frames between 316 and 320, including vertical surface up to height of 4 inches from deck in and around nonskid deck area Port and Stbd

1.3.11 Quantity (300 SF), Top Surface of Stack, 02 1/2 Level Deck Plating, Frames between 370 and 386, including vertical surface up to height of 4 inches from deck in and around nonskid deck area Port and Stbd

1.4 Security Classification: None.

1.5 Initial Condition: None.

1.6 Contractor work start date: 8/10/2026

1.7 Contractor work completion date: 9/4/2026

2. REFERENCES:

4 TGI NO.:

SHIP:

02 WEATHER	AY	A	0
DDG-115	CHG/VER:	0/0	

REF. NO.	DOCUMENT /DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV	CHG NO.	COPY REQ'D (Y/N)	SOURCE DOC (Y/N)	PARA	SEC	PG	CHP
1	NSI FY-26	NAVSEA Standard Items	-	1	N					
2	LI FY-26	Local Standard Items	-	ORG	N					
3	DWG 100-7026702	DDG-51 CLASS UNIT STRL ARR DWG ASSY UNIT3250	M		Y				3B - 12, 3C	
4	DWG 612-6567058	DDG51 CLASS LIFELINES RAILS STANCHIONS, AND FAB INSTL OF EXTERIOR	AD		Y				SE E N O T E	
5	DWG 407-8602224	Topside Electromagnetic Control Measures Ship Specific drawing for USS RAFAEL PE	-		Y				11 2, B2	
6	MIL MIL-STD-1310	Shipboard Bonding, Grounding, and Other Techniques for EMP Mitigation and Safety	H		N					
7	DWG 100-7027658	UNIT STRUCTURAL ARR DWG-ASSY UNIT 3270	D		Y				3-5	
8	TM SYSTEMS & SPECIFICAT IONS	SSPC Painting Manual Volume 2	-		N					

3. **APPENDICES:**

- 3.1. ~~Appendix "J" TGI Job Summary Information Sheet~~ 1/26/2026 C1209.2 K. YOSHIDA
- 3.2. Appendix "M" TGI Material List
- 3.3. Appendix "D" Deficiency Form

4. **GENERAL REQUIREMENTS:**

- 4.1. Not Applicable.

5. **PROCEDURE:**

5.1 Remove existing and install new each fastener listed in 1.3.1 in accordance with 2.3.

5.1.1 Clean, chase, or tap exposed threaded areas.

5.2 Remove each existing toggle pin listed in 1.3.2 and 1.3.3, using 2.4 for guidance.

5.3 Remove existing and install new each bonding strap assembly listed in 1.3.4 in accordance with 2.5 and 2.6, using 2.4 and 2.7 for guidance.

5.3.1 Drill hole(s) on existing stanchion brace of the stanchion assembly for gas free inspection.

5.3.2 Accomplish build up weld of remaining hole(s) on the stanchion brace of the stanchion assembly.

5.3.3 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) D, Lines One through 7.

5.4 Install each toggle pin listed in 1.3.2, 1.3.3, 1.3.5, and 1.3.6 in accordance with 2.4.

5.5 Accomplish the requirements of 009-032 of 2.1, including Table 5, Line(s) 23, for each equipment listed in 1.3.7 and 1.3.8.

5 TGI NO.:

SHIP:

02 WEATHER	AY	A	0
DDG-115	CHG/VER:		0/0

5.6 Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) 21, for each area listed in 1.3.9 through 1.3.11. Application of nonskid system must conform to MIL-PRF-24667, Type V, Composition G.

5.6.1 Power tool clean to bare metal for each vertical surface. Accomplish each requirement of Surface Preparation Specification SSPC-SP 11 of 2.8.

5.7 Accomplish the requirements of 009-032 of 2.1 for each new and disturbed surface.

5.8 Notes:

5.8.1 Planner: Code 231B M. Maeda, 243-6101
Code 231B R. Tsuruoka, 243-9982

5.8.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-6522-9560

5.8.3 WPC will copy the following pages in reference.

REF. 2.4: Pages 1D, 5F1, 6A1, 6B1, 6C1, 7A1, 7B1, 7C1, 7H1, 7W1, 4E4-21, 7AH, 4H1-25, 4E1-30, 4E2-30, 4E3-30, 4E6-30, 4K1-30, 4L1-30, 4W2-30, 6A2, 6B2, 6C2, 6E2, 7B2, 6E4, 6E5, 4W1-34, and 8N1

5.8.4 JCNs OD01-0658 and OD01-L075 are related to this TGI.

5.9 Government Furnished Material (GFM):

5.9.1 SRF-JRMC will provide GFM listed in Appendix "M".

5.10 SRF-JRMC will provide the following service work: (TGI No. 38K6113701S02).

5.10.1 [C740] Crane and crane rigging service.

5.10.2 [X99E] Utility service, electrical.

5.10.3 [X99M] Utility service, including water supply, steam supply, and low air pressure supply except onboard blasting work.

5.10.4 [C106.1] Safety inspection for SRF-JRMC employees.

5.10.5 [C106.2] Gas free inspection for SRF-JRMC employees.

5.10.6 [C133] QA inspection for (G) symbol(s).

5.10.7 [C294] Work scope review and verification for VLS relating work prior to commencement of the work.

02 WEATHER	AY	A	0
DDG-115	CHG/VER:	0/0	

APPENDIX "M"

TGI MATERIAL LIST

SYSTEM:	PLANT NO.:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CU PH VERSION:	CASREP CAT:
		02 WEATHER	AY	A	0	0	

CU PHASE TITLE:

F/O - ACCOMPLISH REPLT OF NONSKID SYS, PSVTN OF STAN, & INSTL OF EQPT ON 02 LVL

MATERIAL REFERENCES

REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV
------------	----------------------------	------------------------	-----

JOB ORDER:

38K6113701

KEY OP:

A01

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
001			M	ROPE,WIRE, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 4010 015720869		NA	4	N	53175415	200/FT	
002			M	SWAGING, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 4030 010882952		NA	4	N	53175412	400/EA	
003			M	PIN, TOG, TOGGLE PIN, DIA: 5/8", GRIP LG: 1-1/8", TOGGLE END TYPE: FLAT, PIN MATL: CRES 316, TOGGLE END MATL: CRES 316, BIW CAT NO. 54055-323, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9Z 5315 LL9301811		NA	4	N	53177474	30/EA	

NOTES:

M-1

TGI NO.:	02 WEATHER	AY	A	0
SHIP:	DDG-115	CHG/VER:	0/0	

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
004			M	TOGGLE PIN, TOGGLE PIN, WITHOUT CLIP & RETAINING CABLE, DWG: 803-2258314 REV.B MOD, DIA: 1/2", GRIP LG: 2-1/2", TOGGLE END TYPE: FLAT, PIN MATL: CRES 316, TOGGLE END MATL: CRES 316, BIW CAT NO. 54055-293, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	LL4713114		NA	4	N		10/EA	
005			M	TOGGLE P, TOGGLE PIN, WITHOUT CLIP & RETAINING CABLE, DWG: 803-2258314 REV.B MOD, DIA: 1/2", GRIP LG: 2-5/8", TOGGLE END TYPE: FLAT, PIN MATL: CRES 316, TOGGLE END MATL: CRES 316, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9Z 5315 LL9301826		NA	4	N	53177475	10/EA	
006			M	STRIP,EL, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 5999 013438667		NA	4	N		40/EA	
007			M	SCREW,CA, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 5305 014535741		NA	4	N		80/EA	
008			M	NUT,SLEE, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 5310 014231667		NA	4	N		80/EA	
009			M	SCREW, TRUSS HEAD, S, SCREW, TRUSS HEAD, SLOTTED, SIZE: 5/16"-18UNC-2A X 3/4" LENGTH, MATL: CRES 316,FF-S-92B TYPE I STYLE 7S,TRUSS HEAD SLOTTED ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	LL4694513		NA	4	N		75/EA	
010			M	WASHER, 7/8"OD X 11/, WASHER, SIZE: 7/8"(0.875")OD X 11/32"(0.343")ID X 1/16"(0.0625") THK, BOLT SIZE: 5/16", MATL: CRES 316. FF-W-92 TY A GR I CL B, ASME B18.21.1, BIW CAT# 53239-081. ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	LL9304042		NA	4	N		75/EA	
011			M	SCREW, FLAT, SELFLOC, SCREW, FLAT, SELFLOCK, SPEC: FF-S-92 TYPE 1 STYLE 2S & MOD, HEAD: 82 DEGREES FLAT COUNTERSUNK, SLOTTED, SIZE: 3/8"-16UNC-2A X 5/8" LG, MATL: CRES 316, LOCKING ELEMENT: MIL-DTL-18240 TYPE P, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	LL9301068		NA	4	N		80/EA	
012			M	INSULATI, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9Q 5640 013713263		NA	4	N	53175403	4/SH	

M-2

TGI NO.:	02 WEATHER	AY	A	0
SHIP:	DDG-115	CHG/VER:	0/0	

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
013			M	INSULATI, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9Q 5640 013713262		NA	4	N	53175395	6/SH	
014			M	TAPE,TEX, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 8315 002671632		NA	4	N	53175276	1/RO	
015			M	TAPE,TEX, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 8315 002671633		NA	4	N	53175280	1/RO	
016			M	ADHESIVE, ORIG: C231B, R. TSURUOKA, 243-9982 ORDERED FOR KTR	9B 8040 002738708		NA	4	Y	53175283	1/GL	

M-3

TGI NO.:	02 WEATHER	AY	A	0
SHIP:	DDG-115	CHG/VER:	0/0	

☐ NUCLEAR☐ NON-NUCLEAR

APPENDIX "D"

DEFICIENCY FORM

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-115			02 WEATHER	AY	A	0
4a. ICN:		4b. KEY OP:	5. LOC SPACE/LVL:	FRAME:	P/S/C:	6. CAUSED BY:
38K6113701		A01				

7. DESCRIPTION:

8. ORIGINATOR:

NAME:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.:

9. CORRECTIVE ACTION:

10. EVALUATOR:

NAME:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.:

FOR NON-NUCLEAR USE ONLY

11. RFD/RFW REQ'D ☐LAR REQ'D ☐SRD/PLAN REV REQ'D ☐ILS MOD REQ'D ☐

DWG NO.: _____ S/A NO.: _____

12. ISOLATION

SATISFACTORY:

SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.:

13. SUBSAFE OQE RECORD?

YES ☐ NO ☐

SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.

14. CORRECTIVE ACTION
COMPLETE:

SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.

15. INSPECTION REQ'D?

:YES ☐ NO ☐

INSPECTION COMPLETE/SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.

16. RECORDS REVIEW
COMPLETE (DR ONLY)

SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.

DL's ISSUED
(DR ONLY)

☐ NUCLEAR


Deficiency Form Continuation Sheet

☐ NON-NUCLEAR

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-115			02 WEATHER	AY	A	0


[illegible]

Location Detail for Installation of Toggle Pin for Liferail Stanchion in 02 Level Weather, Frame 240 - 396, Port & Starboard

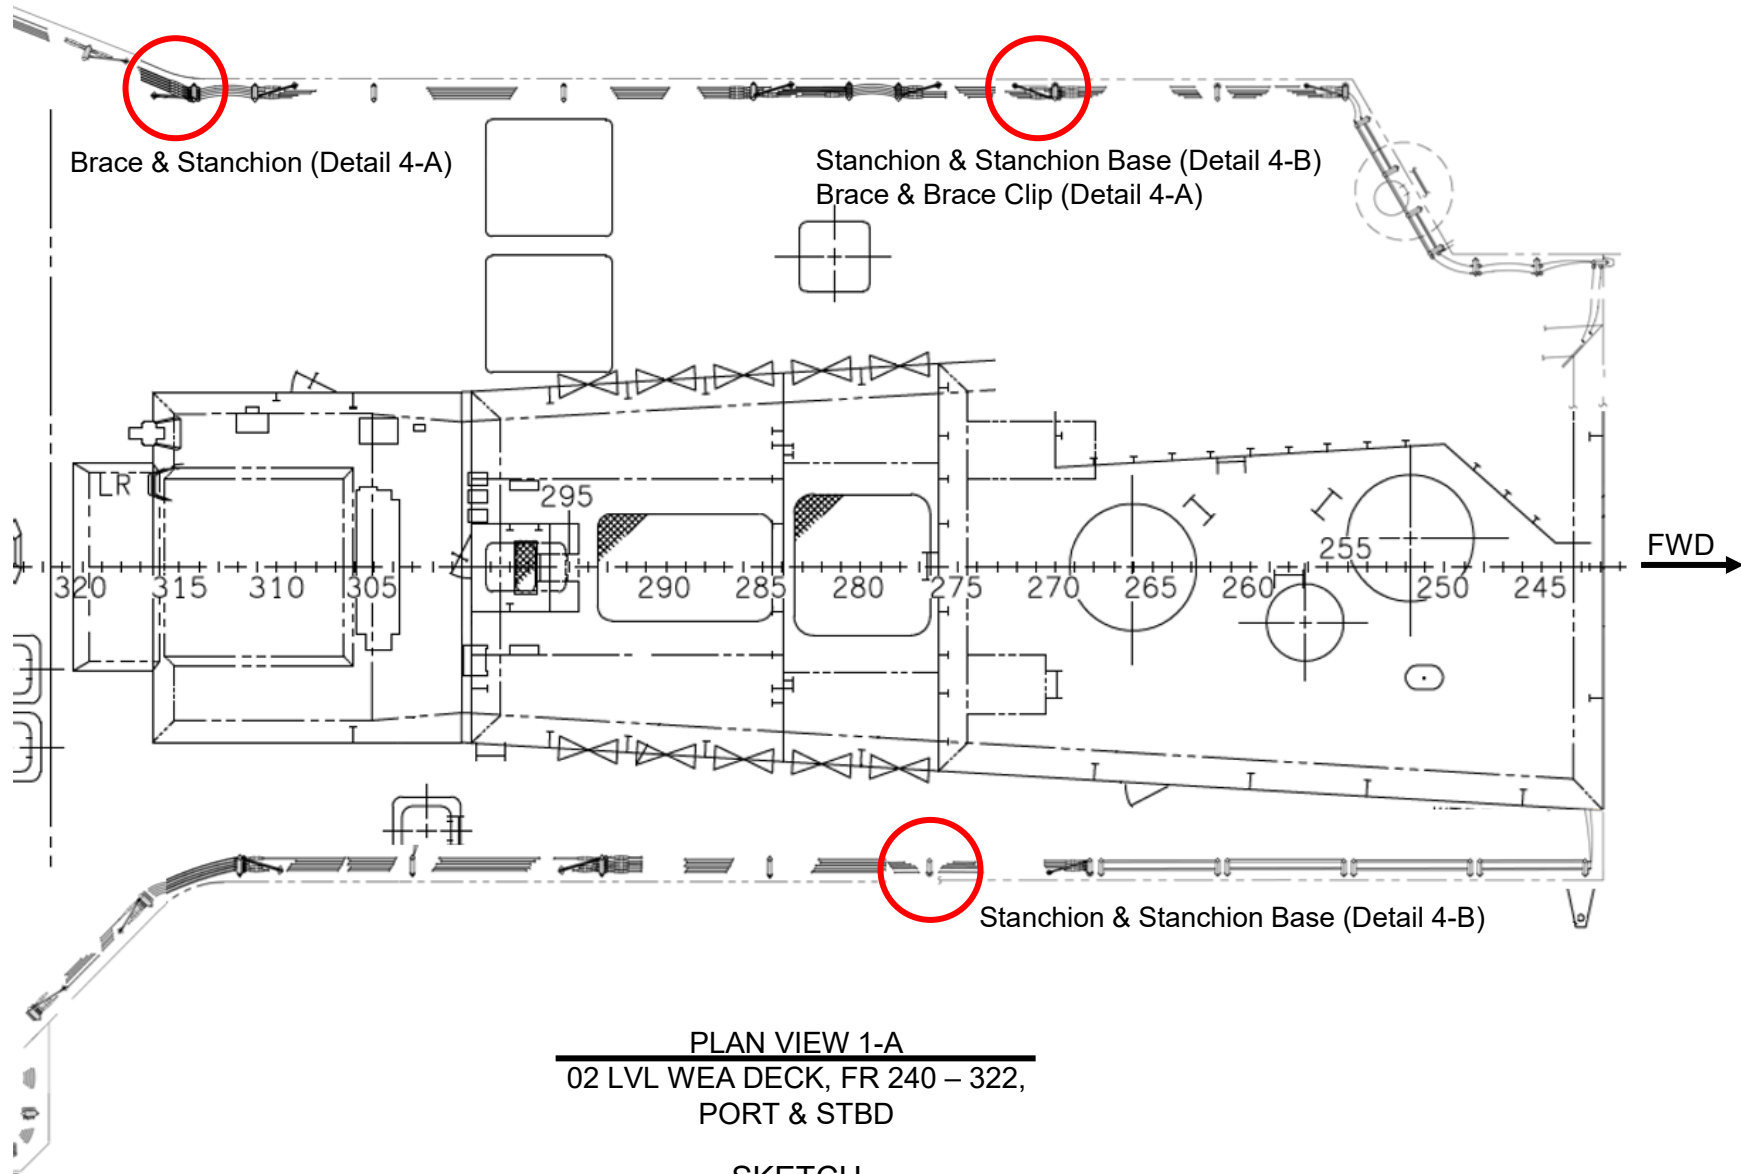


PLAN VIEW 1-A
02 LVL WEA DECK, FR 240 – 322,
PORT & STBD

SKETCH
ENCLOSURE-01

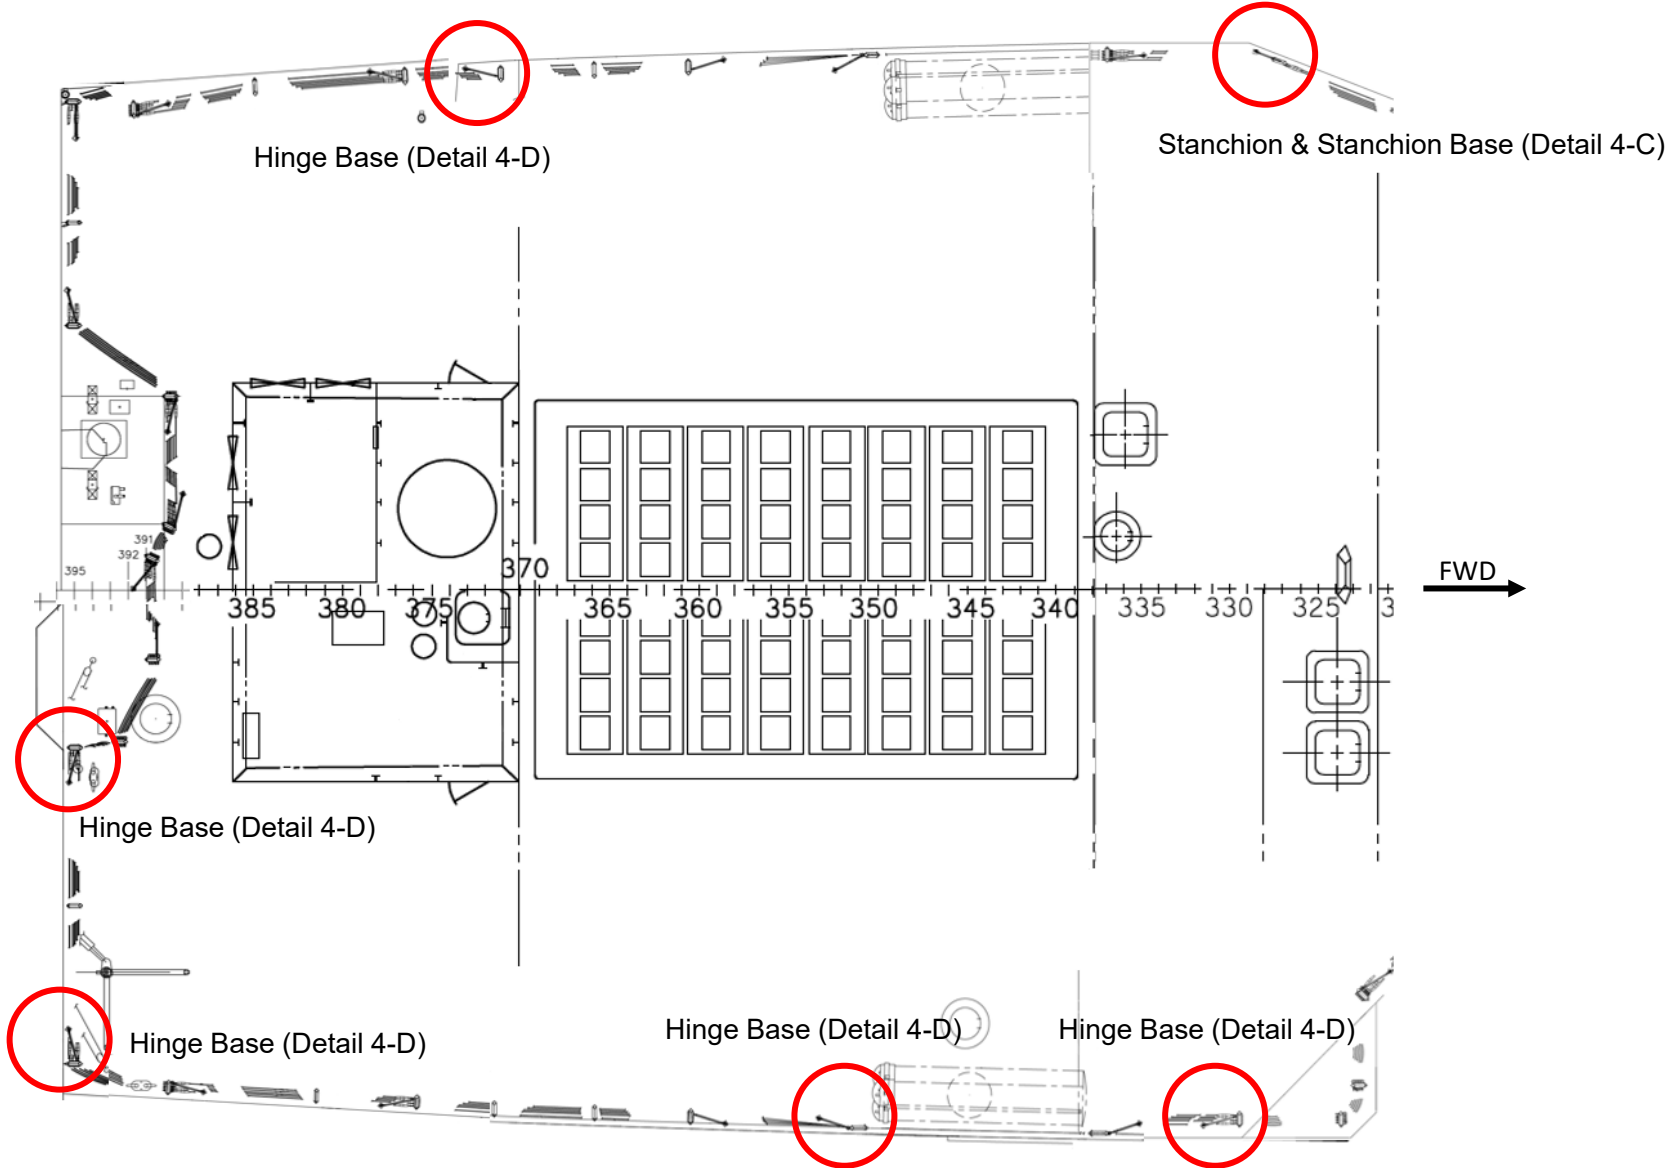


PLAN VIEW 2-A
 02 LVL WEA DECK, FR 322 – 396
 PORT & STBD

SKETCH
 ENCLOSURE-01

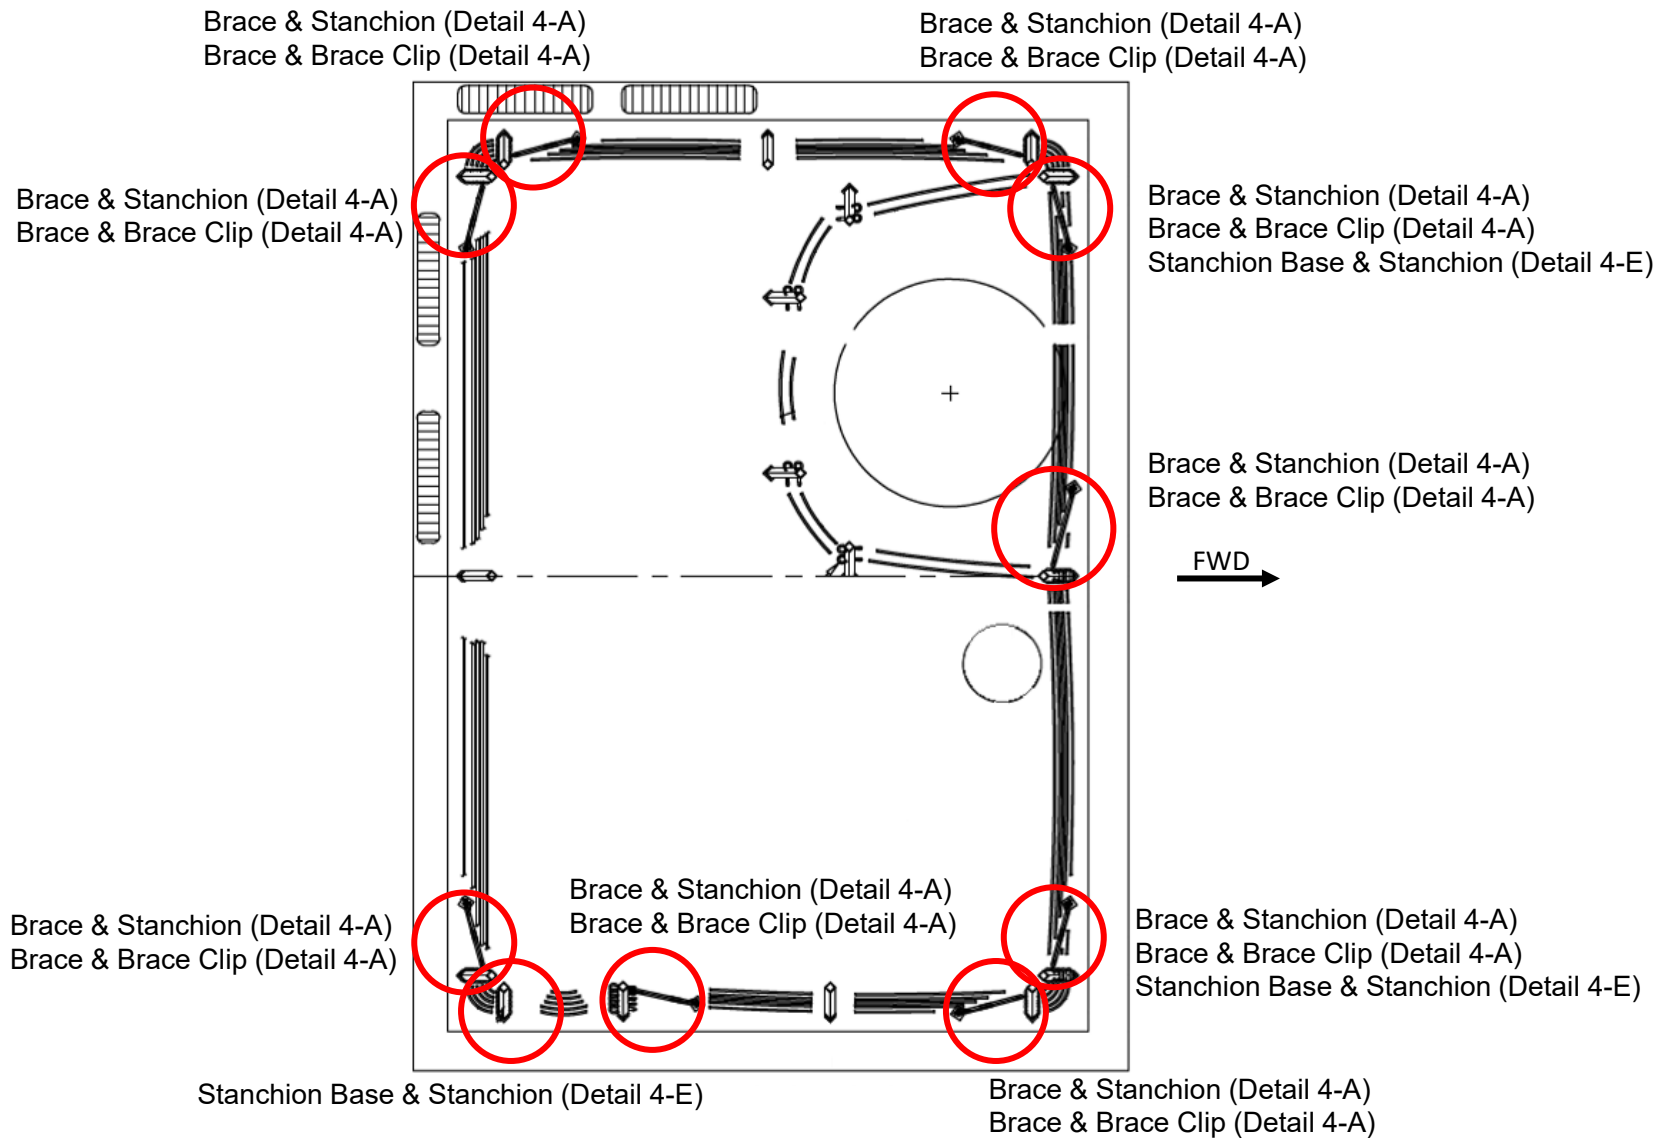


PLAN VIEW 3-A
02 1/2 LVL DECK, FR 370 - 386,
PORT & STBD


SKETCH
ENCLOSURE-01

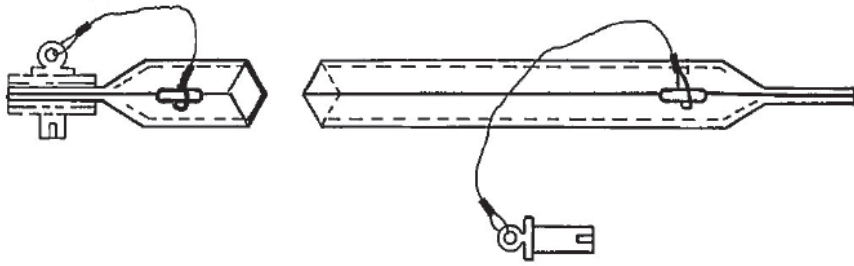


DETAIL 4-A
Toggle Pin of Brace to Brace Clip
& Stanchion

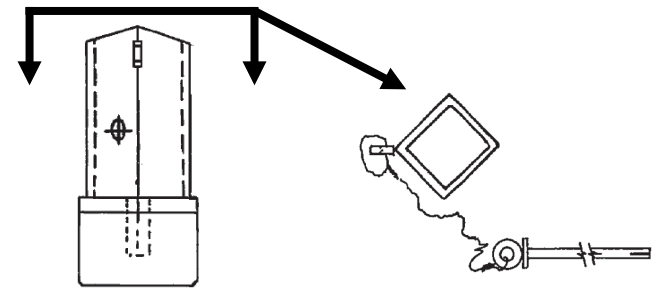


DETAIL 4-B
Toggle Pin of Stanchion Base to Stanchion

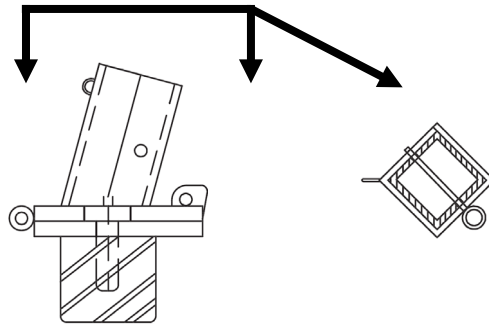

DETAIL 4-C
Toggle Pin of Stanchion Base to Stanchion

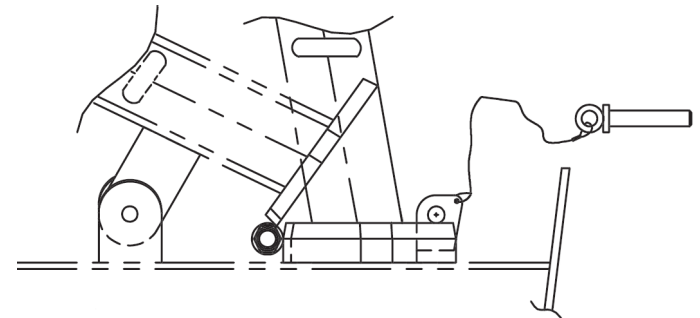

DETAIL 4-D
Toggle Pin of Hinge Base

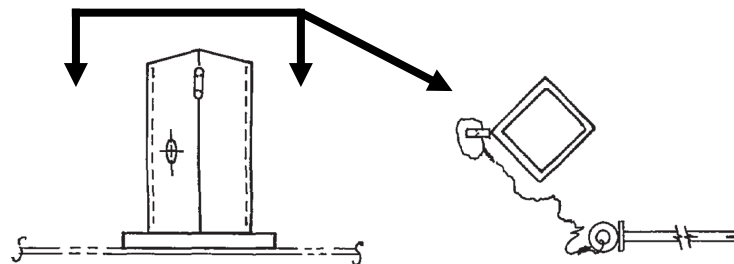

DETAIL 4-E
Toggle Pin of Stanchion Base to Stanchion

SKETCH
ENCLOSURE-01