

TASK GROUP INSTRUCTION

AIM REV 20.11.4.0 (OCTOBER 2020)

TGI NO.:	COMPONENT NAME: HATCH 02-324-3	TYPE: HA	PHASE: A	REPEAT: 0	CHANGE: 1
SHIP/HULL NO.:	SHIP/HULL NAME:	SYSTEM:	PROJ/WO NO:	CASREP CAT:	
DDG-115	USS RAFAEL PERALTA	16812	K61		
CU PHASE TITLE: *F/O - OVERHAUL WATERTIGHT HATCH 02-324-3					
PREPARING ACTIVITY:					
PREPARED BY: YUUJI KOYAMA	CODE 231B	PHONE 315-243-9937	DATE 07-NOV-2025		
APPROVED BY: RYOUTA TAKAGI	CODE 231B	PHONE 315-243-4502	DATE 07-NOV-2025		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
REASON FOR WORK/NEED FOR CHANGE: Correction of Paragraphs 5.10.1 and 5.11 is required.					
CHANGE INSTRUCTIONS: CH1: Revise Paragraphs 5.10.1 and 5.11. (11/08/2025)					
SPECIAL REQUIREMENTS: This work affects a fire zone boundary. Fabrication and/or staging of a non-flammable closure is required.					

WORK CERTIFICATION SIGNATURES

COMPLETION OF WORK REVIEW:		BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
ACCEPTANCE OF COMPLETED WORK					
PHYSICAL INSPECTION REQUIRED: ☐ YES ☒ NO	PHYSICAL INSPECTION COMPLETED:	BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
RECORDS REVIEW:		BADGE NO.:	SHOP/CODE:	PHONE:	DATE:



LIST OF EFFECTIVE PAGES									
SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.
1-5									
J1-2									
M1-5									
Sketch (1)									

1. SCOPE/PURPOSE

1.1 Title: Watertight Hatch 02-324-3; overhaul

1.2 Location of Work:

1.2.1 02 Level Weather, Frames between 322 and 326, Starboard (Stbd)

1.2.2 Escape Trunk (2-322-1-T)

1.2.3 Stateroom (01-314-1-L)

1.3 Identification:

1.3.1 Quantity (6 SF), Rubber Insulation on Hatch Panel of Watertight Hatch 02-324-3, Interior

Material: Form Rubber, NH Armaflex, One inch thickness

1.3.2 Quantity (One EA), Hatch, Watertight

Hatch No. : 02-324-3

Size: 30 Inches x 30 Inches

Material: Steel

Type: Low Profile Ramped, Quick Acting, 6 Dogs, Spring Balanced

1.3.3 Quantity (One Lot), Longitudinal 5S on 02 Level Plating in 2-322-1-T and 01-314-1-L, Frames between 322 and 324, Stbd

Base Material: HTS, MIL-S-22698 GR-AH36, 16 Inches x 7 Inches x 50 LBs I-T

Remarks: See Sheet 4-12 Detail 4-4A of 2.6 for detail

1.3.4 Quantity (4 EA), Label Plate, Watertight Hatch

1.3.4.1 Quantity (One EA), Label Plate, Exterior

Material: CRES, Type-II of 2.8

Inscription: 1st. Line: 02-324-3

2nd. Line: ESCAPE TRUNK

3rd. Line: 2-322-1-T

1.3.4.2 Quantity (One EA), Label Plate, Damage Control Closure Classification, Exterior

Material: CRES, Type-II of 2.8

Remarks: Figure-D of 2.8

1.3.4.3 Quantity (One EA), Label Plate, Interior

Material: Aluminum Alloy, Type-I of 2.8

2 TGI NO.:

SHIP:

HATCH 02-324-3	HA	A	0
DDG-115	CHG/VER:	1/0	

Inscription: 1st. Line: 01-123-4
2nd. Line: WEATHER

1.3.4.4 Quantity (One EA), Label Plate, Damage Control Closure Classification, Interior

Material: Aluminum Alloy, Type-I of 2.8
Remarks: Figure-D of 2.8

1.3.5 Quantity (6 SF), Compartment Insulation on Hatch Panel of Watertight Hatch 02-324-3, Interior

Material: Anti-Sweat, Polyimide, One Inch Thickness, MIL-DTL-24688, Type II
Remarks: See 2.9 for material and details

1.3.6 Quantity (One Lot), Insert Plate of Hatch 02-324-3, between Knife Edge and Rump

Material: Steel
Remarks: See Sketch Enclosure-01 for location detail

1.4 Security Classification: None.

1.5 Initial Condition: None.

1.6 Contractor work start date: 7/27/2026

1.7 Contractor work completion date: 9/4/2026

2. **REFERENCES:**

REF. NO.	DOCUMENT /DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV	CHG NO.	COPY REQ'D (Y/N)	SOURCE DOC (Y/N)	PARA	SEC	PG	CHP
1	NSI FY-26	NAVSEA Standard Items	-	1	N					
2	LI FY-26	Local Standard Items	-	ORG	N					
3	DWG 167-7027484	HATCH & SCUTTLE LIST	N		Y				7D	
4	DWG 8100-1252-0235	Hatches Structural (Steel) Arrangement	K		Y				8,9	
5	DWG 8100-1252-0236	Hatches, Structural (Steel) Assemblies & Details	AH		Y				SE E N O T E	
6	DWG 150-7026732	UNIT STRL ARR DWG ASSY UNIT 4710	L		Y				3- 12, 4- 12	
7	TM SYSTEMS & SPECIFICATIONS	SSPC Painting Manual Volume 2	-		N					
8	PDD 602-ELM-150531	SRF-JRMC STD ELM LABEL PLATE FOR CLOSURE	A		Y				AL L	
9	PDD 635-ELM-230114	SRF-JRMC Std ELM Sub Matl of Elastomeric Plstc Foam for Hull Insul	-		Y				AL L	

3. **APPENDICES:**

3.1 Appendix "J" TGI Job Summary Information Sheet 1/24/2026 C1209.2 K. YOSHIDA

3.2 Appendix "M" TGI Material List

3 TGI NO.:

SHIP:

HATCH 02-324-3	HA	A	0
DDG-115	CHG/VER:		1/0

3.3 Appendix "D" Deficiency Form

4. **GENERAL REQUIREMENTS:**

4.1 Not Applicable.

5. **PROCEDURE:**

5.1 Remove each existing rubber insulation listed in 1.3.1.

5.2 Remove existing hatch panel of each hatch listed in 1.3.2, using 2.3 through 2.5 for guidance.

5.2.1 Drill One inch diameter hole on each existing longitudinal listed in 1.3.3 for removal and installation of hinge shaft of hatch panel, using 2.6 for guidance.

5.2.2 Disassemble dog assembly.

5.2.2.1 Clean each part free of dirt, grease and foreign matter.

5.2.3 Remove existing gasket and label plate(s) of each hatch.

5.3 Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) 21, for exterior surfaces and Table 3, Line(s) 25, for interior surfaces of hatch panel of each hatch listed in 1.3.1.

5.3.1 Near-white blast clean for each hatch panel. Accomplish each requirement of Surface Preparation Specification SSPC-SP 10 of 2.7.

5.4 Prepare and align hatch panel of each hatch listed in 1.3.2 for reinstallation, using 2.3 through 2.5 for guidance.

5.4.1 Fabricate and install new gasket conforming to A-A-59588 Class 3B Grade 30.

5.5 Reinstall hatch panel of each hatch listed in 1.3.2, using 2.3 through 2.5 for guidance.

5.5.1 Reassemble dog assembly.

5.5.1.1 Lubricate each dogging mechanisms.

5.5.2 Adjust each dogging mechanism for unobstructed operation and to obtain 100 percent centered contact with the imprint of chalk in the center three-fifths of the gasket.

5.5.3 Accomplish build up weld of remaining hole(s) on each longitudinal listed in 1.3.3, using 2.6 for guidance.

5.5.3.1 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) A, Lines One through 7.

5.5.3.2 Accomplish the requirements of 009-025 of 2.1 for a local air hose test of each new weld of the longitudinal. Allowable leakage: None.

5.6 Accomplish the requirements of 009-025 of 2.1 for a chalk test of each hatch listed in 1.3.2.

5.7 Accomplish the requirements of 009-025 of 2.1 for a local air hose test of hatch panel gasket and knife edge mating area of each hatch listed in 1.3.2. Allowable leakage: None.

5.8 Accomplish an operational test of each hatch listed in 1.3.2 to assure unobstructed operation. Allowable sticking or binding: None.

(V)(G) "OPERATION TEST"

4 TGI NO.:

SHIP:

HATCH 02-324-3	HA	A	0
DDG-115	CHG/VER:	1/0	

5.9 Fabricate and install new each label plate listed in 1.3.4 in accordance with 2.8.

5.9.1 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) D, Lines One through 7.

5.10 Accomplish the requirements of 009-011 of 2.1 to install each new compartment insulation listed in 1.3.5 in accordance with 2.9.

5.10.1 Accomplish the requirements of 009-032 of 2.1 for top surface where new insulation is installed.

5.11 Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) 21, for each insert plate listed in 1.3.6.

5.12 Accomplish the requirements of 009-032 of 2.1 for each new and disturbed surface.

5.13 Notes:

5.13.1 Planner: Code 231B Y. Koyama, 243-9937
 Planner: Code 233 M. Takemura, 080-9350-1458
 Engineer: Code 250 M. Sakanoue, 243-4139

5.13.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-6522-9560

5.13.3 Work per this instruction involves cutting an access (or removal of a door) through a fire zone bulkhead, through the hull of the ship above the turn of the bilge, through ventilation components (ducting, plenums, etc.), or through any air-tight, fume-tight or watertight bulkheads normally used to control air flow in the event of a shipboard fire. A non-flammable closure is required in accordance with COMNAVSEASYS COM MSG R 261400Z JUL 12. The closure, if not continuously in use, shall be staged near the access, readily visible and accessible, so that any emergency responder can install the closure to affect proper air flow onboard the ship.

5.13.4 WPC will copy the following pages in reference.

REF. 2.5: Pages 10, 46, 54, 71, 72, and 81

5.13.5 JCN CE01-0945 is related to this TGI.

5.14 Government Furnished Material (GFM):

5.14.1 SRF-JRMC will provide GFM listed in Appendix "M".

5.15 SRF-JRMC will provide the following service work: (TGI No. 38K6112305S02).

5.15.1 [C740] Crane and crane rigging service.

5.15.2 [X99E] Utility service, electrical.

5.15.3 [X99M] Utility service, including low pressure air supply, water supply, and steam supply.

5.15.4 [C106.1] Safety inspection for SRF-JRMC employees.

5.15.5 [C106.2] Gas free inspection for SRF-JRMC employees.

5.15.6 [C133] QA inspection for (G) symbol(s).

HATCH 02-324-3	HA	A	0
DDG-115	CHG/VER:		1/0

APPENDIX "M"
TGI MATERIAL LIST

SYSTEM: 16812	PLANT NO.:	COMPONENT NAME: HATCH 02-324-3	TYPE: HA	PHASE: A	REPEAT: 0	CU PH VERSION: 0	CASREP CAT:
-------------------------	------------	--	--------------------	--------------------	---------------------	-------------------------------	----------------

CU PHASE TITLE:

***F/O - OVERHAUL WATERTIGHT HATCH 02-324-3**

MATERIAL REFERENCES

REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV
------------	----------------------------	------------------------	-----

JOB ORDER:

38K6112305

KEY OP:

A01

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
001			M	RUBBER S, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5330 013717183		NA	4	N		20/FT	
002			M	PACKING PLUNGER ORIG: C231B, Y. KOYAMA 070- 7787-2059 ORDERED FOR KTR PACKING PLUNGER, SIZE: 5/16" DIA X 3/4" LG, BIW DWG: 8100-1252-0236 REV.AH, SHEET 38, DET-38-D, MANUFACTURE FROM 5/16" DIA, ROUND BAR (BIW CATAOLOG NO. 43024-035 ROUND BAR) , MATERIAL: PHOSPHOR BRONZE,	LL9307365		NA	4	N		1/EA	

NOTES:

M-1

TGI NO.:	HATCH 02-324-3	HA	A	0
SHIP:	DDG-115	CHG/VER:	1/0	

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
003			M	SCREW SET , ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR SCREW SET, CRES 316, 5/16"-24UNC-3A X 3/8"LG, FF-S-200A(2), TY-I, STY 4, CL 316, CUP POINT, HEX SOCKET, MS51021-70 CRES 316, BIW# 53954-081. DO NOT CROSS NSN 5305-00-682-5972 (VARIOUS TYPE OF CRES ASSIGNED BUT CRES 316 REQUIRED).	LL9801913		NA	4	N		1/EA	
004			M	PACKING MATERIAL, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5330 002629437		NA	4	Y		1/YD	
005			M	PACKING, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5330 002629439		NA	4	Y		10/EA	
006			M	SHAFT,SHOULDERED, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 3040 014775051		NA	4	N		1/EA	
007			M	PIN,SHOULDER,HEADED, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5315 014242383		NA	4	N		1/EA	
008			M	COLLAR,H, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 2040 014210078		NA	4	N		1/EA	
009			M	BUSHING,, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 3120 010892602		NA	4	N		1/EA	
010			M	BEARING,, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 3120 009577910		NA	4	N		1/EA	
011			M	PIN,STRAIGHT,HEADLE, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5315 014202169		NA	4	N		1/EA	
012			M	PIN,STRAIGHT,HEADLE, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5315 014202170		NA	4	N		1/EA	
013			M	BEARING,SLEEVE, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 3120 014222228		NA	4	N		3/EA	
014			M	PIN,COTTER, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5315 014196004		NA	4	N		1/HD	

M-2

TGI NO.:	HATCH 02-324-3	HA	A	0
SHIP:	DDG-115	CHG/VER:	1/0	

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
015			M	NUT, SELF-LOCKING , ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR NUT, SELF-LOCKING, HEX, NON-METALLIC INSERT, 250 DEG F, SPEC: NASM25027, MS16228-12C316, SIZE: 3/4-10UNC-3B, MATL: CRES 316, DO NOT CROSS TO NSN 5310-00-245-8827 (OTHER CRES TYPES ARE ASSIGNED), BIW CAT#:53882-064	LL9309271		NA	4	N		1/EA	
016			M	SPRING,HELICAL,COMP, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5360 014208789		NA	4	N		1/EA	
017			M	SPRING,LEAF, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5360 014214181		NA	4	N		1/EA	
018			M	SPRING,LEAF, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5360 014214182		NA	4	N		1/EA	
019			M	SCREW, HEX CAP , ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR SCREW, HEX CAP, SPEC: MIL-DTL-1222, TYPE-I, SIZE: 3/8-16UNC-2A, LG=3/4", MATL: MONEL GRADE 400,	LL9309059		NA	4	N		1/EA	
020			M	FLAT STRIP , ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR FLAT STRIP, 1"W X 1/8"THK, NAVAL BRASS, QQ-B-639, C464, HALF HARD U/I: FT	LL9801916		NA	4	N		1/FT	
021			M	BEARING,, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 3120 014222259		NA	4	N		2/EA	
022			M	PIN,SHOULDER,HEADLE, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5315 014200098		NA	4	N		8/EA	
023			M	SCREW,MACHINE, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5305 016133097		NA	4	N		6/EA	
024			M	SPRING,S, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5360 014209907		NA	4	N		6/EA	

M-3

TGI NO.:	HATCH 02-324-3	HA	A	0
SHIP:	DDG-115	CHG/VER:	1/0	

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
025			M	ROD BUMPER , ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR ROD BUMPER, MFR DWG: 8100-1252-0236 REV.AP PT NO. 350, DET 51-B, SIZE: 5/16" X 1/2", LENGTH: 1-1/2", MATL: ASTM A588 STEEL,	LL9309089		NA	4	N		2/EA	
026			M	BUSHING,, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 3120 010893772		NA	4	N		2/EA	
027			M	NUT, JAM, HEX SELF L, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR SELF LOCKING NUT, JAM, HEXAGON, SPEC: MIL-DTL-1222 TYPE II, SIZE 3/4-10UNC-2B, MATL: CRES 316,	LL9309060		NA	4	N		2/EA	
028			M	PIN,TAPERED,PLAIN, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5315 014199958		NA	4	N		2/EA	
029			M	SCREW,CA, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5305 013506757		NA	4	N		1/EA	
030			M	NUT,PLAIN,HEXAGON, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5310 013722665		NA	4	N		2/EA	
031			M	SPRING,HELICAL,TORS, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5360 015364361		NA	4	N		2/EA	
032			M	BRACE PIN , ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR BRACE PIN, USE FOR BRACE LINK, BIW DWG: 8100-1252-0236, REV.AH, SH 83, DET 83-A, PT-710, SIZE: 7/16" DIA X 1-1/2" OVERALL LG, WITH 7/8" DIA X 3/16" LG FLG, COTTER PIN HOLE: 9/64" DIA, 1/8" FROM END, MATL: ASTM B21, C46400-H02, NAVAL BRASS,	LL9000289		NA	4	N		1/EA	

M-4

TGI NO.:	HATCH 02-324-3	HA	A	0
SHIP:	DDG-115	CHG/VER:	1/0	

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
033			M	SLIDE PLATE , ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR DOG REST SLIDE PLATE, BIW DWG: 8100-1252-0236, REV.AH, DETAIL 43-E (SH 43), SIZE: 3/4" WIDTH X 1" LG X 1/8" THK, MATL: NAVAL BRASS, ASTM B21/B21M, C46400, H02, HALF-HARD (OLD SPEC: QQ-B-637, ALLOY 464, HALF-HARD),	LL9309280		NA	4	N		12/EA	
050			M	INSULATI, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9Q 5640 013713262		NA	4	N		1/SH	
051			M	INSULATI, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9Q 5640 013713263		NA	4	N		2/SH	
052			M	SOUND CO, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9Q 5640 013715238		NA	4	N		1/SH	
060			M	SOUND CO, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5640 014548837		NA	4	N		3/SH	

M-5

TGI NO.:	HATCH 02-324-3	HA	A	0
SHIP:	DDG-115	CHG/VER:	1/0	

☐ NUCLEAR☐ NON-NUCLEAR

APPENDIX "D"

DEFICIENCY FORM

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-115			HATCH 02-324-3	HA	A	0
4a. ICN:		4b. KEY OP:	5. LOC SPACE/LVL:	FRAME:	P/S/C:	6. CAUSED BY:
38K6112305		A01				

7. DESCRIPTION:

8. ORIGINATOR:

NAME:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.:

9. CORRECTIVE ACTION:

10. EVALUATOR:

NAME:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.:

FOR NON-NUCLEAR USE ONLY

11. RFD/RFW REQ'D ☐LAR REQ'D ☐SRD/PLAN REV REQ'D ☐ILS MOD REQ'D ☐

DWG NO.: _____ S/A NO.: _____

12. ISOLATION

SATISFACTORY:

SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.:

13. SUBSAFE OQE RECORD?

YES ☐ NO ☐

SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.

14. CORRECTIVE ACTION
COMPLETE:

SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.

15. INSPECTION REQ'D?

:YES ☐ NO ☐

INSPECTION COMPLETE/SIGN:

BADGE:

SHOP/CODE:

DATE:

PHONE NO.

16. RECORDS REVIEW
COMPLETE (DR ONLY)

SIGN:

BADGE:


SHOP/CODE:

DATE:


PHONE NO.

DL's ISSUED
(DR ONLY)

LOCATION DETAIL OF PRESERVATION AREA

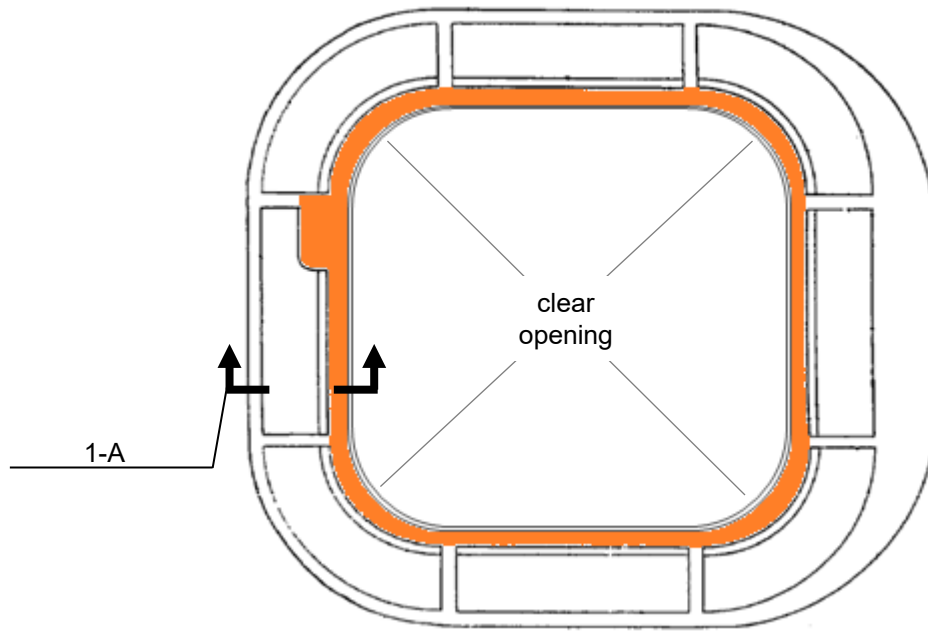

PLAN VIEW
Hatch 02-324-3

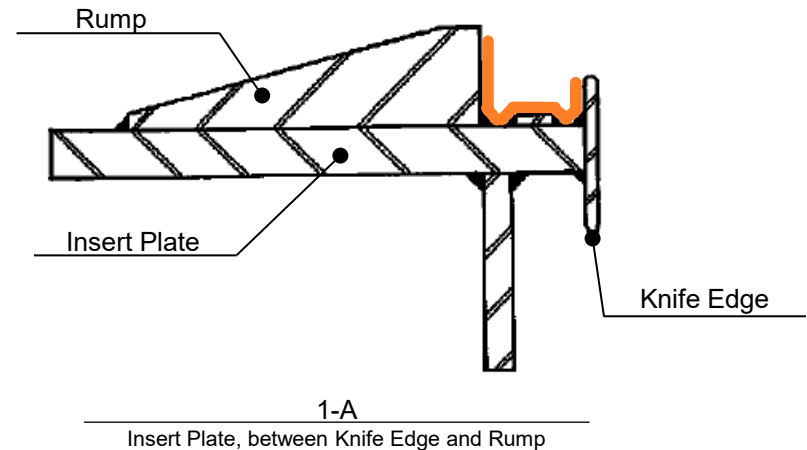

LEGEND

 - Preservation area

SKETCH
ENCLOSURE-01