


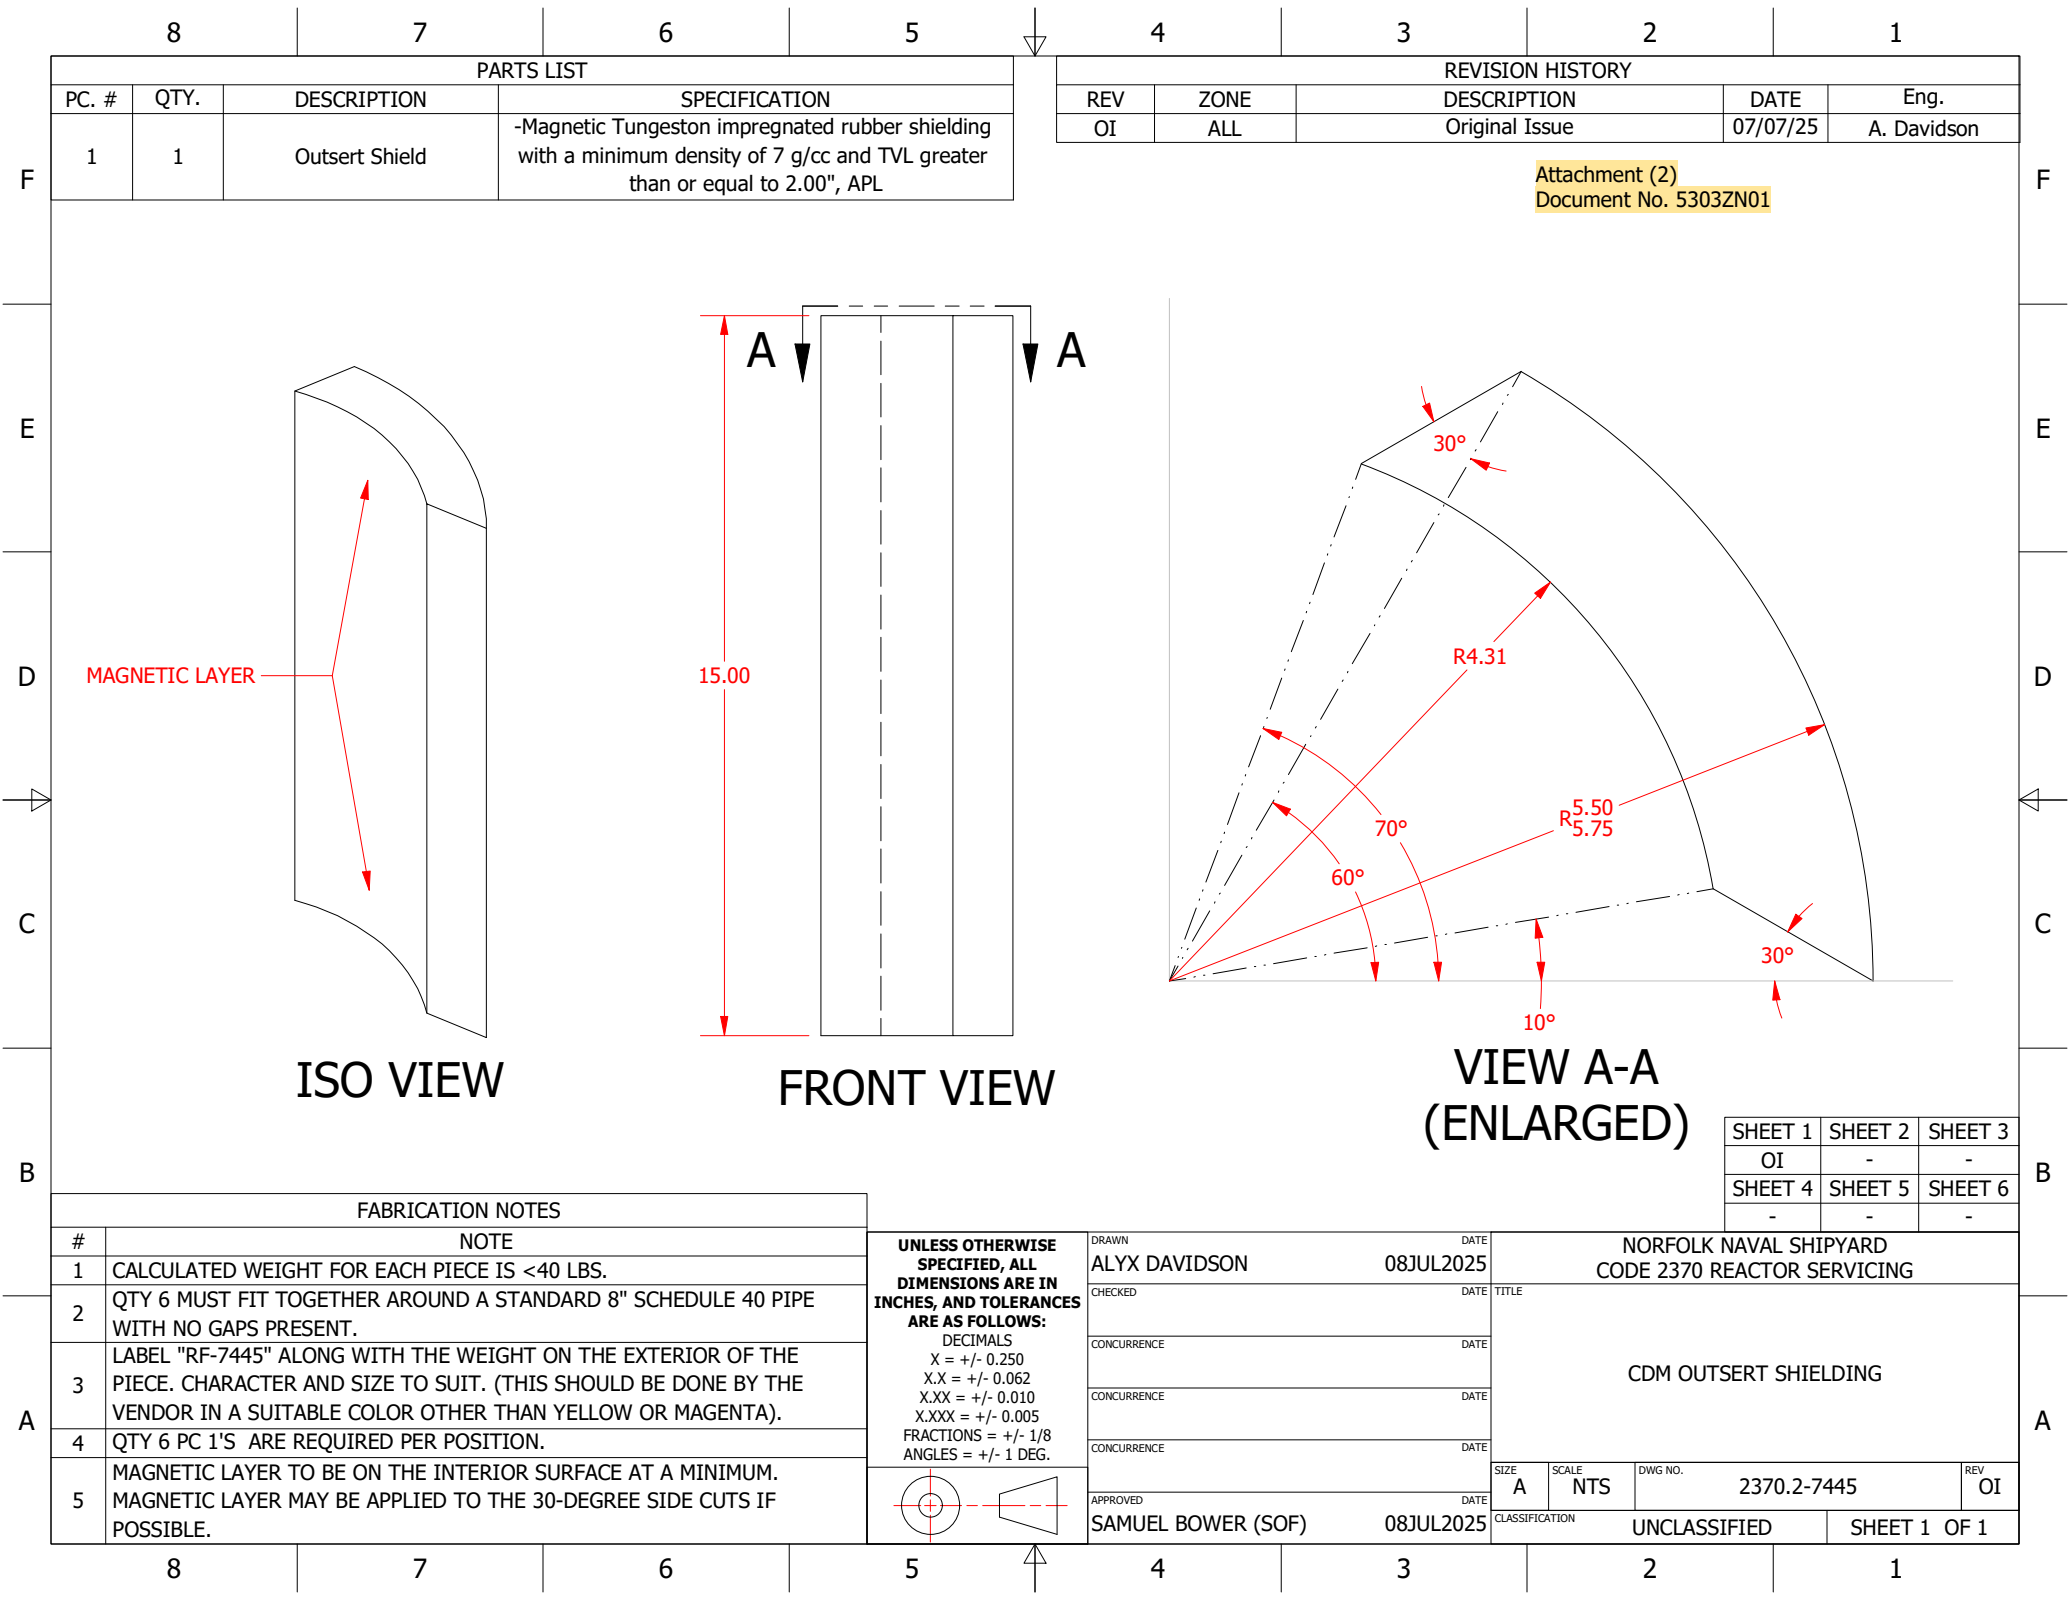

PARTS LIST			
PC. #	QTY.	DESCRIPTION	SPECIFICATION
1	1	Outsert Shield	-Magnetic Tungston impregnated rubber shielding with a minimum density of 7 g/cc and TVL greater than or equal to 2.00", APL

REVISION HISTORY				
REV	ZONE	DESCRIPTION	DATE	Eng.
OI	ALL	Original Issue	07/07/25	A. Davidson

Attachment (2)
Document No. 5303ZN01

FABRICATION NOTES	
#	NOTE
1	CALCULATED WEIGHT FOR EACH PIECE IS <40 LBS.
2	QTY 6 MUST FIT TOGETHER AROUND A STANDARD 8" SCHEDULE 40 PIPE WITH NO GAPS PRESENT.
3	LABEL "RF-7445" ALONG WITH THE WEIGHT ON THE EXTERIOR OF THE PIECE. CHARACTER AND SIZE TO SUIT. (THIS SHOULD BE DONE BY THE VENDOR IN A SUITABLE COLOR OTHER THAN YELLOW OR MAGENTA).
4	QTY 6 PC 1'S ARE REQUIRED PER POSITION.
5	MAGNETIC LAYER TO BE ON THE INTERIOR SURFACE AT A MINIMUM. MAGNETIC LAYER MAY BE APPLIED TO THE 30-DEGREE SIDE CUTS IF POSSIBLE.

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES, AND TOLERANCES ARE AS FOLLOWS:

DECIMALS
X = +/- 0.250
X.X = +/- 0.062
X.XX = +/- 0.010
X.XXX = +/- 0.005
FRACTIONS = +/- 1/8
ANGLES = +/- 1 DEG.

DRAWN ALYX DAVIDSON		DATE 08JUL2025		NORFOLK NAVAL SHIPYARD CODE 2370 REACTOR SERVICING			
CHECKED		DATE		TITLE CDM OUTSERT SHIELDING			
CONCURRENCE		DATE					
CONCURRENCE		DATE					
CONCURRENCE		DATE					
CONCURRENCE		DATE					
APPROVED		DATE		SIZE A	SCALE NTS	DWG NO. 2370.2-7445	REV OI
SAMUEL BOWER (SOF)		08JUL2025		CLASSIFICATION UNCLASSIFIED		SHEET 1 OF 1	