

Project:

26-5996 EMR - Air Force One
Hanger at Andrews Air Force Base

Item	Qty	Description
1	2 ea	HD RANGE, 36" CHARBROILER Jade Range (Middleby) Model No. JTRH-36B Titan™ Heavy Duty Range, gas, 36", charbroiler, cast iron radiants & grates, infinite manual controls, cabinet base, (2) drip trays, stainless steel 6" plate shelf, front, top, sides, stub back & tray bed, 6" adjustable legs, 90,000 BTU, CSAus, NSF
	2 ea	NOTE: For application or installation outside of the USA & Canada (contact factory for quote)
	12 ea	Flame Failure Valve, add -FF as a suffix to base model, per pilot (no electrical required)
	6 ea	Spark igniter, one per every two burner pilots
	2 ea	NOTE: All units are fully welded with heavy duty construction, stainless steel sides, front and top are standard
	2 ea	NOTE: Stainless steel tray bed (burner box), deflectors, tray guides and drip tray/grease can standard
	2 ea	Two years part & labor warranty - Includes Five year warranty parts on oven door (parts only) & Ten year warranty on range frame (parts only), standard
	2 ea	Natural gas, specify if elevation over 2000 ft.
	2 ea	3/4" Rear connection, standard
	2 ea	3/4" Gas regulator supplied with range

26-5996 EMR - Air Force One Hanger
at Andrews Air Force Base

Item	Qty	Description
2	1 ea	HD RANGE, 36", 6 OPEN BURNERS Jade Range (Middleby) Model No. JTRH-6 Titan™ Heavy Duty Range, gas, 36", (6) 35,000 BTU open burners, infinite controls, cabinet base, stainless steel 6" plate shelf, front, sides, stub back & bottom, 6" adjustable legs, 210,000 BTU, CSAus, NSF
	1 ea	NOTE: For application or installation outside of the USA & Canada (contact factory for quote)
	6 ea	Flame Failure Valve, add -FF as a suffix to base model, per pilot (no electrical required)
	3 ea	Spark igniter, one per every two burner pilots
	1 ea	NOTE: All units are fully welded with heavy duty construction, stainless steel sides, front and top are standard
	1 ea	NOTE: Stainless steel tray bed (burner box), deflectors, tray guides and drip tray/grease can standard
	1 ea	Two years part & labor warranty - Includes Five year warranty parts on oven door (parts only) & Ten year warranty on range frame (parts only), standard
	1 ea	Natural gas, specify if elevation over 2000 ft.
	1 ea	3/4" Rear connection, standard
	1 ea	3/4" Gas regulator supplied with range

3	1 ea	HD RANGE, 48" THERMOSTATIC GRIDDLE Jade Range (Middleby) Model No. JTRH-48GT Titan™ Heavy Duty Range, gas, 48", griddle, 1" thick polished steel plate, thermostatic controls, cabinet base, stainless steel grease trough, splashguards, 6" plate shelf, front, sides, stub back & bottom, 6" adjustable legs, 120,000 BTU, CSAus, NSF
	1 ea	NOTE: For application or installation outside of the USA & Canada (contact factory for quote)
	4 ea	Flame Failure Valve, add -FF as a suffix to base model, per pilot (no electrical required)
	2 ea	Spark igniter, one per every two burner pilots
	1 ea	NOTE: All units are fully welded with heavy duty construction, stainless steel sides, front and top are standard
	1 ea	NOTE: Stainless steel tray bed (burner box), deflectors, tray guides and drip tray/grease can standard
	1 ea	Two years part & labor warranty - Includes Five year warranty parts on oven door (parts only) & Ten year warranty on range frame (parts only), standard
	1 ea	Natural gas, specify if elevation over 2000 ft.
	1 ea	3/4" Rear connection, standard
	1 ea	3/4" Gas regulator supplied with range
	1 ea	550°F Thermostat, standard



RANGE MATCH BROILER

TITAN RANGE MATCH BROILER



JTRH-36B shown with optional high riser

MODEL NO.	DESCRIPTION
☐ JTRH-18B	18" CHARBROILER
☐ JTRH-24B	24" CHARBROILER
☐ JTRH-30B	30" CHARBROILER
☒ JTRH-36B	36" CHARBROILER
☐ JTRH-48B	48" CHARBROILER
☐ JTRH-60B	60" CHARBROILER
☐ JTRH-72B	72" CHARBROILER

STANDARD FEATURES

- 14 gauge all welded body construction
- Stainless steel front, top, sides and stub back
- Heavy duty cast iron burner radiants
- One 15,000 BTU/hr. burner every 6" broiler
- Variable size multi-point gas connection—see utility information for details
- Infinite control manual gas valves at each burner for precise heat control
- 12 gauge all welded firebox construction
- Two separate 14 gauge steel drip pans to control flare ups
- Stainless steel 6" plate shelf
- Stainless steel cabinet interior and exterior
- Stainless steel gas tubing throughout
- Stainless steel adjustable 6" legs
- Stainless steel tray bed
- 3/4" gas regulator (shipped loose, must be installed for proper operation)

AVAILABLE OPTIONS

- ☐ Stainless steel high riser
- ☐ Stainless steel double high riser
- ☐ Stainless steel tubular high shelf
- ☐ Stainless steel tubular double high shelf
- ☐ Stainless steel doors
- ☐ Fish grate (round bars)
- ☐ Stainless steel sides
- ☐ Common plate shelf with Item(s) Model(s) _____
- ☐ Cap and cover manifold. Left ☐ Right ☐

ACCESSORIES

- ☐ 6" casters, front two locking (5" diameter wheel)
- ☐ 1" gas pressure regulator (specify gas type)
- ☐ 1-1/4" gas pressure regulator (specify gas type)




WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





RANGE MATCH BROILER

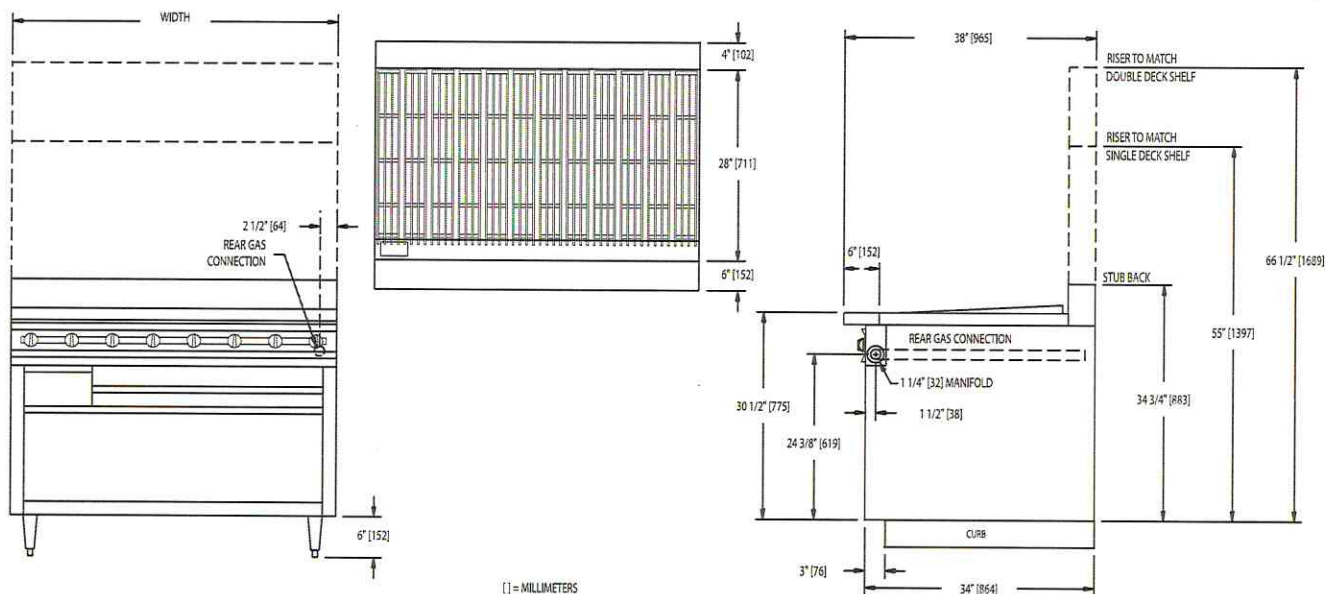

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JTRH-18B	45,000	18"	38"	SEE DRAWING	300 LBS.
JTRH-24B	60,000	24"	38"	SEE DRAWING	360 LBS.
JTRH-30B	75,000	30"	38"	SEE DRAWING	420 LBS.
JTRH-36B	90,000	36"	38"	SEE DRAWING	475 LBS.
JTRH-48B	120,000	48"	38"	SEE DRAWING	620 LBS.
JTRH-60B	150,000	60"	38"	SEE DRAWING	750 LBS.
JTRH-72B	180,000	72"	38"	SEE DRAWING	880 LBS.

DESCRIPTION:

Heavy duty range match charbroiler. To be model # JTRH _____ manufactured by Jade Range. Furnished with 14 gauge all welded body construction and stainless steel front, top, sides, bottom, back, stub back. Provide with heavy duty cast iron top grates and burner radiants. To have one individually controlled 15,000 BTU/hr. burner for every 6" of broiler. Provide 12 gauge firebox with all welded construction. Furnish two separate 14 gauge drip pans. To have 6" stainless steel adjustable legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 ft.

NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

UTILITY INFORMATION:

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure:
 - Natural Gas 5" W.C. minimum
 - Propane Gas 10" W.C. minimum
 - 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA



CABINET BASE OPEN BURNER RANGE (12" SECTIONS)



JTRH-4-A

MODEL NO.	DESCRIPTION
☐ JTRH-2-A	12" TWO OPEN BURNERS
☐ JTRH-4-A	24" FOUR OPEN BURNERS
☒ JTRH-6	36" SIX OPEN BURNERS
☐ JTRH-8-A	48" EIGHT OPEN BURNERS
☐ JTRH-10	60" TEN OPEN BURNERS
☐ JTRH-12	72" TWELVE OPEN BURNERS

STANDARD FEATURES

- Individual lift-off steel top grates
- 35,000 BTU/hr cast iron open burners
- Variable size multi-point gas connection—see utility information for details
- One stainless steel pilot per burner
- 14 gauge stainless steel all welded body construction
- Stainless steel cabinet interior and exterior
- Stainless steel gas tubing throughout
- Stainless steel front, sides, stub back and bottom
- Stainless steel 6" plate shelf
- Stainless steel adjustable 6" legs
- 3/4" gas regulator (shipped loose, must be installed for proper operation)

AVAILABLE OPTIONS

- ☐ Polished steel top grate in lieu of cast iron
- ☐ Stainless steel high riser
- ☐ Stainless steel double high riser
- ☐ Stainless steel high shelf
- ☐ Stainless steel double high shelf
- ☐ Stainless steel tubular high shelf
- ☐ Stainless steel tubular double high shelf
- ☐ Stainless steel doors
- ☐ Common plate shelf with Item(s) Model(s) _____
- ☐ Cap and cover manifold. Left ☐ Right ☐

ACCESSORIES

- ☐ 6" casters, front two locking (5" diameter wheel)
- ☐ 36" flex hose with quick disconnect (3/4" connection)
- ☐ 48" flex hose with quick disconnect (3/4" connection)
- ☐ 1" gas pressure regulator (specify gas type)
- ☐ 1-1/4" gas pressure regulator (specify gas type)



WWW.JADERANGE.COM


JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA

TITAN CABINET BASE OPEN BURNER RANGE (12" SECTIONS)





CABINET BASE OPEN BURNER RANGE (12" SECTIONS)

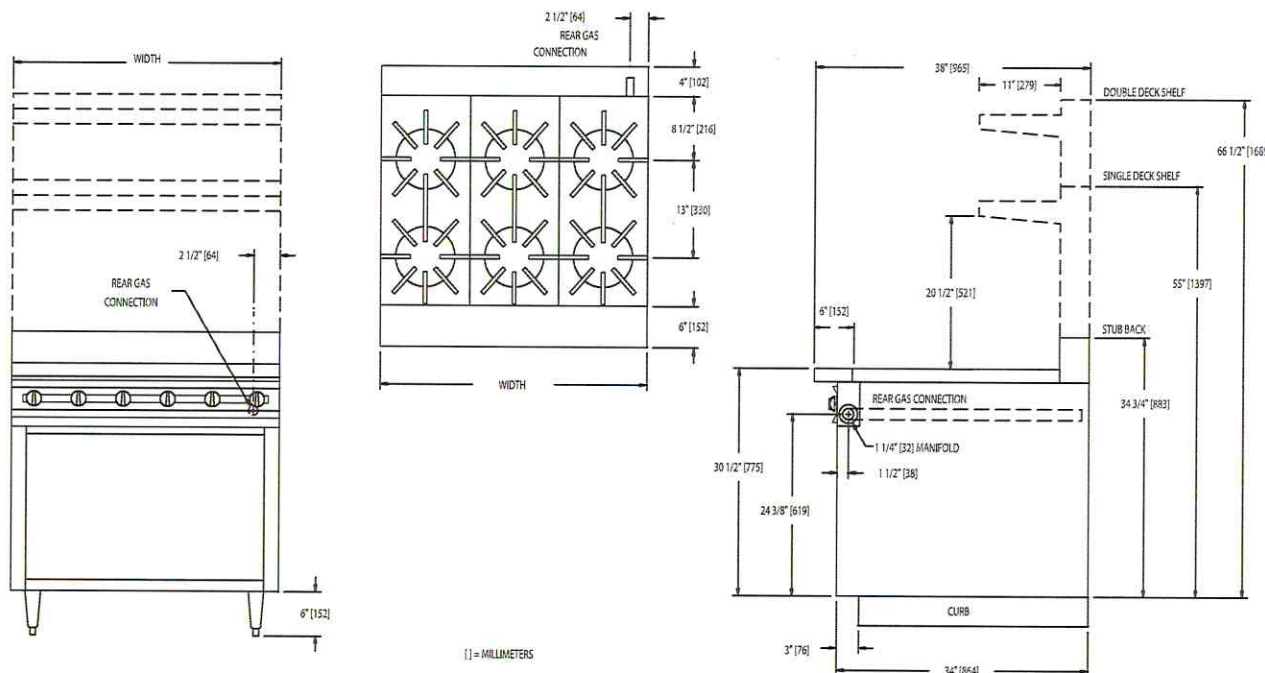

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JTRH-2-A	70,000	12"	38"	SEE DRAWING	190 LBS.
JTRH-4-A	140,000	24"	38"	SEE DRAWING	240 LBS.
JTRH-6	210,000	36"	38"	SEE DRAWING	490 LBS.
JTRH-8-A	280,000	48"	38"	SEE DRAWING	680 LBS.
JTRH-10	350,000	60"	38"	SEE DRAWING	730 LBS.
JTRH-12	420,000	72"	38"	SEE DRAWING	980 LBS.

DESCRIPTION:

Heavy duty cabinet base 12" section open burner range. To be model #JTRH _____ manufactured by Jade Range. Each burner to have heavy duty cast iron grates. Provide with (35,000 BTU/hr.) open burners controlled by infinite gas valves. To have 14 gauge all welded body with stainless steel front, sides, back and bottom. All gas tubing to be stainless steel throughout. To have 6" stainless steel adjustable legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 ft.

UTILITY INFORMATION (GAS):

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure:
Natural Gas 5" W.C. minimum
Propane Gas 10" W.C. minimum
14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA



CABINET BASE GRIDDLE TOP RANGE

TITAN CABINET BASE GRIDDLE TOP RANGE



JTRH-36G

JTRH-36GG
with stainless steel riser
MODEL NO.
DESCRIPTION

☐ JTRH-12GT	12" GRIDDLE TOP SECTION THERMOSTAT CONTROL
☐ JTRH-12G	12" GRIDDLE TOP SECTION MANUAL CONTROL
☐ JTRH-18GT	18" GRIDDLE TOP SECTION THERMOSTAT CONTROL
☐ JTRH-18G	18" GRIDDLE TOP SECTION MANUAL CONTROL
☐ JTRH-24GT	24" GRIDDLE TOP SECTION THERMOSTAT CONTROL
☐ JTRH-24G	24" GRIDDLE TOP SECTION MANUAL CONTROL
☐ JTRH-36GT	36" GRIDDLE TOP SECTION THERMOSTAT CONTROL
☐ JTRH-36G	36" GRIDDLE TOP SECTION MANUAL CONTROL
☒ JTRH-48GT	48" GRIDDLE TOP SECTION THERMOSTAT CONTROL
☐ JTRH-48G	48" GRIDDLE TOP SECTION MANUAL CONTROL
☐ JTRH-60GT	60" GRIDDLE TOP SECTION THERMOSTAT CONTROL
☐ JTRH-60G	60" GRIDDLE TOP SECTION MANUAL CONTROL
☐ JTRH-72GT	72" GRIDDLE TOP SECTION THERMOSTAT CONTROL
☐ JTRH-72G	72" GRIDDLE TOP SECTION MANUAL CONTROL

STANDARD FEATURES

- Polished 1" thick steel griddle plates
- Variable size multi-point gas connection—see utility information for details
- 14 gauge stainless steel grease trough
- 14 gauge stainless side and rear splash
- Stainless steel cabinet interior and exterior
- Stainless steel front, sides, stub back, and bottom
- Stainless steel 6" plate shelf
- Stainless steel adjustable 6" legs
- 3/4" gas regulator (shipped loose, must be installed for proper operation)

AVAILABLE OPTIONS

- ☐ Stainless steel high riser
- ☐ Stainless steel double high riser
- ☐ Stainless steel high shelf
- ☐ Stainless steel double high shelf
- ☐ Stainless steel tubular high shelf
- ☐ Stainless steel tubular double high shelf
- ☐ Common plate shelf with Item(s) Model(s) _____
- ☐ Cap and cover manifold. Left ☐ Right ☐

ACCESSORIES

- ☐ 6" casters, front two locking (5" diameter wheel)
- ☐ 36" flex hose with quick disconnect (3/4" connection)
- ☐ 48" flex hose with quick disconnect (3/4" connection)
- ☐ 1" gas pressure regulator (specify gas type)
- ☐ 1-1/4" gas pressure regulator (specify gas type)
- ☐ Grooved griddle surface
(add "G" to model number)
- ☐ Stainless steel doors



WWW.JADERANGE.COM

 JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA

JADE



CABINET BASE GRIDDLE TOP RANGE

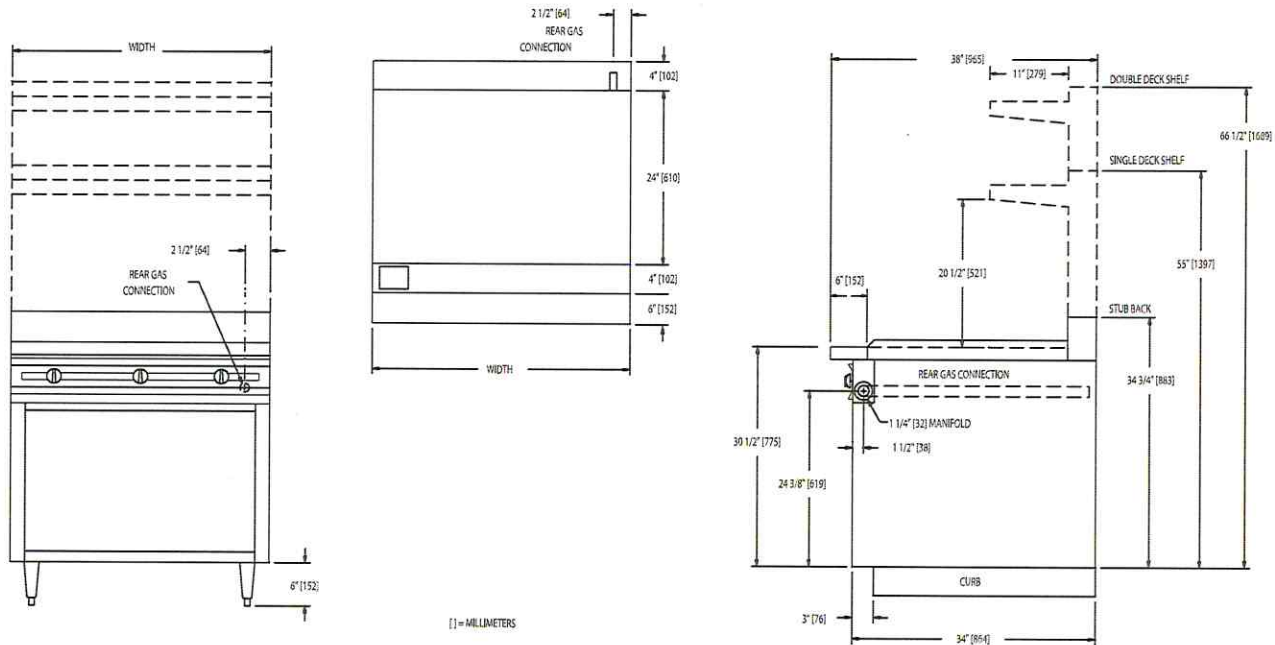

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JTRH-12G(T)	35,000 (30,000)	12"	38"	SEE DRAWING	175 LBS.
JTRH-18G(T)	35,000 (30,000)	18"	38"	SEE DRAWING	250 LBS.
JTRH-24G(T)	70,000 (60,000)	24"	38"	SEE DRAWING	300 LBS.
JTRH-36G(T)	105,000 (90,000)	36"	38"	SEE DRAWING	530 LBS.
JTRH-48G(T)	140,000 (120,000)	48"	38"	SEE DRAWING	705 LBS.
JTRH-60G(T)	175,000 (150,000)	60"	38"	SEE DRAWING	830 LBS.
JTRH-72G(T)	210,000 (180,000)	72"	38"	SEE DRAWING	1060 LBS.

DESCRIPTION:

Heavy duty cabinet base griddle top range. To be model # JTRH _____ manufactured by Jade Range. Top sections to consist of polished 1" reinforced griddle plate with 2-1/2" high stainless steel splash guard. Provide with 35,000 BTU/hr. (30,000 BTU/hr.) per burner section, controlled by infinite gas valves. To have 14 gauge all welded body with stainless steel front, sides, back and bottom. All gas tubing to be stainless steel throughout. To have 6" stainless steel adjustable legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 ft.

UTILITY INFORMATION (GAS):

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure:
Natural Gas 5" W.C. minimum
Propane Gas 10" W.C. minimum
14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA