

SPI NO. F01-097-3064

SPECIAL PACKAGING INSTRUCTION				CODE ID 98747	SPI NO. (TPO) F01-097-3064
ITEM NOMENCLATURE OSCILLATING GROUP					SHEET 2 OF 5
-12	A/R	TAPE, PACKAGING	3 X AS REQUIRED	ASTM D5486 TYPE I OR V	1
-11	1	SLEEVE	65 X 13 1/2 X 1/4	ASTM D4727 CF, DOM, DW, GRADE 200	B
-10	4	NUT, HEX	1/4	ASME B18.2.2	1
-9	4	WASHER, FLAT	1/4	ASME B18.21.1	1
-8	4	BOLT, CARRIAGE	2 X 1/4	ASME B18.5	1
-7	1	SEPARATOR	20 X 10 X 1/8	ASTM D4727 CF, DOM, SW, GRADE 200	
-6	1	BASE	22 X 11 X 1/2	A-A-55057 TYPE A	1 A
-5	1	CONTAINER, INTERIOR	22 X 11 X 14 (ID)	ASTM D5118 RSC, CF, DOM, SW	
-4	1	BAG, BARRIER	55 X 35 (ID)	MIL-DTL-117 TYPE I, CLASS E, STYLE 1	
-3	2	CUSHION, END	19 X 12 X 2	A-A-59136 CLASS 1, GRADE A	
-2	2	CUSHION, SIDE	27 X 19 X 2	A-A-59136 CLASS 1, GRADE A	
-1	2	CUSHION, TOP & BOTTOM	23 X 12 X 2	A-A-59136 CLASS 1, GRADE A	
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. $\pm \frac{1}{8}$, DECIMAL $\pm .10$, ANGLES $\pm 1^\circ$	MATERIAL SPECIFICATION	

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPO) F01-097-3064
ITEM NOMENCLATURE OSCILLATING GROUP		SHEET 3 OF 5

CAUTION NOTICES

NOTICE 1: ASSETS PACKAGED IN ACCORDANCE WITH THE PREVIOUS EDITION OF THIS SPI DO NOT REQUIRE REPACKAGING IF THE INTEGRITY OF THE SPI IS MAINTAINED.

NOTICE 2: SEE SPIRES FOR A COMPLETE LISTING OF NSN's ASSIGNED TO THIS SPI.

NOTICE 3: PACKAGING MATERIAL MAY BE SUBSTITUTED IF IT MEETS THE REQUIREMENTS OF MIL-STD-2073-1, PROVIDES EQUAL OR BETTER PROTECTION AND THERE IS NO INCREASED COST TO THE GOVERNMENT.

NOTICE 4: FOR LEVEL A PACKAGING REQUIREMENTS, LEVEL B PACKS SHALL BE OVERBOXED IN A LEVEL A SPECIFIED CONTAINER SHOWN ON PAGE 1 UNDER PACKAGING LEVEL A.

NOTICE 5: LEVEL A PROTECTION REQUIRED TO MEET THE MOST SEVERE WORLDWIDE SHIPMENT, HANDLING, AND STORAGE CONDITIONS. EXAMPLES OF SITUATIONS ARE: WAR RESERVE MATERIAL, MOBILIZATION, STRATEGIC AND THEATER DEPLOYMENT, OPEN STORAGE AND DECK LOADING. SECURITY ASSISTANCE ITEMS, INCLUDING FMS, ARE ESPECIALLY SUSCEPTIBLE TO DAMAGE DUE TO UNKNOWN AND UNFAVORABLE TRANSPORTATION, CLIMATIC, AND STORAGE CONDITIONS. PROVIDE LEVEL B PACKING UNLESS OTHERWISE DIRECTED BY THE PROCURING COUNTRY.

INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES**REVISION OF ISPM NO. 15****REVISION OF WOOD PACKAGING MATERIAL FOR INTERNATIONAL TRADE**

THE FOLLOWING STATEMENT IS IN COMPLIANCE WITH THE UNITED NATIONS-IMPLEMENTED RESTRICTIONS ON WOOD PACKAGING MATERIAL (WPM). THIS REQUIREMENT IS SPECIFICALLY CONCERNED WITH INVASIVE SPECIES SUCH AS THE PINEWOOD NEMATODE. WPM IS DEFINED AS WOOD PALLETS, SKIDS, LOAD BOARDS, PALLET COLLARS, WOODEN BOXES, REELS, DUNNAGE, CRATES, FRAMES, AND CLEATS. THE STATEMENT BELOW CITES THE REQUIREMENTS IN DETAIL AND COVERS LUMBER FOR BUILDING CONTAINERS AND PALLETS USED FOR DELIVERIES, RESULTING IN SHIPMENTS WORLDWIDE (DIRECT, OR THROUGH AIR LOGISTICS CENTERS (ALC), CONTAINER CONSOLIDATION POINTS (CCP), OR OTHER BASES).

WOODEN LUMBER, WOODEN PALLET AND PACKAGING/CONTAINER STATEMENT:

ALL WOODEN LUMBER, WOODEN PALLETS, AND WOODEN CONTAINERS PRODUCED ENTIRELY OR IN PART OF WOOD PACKAGING MATERIAL (WPM) SHALL BE CONSTRUCTED FROM DEBARKED WOOD IN ADDITION TO THE APPLICATION OF HEAT-TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION/MARKING IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). FOR REFERENCE DOCUMENTATION, SEE LATEST REVISION OF "INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM NO. 15), "REGULATION OF WOOD PACKAGING MATERIAL IN INTERNATIONAL TRADE."



NOTES

1. MOUNT ITEM TO BASE, REF.-6 USING REF.--8, -9, AND -10. INSURE SEPARATOR, REF.-7, IS IN PLACE BETWEEN ITEM AND BASE.

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPO)
F01-097-3064ITEM NOMENCLATURE
OSCILLATING GROUP

SHEET 4 OF 5

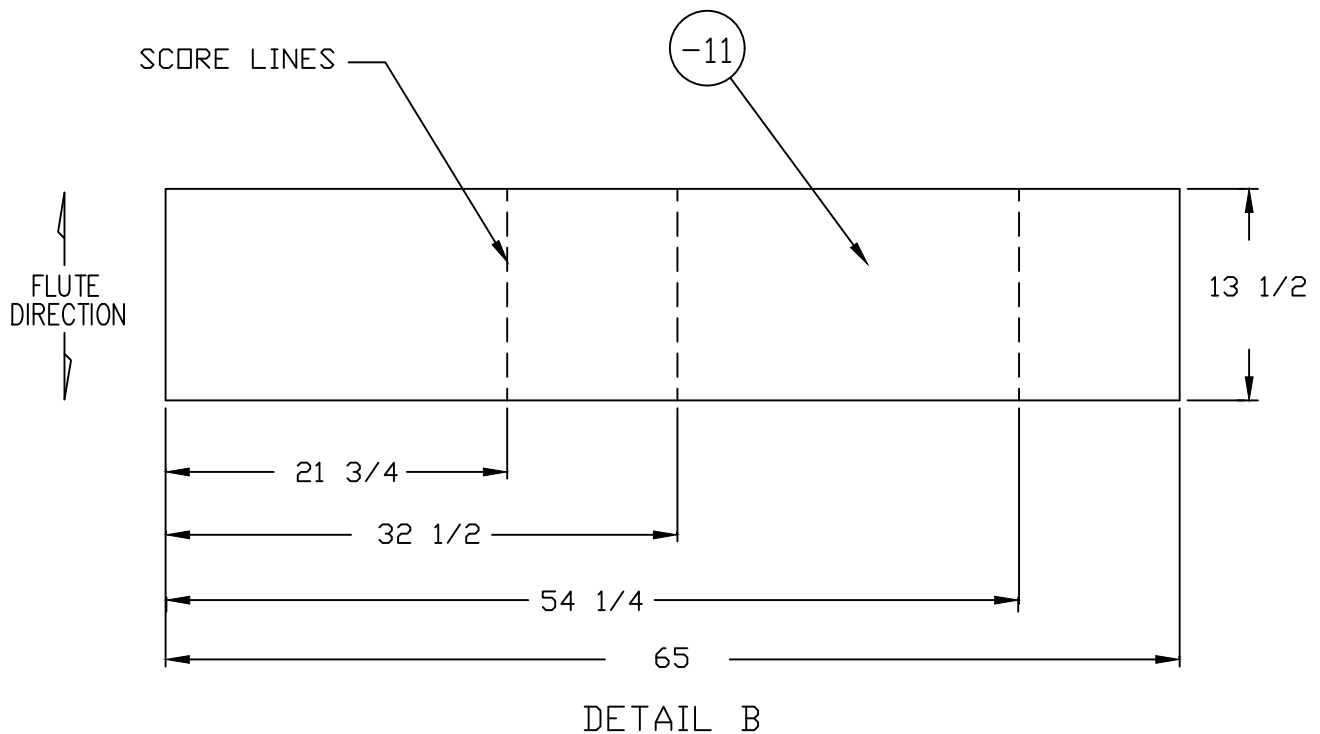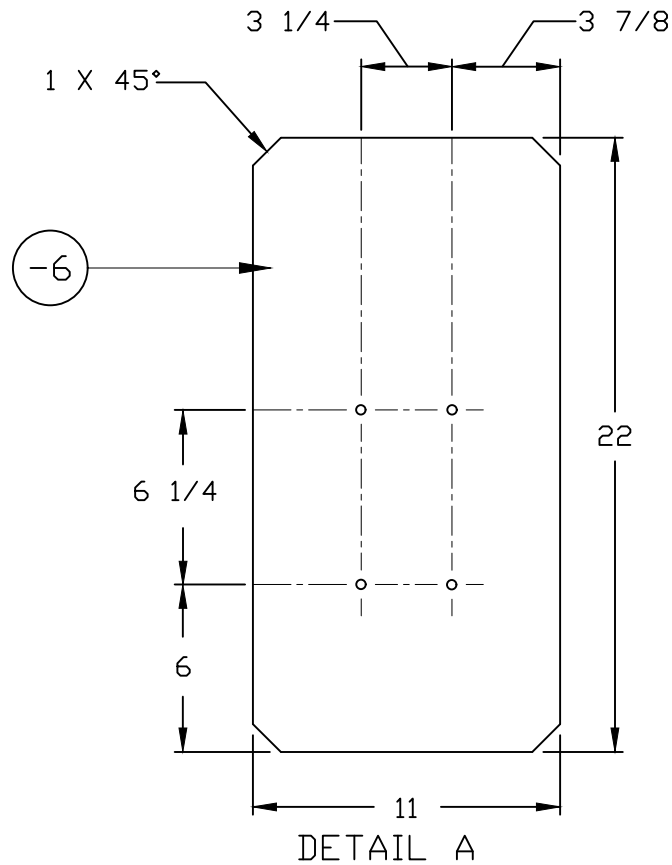

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPO)
F01-097-3064ITEM NOMENCLATURE
OSCILLATING GROUP

SHEET 5 OF 5

