GSX 750 S 2018 / 2020

1. Release the parts that secures the handle bar;

2. Fasten the handle bar with the yoke which goes along with the kit;

3. Remove the side fairings, the tank plastic cover and the plastic ignition key cover;

4. Cut the plastic ignition key cover using a stiletto according to the image below;

5. Remove the screws and washers that fasten the tank to the top triple tree;

6. Use the bumerangue-shaped tower to fasten the tank again;

7. Fasten the steering damper to the top triple tree attaching the bar to the holder opening (it is not necessary too much fastening)

8. Tighten the tower side screw,
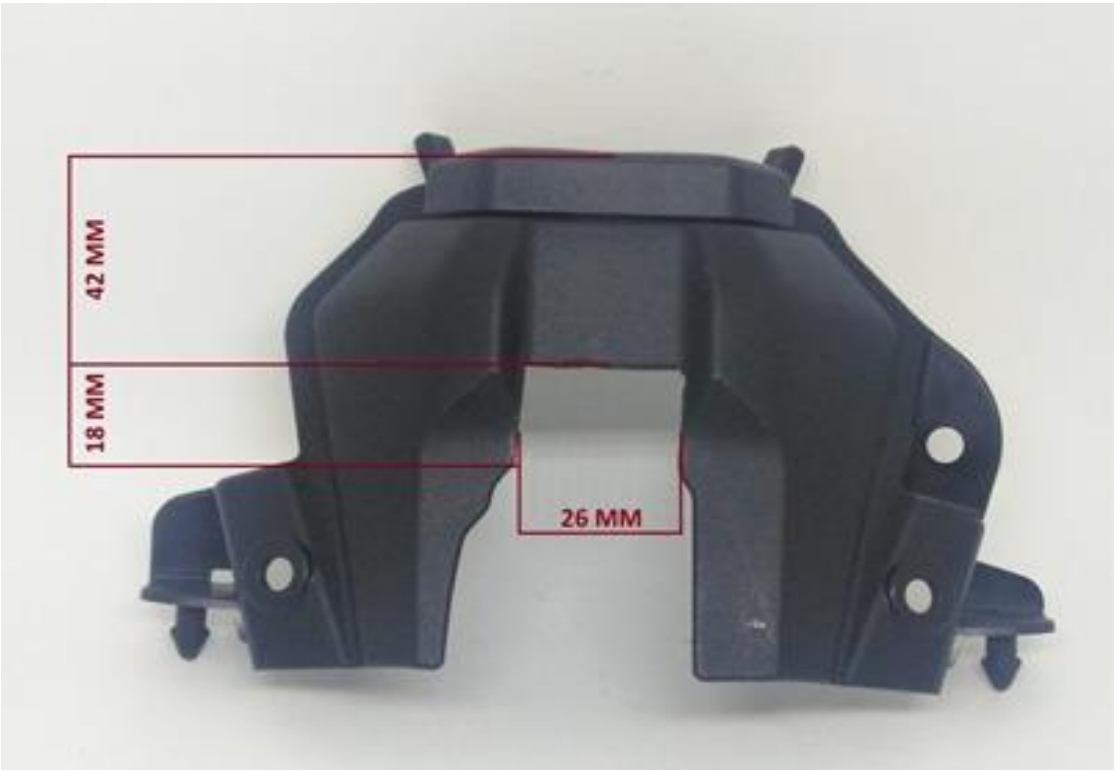
9. Replace the ignition cover and side fairings.