ASSEMBLY INSTRUCTIONS

GSX S 1000 A | GSX S 1000 FA | GSX 1000 F

1. Release the yoke that secures the handlebars;
2. Fasten the handlebar with the yoke which goes along with the kit using the original screws;
3. Remove the side fairings, remove the plastic cover from the tank and remove the plastic key cover;
4. Position the rectangular bar with the M6 threaded holes under the ignition assembly observing that the bar dent faces upward with the relief chamfer facing the ignition assembly;
5. Attach the inverted T-tower to the previously positioned bar, observing that the angle of the inclination is directed towards the front of the motorcycle, align visually this tower to the center of the yoke;
6. Fasten the steering damper to the yoke by attaching the bar to the holder opening (it is not necessary too much fastening);
7. Tighten the tower side screw.
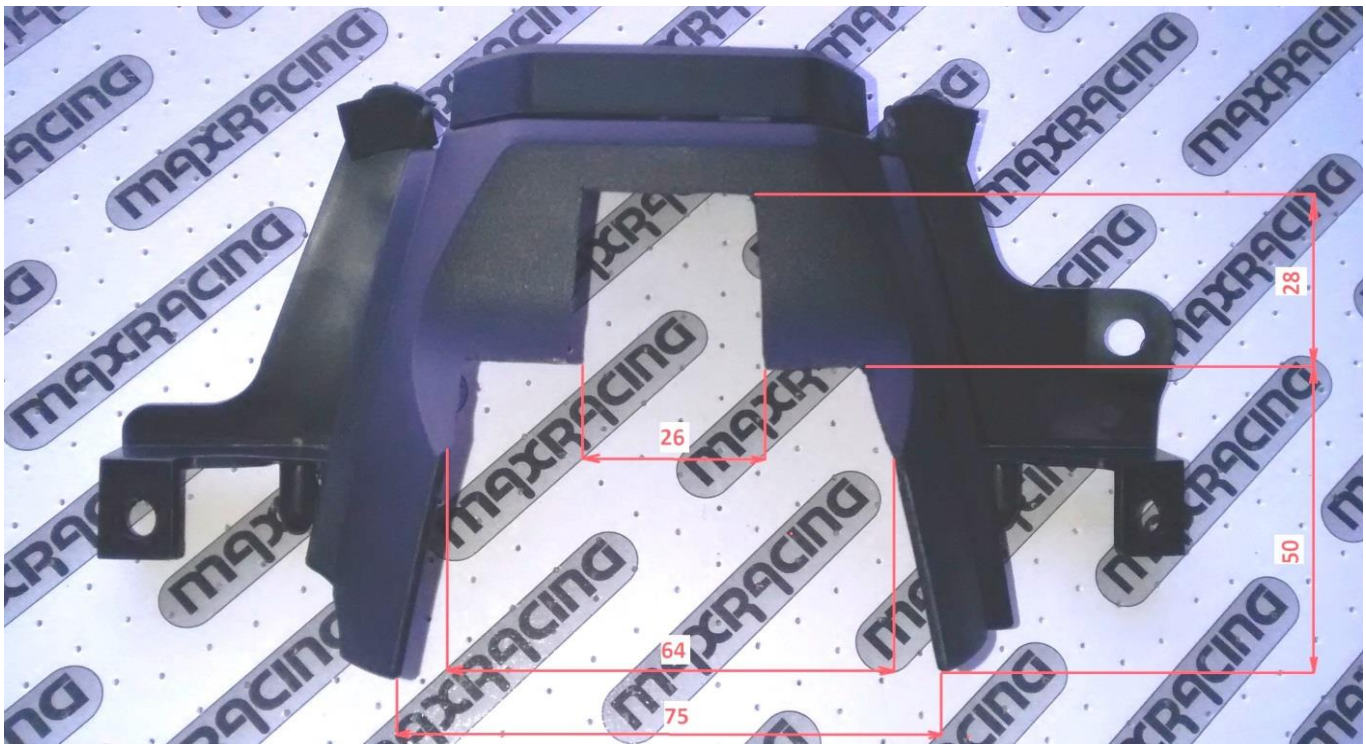
Note: cut the ignition key cover with a stiletto according to the illustration