Hitelecom®

TEMPERATURE & HUMIDITY LOGGER

H100 Series | Local Data Logging

Temperature | Relative Humidity



KEY INDICATORS

Parameters	Typical Accuracy	Memory	Protection	Local Readout
Temperature Relative humidity	±0.2°C ±2% RH	80,000 readings* Time-stamped	IP55 Housing protection	USB to PC PDF / CSV export

OVERVIEW

The Hitelecom H100 Series records temperature and relative humidity locally at a customer-configurable sampling interval. It stores up to 80,000 readings with timestamps for storage, indoor studies and sensitive shipments. Configure the recording interval using the supported NFC app, then retrieve records via USB in free local PC software for curve analysis and PDF / CSV export. The logger uses a non-replaceable battery; match the recording plan and expected runtime to the selected interval and operating conditions.

FEATURES

LOCAL RECORDS

Store up to 80,000 readings with timestamps on the device. Retrieve after the recording task.

YOUR INTERVAL

Customer-configurable sampling. Set the collection interval through the supported NFC app.

USB / PC

USB readout in free PC software. Review curves and export PDF / CSV files locally.

IP55

IP55 housing for storage and transport recording tasks. Keep sensing openings clear.

NON-REPLACEABLE

Battery-powered recording. Non-replaceable battery; confirm runtime for your recording plan.

FLEXIBLE PLACEMENT

Standalone, hanging or adhesive. Use approved mounting and record the logger's position and identity.

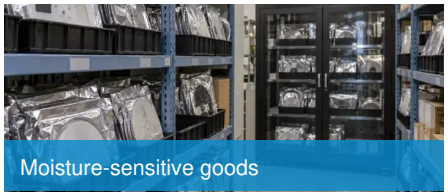
APPLICATIONS


Museums & galleries


Archives & libraries


Pharma & laboratories


Food storage


Moisture-sensitive goods


Wafer & chip transport


Art & heritage transport

Illustrative recording environments; position the logger in air space and plan local USB data retrieval.

Item		Description
Physical Characteristics	Product series	H100 Series - temperature and humidity data logger
	Power supply	Battery-powered standalone recording
	Battery type	Non-replaceable battery
	Battery life	Confirm runtime for the selected interval, temperature and task duration.
	Dimensions	35mm*25mm*10mm
	Mounting	Standalone, hanging or adhesive; keep the sensing area exposed to air.
Temperature & Humidity	Recorded parameters	Temperature and relative humidity
	Typical temperature accuracy	±0.2°C
	Typical humidity accuracy	±2% RH
	Range / resolution	Measurement range and resolution follow the supplied H100 configuration.
Data Recording	Storage capacity	80,000 stored readings
	Recording history	Time-stamped temperature and humidity readings
	Data collection interval	Customer-configurable; confirm supported interval settings for the project.
	Recording duration	Depends on the selected interval, stored-reading counting and battery runtime.
	Retrieval schedule	Plan the recording period and local USB download schedule before deployment.

Plan the collection interval, required recording period and USB retrieval date together. Confirm the supported settings before deployment.

SPECIFICATIONS

Item		Description
Waterproof Rating	Housing protection	IP55
	Sensing / readout area	Keep sensing openings clear; follow supplied USB-contact protection instructions.
Reliability	Recording verification	Verify the clock, collection settings and USB readout before deployment.
Environmental Range	Operating temperature	Operating limits follow the supplied H100 configuration.
	Humidity exposure	Confirm suitability for expected humidity and condensation exposure.
	Storage conditions	Storage limits follow the supplied H100 configuration.
Integration	Local data retrieval	USB connection to compatible local PC software.
	PC software	Free software; curve analysis and PDF / CSV export.
	Computer requirements	Confirm the supported PC operating system and USB connection requirements.
Recording Setup	NFC configuration	Supported NFC app on a compatible Android / iOS device.
	Collection interval	Customer-defined sampling within the supported configuration settings.
Project Configuration	Recording profile	Specify interval, task duration, expected conditions and retrieval checkpoints.
	Placement	Identify the logger and recording location; secure at an approved air-sensing point.
Certification References CCC / CE / FCC / RoHS	Product conformity	Confirm applicable approvals and H100 documentation for the supplied configuration and target market.
	Calibration documents	Specify temperature / humidity check points, certificate and traceability needs.
	Document identity	Match supplied documents to the H100 configuration and logger identity.

* Typical accuracy is a product reference; confirm measurement range, operating points and calibration for the supplied H100.

* 80,000 means stored readings. Counting convention, recording duration and battery runtime depend on the supplied configuration.

NFC configures the logger; USB and local PC software retrieve records. Conformity documents must match the supplied H100 configuration.

Tel: +86 18616602589 / Web: www.hitelecom.com

Email: Justin.Li@hitelecom.cn

Add: 2nd Floor, Building 1, No. 116 Cheyang Road,
Songjiang District, Shanghai, China