

NetXPTO - LinkPlanner

20 de Novembro de 2017

Conteúdo

| | | |
|----------|--|----------|
| 1 | Introduction | 3 |
| 2 | Simulator Structure | 4 |
| 2.1 | System | 4 |
| 2.2 | Blocks | 4 |
| 2.3 | Signals | 4 |
| 3 | Development Cycle | 5 |
| 4 | Visualizer | 6 |
| 5 | Case Studies | 7 |
| 5.1 | QPSK Transmitter | 7 |
| 5.2 | BPSK Transmission System | 9 |
| 5.2.1 | Theoretical Analysis | 9 |
| 5.2.2 | Simulation Analysis | 10 |
| 5.2.3 | Comparative Analysis | 14 |
| 5.3 | M-QAM Transmission System | 17 |
| 5.3.1 | Introduction | 17 |
| 5.3.2 | Bit Error Rate for 4-QAM with Additive White Gaussian Noise (AWGN) | 17 |
| 5.3.3 | Simulation setup | 19 |
| 5.3.4 | Functional description | 19 |
| 5.3.5 | Input Parameters | 20 |
| 5.3.6 | Output Parameters | 20 |
| 5.3.7 | BER measurement | 20 |
| 5.4 | Quantum Noise | 22 |
| 5.4.1 | Theoretical Description | 22 |
| 5.4.2 | Simulation | 26 |
| 5.5 | Continuos Variable Quantum Transmission System | 29 |
| 5.6 | Kramers-Kronig Transceiver with Stokes PolDemux | 42 |

| | |
|--|------------|
| Conteúdo | 2 |
| 5.6.1 Kramers-Kronig transceiver | 42 |
| 5.6.2 Simulation setup | 48 |
| 5.6.3 Experimental setup | 50 |
| 5.7 Quantum Oblivious Key Distribution with Discrete Variables | 57 |
| 5.7.1 Theoretical Description | 57 |
| 5.7.2 Simulation Analysis | 68 |
| 5.7.3 Experimental Setup | 72 |
| 5.7.4 Comparative Analysis | 74 |
| 5.8 Radio Over Fiber Transmission System | 76 |
| 5.8.1 Simulation | 77 |
| 5.8.2 Experimental | 78 |
| 6 Library | 80 |
| 6.1 Add | 81 |
| 6.2 Bit Error Rate | 82 |
| 6.3 Binary source | 85 |
| 6.4 Bit Decider | 89 |
| 6.5 Clock | 90 |
| 6.6 Coupler 2 by 2 | 92 |
| 6.7 Decoder | 93 |
| 6.8 Discrete to continuous time | 96 |
| 6.9 Homodyne receiver | 98 |
| 6.10 IQ modulator | 102 |
| 6.11 Local Oscillator | 104 |
| 6.12 MQAM mapper | 106 |
| 6.13 MQAM transmitter | 109 |
| 7 Matlab Tools | 114 |
| 7.1 Generation of AWG Compatible Signals | 115 |
| 7.1.1 sgnToWfm | 115 |
| 7.1.2 Loading a signal to the Tektronix AWG70002A | 116 |

Capítulo 1

Introduction

LinkPlanner is devoted to the simulation of point-to-point links.

Capítulo 2

Simulator Structure

LinkPlanner is a signals open-source simulator.

The major entity is the system.

A system comprises a set of blocks.

The blocks interact with each other through signals.

2.1 System

2.2 Blocks

2.3 Signals

List of available signals:

- Signal

Capítulo 3

Development Cycle

The NetXPTO-LinkPlanner has been developed by several people using git as a version control system. The NetXPTO-LinkPlanner repository is located in the GitHub site <http://github.com/netxpto/linkplanner>. The more updated functional version of the software is in the branch master. Master should be considered a functional beta version of the software. Periodically new releases are delivered from the master branch under the branch name Release<Year><Month><Day>. The integration of the work of all people is performed by Armando Nolasco Pinto in the branch Develop. Each developer has his/her own branch with his/her name.

Capítulo 4

Visualizer

visualizer

Capítulo 5

Case Studies

5.1 QPSK Transmitter

2017-08-25, Review, Armando Nolasco Pinto

This system simulates a QPSK transmitter. A schematic representation of this system is shown in figure 5.1.

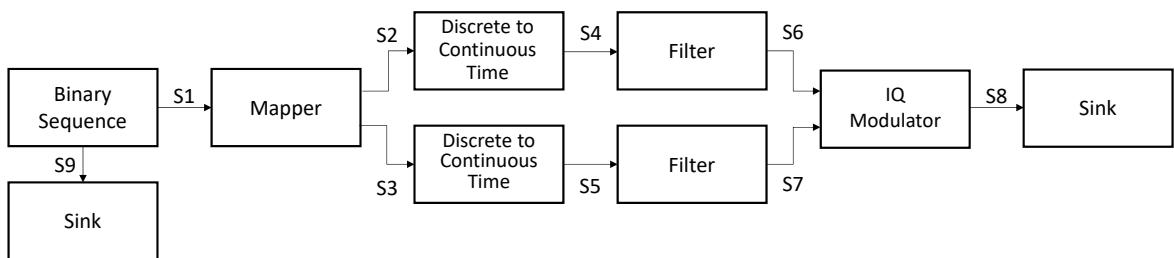


Figura 5.1: QPSK transmitter block diagram.

System Input Parameters

Parameter: *sourceMode*

Description: Specifies the operation mode of the binary source.

Accepted Values: PseudoRandom, Random, DeterministicAppendZeros, DeterministicCyclic.

Parameter: *patternLength*

Description: Specifies the pattern length used by the source in the PseudoRandom mode.

Accepted Values: Integer between 1 and 32.

Parameter: *bitStream*

Description: Specifies the bit stream generated by the source in the DeterministicCyclic and DeterministicAppendZeros mode.

Accepted Values: "XXX..", where X is 0 or 1.

Parameter: *bitPeriod*

Description: Specifies the bit period, i.e. the inverse of the bit-rate.

Accepted Values: Any positive real value.

Parameter: *iqAmplitudes*

Description: Specifies the IQ amplitudes.

Accepted Values: Any four pair of real values, for instance { { 1,1 },{ -1,1 },{ -1,-1 },{ 1,-1 } }, the first value correspond to the "00", the second to the "01", the third to the "10" and the forth to the "11".

Parameter: *numberOfBits*

Description: Specifies the number of bits generated by the binary source.

Accepted Values: Any positive integer value.

Parameter: *numberOfSamplesPerSymbol*

Description: Specifies the number of samples per symbol.

Accepted Values: Any positive integer value.

Parameter: *rollOffFactor*

Description: Specifies the roll off factor in the raised-cosine filter.

Accepted Values: A real value between 0 and 1.

Parameter: *impulseResponseTimeLength*

Description: Specifies the impulse response window time width in symbol periods.

Accepted Values: Any positive integer value.

>>> Romil

5.2 BPSK Transmission System

| | | |
|---------------------|---|--|
| Student Name | : | Daniel Pereira (2017/09/01 -) |
| Goal | : | Estimate the BER in a Binary Phase Shift Keying optical transmission system with additive white Gaussian noise. Comparison with theoretical results. |
| Directory | : | sdf/bpsk_system |

Binary Phase Shift Keying (BPSK) is the simplest form of Phase Shift Keying (PSK), in which binary information is encoded into a two state constellation with the states being separated by a phase shift of π (see Figure 5.2).

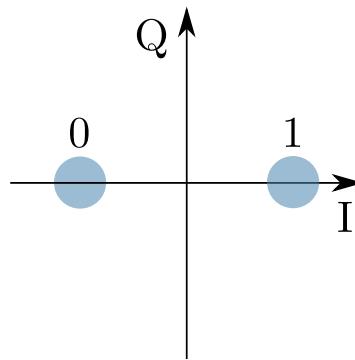


Figura 5.2: BPSK symbol constellation.

White noise is a random signal with equal intensity at all frequencies, having a constant power spectral density. White noise is said to be Gaussian (WGN) if its samples follow a normal distribution with zero mean and a certain variance σ^2 . For WGN its spectral density equals its variance. For the purpose of this work, additive WGN is used to model thermal noise at the receivers.

The purpose of this system is to simulate BPSK transmission in back-to-back configuration with additive WGN at the receiver and to perform an accurate estimation of the BER and validate the estimation using theoretical values.

5.2.1 Theoretical Analysis

The output of the system with added gaussian noise follows a normal distribution, whose first probabilistic moment can be readily obtained by knowledge of the optical power of the received signal and local oscillator,

$$m_i = 2\sqrt{P_L P_S G_{ele}} \cos(\Delta\theta_i), \quad (5.1)$$

where P_L and P_S are the optical powers, in watts, of the local oscillator and signal, respectively, G_{ele} is the gain of the trans-impedance amplifier in the coherent receiver and

$\Delta\theta_i$ is the phase difference between the local oscillator and the signal, for BPSK this takes the values π and 0 , in which case (5.1) can be reduced to,

$$m_i = (-1)^{i+1} 2 \sqrt{P_L P_S} G_{ele}, \quad i = 0, 1. \quad (5.2)$$

The second moment is directly chosen by inputting the spectral density of the noise σ^2 , and thus is known *a priori*.

Both probabilist moments being known, the probability distribution of measurement results is given by a simple normal distribution,

$$f(x) = \frac{1}{\sqrt{2\pi}\sigma} e^{-\frac{(x-m_i)^2}{2\sigma^2}}. \quad (5.3)$$

The BER is calculated in the following manner,

$$BER = \frac{1}{2} \int_0^{+\infty} f(x|\Delta\theta = \pi) dx + \frac{1}{2} \int_{-\infty}^0 f(x|\Delta\theta = 0) dx, \quad (5.4)$$

given the symmetry of the system, this can be simplified to,

$$BER = \int_0^{+\infty} f(x|\Delta\theta = \pi) dx = \frac{1}{2} \operatorname{erfc} \left(\frac{-m_0}{\sqrt{2}\sigma} \right) \quad (5.5)$$

5.2.2 Simulation Analysis

A diagram of the system being simulated is presented in the Figure 5.3. A random binary sequence is generated and encoded in an optical signal using BPSK modulation. The decoding of the optical signal is accomplished by an homodyne receiver, which combines the signal with a local oscillator. The received binary signal is compared with the transmitted binary signal in order to estimate the Bit Error Rate (BER). The simulation is repeated for multiple signal power levels, each corresponding BER is recorded and plotted against the expectation value.



Figura 5.3: Overview of the BPSK system being simulated.

Required files

Header Files

| File | Description |
|-------------------------------|---|
| add.h | Adds the two input signals and outputs the result |
| balanced_beam_splitter.h | Mixes the two optical signals set at it's input. |
| binary_source.h | Generates a sequence of binary values (1 or 0) |
| bit_decider.h | Decodes the input signal into a binary string. |
| bit_error_rate.h | Calculates the bit error rate of the decoded string. |
| discrete_to_continuous_time.h | Converts a signal discrete in time to a signal continuous in time. |
| netxpto.h | Generic purpose simulator definitions. |
| m_qam_mapper.h | Maps the binary sequence into the coded constellation. |
| m_qam_transmitter.h | Generates the signal with coded constellation. |
| local_oscillator.h | Generates a continuous optical signal with set power and phase. |
| i_homodyne_reciever.h | Performs coherent detection on the input signal. |
| ideal_amplifier.h | Multiplies the input signal by a user defined gain factor and outputs the result. |
| iq_modulator.h | Maps two real valued signal into a complex optical bandpass signal. |
| photodiode.h | Converts complex optical bandpass signals into real value electrical signals. |
| pulse_shaper.h | Simulates the impulse response of a circuit. |
| sampler.h | Samples the input signal at a user defined frequency. |
| sink.h | Closes any unused signals. |
| super_block_interface.h | Allows superblocks to output multiple signals. |
| white_noise.h | Generates white gaussian noise with a user defined spectral density. |

Source Files

| File | Description |
|---------------------------------|---|
| add.cpp | Adds the two input signals and outputs the result |
| balanced_beam_splitter.cpp | Mixes the two optical signals set at its input. |
| binary_source.cpp | Generates a sequence of binary values (1 or 0) |
| bit_decider.cpp | Decodes the input signal into a binary string. |
| bit_error_rate.cpp | Calculates the bit error rate of the decoded string. |
| discrete_to_continuous_time.cpp | Converts a signal discrete in time to a signal continuous in time. |
| netxpto.cpp | Generic purpose simulator definitions. |
| m_qam_mapper.cpp | Maps the binary sequence into the coded constellation. |
| m_qam_transmitter.cpp | Generates the signal with coded constellation. |
| local_oscillator.cpp | Generates a continuous optical signal with set power and phase. |
| i_homodyne_reciever.cpp | Performs coherent detection on the input signal. |
| ideal_amplifier.cpp | Multiplies the input signal by a user defined gain factor and outputs the result. |
| iq_modulator.cpp | Maps two real valued signal into a complex optical bandpass signal. |
| photodiode.cpp | Converts complex optical bandpass signals into real value electrical signals. |
| pulse_shaper.cpp | Simulates the impulse response of a circuit. |
| sampler.cpp | Samples the input signal at a user defined frequency. |
| sink.cpp | Closes any unused signals. |
| super_block_interface.cpp | Allows superblocks to output multiple signals. |
| white_noise.cpp | Generates white gaussian noise with a user defined spectral density. |

System Input Parameters

This system takes into account the following input parameters:

| System Parameters | Description | Simulation Value |
|-----------------------|--|--|
| numberOfBitsGenerated | Gives the number of bits to be simulated | 40000 |
| bitPeriod | Sets the time between adjacent bits | 20×10^{-12} |
| samplesPerSymbol | Establishes the number of samples each bit in the string is given | 16 |
| pLength | PRBS pattern length | 5 |
| iqAmplitudesValues | Sets the state constellation | { {−1, 0} , {1, 0} } |
| outOpticalPower_dBm | Sets the optical power, in units of dBm, at the transmitter output | Variable |
| loOutOpticalPower_dBm | Sets the optical power, in units of dBm, of the local oscillator used in the homodyne detector | 0 |
| localOscillatorPhase | Sets the initial phase of the local oscillator used in the homodyne detector | 0 |
| transferMatrix | Sets the transfer matrix of the beam splitter used in the homodyne detector | { { $\frac{1}{\sqrt{2}}$, $\frac{1}{\sqrt{2}}$, $\frac{1}{\sqrt{2}}$, $\frac{-1}{\sqrt{2}}$ } } |
| responsivity | Sets the responsivity of the photodiodes used in the homodyne detector | 1 |
| amplification | Sets the amplification of the trans-impedance amplifier used in the homodyne detector | 10^3 |
| noiseSpectralDensity | Sets the spectral density of the gaussian thermal noise added in the homodyne detector | $5 \times 10^{-4}\sqrt{2} \text{ V}^2$ |
| confidence | Sets the confidence interval for the calculated QBER | 0.95 |
| midReportSize | Sets the number of bits between generated QBER mid-reports | 0 |

Inputs

This system takes no inputs.

Outputs

This system outputs the following objects:

Parameter: Signals:

Description: Initial Binary String; (S_0)

Description: Optical Signal with coded Binary String; (S_1)

Description: Local Oscillator Optical Signal; (S_2)

Description: Beam Splitter Outputs; (S_3, S_4)

Description: Homodyne Detector Electrical Output; (S_5)

Description: Decoded Binary String; (S_6)

Description: BER result String; (S_7)

Parameter: Other:

Description: Bit Error Rate report in the form of a .txt file. (BER.txt)

5.2.3 Comparative Analysis

The following results show the dependence of the error rate with the signal power assuming a constant Local Oscillator power of 0 dBm, the signal power was evaluated at levels between -70 and -25 dBm, in steps of 5 dBm between each. The simulation results are presented in orange with the computed lower and upper bounds, while the expected value, obtained from (5.5), is presented as a full blue line. A close agreement is observed between the simulation results and the expected value. The noise spectral density was set at $5 \times 10^{-4}\sqrt{2} \text{ V}^2$ [1].



Figura 5.4: Bit Error Rate in function of the signal power in dBm at a constant local oscillator power level of 0 dBm. Theoretical values are presented as a full blue line while the simulated results are presented as a errorbar plot in orange, with the upper and lower bound computed in accordance with the method described in 6.2

Bibliografia

- [1] Thorlabs. *Thorlabs Balance Amplified Photodetectors: PDB4xx Series Operation Manual*, 2014.
- [2] Ryo Namiki and Takuya Hirano. Security of quantum cryptography using balanced homodyne detection. *Physical Review A*, 67(2):022308, 2003.
- [3] Tie-Ming Liu, Lie-hui Jiang, Hong-qi He, Ji-zhong Li, and Xian Yu. *Researching on Cryptographic Algorithm Recognition Based on Static Characteristic-Code*, pages 140–147. Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- [4] Gilles Brassard and Louis Salvail. *Secret-Key Reconciliation by Public Discussion*, pages 410–423. Springer Berlin Heidelberg, Berlin, Heidelberg, 1994.
- [5] Min Xu, Run-hua Shi, Zhen-yu Luo, and Zhen-wan Peng. Nearest private query based on quantum oblivious key distribution. *Quantum Information Processing*, 16(12):286, Oct 2017.
- [6] Álvaro J Almeida, Nelson J Muga, Nuno A Silva, João M Prata, Paulo S André, and Armando N Pinto. Continuous control of random polarization rotations for quantum communications. *Journal of Lightwave Technology*, 34(16):3914–3922, 2016.

5.3 M-QAM Transmission System

| | | |
|---------------------|---|--|
| Student Name | : | Ana Luisa Carvalho |
| Goal | : | M-QAM system implementation with BER measurement and comparison with theoretical values. |

5.3.1 Introduction

M-QAM, which stands for Quadrature Amplitude Modulation, is a modulation scheme that takes advantage of two carriers (usually sinusoidal waves) with a phase difference of $\frac{\pi}{2}$. The resultant output consists of a signal with both amplitude and phase variations. The two carriers, referred to as I (In-phase) and Q (Quadrature), can be represented as

$$I = A \cos(\phi) \quad (5.6)$$

$$Q = A \sin(\phi) \quad (5.7)$$

which means that any sinusoidal wave can be decomposed in its I and Q components:

$$A \cos(\omega t + \phi) = A (\cos(\omega t) \cos(\phi) - \sin(\omega t) \sin(\phi)) \quad (5.8)$$

$$= I \cos(\omega t) - Q \sin(\omega t), \quad (5.9)$$

where we have used the expression for the cosine of a sum and the definitions of I and Q.

For $M=4$ the symbol constellation is shown figure ??.

M can take several values: 2, 4, 16, 32, The first two correspond to BPSK and QPSK modulation, respectively.

5.3.2 Bit Error Rate for 4-QAM with Additive White Gaussian Noise (AWGN)

When demodulating a signal it is necessary to associate the received signal to the corresponding signal. The existence of noise in the channel means that we can only compute the probability that a given signal corresponds to a certain carrier and that's why we need to define the Bit Error Rate (BER). Using

$$P_i f(s|c_i) > P_j f(s|c_j), \quad i \neq j \quad (5.10)$$

where $f(s|c_i)$ stands for the probability of detecting the signal s given that c_i was emitted. This inequality can be rewritten in the following way

$$P(c_i|s) > P(c_j|s) \quad (5.11)$$

where $P(c_i|s)$ and $P(c_j|s)$ are called *a posteriori* probabilities and represent the probability that c_i or c_j were transmitted given that s was received. In terms of the systems this simply means that we should select the signal most likely to have been transmitted.

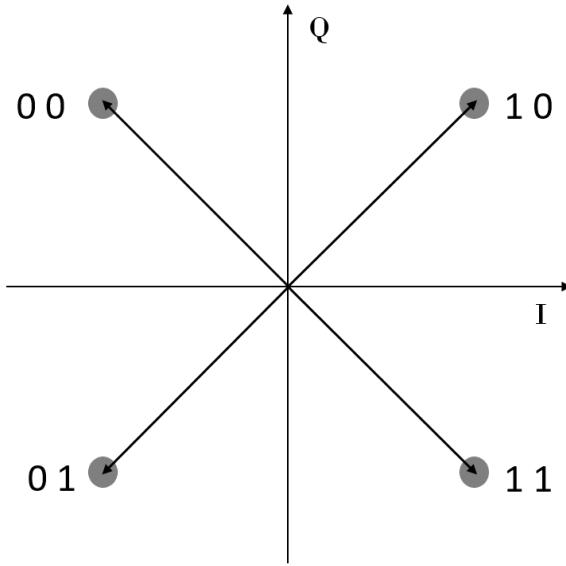


Figura 5.5: 4-QAM symbol constellation

In the case of additive white gaussian noise the f function is simply given by

$$f(s|c_i) = \frac{e^{-x^2/n_0}}{(\pi n_0)^{N/2}} \quad (5.12)$$

where x is the Euclidean distance in the I-Q plane between the signal received and carrier i and N is the number of noise samples.

When using 4-QAM modulation all points are at an equal distance from the origin (in the I-Q plane) so they all have the same energy given by

$$E = \frac{d^2}{2} \quad (5.13)$$

where d is the side of the square formed by the constellation points.

The probability that a given signal is identified correctly is given by

$$P_c = r^2 \quad (5.14)$$

where $n_0/2$ is the noise variance for AWGN and

$$r = \int_{-d/2}^{\infty} \frac{e^{-x^2/n_0}}{\sqrt{\pi n_0}} dx. \quad (5.15)$$

The error probability, P_e , given by $1 - P_c$ is given by

$$P_e = erfc \sqrt{\frac{E}{2n_0}}. \quad (5.16)$$

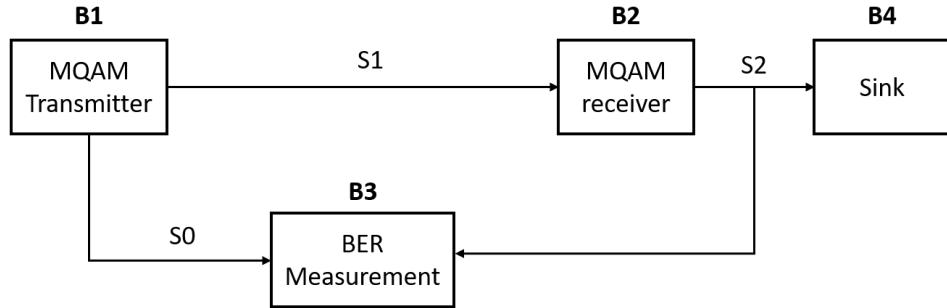


Figura 5.6: Schematic representation of the MQAM system.

5.3.3 Simulation setup

The M-QAM system transmission system is a complex block of code that simulates the modulation, transmission and demodulation of an optical signal using M-QAM modulation. It is composed of four blocks: a transmitter, a receiver, a sink and a block that performs a Bit Error Rate (BER) measurement.

Current state: The system currently being implemented is a QPSK system ($M=4$).

Future work: Extend this block to include other values of M .

5.3.4 Functional description

The schematic representation of the system is presented in figure 5.6.

A complete description of the M-QAM transmitter and M-QAM receiver blocks can be found in the *Library* chapter of this document as well as a detailed description of the independent blocks that compose these blocks.

The M-QAM transmitter is a complex block that generates one or two optical signals by encoding a binary string using M-QAM modulation. It also outputs a binary signal that is used to perform a BER measurement.

The M-QAM receiver is a homodyne receiver. It is a complex block that accepts one input optical signal and outputs a binary signal. It performs the M-QAM demodulation of the input signal by combining the optical signal with a local oscillator.

The demodulated optical signal is compared to the one produced by the transmitter in order to estimate the Bit Error Rate (BER).

The files corresponding to each of the system's blocks are summarized in table ???. Along with the library and corresponding source files these allow for the full operation of the M-QAM system described here.

Tabela 5.1: Main system files

| System blocks | cpp file | include file |
|-------------------|-----------------------|---------------------|
| Main | m_qam_system_sdf.cpp | — |
| M-QAM transmitter | m_qam_transmitter.cpp | m_qam_transmitter.h |
| M-QAM receiver | homodyne_receiver.cpp | homodyne_receiver.h |
| Sink | sink.cpp | sink.h |
| BER estimator | bit_error_rate.cpp | bit_error_rate.h |

5.3.5 Input Parameters

5.3.6 Output Parameters

As output this block

5.3.7 BER measurement

Tabela 5.2: Input parameters

| Parameter | Type | Description |
|--------------------------|--------------------|---|
| numberOfBitsGenerated | t_integer | Determines the number of bits to be generated by the binary source |
| samplesPerSymbol | t_integer | |
| prbsPatternLength | int | Determines the length of the pseudorandom sequence pattern (used only when the binary source is operated in <i>PseudoRandom</i> mode) |
| bitPeriod | t_real | Temporal interval occupied by one bit |
| rollOffFactor | t_real | |
| signalOutputPower_dBm | t_real | Determines the power of the output optical signal in dBm |
| numberOfBitsReceived | int | |
| iqAmplitudeValues | vector<t_iqValues> | Determines the constellation used to encode the signal in IQ space |
| symbolPeriod | double | Given by bitPeriod / samplesPerSymbol |
| localOscillatorPower_dBm | t_real | Power of the local oscillator |
| responsivity | t_real | Responsivity of the photodiodes (1 corresponds to having all optical power transformed into electrical current) |
| amplification | t_real | ?? |
| noiseAmplitude | t_real | ?? |
| samplesToSkip | t_integer | Number of samples to be skipped by the <i>sampler</i> block |
| confidence | t_real | Determines the confidence limits for the BER estimation |
| midReportSize | t_integer | |
| bufferLength | t_integer | Corresponds to the number of samples that can be processed in each run of the system |

5.4 Quantum Noise

| | | |
|----------------------|---|---|
| Student Name | : | Diamantino Silva |
| Starting Date | : | October 19, 2017 |
| Goal | : | Simulation of quantum noise in double homodyne detection. |
| Directory | : | sdf/quantum_noise |

Quantum noise is an intrinsic property of light, a manifestation of the vacuum field fluctuations [?]. Contrarily to the majority of noise sources, that are overcomed by better equipment, quantum noise has a lower bound, given by the Heisenberg uncertainty principle, which cannot be broken. This propertie can be useful in some areas, such in quantum cryptography, were many protocols depend on it to ensure their security. The objective of this work is to develop a numerical model for the quantum noise in a double homodyne detection and to validate the numerical model with experimental results.

5.4.1 Theoretical Description

We start by defining number states $|n\rangle$ (or Fock states), which correspond to states with perfectly fixed number of photons [?]. Associated to those states are two operators, the creation \hat{a}^\dagger and annihilation \hat{a} operators, which in a simple way, remove or add one photon from a given number state [?]. Their action is defined as

$$\hat{a}|n\rangle = \sqrt{n}|n-1\rangle \quad (5.17), \quad \hat{a}^\dagger|n\rangle = \sqrt{n+1}|n+1\rangle \quad (5.18), \quad \hat{n}|n\rangle = n|n\rangle \quad (5.19)$$

in which $\hat{n} = \hat{a}^\dagger\hat{a}$ is the number operator. Therefore, number states are eigenvectors of the number operator.

Coherent states have properties that closely resemble classical electromagnetic waves, and are generated by single-mode lasers well above the threshold. [?] We can defined them, using number states in the following manner

$$|\alpha\rangle = e^{-\frac{|\alpha|^2}{2}} \sum_{n=0}^{\infty} \frac{\alpha^n}{\sqrt{n!}} |n\rangle \quad (5.20)$$

in which the complex number α is the sole parameter that characterizes it. In fact, if we calculate the expected number of photons with $\langle\alpha|\hat{n}|\alpha\rangle$ we will obtain $|\alpha|^2$. The coherent state is an eigenstate of the annihilation operator, $\hat{a}|\alpha\rangle = \alpha|\alpha\rangle$.

Using the creation and annihilation operators, we can define two quadrature operators [?]

$$\hat{X} = \frac{1}{2} (\hat{a}^\dagger + \hat{a}) \quad (5.21), \quad \hat{Y} = \frac{i}{2} (\hat{a}^\dagger - \hat{a}) \quad (5.22)$$

The expected value of these two operators, using a coherent state $|\alpha\rangle$ are

$$\langle \hat{X} \rangle = \text{Re}(\alpha) \quad (5.23), \quad \langle \hat{Y} \rangle = \text{Im}(\alpha) \quad (5.24)$$

We see that the expected value of these operators give us the real and imaginary part of α . Now, we can obtain the uncertainty of these operators, using:

$$\text{Var}(\hat{X}) = \langle \hat{X}^2 \rangle - \langle \hat{X} \rangle^2 \quad (5.25)$$

For each of these quadrature operators the variance will be

$$\text{Var}(\hat{X}) = \text{Var}(\hat{Y}) = \frac{1}{4} \quad (5.26)$$

This result show us that for both quadratures, the variance of measurement is the same and independent of the value of α .

Homodyne detection

The measurent of a quadrature of an input signal (S) is made by using the balanced homodyne detection technique, which measures the phase difference between the input signal and a local oscillator (LO). The measurement of quadrature are made relative to a reference phase of the LO, such that if the measurement is made in-phase with this reference, the value will be proportional to the \hat{X} quadrature of the signal. If the phase of the LO is has an offset of $\pi/2$ relative to the reference, the output will be proportional to the \hat{Y} quadrature of the signal.

Experimentally, the balanced homodyne detection requires a local oscillator with the same frequency as the input signal, but with a much larger amplitude. These two signals are combined using a 50:50 beam splitter, from were two beams emerge, which are then converted to currents using photodides. Finally, the two currents are subtracted, resulting in an output current proportional to a quadrature of the input signal [?].

In the lab and in our simulations, a more complex system is used, the double balanced homodyne detection, which allows the simultaneous measurement of the \hat{X} and \hat{Y} components. The signal is divided in two beam with half the power of the original. One of the beams is used in a balanced homodyne detection with a local oscillator. The other beam is used in another balanced homodyne detection, but using a local oscillator with a phase difference $\pi/2$ relative to the first one.

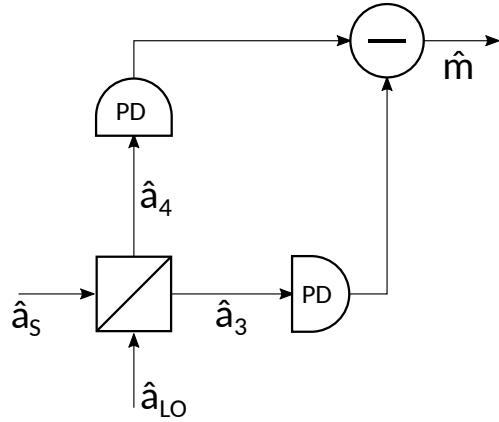


Figura 5.7: Balanced double homodyne detection.

Noise sources in homodyne detection

The detection of light using photodiodes is subjected to various sources of noise. One of these sources is the electrical field itself. The interaction of the signal with the vacuum field adds quantum noise to the detection. Another source of noise comes from the detection system, such as photodiodes and other electrical circuits, originating various kinds of noise, such as thermal noise, dark noise and amplifier noise [?]. In the following sections, we will focus on two noise sources, quantum noise and thermal noise.

Quantum Noise

In order to grasp this effect, the quantum mechanical description of balanced homodyne detection will be used, employing quantum operators to describe the effect of each component in the system (fig. ??). We start with the operators \hat{a}_S and \hat{a}_{LO} corresponding to the annihilation operator for the signal and local oscillator, which are the inputs in a beam divisor. The outputs will be \hat{a}_3 and \hat{a}_4 . Using a balanced beam splitter, we can write the output as

$$\hat{a}_3 = \frac{1}{\sqrt{2}} (\hat{a}_S + \hat{a}_{LO}) \quad (5.27), \quad \hat{a}_4 = \frac{1}{\sqrt{2}} (\hat{a}_S - \hat{a}_{LO}) \quad (5.28)$$

The final output of a homodyne measurement will be proportional to the difference between the photocurrents in arm 3 and 4. Then

$$I_{34} = I_3 - I_4 \sim \langle \hat{n}_3 - \hat{n}_4 \rangle \quad (5.29)$$

We can define an operator that describes the difference of number of photons in arm 3 and arm 4:

$$\hat{m} = \hat{a}_3^\dagger \hat{a}_3 - \hat{a}_4^\dagger \hat{a}_4 \quad (5.30)$$

If we assume that the local oscillator produces the coherent state $|\beta\rangle$, then the expected value of this measurement will be

$$\langle m \rangle = 2|\alpha||\beta| \cos(\theta_\alpha - \theta_\beta) \quad (5.31), \quad \text{Var}(m) = |\alpha|^2 + |\beta|^2 \quad (5.32)$$

The local oscillator normally has a greater power than the signal, then $|\alpha| \ll |\beta|$. If we use as unit, $2|\beta|$, then these two quantities can be simplified to

$$\langle m \rangle = |\alpha| \cos(\theta_\alpha - \theta_\beta) \quad (5.33), \quad \text{Var}(m) \approx \frac{1}{4} \quad (5.34)$$

[?]

Has we have seen previously, in order to measure two quadratures simultaneously, we can use double balanced homodyne detection. For each quadrature, the input signal now has half the power, so $|\alpha| \rightarrow |\alpha/\sqrt{2}|$. If we use a local oscillator that produces states $|\beta\rangle$, then we can divide it in two beams in state $|\beta/\sqrt{2}\rangle$ and $|i\beta/\sqrt{2}\rangle$ which will be used in each homodyne detection. In this setting, the expected values for each quadrature, X and Y , (in normalized values of $\sqrt{2}|\beta|$) are

$$\langle m_X \rangle = \left| \frac{\alpha}{\sqrt{2}} \right| \cos(\theta_\alpha - \theta_\beta) \quad (5.35), \quad \text{Var}(m_X) \approx \frac{1}{4} \quad (5.36)$$

$$\langle m_Y \rangle = \left| \frac{\alpha}{\sqrt{2}} \right| \sin(\theta_\alpha - \theta_\beta) \quad (5.37), \quad \text{Var}(m_Y) \approx \frac{1}{4} \quad (5.38)$$

Therefore the measurement of each quadrature will have half the amplitude, but the same variance.

Thermal noise

Thermal noise is generated by electrons in response to temperature. It's contribution to the resulting current can be described by the following equation [?]

$$\langle (\Delta i_T)^2 \rangle = 4K_B T_0 B / R_L \quad (5.39)$$

in which K_B it's Boltzmann's constant, T_0 is the absolute temperature, B is the bandwidth and R_L is the receiver load impedance. The B value is imposed by default or chosen when the measurements are made, but the R_L value is dependent in the internal setup of the various components of the detection system. Nevertheless, for simulation purposes, we can just introduce an experimental value.

5.4.2 Simulation

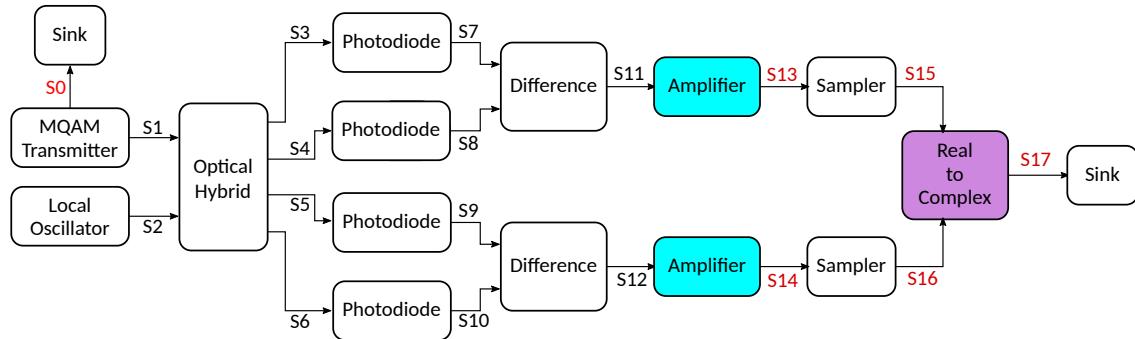


Figura 5.8: Overview of the simulated optical system.

List of signals used in the simulation:

| Signal name | Signal type | Status |
|-------------|---------------------------------------|--------|
| S0 | Binary | check |
| S1 | OpticalSignal | check |
| S2 | OpticalSignal | check |
| S3 | OpticalSignal | check |
| S4 | OpticalSignal | check |
| S5 | OpticalSignal | check |
| S6 | OpticalSignal | check |
| S7 | TimeContinuousAmplitudeContinuousReal | check |
| S8 | TimeContinuousAmplitudeContinuousReal | check |
| S9 | TimeContinuousAmplitudeContinuousReal | check |
| S10 | TimeContinuousAmplitudeContinuousReal | check |
| S11 | TimeContinuousAmplitudeContinuousReal | check |
| S12 | TimeContinuousAmplitudeContinuousReal | check |
| S13 | TimeContinuousAmplitudeContinuousReal | check |
| S14 | TimeContinuousAmplitudeContinuousReal | check |
| S15 | TimeDiscreteAmplitudeContinuousReal | check |
| S16 | TimeDiscreteAmplitudeContinuousReal | check |
| S17 | OpticalSignal | check |

This system takes into account the following input parameters:

| System Parameters | Default value | Description |
|-----------------------|--|--|
| localOscillatorPower1 | $2.0505 \times 10^{-8} \text{W}$ | Sets the optical power, in units of W, of the local oscillator inside the MQAM |
| localOscillatorPower2 | $2.0505 \times 10^{-8} \text{W}$ | Sets the optical power, in units of W, of the local oscillator used for Bob's measurements |
| localOscillatorPhase | 0 rad | Sets the initial phase of the local oscillator used in the detection |
| responsivity | 1 A/W | Sets the responsivity of the photodiodes used in the homodyne detectors |
| iqAmplitudeValues | $\{\{1, 1\}, \{-1, 1\}, \{-1, -1\}, \{1, -1\}\}$ | Sets the amplitude of the states used in the MQAM |

The simulation setup is represented in figure 5.8. The starting point is the MQAM, which generates random states from the constelation given by the variable `iqAmplitudeValues`. The output from the generator is received in the Optical Hybrid where it is mixed with a local oscillator, outputing two optical signal pairs. Each pair is converted to currents by two photodiodes, and the same currents are subtracted from each other, originating another current proportional to one of the quadratures of the input state. The other pair suffers the same process, but the resulting subtraction current will be proportional to another quadrature, dephased by $\pi/2$ relative to the other quadrature.

Required files

Bibliografia

- [1] Thorlabs. *Thorlabs Balance Amplified Photodetectors: PDB4xx Series Operation Manual*, 2014.
- [2] Ryo Namiki and Takuya Hirano. Security of quantum cryptography using balanced homodyne detection. *Physical Review A*, 67(2):022308, 2003.
- [3] Tie-Ming Liu, Lie-hui Jiang, Hong-qi He, Ji-zhong Li, and Xian Yu. *Researching on Cryptographic Algorithm Recognition Based on Static Characteristic-Code*, pages 140–147. Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- [4] Gilles Brassard and Louis Salvail. *Secret-Key Reconciliation by Public Discussion*, pages 410–423. Springer Berlin Heidelberg, Berlin, Heidelberg, 1994.
- [5] Min Xu, Run-hua Shi, Zhen-yu Luo, and Zhen-wan Peng. Nearest private query based on quantum oblivious key distribution. *Quantum Information Processing*, 16(12):286, Oct 2017.
- [6] Álvaro J Almeida, Nelson J Muga, Nuno A Silva, João M Prata, Paulo S André, and Armando N Pinto. Continuous control of random polarization rotations for quantum communications. *Journal of Lightwave Technology*, 34(16):3914–3922, 2016.

5.5 Continuos Variable Quantum Transmission System

Student Name: Daniel Pereira

Starting Date: May 1, 2017

Goal: Simulation and experimental validation of a continuous variable transmission system.

Description of the Laboratorial and Simulation Setup:

Theoretical Description of the System:

Laboratorial and Simulation Results:

Discussion:

In this section a continuous variable quantum transmission system is analyzed. The results here presented follow closely the [2]. In [2], the security of a continuous variable quantum key distribution (CV-QKD) system is studied theoretically, here we complete that theoretical study with simulations results.

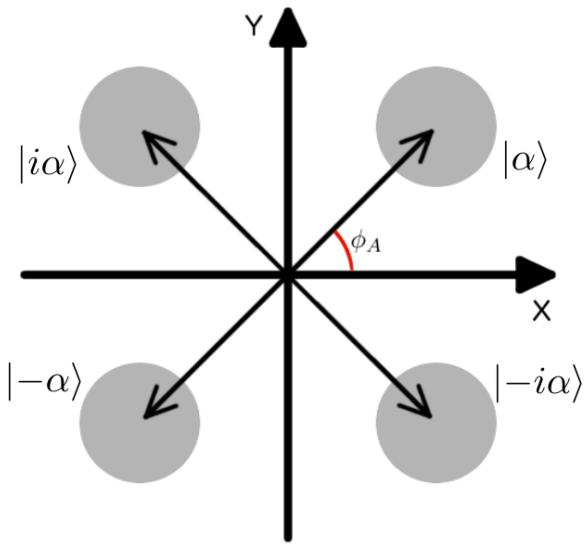


Figura 5.9: State constellation

The state constellation used in the system is presented in Figure 5.9. The emitter (usually named Alice) is going to use two basis, the 45° base and the -45° base. In the 45° base, Alice sends one of two values, 1 and -1 , which correspond to the states $|\alpha\rangle$ and $|- \alpha\rangle$. In the -45° base, Alice can also send one of two values, 1 and -1 , which correspond to the states $|i\alpha\rangle$ and $|-i\alpha\rangle$. At the end Alice is going to send one of the four states $|\alpha\rangle$, $|- \alpha\rangle$, $| - i\alpha\rangle$, and $|i\alpha\rangle$, with equal probability.

Because we don't know à prior which state is going be transmitted, neither which basis is going to be used, and to incorporate our "ignorance" in the system description, we can

work with the density operator. The density operator is a proper tool to describe "statistical mixtures". A "statistical mixtures" is one state, from a possible set, but we don't know which state it is. There is no state superposition.

Since all states have the same probability of occurring, the state density operator is given by:

$$\hat{\rho} = \frac{1}{4} (|\alpha\rangle\langle\alpha| + |-\alpha\rangle\langle-\alpha| + |i\alpha\rangle\langle i\alpha| + |-i\alpha\rangle\langle -i\alpha|). \quad (5.40)$$

The probability to detect at the receiver the state $|\alpha\rangle$ is given by

$$P(\alpha) = \langle\alpha|\hat{\rho}|\alpha\rangle = \frac{1}{4}. \quad (5.41)$$

Note that the density operator is equivalent to the wave function in terms of the system description.

From the receiver perspective, i.e. from the Bob perspective, and after knowing the base used by Alice. The density operator can be reduce to,

$$\hat{\rho}_1 = \frac{1}{2} (|\alpha\rangle\langle\alpha| + |-\alpha\rangle\langle-\alpha|), \quad (5.42)$$

$$\hat{\rho}_2 = \frac{1}{2} (|i\alpha\rangle\langle i\alpha| + |-i\alpha\rangle\langle -i\alpha|). \quad (5.43)$$

where 1 corresponds to the 45° base and -1 corresponds to -45° .

Single Base Homodyne Detection

The probability of obtaining a quadrature $\hat{X}_\phi = \hat{X}_1 \cos \phi + \hat{X}_2 \sin \phi$ when measuring the coherent state $|\alpha\rangle$ is given by the following gaussian distribution:

$$|\langle X_\phi | \alpha \rangle|^2 = \sqrt{\frac{2}{\pi}} e^{-2(X_\phi - \alpha \cos \phi)^2}, \quad (5.44)$$

We can define the "correct" and "wrong" basis measurement probability density, respectively, as:

$$\langle X_i | \hat{\rho}_j | X_i \rangle = \begin{cases} \frac{1}{\sqrt{2\pi}} (e^{-2(X_i - \alpha)^2} + e^{-2(X_i + \alpha)^2}), & i = j \\ \sqrt{\frac{2}{\pi}} e^{-2X_i^2}, & i \neq j \end{cases}. \quad (5.45)$$

The post selection efficiency (PSE) can be defined as the probability of a measurement in the correct basis yields a result that satisfies the limit value X_0 :

$$\begin{aligned} P(X_0, \alpha) &= \int_{-\infty}^{-X_0} \langle X_1 | \hat{\rho}_1 | X_1 \rangle dX_1 + \int_{X_0}^{\infty} \langle X_1 | \hat{\rho}_1 | X_1 \rangle dX_1 \\ &= \frac{1}{2} [\text{erfc}(\sqrt{2}(X_0 + \alpha)) + \text{erfc}(\sqrt{2}(X_0 - \alpha))]. \end{aligned} \quad (5.46)$$

The bit error rate (BER) is the normalized probability of, after choosing the correct basis, obtaining the wrong bit value:

$$Q(X_0, \alpha) = \frac{1}{P(X_0, \alpha)} \int_{-\infty}^{-X_0} |\langle X_i | \alpha \rangle| dX_i = \frac{\operatorname{erfc}(\sqrt{2}(X_0 + \alpha))}{2P(X_0, n)} \quad (5.47)$$

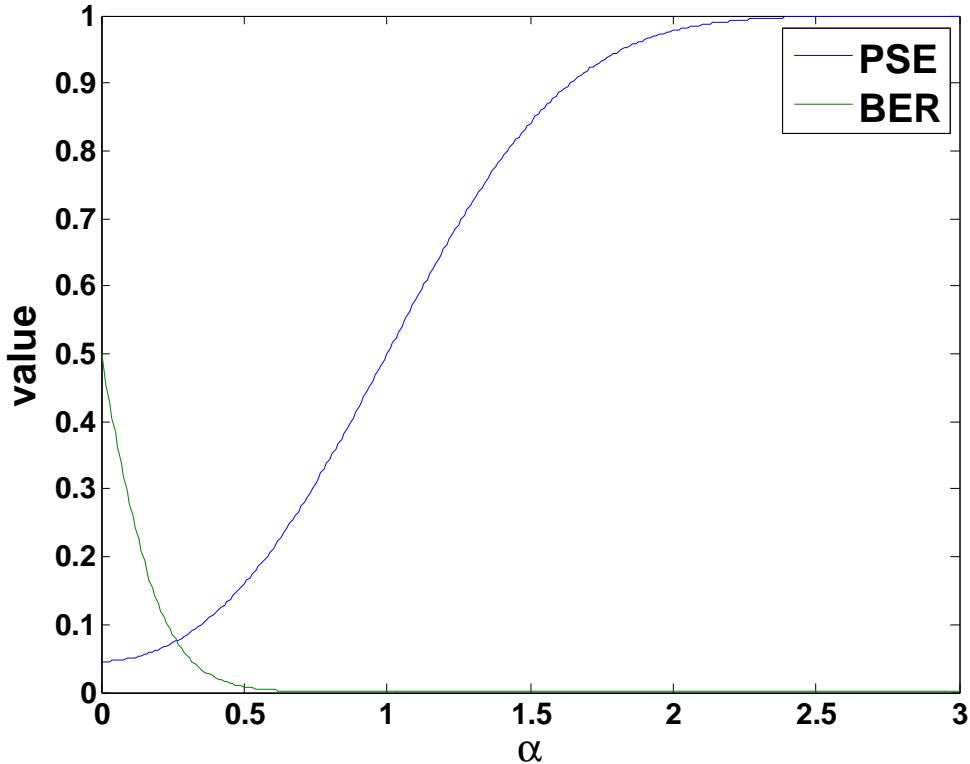


Figura 5.10: BER and PSE in function of α for the single homodyne setup. $X_0 = 1$ was used

Double Homodyne setup

In our proposed double homodyne protocol both quadratures are measured simultaneously, as such the concept of correct and wrong basis measurements has no value. Our protocol also makes use of a locally generated Local Oscillator (LO), obtained from a different laser than the one used to generate the signal, thus we have to take into account the phase drift between both lasers. High intensity reference pulses are sent periodically to allow for an estimation of the phase drift. The double homodyne setup requires the signal to be divided into the two utilized detectors, so each measurement is made on a coherent state with half the amplitude of the incoming signal $\alpha \rightarrow \frac{\alpha}{\sqrt{2}}$.

For each incoming pulse we measure quadratures X_ϕ and Y_ϕ . ϕ has contributions from both the encoded angle, θ , and the phase difference between lasers, ϵ , we assume $\phi = \theta + \epsilon$.

On the reference pulses no phase is encoded, that is $\theta = 0$, thus ϵ can be estimated. Assuming ϵ doesn't change between a reference pulse and the following signal pulse, the measured quadratures can be cast into the originally sent quadratures X_θ and Y_θ via:

$$\begin{aligned} X_\theta &= X_\phi \cos \epsilon - Y_\phi \sin \epsilon \\ Y_\theta &= X_\phi \sin \epsilon + Y_\phi \cos \epsilon \end{aligned} \quad (5.48)$$

Assuming an announcement of the coding basis, the density operators (5.42) and (5.43) still apply. We can now define the probability density of obtaining results X_θ and Y_θ , assuming a state in the X_1 base was sent, as:

$$\langle X_\theta | \hat{\rho}_1 | X_\theta \rangle = \frac{\sqrt{\frac{2}{\pi}}}{4} \left(e^{-2(x_\theta - \frac{\alpha}{\sqrt{2}} \cos \theta)^2} + e^{-2(x_\theta + \frac{\alpha}{\sqrt{2}} \cos \theta)^2} \right), \quad (5.49)$$

$$\langle Y_\theta | \hat{\rho}_1 | Y_\theta \rangle = \frac{\sqrt{\frac{2}{\pi}}}{4} \left(e^{-2(y_\theta - \frac{\alpha}{\sqrt{2}} \sin \theta)^2} + e^{-2(y_\theta + \frac{\alpha}{\sqrt{2}} \sin \theta)^2} \right). \quad (5.50)$$

Now each state needs to satisfy two limit values, X_0 and Y_0 , to be accepted. Thus, the PSE is now defined as:

$$\begin{aligned} P_{DH}(X_0, Y_0, \alpha) &= \int_{-\infty}^{-X_0} \langle X_\theta | \hat{\rho}_1 | X_\theta \rangle dx_\theta \int_{-\infty}^{-Y_0} \langle Y_\theta | \hat{\rho}_1 | Y_\theta \rangle dy_\theta + \\ &\quad \int_{X_0}^{\infty} \langle X_\theta | \hat{\rho}_1 | X_\theta \rangle dx_\theta \int_{Y_0}^{\infty} \langle Y_\theta | \hat{\rho}_1 | Y_\theta \rangle dy_\theta \\ &= \frac{1}{4} \left\{ \operatorname{erfc} \left[\sqrt{2} \left(X_0 - \frac{\alpha}{\sqrt{2}} \cos \theta \right) \right] + \operatorname{erfc} \left[\sqrt{2} \left(X_0 + \frac{\alpha}{\sqrt{2}} \cos \theta \right) \right] \right\} \\ &\quad \left\{ \operatorname{erfc} \left[\sqrt{2} \left(Y_0 - \frac{\alpha}{\sqrt{2}} \sin \theta \right) \right] + \operatorname{erfc} \left[\sqrt{2} \left(Y_0 + \frac{\alpha}{\sqrt{2}} \sin \theta \right) \right] \right\}, \end{aligned} \quad (5.51)$$


The DH subscript denotes Double Homodyne. In a somewhat similar manner, the BER is now defined as:

$$\begin{aligned} Q_{DH}(X_0, Y_0, \alpha) &= \frac{1}{P_{DH}} \left(\int_{-\infty}^{-X_0} \left| \langle X_\theta | \frac{\alpha}{\sqrt{2}} \rangle \right|^2 dx_\theta \int_{-\infty}^{-Y_0} \left| \langle Y_\theta | \frac{\alpha}{\sqrt{2}} \rangle \right|^2 dy_\theta + \right. \\ &\quad \left. \int_{X_0}^{\infty} \left| \langle X_\theta | -\frac{\alpha}{\sqrt{2}} \rangle \right|^2 dx_\theta \int_{Y_0}^{\infty} \left| \langle Y_\theta | -\frac{\alpha}{\sqrt{2}} \rangle \right|^2 dy_\theta \right) \\ &= \frac{1}{2P_{DH}} \operatorname{erfc} \left[\sqrt{2} \left(X_0 + \frac{\alpha}{\sqrt{2}} \cos \theta \right) \right] \operatorname{erfc} \left[\sqrt{2} \left(Y_0 + \frac{\alpha}{\sqrt{2}} \sin \theta \right) \right], \end{aligned} \quad (5.52)$$

note that, in this definition for BER, only values $\theta \in [0, \frac{\pi}{2}]$ make sense (the sent state was α).

Functional Description

Simplified diagrams of the systems being simulated are presented in Figures 5.12a. and 5.12b. Two optical signals are generated, one with a constant power level of 10 dBm and the other with power in multiples of the power corresponding to a single photon per

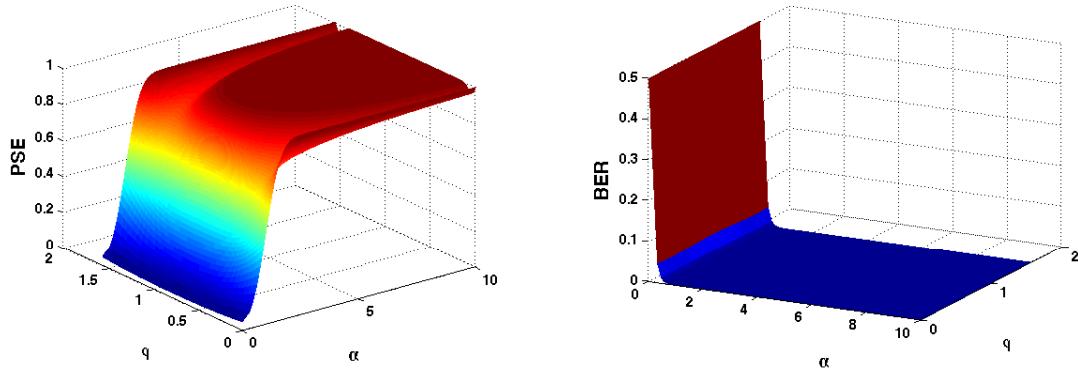

(a) PSE in function of α and θ for the double homodyne setup. $X_0 = 1$ was used
 (b) BER in function of α and θ for the double homodyne setup. $X_0 = 1$ was used

Figura 5.11: Theoretical results for double homodyne setup.

sampling time ($6.4078e \times 10^{-13}$ W for a sampling time of 200 ns). The two signals are mixed, with a Balanced Beam Splitter in the single homodyne case and with a 90° Optical Hybrid in the double homodyne one, and are subsequently evaluated with recourse to Homodyne Receivers.

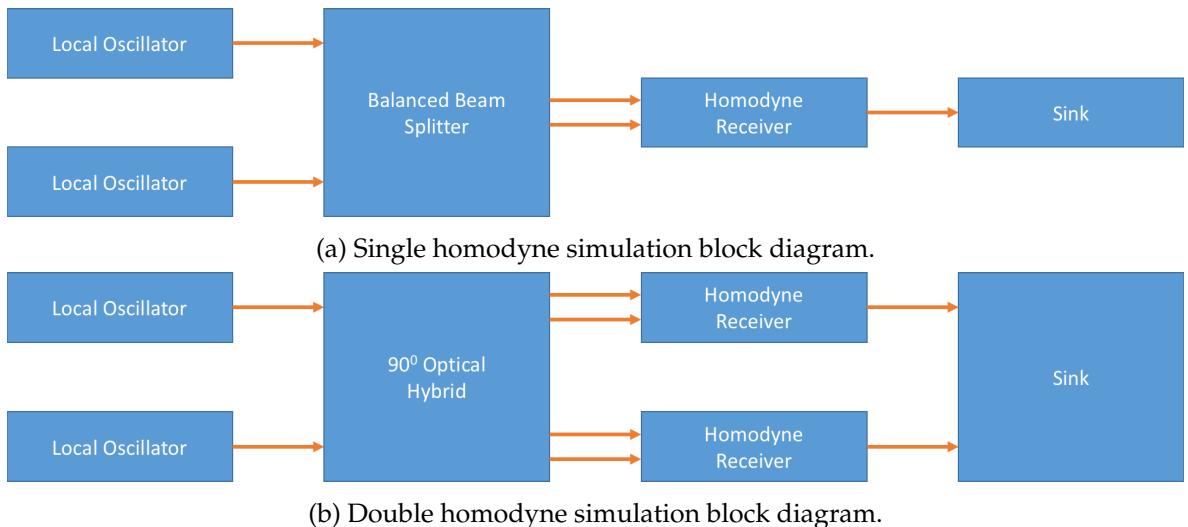


Figura 5.12: Block diagrams of both simulation results presented in this report.

| System Blocks | netxpto Blocks |
|---------------------------|----------------------|
| Local Oscillator | LocalOscillator |
| Homodyne Receiver | I_HomodyneReceiver |
| Balanced Beam Splitter | BalancedBeamSplitter |
| 90° Optical Hybrid | OpticalHybrid |

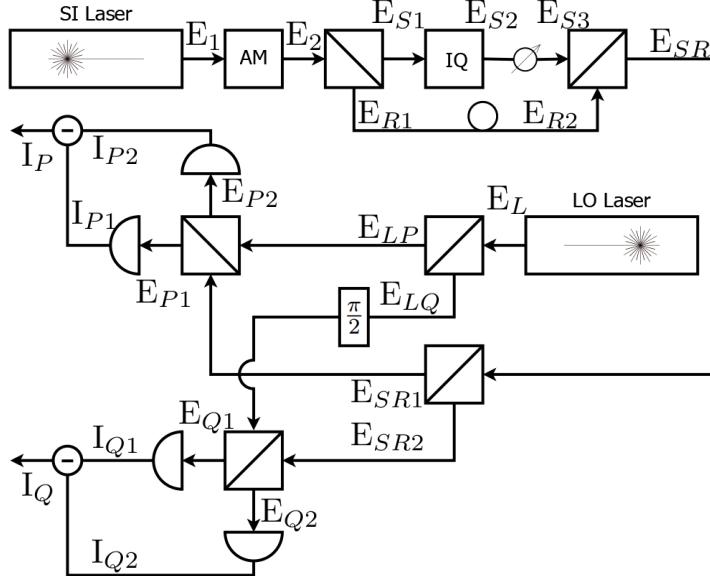


Figura 5.13: Simplified diagram of experimental setup.

Theoretical study of the setup

A detailed diagram of the system studied is presented in Figure 5.13, with the respective mathematical treatment presented in equations (5.53) through (5.72).

$$E_1 = |E_S| e^{i(\omega_S t + \xi_S(t))} \quad (5.53)$$

$$p(t) = \begin{cases} 1, & \frac{T}{8} \leq t < \frac{T}{8} \\ 0, & \text{otherwise} \end{cases} \quad (5.54)$$

$$E_2 = p(t) |E_S| e^{i(\omega_S t + \xi_S(t))} \quad (5.55)$$

$$E_{S1} = \frac{p(t)}{\sqrt{2}} |E_S| e^{i(\omega_S t + \xi_S(t))} \quad (5.56)$$

$$E_{S2} = \frac{p(t)}{\sqrt{2}} |E_S| e^{i(\omega_S t + \phi_{IQ}(t) + \xi_S(t) + \xi_{IQ}(t))} \quad (5.57)$$

$$E_{S3} = \frac{p(t)}{\sqrt{2} \text{Att}} |E_S| e^{i(\omega_S t + \phi_{IQ}(t) + \xi_S(t) + \xi_{IQ}(t))} \quad (5.58)$$

$$E_{R1} = \frac{p(t)}{\sqrt{2}} |E_S| e^{i(\omega_S t + \xi_S(t))} \quad (5.59)$$

$$E_{R2} = \frac{p(t - \frac{T}{2})}{\sqrt{2}} |E_S| e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \quad (5.60)$$

$$E_{SR} = \frac{|E_S|}{\sqrt{2}} \left[\frac{p(t)}{\text{Att}} e^{i(\omega_S t + \phi_{IQ}(t) + \xi_S(t) + \xi_{IQ}(t))} + p \left(t - \frac{T}{2} \right) e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \right] \quad (5.61)$$

$$E_{SR1} = \frac{|E_S|}{2} \left[\frac{p(t)}{\text{Att}} e^{i(\omega_S t + \phi_{IQ}(t) + \xi_S(t) + \xi_{IQ}(t))} + p \left(t - \frac{T}{2} \right) e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \right] \quad (5.62)$$

$$E_{SR2} = \frac{|E_S|}{2} \left[\frac{p(t)}{\text{Att}} e^{i(\omega_S t + \phi_{IQ}(t) + \xi_S(t) + \xi_{IQ}(t))} + p \left(t - \frac{T}{2} \right) e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \right] \quad (5.63)$$

$$E_L(t) = |E_L| e^{i(\omega_L t + \xi_L(t))} \quad (5.64)$$

$$E_{LP}(t) = \frac{1}{\sqrt{2}} |E_L| e^{i(\omega_L t + \xi_L(t))} \quad (5.65)$$

$$E_{LQ}(t) = \frac{1}{\sqrt{2}} |E_L| e^{i(\omega_L t + \xi_L(t) + \frac{\pi}{2})} \quad (5.66)$$

$$E_{P1}(t) = \frac{1}{\sqrt{2}} \left\{ \frac{|E_L|}{\sqrt{2}} e^{i(\omega_L t + \xi_L(t))} + \frac{|E_S|}{2} \left[\frac{p(t)}{\text{Att}} e^{i(\omega_S t + \phi_{IQ} t + \xi_S(t) + \xi_{IQ}(t))} \right. \right. \\ \left. \left. + p \left(t - \frac{T}{2} \right) e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \right] \right\} \quad (5.67)$$

$$E_{P2}(t) = \frac{1}{\sqrt{2}} \left\{ \frac{|E_L|}{\sqrt{2}} e^{i(\omega_L t + \xi_L(t))} - \frac{|E_S|}{2} \left[\frac{p(t)}{\text{Att}} e^{i(\omega_S t + \phi_{IQ} t + \xi_S(t) + \xi_{IQ}(t))} \right. \right. \\ \left. \left. + p \left(t - \frac{T}{2} \right) e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \right] \right\} \quad (5.68)$$

$$E_{Q1}(t) = \frac{1}{\sqrt{2}} \left\{ \frac{|E_L|}{\sqrt{2}} e^{i(\omega_L t + \xi_L(t) + \frac{\pi}{2})} + \frac{|E_S|}{2} \left[\frac{p(t)}{\text{Att}} e^{i(\omega_S t + \phi_{IQ} t + \xi_S(t) + \xi_{IQ}(t))} \right. \right. \\ \left. \left. + p \left(t - \frac{T}{2} \right) e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \right] \right\} \quad (5.69)$$

$$E_{Q2}(t) = \frac{1}{\sqrt{2}} \left\{ \frac{|E_L|}{\sqrt{2}} e^{i(\omega_L t + \xi_L(t) + \frac{\pi}{2})} - \frac{|E_S|}{2} \left[\frac{p(t)}{\text{Att}} e^{i(\omega_S t + \phi_{IQ} t + \xi_S(t) + \xi_{IQ}(t))} \right. \right. \\ \left. \left. + p \left(t - \frac{T}{2} \right) e^{i(\omega_S(t - \frac{T}{2}) + \xi_S(t - \frac{T}{2}))} \right] \right\} \quad (5.70)$$

$$I_P(t) = \frac{|E_S| |E_L|}{\sqrt{2}} \left\{ \frac{p(t)}{\text{Att}} \cos((\omega_S - \omega_L)t + \phi_{IQ}(t) + \xi_S(t) + \xi_{IQ}(t) - \xi_L(t)) \right. \\ \left. + p \left(t - \frac{T}{2} \right) \cos \left((\omega_S - \omega_L)t + \omega_S \frac{T}{2} + \xi_S \left(t - \frac{T}{2} \right) - \xi_L(t) \right) \right\} \quad (5.71)$$

$$I_Q(t) = \frac{|E_S| |E_L|}{\sqrt{2}} \left\{ \frac{p(t)}{\text{Att}} \sin((\omega_S - \omega_L)t + \phi_{IQ}(t) + \xi_S(t) + \xi_{IQ}(t) - \xi_L(t)) \right. \\ \left. + p \left(t - \frac{T}{2} \right) \sin \left((\omega_S - \omega_L)t + \omega_S \frac{T}{2} + \xi_S \left(t - \frac{T}{2} \right) - \xi_L(t) \right) \right\} \quad (5.72)$$

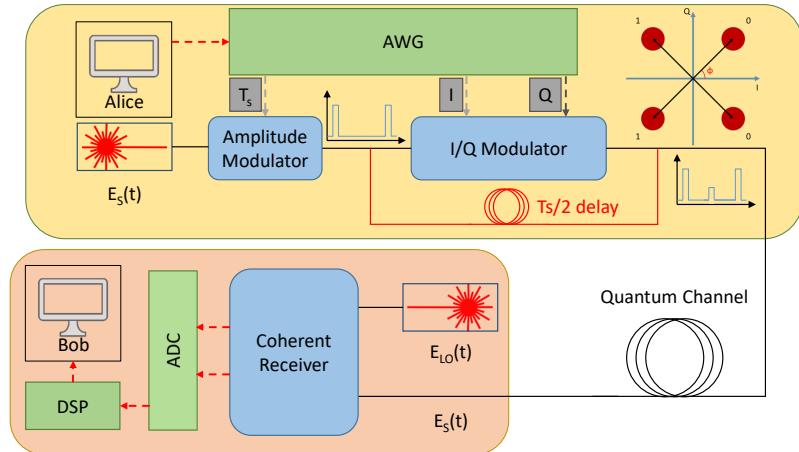


Figura 5.14: Diagram of full experimental setup.

Experimental description

The main experimental setup utilized for the study presented in this document is presented in Figure 5.14. The setup contained two Yenista OSICS Band C/AG TLS lasers, tuned to a 1550 nm wavelength. A JDSU dual drive Mach-Zehnder Modulator with a Picosecond 5865 RF driver, employed at the output of one of the lasers, set the repetition rate at 1 GHz with a pulse time of 125 ps. The driving signal was generated by an Agilent Technologies BER Tester. A 50/50 beam-splitter was employed at the output of the Mach-Zehnder Modulator, one arm output is sent through an IQ Modulator while the other is sent through a fibre loop with length chosen such that the two arms have a relative delay of ~ 500 ps. The employed IQ Modulator was a u2t photonics 32 GHz IQ Modulator with a SHF 807 RF driver, the driving signal being generated by a Tektronix AWG70002A Arbitrary Waveform Generator (AWG). A Variable Optical Attenuator (VOA) was set at the output of the IQ modulator to allow a fine tuning of the optical power to the desired level. The two arms output created by the first beam-splitter are combined by a 50/50 beam combiner. A fibre channel of ~ 10 km was set between Alice's and Bob's setup. A Picometrix CR-100D 100G Integrated Balanced Receiver for Coherent Applications was employed to perform double homodyne measurements, recovering both the in-phase and in-quadrature components of the incoming light field. The response of the receiver was recorded by a Tektronix DPO77002SX-R3 oscilloscope, with an acquisition frequency of 100 GHz for a period of 400 μ s.

Experimental results

Required files

Header Files

| File | Description |
|--------------------------|--|
| netxpto.h | Generic purpose simulator definitions. |
| local_oscillator.h | Generates continuous coherent signal. |
| balanced_beam_splitter.h | Mixes the two input signals into two outputs. |
| optical_hybrid.h | Mixes the two input signals into four outputs. |
| homodyne_reciever.h | Performs coherent detection on the input signal. |
| sink.h | Closes any unused signals. |

Source Files

| File | Description |
|----------------------------|--|
| netxpto.cpp | Generic purpose simulator definitions. |
| local_oscillator.cpp | Generates continuous coherent signal. |
| balanced_beam_splitter.cpp | Mixes the two input signals into two outputs. |
| optical_hybrid.cpp | Mixes the two input signals into four outputs. |
| homodyne_reciever.cpp | Performs coherent detection on the input signal. |
| sink.cpp | Closes any unused signals. |

System Input Parameters

This system takes into account the following input parameters:

| System Parameters | Description |
|--------------------------|---|
| numberOfBitsGenerated | Gives the number of bits to be simulated |
| bitPeriod | Sets the time between adjacent bits |
| samplesPerSymbol | Establishes the number of samples each bit in the string is given |
| localOscillatorPower_dBm | Sets the optical power, in units of dBm, at the reference output |
| localOscillatorPower2 | Sets the optical power, in units of W, of the signal |
| localOscillatorPhase1 | Sets the initial phase of the local oscillator used for reference |
| localOscillatorPhase2 | Sets the initial phase of the local oscillator used for signal |
| transferMatrix | Sets the transfer matrix of the beam splitter used in the homodyne detector |
| responsivity | Sets the responsivity of the photodiodes used in the homodyne detector |
| amplification | Sets the amplification of the trans-impedance amplifier used in the homodyne detector |
| electricalNoiseAmplitude | Sets the amplitude of the gaussian thermal noise added in the homodyne detector |
| shotNoise | Chooses if quantum shot noise is used in the simulation |

Inputs

This system takes no inputs.

Outputs

The single homodyne system outputs the following objects:

Parameter: Signals:

Description: Local Oscillator Optical Reference; (S_1)

Description: Local Oscillator Optical Signal; (S_2)

Description: Beam Splitter Outputs; (S_3, S_4)

Description: Homodyne Detector Electrical Output; (S_5)

The double homodyne system outputs the following objects:

Parameter: Signals:

Description: Local Oscillator Optical Reference; (S_1)

Description: Local Oscillator Optical Signal; (S_2)

Description: 90° Optical Hybrid Outputs; (S_3, S_4, S_5, S_6)

Description: Homodyne Detector Electrical Output; (S_7)

Simulation Results

Single homodyne results

The numerical results presented in Figure 5.15 were obtained with the simulation described by the block diagram in Figure 5.12a. Theoretical results are a direct trace of (5.47). One can see that the numerical results adhere quite well to the expected curve.

Double homodyne results

The numerical results presented in Figure 5.16 were obtained with the simulation described by the block diagram in Figure 5.12b. Theoretical results are a direct trace of (5.52) with $\theta = \frac{\pi}{4}$. One can see that the numerical results adhere quite well to the expected curve.

Known Problems

1. Homodyne Super-Block not functioning

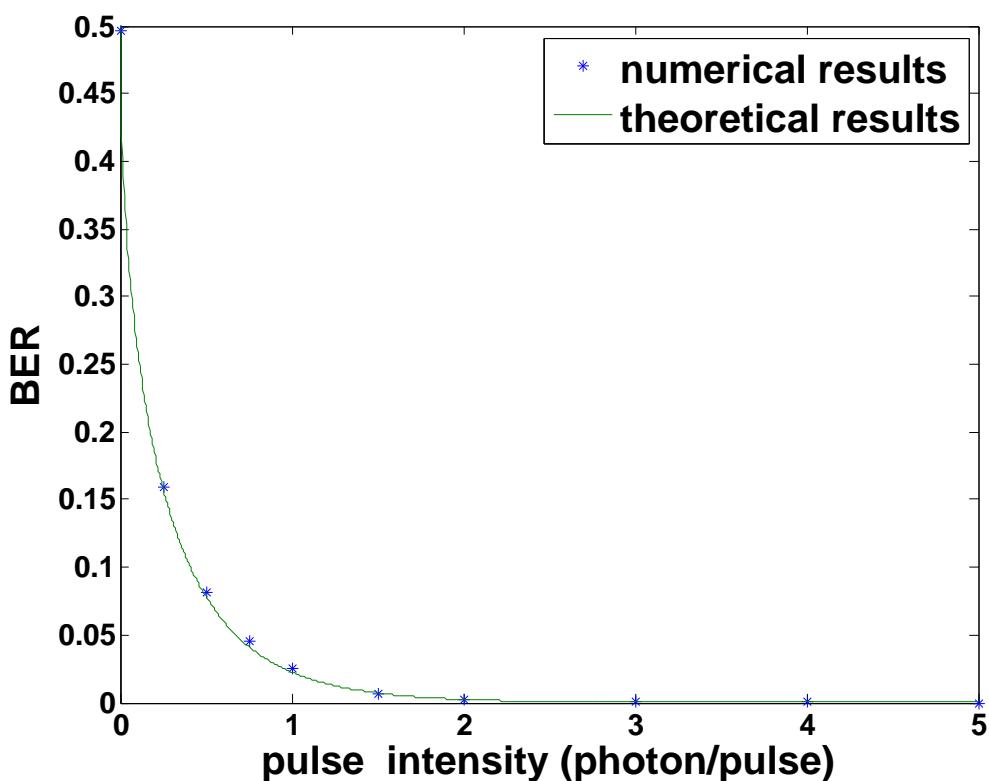


Figura 5.15: BER in function of α for the single homodyne setup. $X_0 = 0$ was used

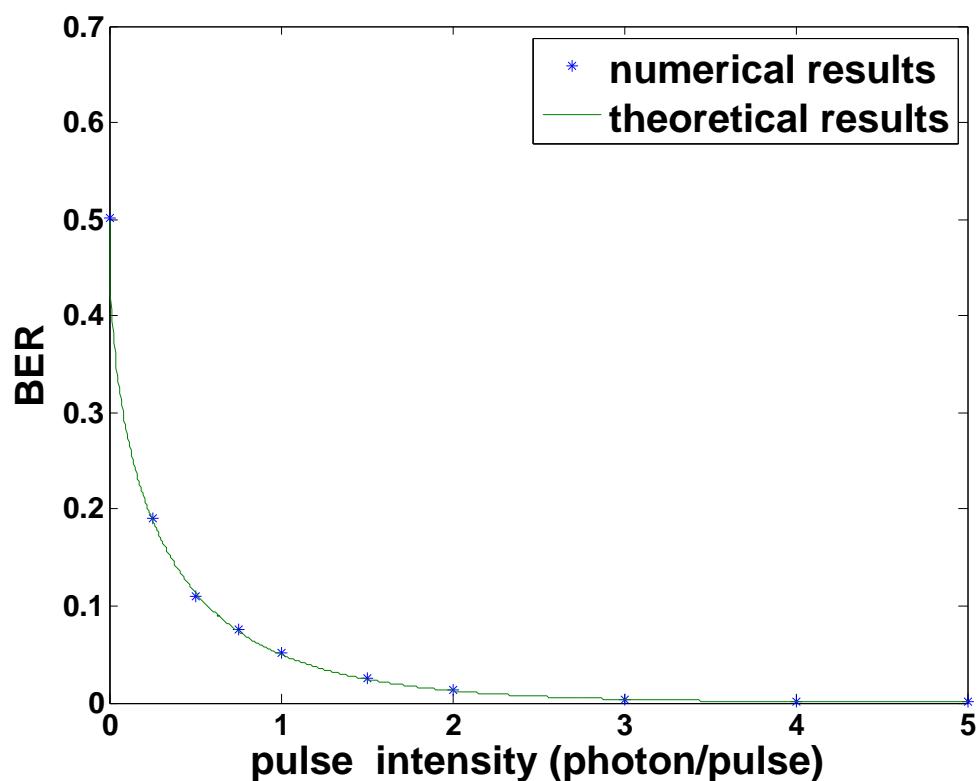


Figura 5.16: BER in function of α for the double homodyne setup. $X_0 = 0$ was used

Bibliografia

- [1] Thorlabs. *Thorlabs Balance Amplified Photodetectors: PDB4xx Series Operation Manual*, 2014.
- [2] Ryo Namiki and Takuya Hirano. Security of quantum cryptography using balanced homodyne detection. *Physical Review A*, 67(2):022308, 2003.
- [3] Tie-Ming Liu, Lie-hui Jiang, Hong-qi He, Ji-zhong Li, and Xian Yu. *Researching on Cryptographic Algorithm Recognition Based on Static Characteristic-Code*, pages 140–147. Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- [4] Gilles Brassard and Louis Salvail. *Secret-Key Reconciliation by Public Discussion*, pages 410–423. Springer Berlin Heidelberg, Berlin, Heidelberg, 1994.
- [5] Min Xu, Run-hua Shi, Zhen-yu Luo, and Zhen-wan Peng. Nearest private query based on quantum oblivious key distribution. *Quantum Information Processing*, 16(12):286, Oct 2017.
- [6] Álvaro J Almeida, Nelson J Muga, Nuno A Silva, João M Prata, Paulo S André, and Armando N Pinto. Continuous control of random polarization rotations for quantum communications. *Journal of Lightwave Technology*, 34(16):3914–3922, 2016.

5.6 Kramers-Kronig Transceiver with Stokes PolDemux

| | | |
|----------------------|---|--|
| Student Name | : | Romil Patel |
| Starting Date | : | August 16, 2017 |
| Goal | : | Develop a simplified structure (low cost) for a coherent transceiver, that can be used in coherent PON, inter-data center connections, or metropolitan networks (optical path lengths < 100 km) We are going to explore a Kramers-Kronig transceiver with Stokes based PolDemux. |
| Directory | : | |

Coherent optical transmission schemes are spectrally efficient since they allow the encoding of information in both quadrature of sinusoid signal. However, the cost of coherent receiver becomes a major obstacle in the case of short-reach links applications like PON, inter-data-center communications and metropolitan network. In order to make the transceiver applicable in short-reach links, an architecture has been proposed which combines the advantages of coherent transmission and cost effectiveness of direct detection. The working principle of the proposed transceiver is based on the Kramers-Kronig (KK) relationship. The KK transceiver scheme allows digital compensation of propagation impairment because both amplitude and phase of the electrical field can be retrieved at the receiver.

5.6.1 Kramers-Kronig transceiver

The Kramers-Kronig relations are bidirectional mathematical relations, connecting the real and imaginary parts of any complex function that is analytic in the upper half-plane. For instance, a signal $x(t) = x_r(t) + ix_i(t)$ satisfies the Kramers-Kronig relationship if,

$$x_r(t) = -\frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{x_i(t')}{t - t'} dt'$$

$$x_i(t) = \frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{x_r(t')}{t - t'} dt'$$

This relationship imposes that the real and the imaginary parts of the signal are related to each other though Hilbert transform. Therefore, if we have the real part of the signal then the imaginary part can be calculated by its Hilbert transform.

For a signal that satisfies the Kramers-Kronig relationship, the real and imaginary part can be obtained only from the module. The following questions would give a comprehensive overview of Kramers-Kroning relation and the detailed mathematical calculation which depicts how phase can be extracted from the amplitude information.

1. What is Hilbert transform?

If we consider a filter $H(\omega)$, described in Figure 5.17, that has a unity magnitude response for all frequencies and the phase response is $-\pi/2$ for all positive frequencies and $\pi/2$ for negative frequencies. The transfer function of this filter is given by

$$H(\omega) = -isgn(\omega) \quad (5.73)$$

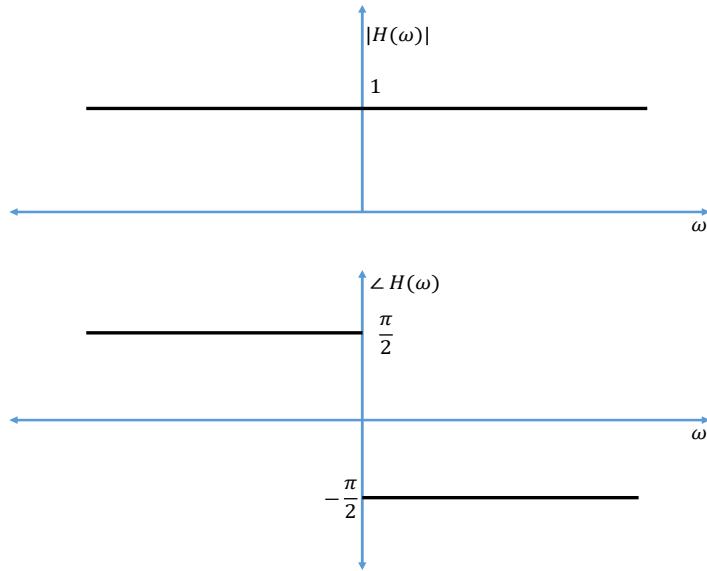


Figura 5.17: Magnitude and phase of Hilbert transform filter

The impulse response of this filter can be given as,

$$\begin{aligned} h(t) &= \mathcal{F}^{-1}[H(i\omega)] \\ &= -i\mathcal{F}^{-1}[sgn(\omega)] \\ &= -i\left(\frac{i}{\pi t}\right) \\ &= \frac{1}{\pi t} \end{aligned} \quad (5.74)$$

When this filter driven by an arbitrary signal $s(t)$, the filter produces the output as,

$$\begin{aligned} \hat{s}(t) &= s(t) * h(t) \\ &= \int_{-\infty}^{\infty} \frac{s(u)}{\pi(t-u)} du \end{aligned} \quad (5.75)$$

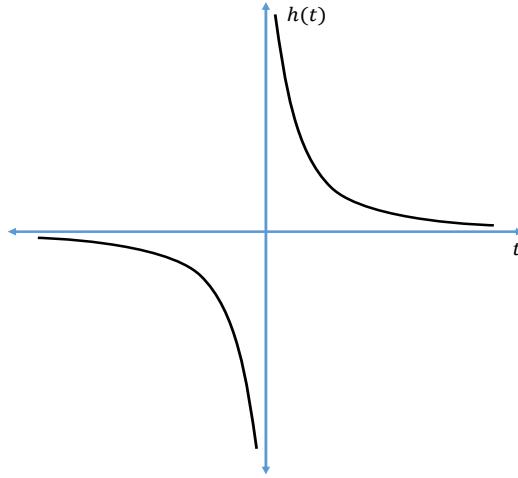


Figura 5.18: Impulse response $h(t)$ of Hilbert transform filter

The function $\hat{s}(t)$ is called the Hilbert transform if $s(t)$. Note that

$$\mathcal{F}[\hat{s}(t)] = H(\omega)S(\omega) = -isgn(\omega)S(\omega) \quad (5.76)$$

In conclusion, if we convolve any time domain signal with $\frac{1}{\pi t}$ then it will give us Hilbert transformed signal in time domain. Similarly, from the convolution property of the Fourier transform, if we multiply $-isgn(\omega)$ with any frequency domain signal $S(\omega)$ then it'll give us Hilbert transformed signal in frequency domain.

2. What is analytical signal?

An analytic signal is a complex-valued signal that has no negative frequency components, and its real and imaginary parts are related to each other by the Hilbert transform.

$$s_a(t) = s(t) + i\hat{s}(t) \quad (5.77)$$

where, $s_a(t)$ is an analytical signal and $\hat{s}(t)$ is the Hilbert transform of the signal $s(t)$. Such analytical signal can be used to generate Single Sideband Signal (SSB) signal.

3. What is a SSB signal and how it can be generated?

By definition, the SSB is the signal which contains either upper sideband or lower sideband and hence it reduces the spectral occupancy by half.

This section will represent the brief idea of generating SSB signal using Hilbert transform method. To understand this, we may express signal $s(t)$ as a summation of the two complex-valued functions.

$$s(t) = \frac{1}{2}[s(t) + i\hat{s}(t)] + \frac{1}{2}[s(t) - i\hat{s}(t)] \quad (5.78)$$

From Equation 5.77,

$$s(t) = s_a(t) + i s_a^*(t) \quad (5.79)$$

Such representation of $s_a(t)$ and $s_a^*(t)$ divide the signal into non-negative frequency component and non-positive frequency component respectively. Considering only non-negative frequency $s_a(t)$ part, we can write it as

$$\frac{1}{2} S_a(f) = \begin{cases} S(f) & \text{for } f > 0 \\ 0 & \text{for } f < 0 \end{cases} \quad (5.80)$$

where $S_a(f)$ and $S(f)$ are the Fourier transform of $t_a(t)$ and $s(t)$ respectively. The frequency translated version of $S_a(f - f_0)$ contains only one side (positive) of $S(f)$ and hence it is called single sideband signal $s_{ssb}(t)$,

$$F^{-1}\{S_a(f - f_0)\} = s_a(t)e^{i2\pi f_0 t} = s_{ssb}(t) + i\hat{s}_{ssb}(t) \quad (5.81)$$

Therefore, from the Euler's formula,

$$\begin{aligned} s_{ssb}(t) &= Re\{s_a(t)e^{i2\pi f_0 t}\} \\ &= Re\{[s(t) + i\hat{s}(t)][\cos(2\pi f_0 t) + i\sin(2\pi f_0 t)]\} \\ &= s(t)\cos(2\pi f_0 t) - \hat{s}(t)\sin(2\pi f_0 t) \end{aligned} \quad (5.82)$$

This Equation 5.82 displays the mathematical modeling of the upper sideband SSB signal. Similarly, we can generate lower sideband SSB signal by,

$$s_{ssb}(t) = s(t)\cos(2\pi f_0 t) + \hat{s}(t)\sin(2\pi f_0 t) \quad (5.83)$$

4. What is minimum phase signal?

A necessary and sufficient condition for a complex signal $A(t)$ to be minimum phase is that the curve described in a complex plane by $A(t)$ when $t \rightarrow -\infty$ to $t \rightarrow \infty$ **does not encircle the origin**. A minimum-phase signal has an useful property that the natural logarithm of the magnitude of the frequency response is related to the phase angle of the frequency response by the Hilbert transform.

For instance, if we consider a complex data-carrying signal whose spectrum is contained between $-B/2$ and $B/2$, and consider a SSB signal of the form,

$$x(t) = A + A_s(t)\exp(-i\pi Bt) \quad (5.84)$$

where A is a constant. Here, $x(t)$ is minimum phase if and only if the winding number of its trajectory into complex plane is zero. The condition $|A| > |A_s(t)|$ is sufficient for guaranteeing minimum phase property [3].

5. How we can use these signals and profit from them?

This section represents the justification that why we need to use these signals into our proposed transceiver system.

Analytical Signal:

If we denote an analytic signal $A_s(t)$ as,

$$A_s(t) = A_{s,r}(t) + iA_{s,i}(t) \quad (5.85)$$

then in the equation 5.85, the real and imaginary parts $A_{s,r}(t)$ and $A_{s,i}(t)$ are related through the Kramers-Kronig relation with each other. An intuitive way to analyze the relation is based on expressing its Fourier transform $A_s(\omega)$ as follows,

$$A_s(\omega) = \frac{1}{2}[1 + sgn(\omega)]A_s(\omega) \quad (5.86)$$

The equation 5.86 follows the SSB signal condition $A_s(\omega) = 0$ for $\omega < 0$. Further, simplification0n of the signal can be summarized as follows:

$$\begin{aligned} A_s(\omega) &= \frac{1}{2}[1 + sgn(\omega)]A_s(\omega) \\ &= \frac{1}{2}A_s(\omega) + \frac{1}{2}sgn(\omega)A_s(\omega) \end{aligned} \quad (5.87)$$

Taking inverse Fourier transform of the equation 5.87,

$$\begin{aligned} A_s(t) &= IFT\{A_s(\omega)\} \\ &= \underline{\frac{1}{2}A_s(t)} + \underline{\frac{1}{2}[IFT\{sgn(\omega)\} \otimes A_s(t)]} \end{aligned} \quad (5.88)$$

The underlined term in Equation 5.88 displays that multiplication in frequency domain converted into the convolution in the time domain. Further, IFT of the function $sgn(\omega)$ given as $(-i/\pi t)$. As a consequences, we can further simplify our equation as,

$$\begin{aligned} A_s(t) &= \frac{1}{2}A_s(t) + \frac{1}{2}\left[\frac{i}{\pi t} \otimes A_s(t)\right] \\ \frac{A_s(t)}{2} &= \frac{1}{2}\left[\frac{i}{\pi t} \otimes A_s(t)\right] \\ A_s(t) &= i\left[\frac{1}{\pi t} \otimes A_s(t)\right] \\ A_s(t) &= \frac{i}{\pi} p.v. \int_{-\infty}^{\infty} \frac{A_s(t')}{t - t'} dt' \end{aligned} \quad (5.89)$$

Using Equation 5.85 into Equation 5.89,

$$A_{s,r}(t) + iA_{s,i}(t) = \frac{i}{\pi} p.v. \int_{-\infty}^{\infty} \frac{A_s(t')}{t - t'} dt' \quad (5.90)$$

Therefore,

$$\begin{aligned} A_{s,r}(t) + iA_{s,i}(t) &= \frac{i}{\pi} p.v. \int_{-\infty}^{\infty} \frac{A_{s,r}(t') + iA_{s,i}(t')}{t - t'} dt' \\ A_{s,r}(t) + iA_{s,i}(t) &= -\frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{A_{s,i}(t')}{t - t'} dt' + \frac{i}{\pi} p.v. \int_{-\infty}^{\infty} \frac{A_{s,r}(t')}{t - t'} dt' \end{aligned} \quad (5.91)$$

which leads to,

$$\begin{aligned} A_{s,r}(t) &= -\frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{A_{s,i}(t')}{t - t'} dt' \\ A_{s,i}(t) &= \frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{A_{s,r}(t')}{t - t'} dt' \end{aligned} \quad (5.92)$$

Minimum Phase signal:

Given function $A(t) = A_s(t) + \bar{E}$ never encircles the origin for $t \in (-\infty, \infty)$. if we define,

$$G(t) = \log \left[\frac{A(t)}{\bar{A}} \right] \quad (5.93)$$

then $G(\omega)$, the spectrum of $G(t)$, is such that $G(\omega) = 0$ for $\omega < 0$. Under the hypothesis stated by Equation 5.90, we can write $G(t)$ as,

$$G(t) = \frac{i}{\pi} p.v. \int_{-\infty}^{\infty} \frac{G(t')}{t - t'} dt' \quad (5.94)$$

From the equations 5.93 and 5.94,

$$\log|A(t)| - \log|\bar{A}| + i[\phi(t) - \bar{\phi}] = \frac{i}{\pi} p.v. \int_{-\infty}^{\infty} \frac{\log|A(t)| - \log|\bar{A}|}{t - t'} dt' + \frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{\phi(t) - \bar{\phi}}{t - t'} dt' \quad (5.95)$$

Comparing Imaginary part of Equation 5.95,

$$\phi(t) - \bar{\phi} = +\frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{\log|A(t)| - \log|\bar{A}|}{t - t'} dt' \quad (5.96)$$

In equation 5.96, $\frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{\log|\bar{A}|}{t - t'} dt' = 0$ which leads to,

$$\begin{aligned} \phi(t) &= \bar{\phi} + \frac{1}{\pi} p.v. \int_{-\infty}^{\infty} \frac{\log|A(t)|}{t - t'} dt' \\ \phi(t) &= \bar{\phi} + \frac{1}{2\pi} p.v. \int_{-\infty}^{\infty} \frac{\log|A(t)|^2}{t - t'} dt' \end{aligned} \quad (5.97)$$

5.6.2 Simulation setup

Transmitter setup

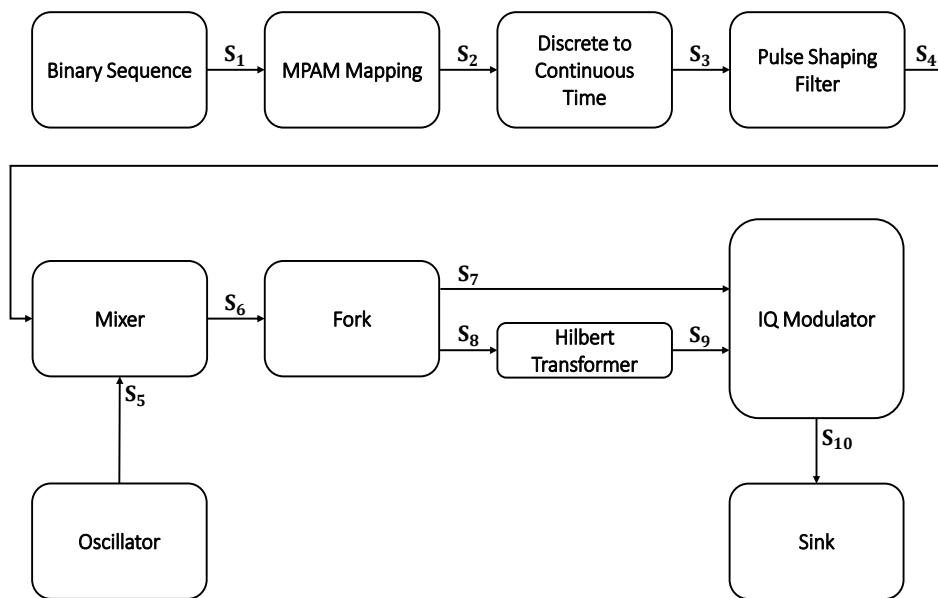


Figura 5.19: Transmitter simulation setup

System input parameters:

| Parameter | Default Value | Comments |
|---------------------------|--|----------|
| sourceMode | PseudoRandom | |
| patternLength | 5 | |
| bitPeriod | 1/50e9 | |
| iqAmplitudes | $\{\{0,0\}, \{1,0\}, \{2,0\}, \{3,0\}\}$ | |
| numberOfBits | 1000 | |
| numberOfSamplesPerSymbol | 8 | |
| filterType | RaisedCosine | |
| rollOffFactor | 0.3 | |
| impulseResponseTimeLength | 16 | |
| outputOpticalPower | 1e-3 | |

Transmitter setup description:

| Header Files | | |
|-------------------------------|-------------------|--------|
| File name | Comments | Status |
| binary_source.h | | ✓ |
| m_qam_mapper.h | Needs improvement | |
| discrete_to_continuous_time.h | | ✓ |
| pulse_shaper.h | | ✓ |
| local_oscillator.h | | |
| mixer.h | | |
| fork.h | | |
| hilbert_transform.h | | |
| iq_modulator.h | | ✓ |
| sink.h | | ✓ |
| netxpto.h | | ✓ |

| Source Files | | |
|------------------------------------|----------|--------|
| File name | Comments | Status |
| binary_source.cpp | | ✓ |
| m_qam_mapper.cpp | | |
| discrete_to_continuous_time.cpp | | ✓ |
| pulse_shaper.cpp | | ✓ |
| local_oscillator.cpp | | |
| mixer.cpp | | |
| fork.cpp | | |
| hilbert_transform.cpp | | |
| iq_modulator.cpp | | ✓ |
| sink.cpp | | ✓ |
| netxpto.cpp | | ✓ |
| kramers_kronig_transceiver_sdf.cpp | | ✓ |

Receiver setup

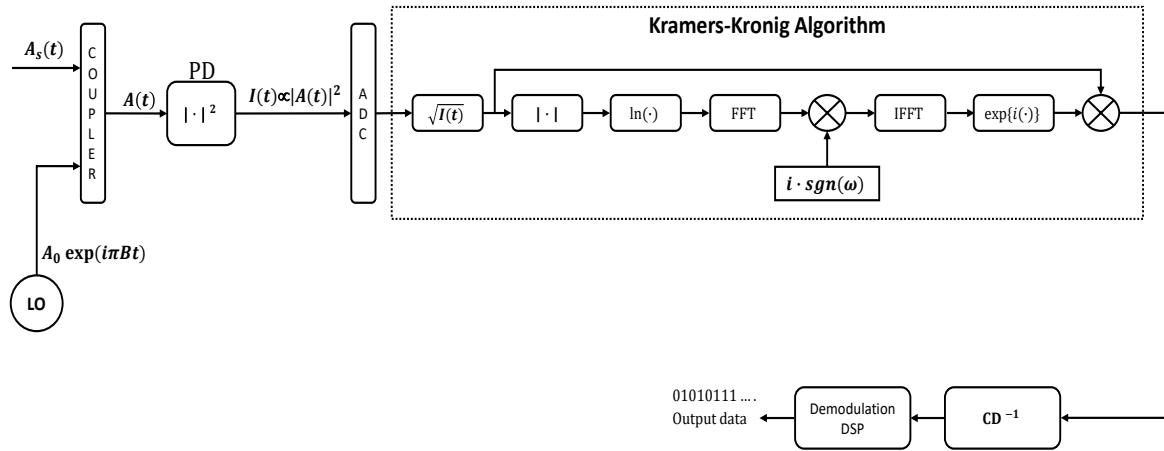


Figura 5.20: Receiver simulation setup

5.6.3 Experimental setup

As shown in the Figure 5.21, at the transmitter end, analytical signal generated with the help of netxppt and applied to the AWG. Waveform generated by AWG applied dual polarization IQ modulator which generates SSB signal in optical domain. SSB optical signal generated by both the IQ modulator is then combined using polarization beam combiner (PBC) and launched into the optical fiber.

At the receiver end, the PDM received signal first spitted by a polarization beam splitter (PBS). Each polarization is combined with an LO tapped from the transmit laser. The laser's wavelength and power are set to ensure that the received signal should satisfy the minimum phase condition. After direct-detection, Kramers-Kronig algorithm is performed on each polarization separately to recover full complex signal. After compensation of the chromatic dispersion, stokes parameter based poldemux algorithm can be applied to recover PDM signals.

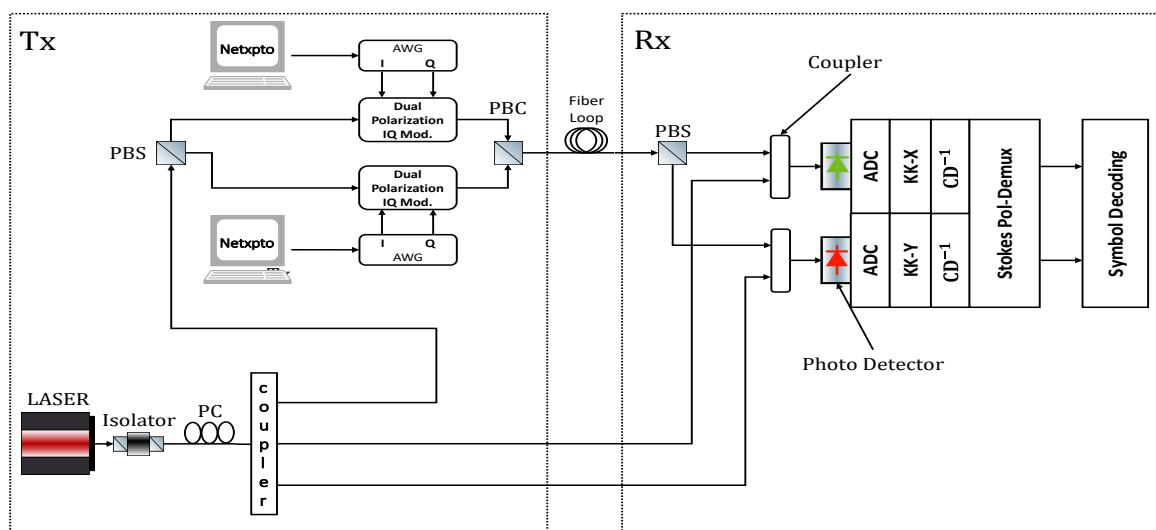


Figura 5.21: PDM Kramers-Kronig receiver experimental setup

Bibliografia

- [1] Antonio Mecozzi, Cristian Antonelli, and Mark Shtaif. *Kramers-Kronig Coherent Receiver*. Optica, vol.3, no.11, 2016, p.1220., doi:10.1364/optica.3.001220.
- [2] Antonio Mecozzi. *Retrieving the full optical response from amplitude data by Hilbert transform*. Opt. Comm. 282, 4183-4187.
- [3] Antonio Mecozzi. *A necessary and sufficient condition for minimum phase and implication of phase retrieval*. arXiv:1606.04861.

APPENDICES

Appendix A : SSB with graphical explanation

This section describes the SSB signal generation using Hilbert transformation method (Phase Shift Method). Consider a message signal $m(t)$ with its frequency domain spectrum $M(F)$ as shown in Figure 5.22. From the Figure 5.22, we can see that both the side are scaled by factor '1' which means it represents the original signal.

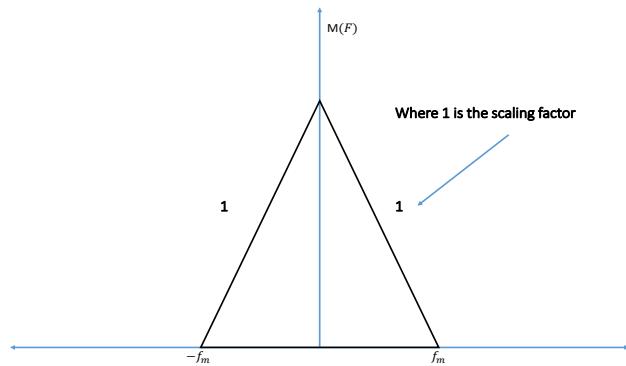


Figura 5.22: Original baseband signal

Now let's consider the modulated signal $x(t)$ given as,

$$x(t) = m(t)\cos(2\pi f_c t) \quad (5.98)$$

Frequency domain representation of the equation 5.98 can be given as,

$$X(F) = \frac{1}{2}M(f - f_c) + \frac{1}{2}M(f + f_c) \quad (5.99)$$

Here in equation 5.99, we can observe that each side band are scaled by $\frac{1}{2}$ on the frequency spectrum. Figure displays the frequency domain representation of the modulated signal $X(F)$.

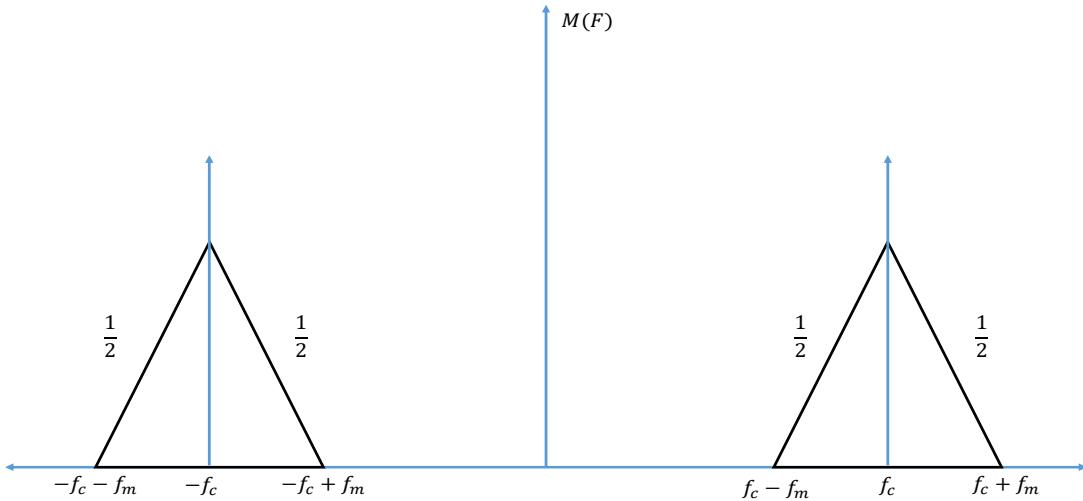


Figura 5.23: Original modulated signal

Next, we will discuss something more interesting which is called as Hilbert transform of the original message signal $m(t)$. As we discussed earlier, in the frequency domain, the Hilbert transformed signal $\hat{M}(f)$ can be achieved by multiplying the Fourier transformed signal $M(F)$ with $[-isgn(F)]$. Suppose we modulate the Hilbert transformed message signal $\hat{m}(t)$

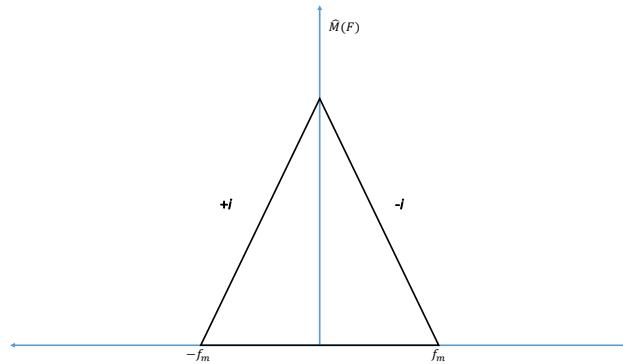


Figura 5.24: Hilbert transformed modulated signal

with the $\sin(2\pi f_c t)$ (quadrature phase carrier), then we get the following results:

$$\begin{aligned}
 \hat{m}(t) \sin(2\pi f_c t) &= \hat{m}(t) \frac{e^{i2\pi f_c t} - e^{-i2\pi f_c t}}{2} \\
 &= \hat{m}(t) \frac{e^{i2\pi f_c t}}{2} - \hat{m}(t) \frac{e^{-i2\pi f_c t}}{2} \\
 &= \frac{\hat{M}(f - f_c)}{2i} - \frac{\hat{M}(f + f_c)}{2i} \\
 &= \frac{-i}{2} \hat{M}(f - f_c) + \frac{-i}{2} \hat{M}(f + f_c)
 \end{aligned} \tag{5.100}$$

The detailed explanation of the equation 5.100 has been given in the Figure 5.25 and 5.26. Figure 5.25 displays the spectrum of the $\hat{M}(f + f_c)$ and $\hat{M}(f - f_c)$ for the positive and negative frequencies respectively. The final equation resolution of equation displays that both positive and negative side of the spectrum multiplied with $\frac{i}{2}$ and $\frac{-i}{2}$ respectively. Finally the spectrum of the signal $\hat{m}(t) \sin(2\pi f_c t)$ can be given as Figure 5.26.

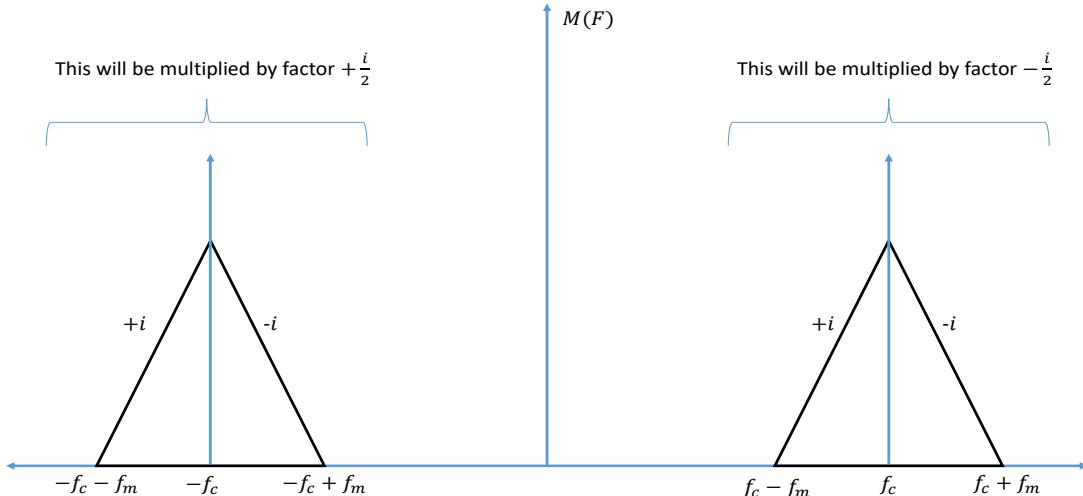


Figura 5.25: Hilbert transformed modulated signal

Further, summation of the two signals $m(t) \cos(2\pi f_c t)$ and $\hat{m}(t) \sin(2\pi f_c t)$ will generate the upper sideband SSB signal as follows,

$$u(t) = m(t) \cos(2\pi f_c t) - \hat{m}(t) \sin(2\pi f_c t) \tag{5.101}$$

From the above discussion, the spectrum of the Equation 5.101 can be given by the Figure 5.27. Similarly, for the lower sideband SSB can be generated by Equation,

$$u(t) = m(t) \cos(2\pi f_c t) + \hat{m}(t) \sin(2\pi f_c t) \tag{5.102}$$

Appendix B : Kramers-Kronig scheme

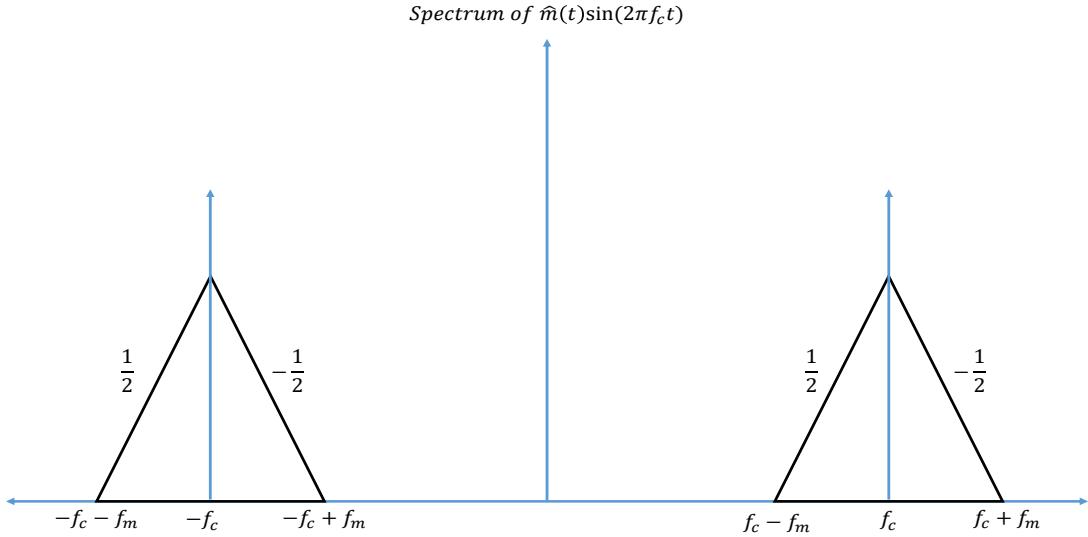


Figura 5.26: Hilbert transformed modulated signal

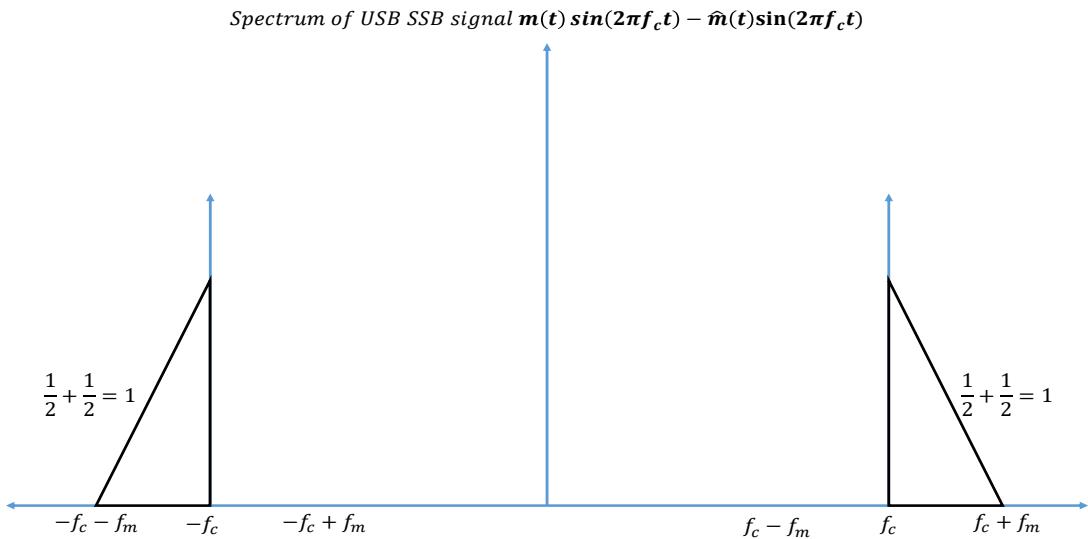


Figura 5.27: SSB signal spectrum

If we consider the complex envelope of the incoming electric field by $A_s(t)$ confined within the optical bandwidth denoted by B . The LO assumed to be a continuous wave (CW) signal whose amplitude is A_0 whose frequency coincides with the left edge of the information-carrying signal spectrum. Here, we assumed that A_0 is real-valued and positive, which is equivalent to referring all phase value to that of LO.

The complex envelope of the field striking upon the photo-diode can be given as,

$$A(t) = A_s(t) + A_0 \exp(i\pi Bt) \quad (5.103)$$

The photo current I produced by the photo-diode is proportional to the field intensity $I = |A(t)|^2$, here proportionality constant considered as 1 for the sake of simplicity. If A_0 is large enough to ensure that the signal $A(t)\exp(-i\pi Bt) = A_0 + A_s(t)\exp(-i\pi Bt)$ is minimum phase. The discussed hypothesis can be used to reconstruct the signal $E_s(t)$ as follows[1]:

$$A_s(t) = \{\sqrt{I(t)}\exp[i\phi_E(t)] - A_0\}\exp(i\pi Bt) \quad (5.104)$$

$$\phi_A(t) = \frac{1}{2\pi} p.v. \int_{-\infty}^{\infty} dt' \frac{\log[|I(t')|]}{t - t'} \quad (5.105)$$

5.7 Quantum Oblivious Key Distribution with Discrete Variables

| | | |
|----------------------|---|---|
| Student Name | : | Mariana Ramos |
| Starting Date | : | September 18, 2017 |
| Goal | : | Quantum oblivious key distribution (QOKD) implementation with discrete variables. |
| Directory | : | sdf/ot_with_discrete_variables. |

Oblivious Transfer (OT) is a fundamental primitive in multi-party computation. The one-out-of-two OT consists in a communication protocol between Alice and Bob. At the beginning of the protocol Alice has two messages m_1 and m_2 and Bob wants to know one of them, m_b , without Alice knowing which one, i.e. without Alice knowing b , and Alice wants to keep the other message private, i.e. without Bob knowing $m_{\bar{b}}$. therefore two conditions must be fulfilled:

1. The protocol must be concealing, i.e at the beginning of the protocol Bob does not know nothing about Alice's messages, while at the end of the protocol Bob will learn the message m_b chosen by him.
2. The protocol is oblivious, i.e Alice cannot learn anything about Bob's choice, bit b , and Bob cannot learning nothing about the other message $m_{\bar{b}}$.

In order to implement OT between two parties (Alice and Bob) they must be able to exchange continuously oblivious keys, i.e a QOKD system must exist between them.

5.7.1 Theoretical Description

Quantum Oblivious Key Distribution System (QOKD)

In this section we are going to describe the Quantum Oblivious Key Distribution system (QOKD). The QOKD system enables two parties (Alice and Bob) to share a set of keys. These keys have the particularity of being half right and half wrong. Only Bob knows which are right and wrong keys.

Considering a discrete variables implementation, both Alice and Bob agree with the following correspondence, where + corresponds to *Rectilinear Basis* and × corresponds to *Diagonal Basis*,

| <i>Basis</i> | |
|--------------|---|
| 0 | + |
| 1 | × |

Alice and Bob also agree with the bit correspondence for each direction for each basis. For *Rectilinear basis*, "+",

| | Basis "+" |
|---|-------------------------|
| 0 | $\rightarrow (0^\circ)$ |
| 1 | $\uparrow (90^\circ)$ |

and for *Diagonal Basis*, "x",

| | Basis "x" |
|---|------------------------|
| 0 | $\searrow (-45^\circ)$ |
| 1 | $\nearrow (45^\circ)$ |

1. The first step is to establish for both Alice and Bob the block length l . In this case, lets assume $l = 16$. Alice randomly generate a bit sequence with length l . Therefore, she must define two sets randomly: S_{A1} which contains the basis values; and S_{A2} , which contains the key values.

In that case, lets assume she generates the following sets $S_{A1'}$ and $S_{A2'}$:

$$S_{A1'} = \{0, 0, 1, 1, 1, 0, 0, 1, 1, 0, 0, 1, 1, 1, 0, 1\},$$

$$S_{A2'} = \{1, 1, 1, 0, 0, 0, 0, 0, 1, 1, 0, 0, 1, 0, 1, 1\}.$$

2. Next, Alice sends to Bob throughout a quantum channel l photons encoded using the basis defined in $S_{A1'}$ and according to the key bits defined in $S_{A2'}$.

Therefore, in the current example, Alice sends the following photons,

$$\begin{aligned} S_{AB} &= \{\uparrow, \uparrow, \nearrow, \searrow, \downarrow, \rightarrow, \rightarrow, \searrow, \nearrow, \uparrow, \rightarrow, \searrow, \nearrow, \downarrow, \uparrow, \nearrow\} \\ &= \{90^\circ, 90^\circ, 45^\circ, -45^\circ, -45^\circ, 0^\circ, 0^\circ, -45^\circ, 45^\circ, 90^\circ, 0^\circ, -45^\circ, 45^\circ, -45^\circ, 90^\circ, 45^\circ\}. \end{aligned}$$

3. Bob also randomly generates $l = 16$ bits, which are going to define his measurement basis, $S_{B1'}$. Lets assume,

$$\begin{aligned} S_{B1'} &= \{0, 1, 1, 0, 0, 1, 0, 1, 1, 0, 1, 0, 0, 0, 1\} \\ &= \{+, \times, \times, +, +, \times, +, \times, +, \times, +, +, +, \times\}. \end{aligned}$$

Bob will get l results:

$$S_{B2'} = \{1, -, \underline{0}, 0, -, 1, \underline{1}, -, 1, -, 1, 0, 1, 1, \underline{0}, 1\}.$$

The "−" corresponds to no clicks in Bob's detector, due to attenuation. The underlined values are bits which were measured with a correct basis but an error has occurred due to imperfections in the quantum communication system.

4. Bob is going to send a "-1" or a hash value to Alice for each measurement that he performed, thereby being "-1" the measurements which correspond to no clicks. In this case, we are going to assume that the hash value is calculated using the SHA-256 algorithm [3]. In detail, Bob has two sets $S_{B1'}$ and $S_{B2'}$ and he is going to generate the set S_{BH1} with l values (" -1 " or hash values calculated for each position of $S_{B1'}$ with the correspondent position of $S_{B2'}$). Therefore, Bob will send to Alice the following set:

$$S_{BH1} = \{S_1, -1, S_2, S_3, -1, S_4, S_5, -1, S_6, -1, S_7, S_8, S_9, S_{10}, S_{11}, S_{12}\}.$$

5. Since Alice has received the confirmation of measurement from Bob, i.e after Alice has received S_{BH1} , she sends throughout a classical channel the basis which she has used to codify the photons updated with the information about the no received photons,

$$S_{A1'} = \{0, -1, 1, 1, -1, 0, 0, -1, 1, -1, 0, 1, 1, 1, 0, 1\}$$

Due to attenuation, the previous sets are reduced to the length 12 and they shall be replaced by the following:

$$S_{A1} = \{0, 1, 1, 0, 0, 1, 0, 1, 1, 1, 0, 1\},$$

$$S_{A2} = \{1, 1, 0, 0, 0, 1, 0, 0, 1, 0, 1, 1\},$$

$$S_{B1} = \{0, 1, 0, 1, 0, 1, 1, 1, 0, 0, 0, 1\},$$

$$S_{B2} = \{1, 0, 0, 1, 1, 1, 1, 0, 1, 1, 0, 1\}$$

Note that S_{B2} still has errors.

6. In order to know which photons were measured correctly, Bob does the operation $S_{B3} = S_{B1} \oplus S_{A1}$. In the current example,

$$\begin{array}{c|cccccccccccc} S_{B1} & 0 & 1 & 0 & 1 & 0 & 1 & 1 & 1 & 0 & 0 & 0 & 1 \\ \hline S_{A1} & 0 & 1 & 1 & 0 & 0 & 1 & 0 & 1 & 1 & 1 & 0 & 1 \\ \oplus & 1 & 1 & 0 & 0 & 1 & 1 & 0 & 1 & 0 & 0 & 1 & 1 \end{array}$$

In this way, Bob gets

$$S_{B3} = \{1, 1, 0, 0, 1, 1, 0, 1, 0, 0, 1, 1\}.$$

When Bob uses the right basis he gets the values correctly, apart from possible errors in transmission, when he uses the wrong basis he just guess the value. The values "1" correspond to the values he measured correctly and "0" to the values he just guessed. Thus, Bob is building two sets of keys, one with correct basis measurements values and other with the wrong basis measurement values that he just guessed.

Thus, Bob has two pair of sets, one for the right basis,

$$S_{B_{rp}} = \{1, 2, 5, 6, 8, 11, 12\},$$

$$S_{B_{rb}} = \{1, 0, 1, 1, 0, 0, 1\},$$

where $S_{B_{rp}}$ is the set of positions and $S_{B_{rb}}$ is the set of bit values he measured for each position. The other pair is for photons he measured with the wrong basis and then he just guessed the values,

$$S_{B_{wp}} = \{3, 4, 7, 9, 10\},$$

$$S_{B_{wb}} = \{0, 1, 1, 1, 1\},$$

where $S_{B_{wp}}$ is the set of positions and $S_{B_{wb}}$ is the set of bit values he measured for each position.

Nevertheless, due to errors in transmission, some bits in $S_{B_{rb}}$ may be not right.

At this point, in order to test Bob's honesty and to estimate the QBER of the channel, Alice is going to ask Bob to open some pairs of the Bob's sets. The definition of the protocol to test Bob's honesty is still an open issue. However, depending on the QBER estimated by her, Alice must have a parameter to set the number of right position she wants to open, i.e she must open a minimum number of right position in order to guarantee a minimum QBER. This will increase the security of the protocol. Alice chooses some positions to open and tells Bob which positions she wants to open. Bob sends to Alice the pairs she chose and then these pairs are eliminated from them sets. Lets assume she asked to open the positions 10, 11 and 12. If she concludes Bob is not being honest, she stops the protocol and they must start it again. Otherwise, the protocol continues. Lets assume Alice has verified these pairs using the hash function committed by Bob and concluded that he is being honest. Therefore, she sends to Bob the QBER estimated by her.

Now, Bob has the previous sets replaced by the following,

$$S_{B_{rp}} = \{1, 2, 5, 6, 8\}$$

$$S_{B_{rb}} = \{1, 0, 1, 1, 0\}$$

$$S_{B_{wp}} = \{3, 4, 7, 9\}$$

$$S_{B_{wb}} = \{0, 1, 1, 1\}$$

Bob is going to use a modified version of *Cascade algorithm* to correct the errors due transmission.

Modified version of Cascade Algorithm

The Cascade algorithm is often used with a key set where all values are supposed right. In this case, Bob has two pairs of sets, one with the position and bit values of photon he measured with the correct basis and other with position and bit values of photon

he measured with the wrong basis. He only needs to apply the Cascade algorithm in the set that he measured the photons correctly [4]. However, he must apply a modified version of the Cascade in the other set in order to keep in secret from Alice which set corresponds to right and which set corresponds to wrong measurements.

Bob randomly generates a bit value. If he gets 0, he will send to Alice the set $\{S_{B_{rp}}, S_{B_{wp}}\}$. Otherwise, if he gets 1 he will send the set $\{S_{B_{wp}}, S_{B_{rp}}\}$. This guarantee that Alice does not know which is the right or wrong set. Lets assume this random bit is "0" and he sends $\{S_{B_{rp}}, S_{B_{wp}}\}$.

- (a) Bob starts by applying the normal cascade to the set $S_{B_{rb}}$. After both know the error estimative Bob determine if the error rate is above the fail threshold. If it is truth they must start the procedure again. Lets assume the estimated error rate is acceptable. Bob and Alice use a random permutation which is represented in figure 5.28 for a larger number of bits (agreed at the beginning) by applying it to the shifted keys, in order to guarantee the spread out of the error bits randomly and to separate consecutive errors from each other.

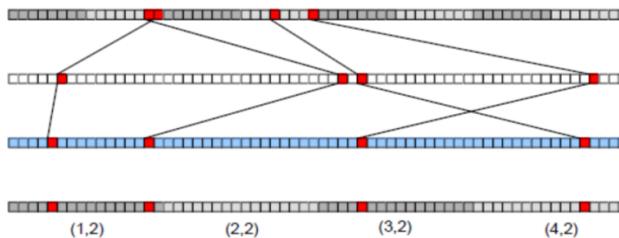


Figura 5.28: Cascade Algorithm - permutation

- (b) Bob and Alice divide all the shifted key bits into blocks of N bits depending on the estimated error rate in order to have one or no error per block. In general, the sets of keys are too large and it is easier to explain the algorithm based on a larger number of bits. Therefore, figure 5.29 represents the typical cascade initial steps. However, in this case, the set to be corrected only has five bits, therefore they divide the set in two sub-blocks, one with 3 bits and other with 2 bits.
- (c) They use a classical channel to compare the block parities. For blocks with different parities, an odd number of errors must exist, otherwise an even number of errors would mask each other. Thus, the block in which the parities disagree is divided in half into two smaller blocks of length $\frac{N}{2}$, and another parity check is performed on the first sub-block, as one can see in figure 5.30. As it was referred above, there is at least one error in one sub-block being the error location revealed by the parity of one sub-block. In other words, if the parity of the first sub-block passes, the error will be in the second sub-block. The sub-block with error will be sub-divided until the error is found.

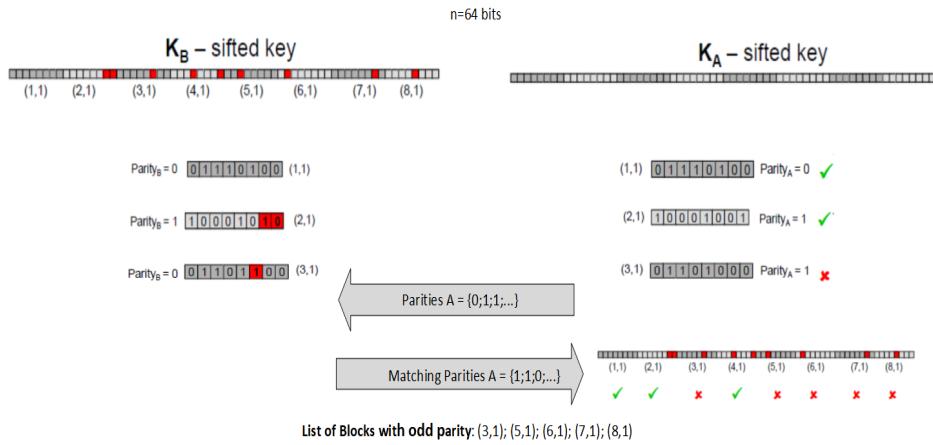


Figura 5.29: Cascade Algorithm

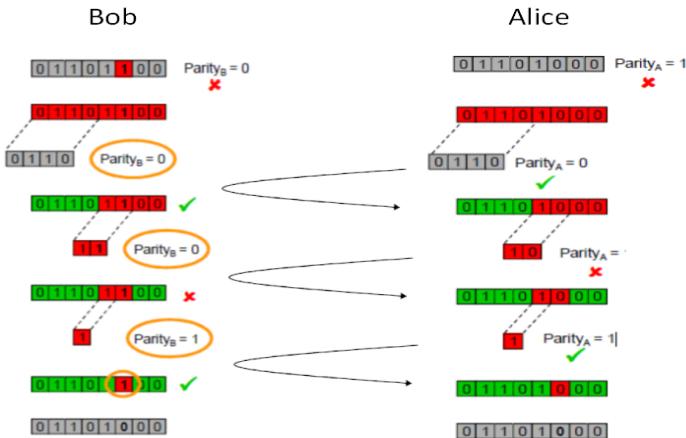


Figura 5.30: Cascade Algorithm - example of error correction

- (d) When the error is corrected, the last bit of the block is discard in order to prevent the gain of additional information by Bob.

In this case, lets assume the set of right positions was corrected with the algorithm described above and it will be replaced by the following:

$$S_{B_{rp}} = \{1, 2, 5, 6, 8\}$$

$$S_{B_{rb}} = \{1, 1, 0, 1, 0\}$$

In order to test Alice's honesty, Bob must verify if the QBER sent by Alice is a realistic value. If it is not he stops the protocol and they must start again. Otherwise, the protocol continues.

After that, Bob needs to apply the Fake Cascade to the set $S_{B_{wb}}$. The main goal of this

step is to convince Alice she is performing the real Cascade but she is not.

- (a) First of all, based on the positions contained in $S_{B_{wb}}$, Bob must build an array with the correspondent bits in a random order and informs Alice the order of positions. In order to best explain this version of the algorithm, lets assume a larger set of bits.

Bob sends to Alice throughout a classical channel the new positions order as if it were the permutation step represented in figure 5.28 in real Cascade algorithm.

- (b) Assuming each of them has a set with 32 bits randomly organized by Bob, they divide the supposed shifted keys in blocks with N bits according to the estimated error rate. As the QBER is the same as for real cascade, Bob will assume the same number of errors, even if he starts for this modified version he can know the number of errors from QBER estimated by Alice.
- (c) Bob and Alice use a classical channel to compare the block parities. Alice sends to Bob her parity list. Based on Alice's parity list, Bob sends a block list with odd parities, i.e the blocks position in which parity supposed disagree. This list is randomly built based on the number of errors considered by Bob, i.e if he considered five errors from QBER estimative, he will distributed them randomly and after that he will fill the remaining spaces with even parities. Bob sends to Alice the set with the list of odd parities, i.e the list of sub-sets he has different parities than Alice.
- (d) The blocks with errors will be consecutively divided until they found the supposed errors. Since we have assumed there were five errors, this is the number of errors that Alice must supposedly correct.

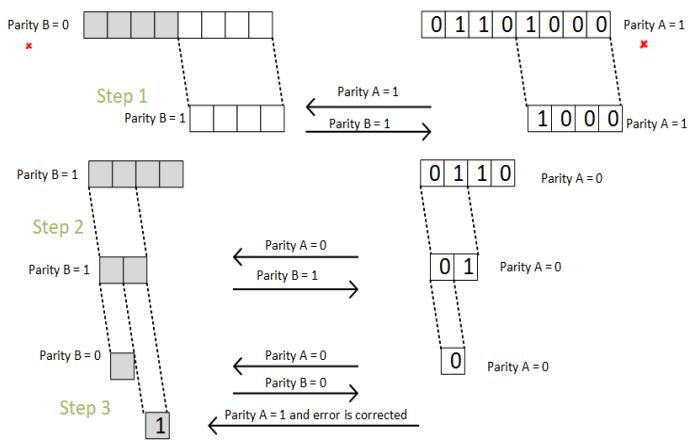


Figura 5.31: Fake cascade - example of error correction

Lets assume one of the blocks with error and analyse figure 5.31. Bob starts with a set filled with random bits, therefore we do not need to know which bits are. Alice starts by dividing her set in half with two blocks with N bits.

Step 1: Bob chooses one of the to blocks and informs Alice she must send the parity of this block. Lets assume he chose sub-block 2. She sends the parity and Bob is going to send his parity, which after know Alice's block parity he send the opposite parity. As referred in normal Cascade, there must be one error or no error in each block. Thus, since the parities disagree, the error must be in seconde block. They start the procedure to correct it.

Step 2: Bob divides again the sub-block in half with $\frac{N}{2}$ bits and asks Alice for the parity of the first sub-block. She sends her parity equals to 0 and Bob sends to her the opposite parity again.

Step 3: They divide the sub-block in half again and Bob asks Alice for the parity of the first bit. Alice sends to him the parity equals to her. As the error is not in the first be, it must be in the second, therefore Bob is able to correct this bit with the information sent by Alice.

Note that Bob make his choice of which half analyse first using a random bit generator result. If he got "0" he starts with the first half of the sub-block, otherwise, if he got "1", he starts with the second half. In addition, they must discard the last bit of each block and sub-block in which fake Cascade were applied in order to guarantee that Bob does not gain additional information.

In this case, after apply the fake Cascade to $S_{B_{wb}}$, lets assume,

$$\begin{aligned} S_{B_{wp}} &= \{3, 4, 7, 9\} \\ S_{B_{wb}} &= \{0, 1, 1, 0\} \end{aligned}$$

If Bob starts by applying the fake Cascade, he must test Alice's honesty at the beginning of the real Cascade application, based on the number of errors he has. If he thinks that the QBER sent by Alice is unrealistic, he stops the protocol at this point.

7. When Alice sends to Bob a photons set, they are building a set of pairs (array positions and bit values which correspond to measured photons at Bob's side and to the key bit with the photon was encoded at Alice's side). The main goal is to guarantee that Bob has the same number of right and wrong pairs. In addition, they must know information about t (represented in figure 5.32) which corresponds to the points where the previous condition is verified.

Since Bob has sent to Alice the information about the smallest set, in this example, Alice know that there are four pairs of wrong positions and five pairs of right positions. Alice must destroy one of the right pairs by asking Bob to open it. Therefore, at $t = 8$ both know that there are the same number of right and wrong pairs thereby being the main goal guaranteed.

As we can see in figure 5.32, unlike Bob, Alice does not know which positions corresponds to right or wrong measurements performed by Bob. They have been building these sets during all protocol.

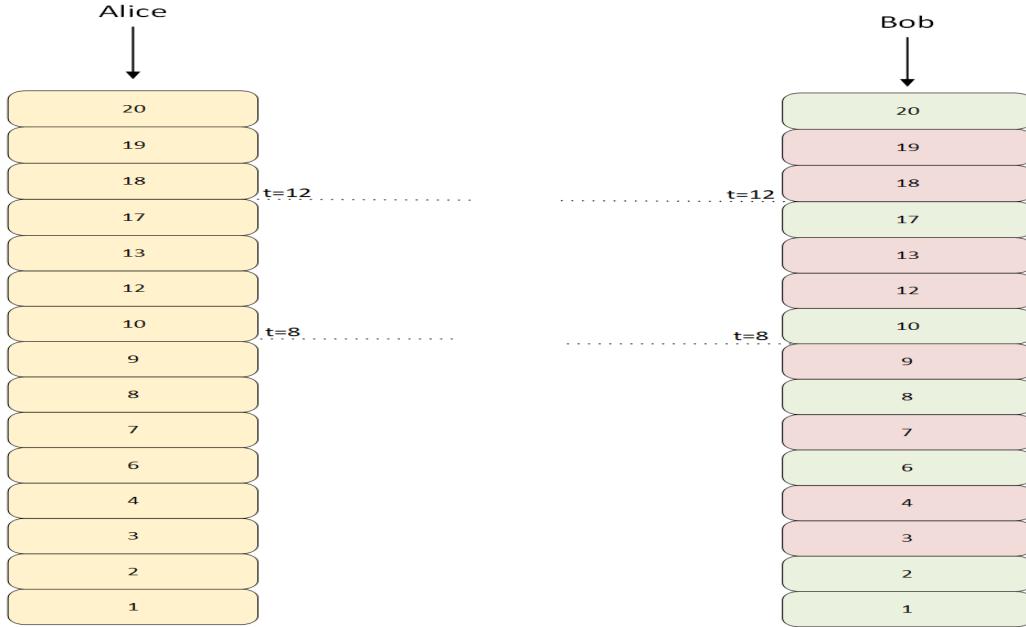


Figura 5.32: Alice and Bob key sets.

1-out-of-2 Oblivious Transfer Protocol with QOKD system

At this time, we are going to describe the oblivious transfer protocol with detail. As it was referred at the beginning, Alice sends two messages to Bob and he wants to know one of them. Alice does not know which message Bob wants and Bob only know the message he wants, i.e he does not know anything about the other message. Furthermore, only Alice knows information about messages m_0 and m_1 . In this case, lets assume the following two messages with size $s = 4$, $m_0 = \{0011\}$ and $m_1 = \{0001\}$. Alice must guarantee $t = s \times 2$. In order to do that, she must destroy the remaining pairs. In this case, there is no need to do that because they have a set for $t = 8$ with the same number of wrong and right pairs.

1. Bob defines two new sub-sets, I_0 and I_1 . I_0 is a set of values with photons array positions which Bob just guessed the measurement since he did not measure them with the same basis as Alice, I_1 is a set of values with photons array positions which Bob measured correctly since he used the same basis as Alice used to encoded them. The position of the pairs of each right and wrong message are in the keys sets that they have been building during the protocol.

In this example, the message size is 4. Since, at this time $t = 10$ and we have 5 right pairs and 5 wrong pairs, Alice ask to Bob to open one right pair and one wrong pair in order to both have exactly the message's size number of right and wrong pairs. Lets assume that Alice opened two pairs, position 15 which is a wrong measurement and position 10 which is a right measurement. We have now $t = 8$.

Next, Bob defines two sub-sets with size $s = 4$:

$$I_0 = \{3, 4, 7, 9\},$$

and

$$I_1 = \{1, 2, 6, 8\},$$

where I_0 is the sequence of positions in which Bob was wrong about basis measurement and I_1 is the sequence of positions in which Bob was right about basis measurement. Bob sends to Alice the set S_b

Thus, if Bob wants to know m_0 he must send to Alice throughout a classical channel the set $S_0 = \{I_1, I_0\}$, otherwise if he wants to know m_1 he must send to Alice throughout a classical channel the set $S_1 = \{I_0, I_1\}$.

2. Alice is sure about Bob's honesty, since she knows he only has 4 right basis to measure the photons. In addition, Alice cannot know which message Bob chose because she did not know the order that he sent the sets.
3. Lets assume Bob sent $S_0 = \{I_1, I_0\}$. Alice defines two encryption keys K_0 and K_1 using the values in positions defined by Bob in the set sent by him. In this example, lets assume:

$$K_0 = \{1, 1, 1, 0\}$$

$$K_1 = \{0, 0, 0, 1\}.$$

Alice does the following operations:

$$m = \{m_0 \oplus K_0, m_1 \oplus K_1\}.$$

$$\begin{array}{c|cccc} m_0 & 0 & 0 & 1 & 1 \\ \hline K_0 & 1 & 1 & 1 & 0 \\ \oplus & 1 & 1 & 0 & 1 \end{array}$$

$$\begin{array}{c|cccc} m_1 & 0 & 0 & 0 & 1 \\ \hline K_1 & 0 & 0 & 0 & 1 \\ \oplus & 0 & 0 & 0 & 0 \end{array}$$

Adding the two results, m will be:

$$m = \{1, 1, 0, 1, 0, 0, 0, 0\}.$$

After that, Alice sends to Bob the encrypted message m through a classical channel.

4. When Bob receives the message m , in the same way as Alice, Bob uses $S_{B1'}$ values of positions given by I_1 and I_0 and does the decrypted operation. In this case, he does following operation:

$$\begin{array}{c|cccccccc} m & 1 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ \hline \oplus & 0 & 0 & 1 & 1 & 0 & 1 & 1 & 0 \end{array}$$

The first four bits corresponds to message 1 and he received $\{0, 0, 1, 1\}$, which is the right message m_0 and $\{0, 1, 1, 0\}$ which is a wrong message for m_1 .

Nearest Private Query

The Nearest Private Query is another example of QOKD application [5]. In this case, there are also two parties: a user (who we called Bob) and a data owner (who we called Alice). Bob has an input secrete parameter x and Alice has a private data set A .

Lets assume Bob's secret input parameter $x = 8$ and Alice's data set $A = \{1, 2, 3, 6, 7, 10, 11, 14\}$.

Bob wants to know which element (x_i) is the closest to x in Alice data set A , without revealing his secrete x . Alice does not know which is the Bob's secret parameter, and Bob does not know any information about Alice's set except the closest element x_i to his x .

Step 1 Alice generates a new set with $N = 2^n$ elements, $D(j)$ for $j = 0, 1, \dots, N - 1$, in which $D(j) = x_l$ being $x(l)$ the closest element to j in A . n is the number of bits that Alice needs to represent each element of her data set.

| j | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|
| $D(j)$ | 1 | 1 | 2 | 3 | 3 | 6 | 6 | 7 | 7 | 10 | 10 | 11 | 11 | 14 | 14 | 14 |
| | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |

Step 2 Bob and Alice have a set of keys K_i^* and K_i , respectively, with 64 elements where 60 are bits resulted from wrong basis measurement and 4 resulted from correct basis measurement. This allows Alice to know that Bob is being honest. They start from QOKD with symmetric keys and then Alice is being asking Bob to destroy pairs of keys until they have a set with the characteristics above.

Step 3 Bob sends to Alice the set S with all positions referred random measurements except the position bits at $j = 8$.

Step 4 Alice encoded all bits with the corresponding bit keys at the positions sent by Bob, and then she sends the encoded message to Bob.

Step 5 Bob receives the encoded message and apply an operation XOR based on the correspondent bits to the positions he sent two Alice above.

Step 6 At the end, Bob gets the message he wanted, the closest element to 8, which corresponds to message 0, 1, 1, 1 or 7 and he remains know nothing about the other elements of Alice's data set. In the same way, Alice does not know which element Bob wants to know.

QKD from QOKD

All Quantum Key Distribution systems can be obtained from the QOKD system presented in this report. The Quantum Oblivious Key Distribution system allows to obtain symmetric secret keys and symmetric or asymmetric oblivious keys.

In fact, since Alice and Bob has the same set of keys and at some tab Alice knows that there are the same number of right and random bits, she can obtain any combination from this set by asking Bob to destroy some pairs.

QOKD has a big advantage over other QKD systems because of its versatility. However, the biggest disadvantage is related with a large number of photons consumption which can became the communication rate slower.

5.7.2 Simulation Analysis

First of all, the protocol will be simulated and then a experimental setup will be built in the laboratory.

The main goal of this simulation is to demonstrate that Bob was able to learn correctly message m_b and he does not know the message $m_{\bar{b}}$.

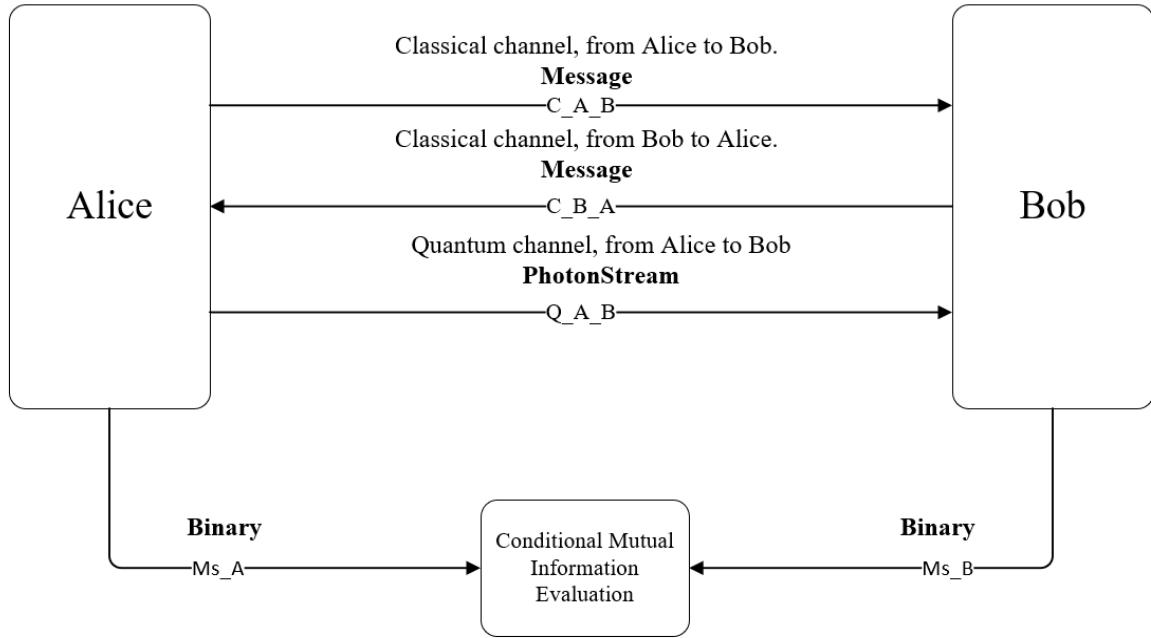


Figura 5.33: Simulation diagram at a top level

As one may see in figure 5.33 this simulation will have three top level blocks. Two of them are Alice and Bob and they are connected through two classical channels and one quantum channel. In addition, a third block will be performed in order to calculate the *Mutual Information*. The mutual information (MI) between Alice and Bob is defined in terms of their joint distribution.

1. In figure 5.34 one can observe a block diagram of the simulation at Alice's side. As it is shown in the figure, Alice must have one block for random number generation which is responsible for basis generation to polarize the photons, and for key random generation in order to have a random state to encode each photon. Furthermore, she has a Processor block for all logical operations: array analysis, hash function results validation, random number generation requests, and others. This block also receives the start information, i.e. message size s and messages m_0 and m_1 , as well as information from Bob, i.e sets I_0 and I_1 , hash function results, and others. In addition it is responsible for set the initial length l of the first array of photons which will send to Bob. This block also must be responsible for send classical information to Bob. Finally, Processor block will also send a real continuous time signal to single photon generator, in order to generate photons according to this signal, and finally this block also sends to polarizer a real discrete signal in order to inform the polarizer which basis it should use. Therefore, she has two more blocks for quantum tasks: the single photon generator and the polarizer block which is responsible to encode the photons generated from the previous block and send them throughout a quantum channel from Alice to Bob.

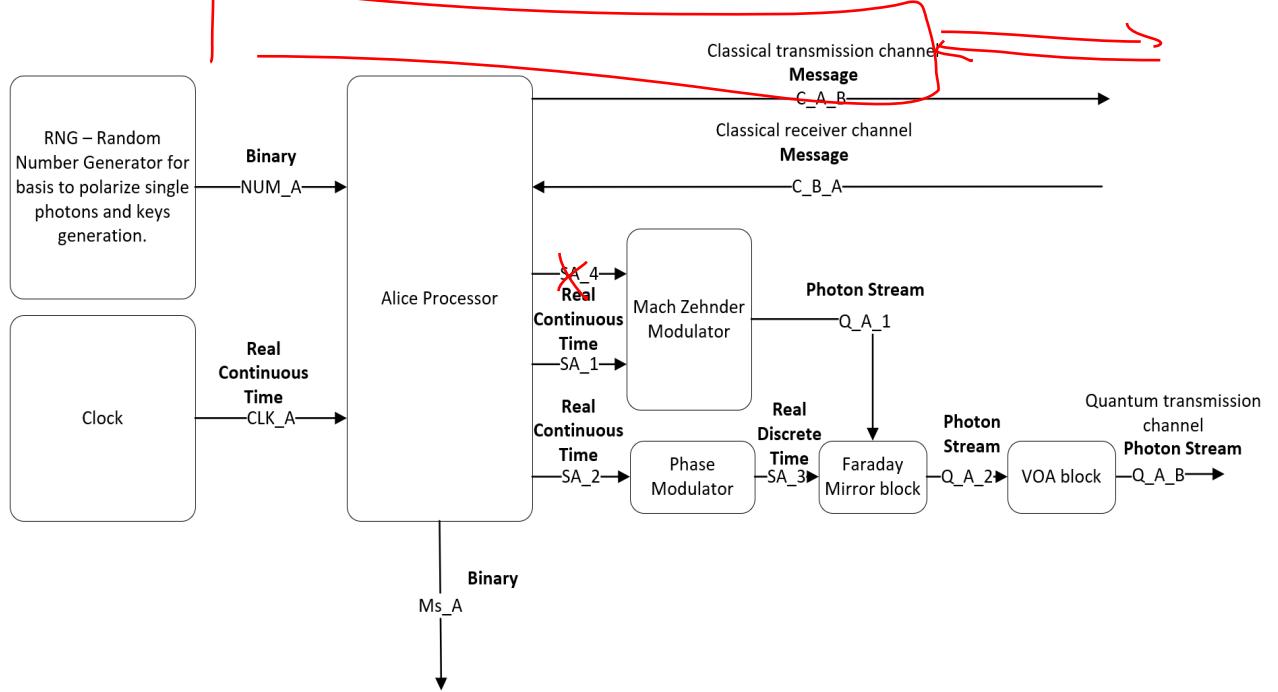


Figura 5.34: Simulation diagram - Alice's side

Finally, Alice's processor has an output to Mutual Information top level block, Ms_A .

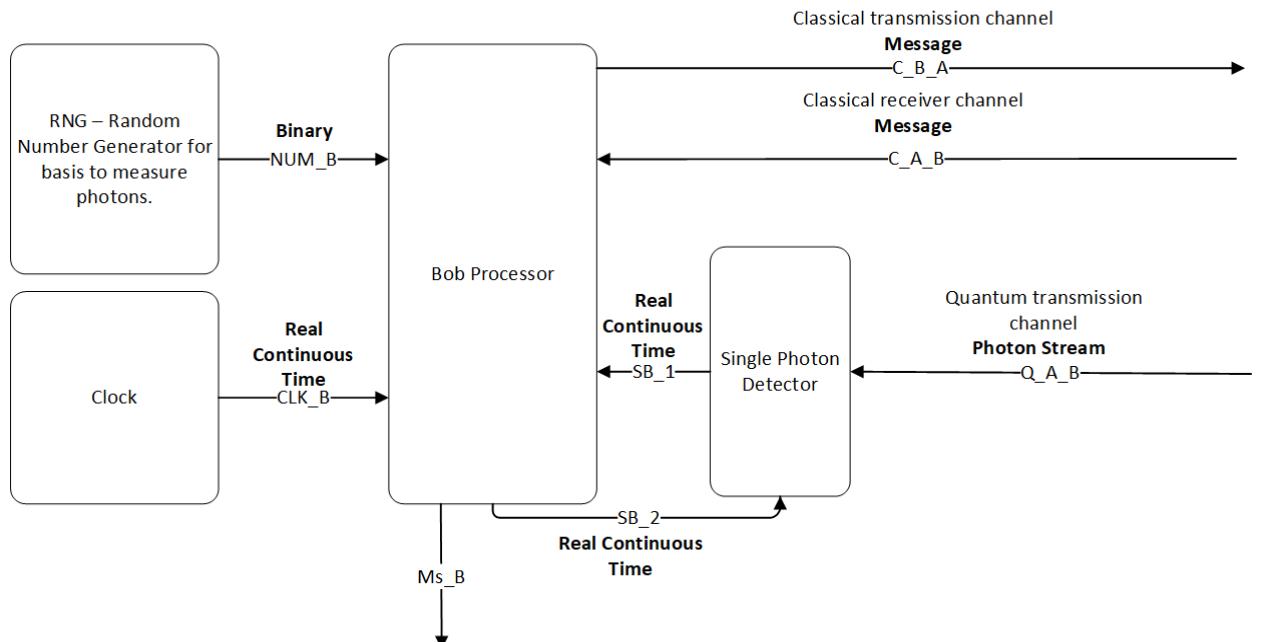


Figura 5.35: Simulation diagram - Bob's side

2. In figure 5.35 one can observe a block diagram of the simulation at Bob's side. From

this side, Bob has one block for Random Number Generation which is responsible for randomly generate basis values which Bob will use to measure the photons sent by Alice throughout the quantum channel. Furthermore, this Block will generate the random bits that Bob needs in Modified Version of Cascade Algorithm. Like Alice, Bob has a Processor block responsible for all logical tasks, i.e Hash function generation, analysing functions, requests for random number generator block, etc. Additionally, it receives information from Alice throughout a classical channel and a quantum channel but it sends information to Alice only throughout a classical channel. Furthermore, Bob has one more block for single photon detection which receives from processor block a real discrete time signal, in order to obtain the basis it should use to measure the photons.

Finally, Bob's processor has an output to Mutual Information top level block, Ms_B .

3. Mutual Information calculation

Tabela 5.3: System Signals

| Signal name | Signal type | Status |
|-------------|----------------------|--------|
| NUM_A | Binary signal | |
| NUM_B | Binary signal | |
| CLK_A | Real continuous Time | |
| CLK_B | Real continuous Time | |
| C_A_B | Message | |
| C_B_A | Message | |
| SA_1 | Real Continuous Time | |
| SA_2 | Real Continuous Time | |
| SA_3 | Real Discrete Time | |
| SA_3 | Real Continuous Time | |
| Q_A_1 | Photon Stream | |
| Q_A_2 | Photon Stream | |
| Q_A_B | Photon Stream | |
| Ms_A | Binary | |
| Ms_B | Binary | |
| S_B1 | Real continuous Time | |
| S_B2 | Real continuous Time | |

Tabela 5.4: System input parameters

| Parameter | Default Value | Description |
|-------------|---------------|---|
| messageSize | 4 | Size of the message Alice must send to Bob. |
| blockLength | 16 | Block length. |
| symbolRate | 100K | |

Tabela 5.5: Header Files

| File name | Description | Status |
|----------------------------|-------------|--------|
| random_number_generator.h | | |
| single_photons_generator.h | | |
| single_photons_detector.h | | |
| encorder.h | | |
| decoder.h | | |
| messageToSend.h | | |
| messageToReceive.h | | |
| mutual_information.h | | |
| cascade_truth.h | | |
| cascade_fake.h | | |
| Sha256.h | | |

Tabela 5.6: Source Files

| File name | Description | Status |
|----------------------------|-------------|--------|
| random_number_generator.c | | |
| single_photons_generator.c | | |
| single_photons_detector.c | | |
| encorder.c | | |
| decoder.c | | |
| messageToSend.c | | |
| messageToReceive.c | | |
| mutual_information.c | | |
| QOKD_main.c | | |
| cascade_truth.c | | |
| cascade_fake.c | | |
| Sha256.c | | |

5.7.3 Experimental Setup

In figure 5.36 are presented the experimental setup to be performed in the lab. The main goal is to build an experimental setup in which Alice and Bob communicate through two classical channels and one quantum channel that will have only one direction (Alice to Bob).

The laser **LD** emits light with a wavelength of 1550 nm and then the light passes throughout a Mach-Zehnder Modulator (**MZM**) in order to have pulsed light. The light is polarized with a polarizer controller and gets a linear polarization of 45°. When the light reaches the polarization beam splitter, **PBS1**, single photon pulses in 45° linearly polarization state

$$|in\rangle = |45\rangle = \frac{\sqrt{2}}{2}(|H\rangle + |V\rangle)$$

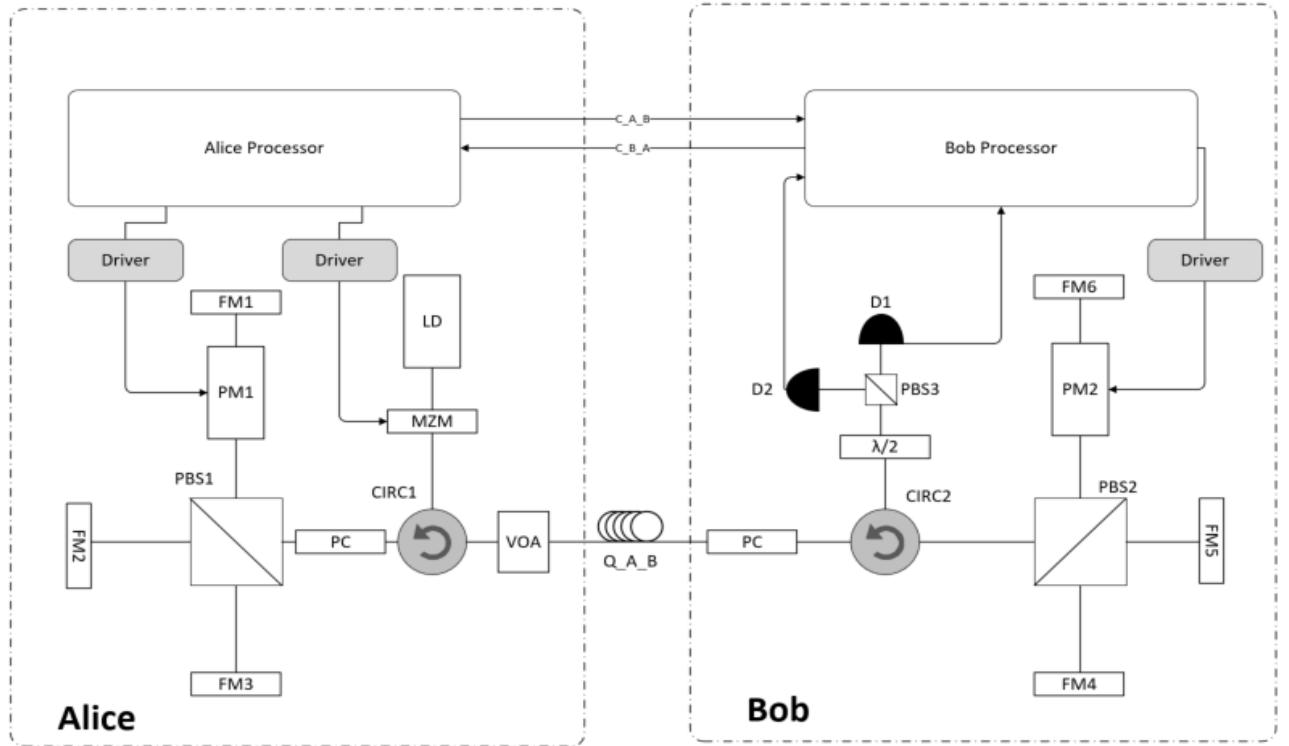


Figura 5.36: QOKD Experimental setup

and each pulse is divided in **PBS1** into two orthogonal components P_x and P_y . P_x is directly transmitted in **FM2** direction and it is reflected by it with its stated rotated, which means it has a new direction $|V\rangle$. This way, when it reaches again **PBS1** is reflected to **FM3** direction and it happens the same being the P_x component transmitted through the **PBS1** in **FM1** direction passing through the phase modulator and suffers a certain phase shift. Relatively to vertical component which reaches the **PBS1** and was reflected to **FM1** direction and passes through the phase modulator, **PM**, that applies a phase shift to it, than it follows to the **FM1** and is reflected rotated by 90° , meaning that it follows to **FM3** and it is reflected at its original state. At the end, the two components recombine in **PSB1** and the single photon pulse follows its path with a polarization state defined by the phase shift applied in **PM**.

In table 5.7 is present the phases shifts that must be applied at Phase Modulator in order to get the polarized photons chose by Alice.

Tabela 5.7: Different Alice's output polarization states based on shift phases applied in Phase Modulator.

| Alice: (ϕ_1, ϕ_2) | Output Polarization |
|-----------------------------------|---------------------|
| $(\frac{\pi}{2}, 0)$ | Vertical |
| $(\frac{\pi}{2}, \frac{3\pi}{2})$ | Horizontal |
| $(0, 0)$ | -45° |
| $(0, \frac{\pi}{2})$ | 45° |

In table 5.8 are described all components needed to build the experimental setup.

Tabela 5.8: List of material

| Material Name | Quantity | Status |
|---------------------------------------|----------|-----------|
| Laser semiconductor 1550nm | 1 | ✓ |
| Manual polarization controller | 5 | |
| Faraday Mirror (FM) | 6 | |
| Mach-Zehnder Modulator | 1 | ✓ 2.56GHz |
| Single Photon Detector | 2 | ✓ |
| Phase modulator | 2 | |
| Four-port polarization beam splitter | 2 | |
| Three-port polarization beam splitter | 1 | |
| Half-wave plate | 1 | |
| Optical circulator | 2 | |
| Variable Optical Attenuator | 1 | ✓ |
| Computer | 1 | |

5.7.4 Comparative Analysis

Bibliografia

- [1] Thorlabs. *Thorlabs Balance Amplified Photodetectors: PDB4xx Series Operation Manual*, 2014.
- [2] Ryo Namiki and Takuya Hirano. Security of quantum cryptography using balanced homodyne detection. *Physical Review A*, 67(2):022308, 2003.
- [3] Tie-Ming Liu, Lie-hui Jiang, Hong-qi He, Ji-zhong Li, and Xian Yu. *Researching on Cryptographic Algorithm Recognition Based on Static Characteristic-Code*, pages 140–147. Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- [4] Gilles Brassard and Louis Salvail. *Secret-Key Reconciliation by Public Discussion*, pages 410–423. Springer Berlin Heidelberg, Berlin, Heidelberg, 1994.
- [5] Min Xu, Run-hua Shi, Zhen-yu Luo, and Zhen-wan Peng. Nearest private query based on quantum oblivious key distribution. *Quantum Information Processing*, 16(12):286, Oct 2017.
- [6] Álvaro J Almeida, Nelson J Muga, Nuno A Silva, João M Prata, Paulo S André, and Armando N Pinto. Continuous control of random polarization rotations for quantum communications. *Journal of Lightwave Technology*, 34(16):3914–3922, 2016.

5.8 Radio Over Fiber Transmission System

| | | |
|----------------------|---|---|
| Student Name | : | Celestino Martins |
| Starting Date | : | September 25, 2017 |
| Goal | : | Simulation of Radio over fiber Transmission considering the uplink of base station cooperation systems. |

Radio over fiber (RoF) technology comprises the transmission over fiber technology, where radio signal is modulated onto optical carrier and transmitted over an optical fiber link to provide a simple antenna front ends with increased capacity and broadband wireless services. In this network a central processing units (CPU) is connected to numerous base stations (BSs) via optic fibers. That means, RoF networks use optic fiber links to distribute radio frequency (RF) signals between the CPU and BSs. The downlink RF signals are distributed from a CPU to many BSs through the fibres, while the uplink signals received at BSs are sent back to the CPU for any signal processing. Figure 5.37 shows a general RoF architecture, where the wireless signals are transported over the optical fiber between a CPU and a set of base stations before being radiated through the air. RoF transmission systems are usually classified into two main categories, depending on the frequency range of the radio signal to be transported: i) RF-over-Fiber; ii) intermediate frequency (IF)-over-Fiber.

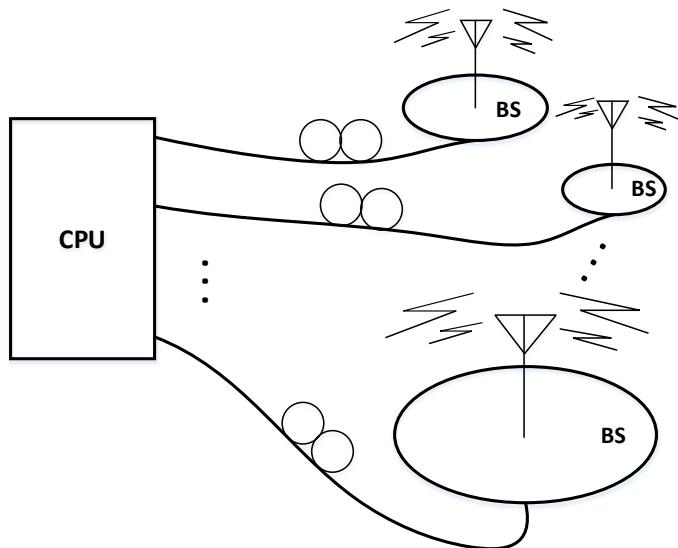


Figura 5.37: Schematic showing the concept of a centralized CPU architecture for future integrated optical wireless networks based on RoF.

- (i) In RF-over-Fiber architecture, a data-carrying RF (Radio Frequency) signal with a high frequency (usually greater than 10 GHz) is imposed on a lightwave signal before being transported over the optical link. Therefore, wireless signals are optically distributed to base stations directly at high frequencies and converted from the optical to electrical

domain at the base stations before being amplified and radiated by an antenna. As a result, no frequency up/down conversion is required at the various base stations, thereby resulting in simple and rather cost-effective implementation is enabled at the base stations.

- (ii) In IF-over-Fiber architecture, an IF (Intermediate Frequency) radio signal with a lower frequency (less than 10 GHz) is used for modulating light before being transported over the optical link. Therefore, before radiation through the air, the signal must be up-converted to RF at the base station.

In addition, the RoF technology can be implemented as analog RoF or digital RoF:

- (i) In analog RoF technology, the analog signal is transmitted over the optical fiber, being either RF signal, IF signal or baseband BB signal. In the optical transmitter, the RF/IF/BB signal is modulated onto the optical carrier by either using direct or external modulation of the laser. In this case, the signal distribution through RoF has the advantage of simplified BS design, however it is susceptible to fiber chromatic dispersion and nonlinearity generated by optical devices.
- (ii) In the digitized RoF the wireless carrier RF signal is first digitized prior to transport over the optical link. The digitalization of an RF signal produces a sampled digital signal in a serial form that can be directly modulated on an optical carrier, transmitted over the fiber optic link, and then detected like any other digital information. Modulation of the digital signal onto an optical carrier minimizes the nonlinear effects originating from the optical-to-electrical conversion function presented on analog RoF. In order to use not so high sample rates at the ADC/DAC components generally the bandpass sampling technique is applied to the RF signal.

5.8.1 Simulation

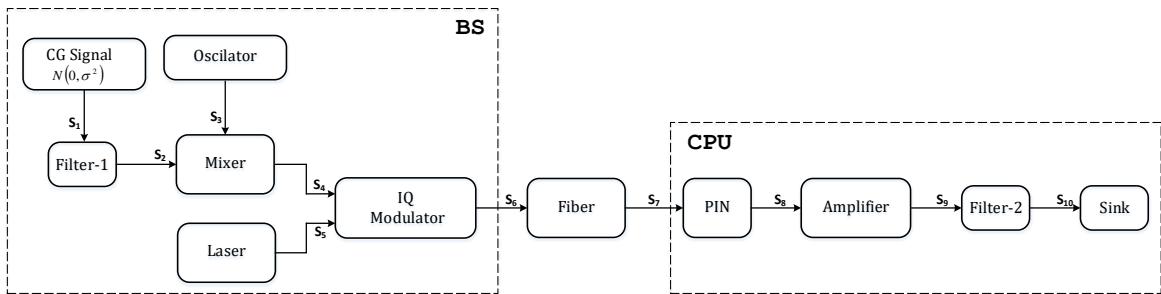


Figura 5.38: Simulation setup for the uplink of RoF transmission system. Complex Gaussian (CG);

Figure 5.38 depicts the simulation setup for an uplink of RoF, providing the connection between BS to CPU. At BS, we model the RF signal received from a mobile terminal, as zero

mean complex gaussian (CG) signal with a given bandwidth imposed by the low pass filter, Filter-1. The generated baseband signal is then up-converted to RF carrier frequency by utilizing an oscillator and a mixer. In this simulation we consider the RF carrier frequency between 2 to 5 GHz, according to the 5G technologies specifications. The generated RF passband signal modulates optical carrier by utilizing a laser and a mach-zehnder modulator (MZM). The optical signal is then transmitted to CPU using optical fiber. In CPU, the optical signal is detected by a PIN, amplified and followed with an electrical filter. After these operations, digital signal processing techniques can be applied to recover the transmitted signal.

Tabela 5.9: System Input Parameters.

| Parameter | Default Value | Description |
|--------------------------|---------------|-------------|
| sourceMode | | |
| symbolPeriod | | |
| samplePeriod | | |
| numberOfSamplesPerSymbol | | |
| filterType1 | | |
| rollOffFactor | | |
| filterType2 | | |
| outputOpticalPower | | |
| outputOpticalWavelength | | |
| rfCenterFrequency | | |
| fiberAttenuation | | |

Tabela 5.10: Header Files for RoF Transmission System.

| File Name | Description | Status |
|---------------------------|-------------|--------|
| complex_gaussian_signal.h | | |
| pulse_shaper.h | | ✓ |
| local_oscillator.h | | ✓ |
| mixer.h | | |
| cw_laser.h | | |
| iq_modulator.h | | ✓ |
| fiber.h | | |
| pin.h | | |
| amplifier.h | | |
| filter_rx.h | | |
| sink.h | | ✓ |
| netxpto.h | | ✓ |

5.8.2 Experimental

Tabela 5.11: Source Files for RoF Transmission System.

| File Name | Description | Status |
|-----------------------------|-------------|--------|
| complex_gaussian_signal.cpp | | |
| pulse_shaper.cpp | | ✓ |
| local_oscillator.cpp | | ✓ |
| mixer.cpp | | |
| cw_laser.cpp | | |
| iq_modulator.cpp | | ✓ |
| fiber.cpp | | |
| pin.cpp | | |
| amplifier.cpp | | |
| filter_rx.cpp | | |
| sink.cpp | | ✓ |
| netxpto.cpp | | ✓ |

Capítulo 6

Library

6.1 Add

Input Parameters

This block takes no parameters.

Functional Description

This block accepts two signals and outputs one signal built from a sum of the two inputs. The input and output signals must be of the same type, if this is not the case the block returns an error.

Input Signals

Number: 2

Type: Real, Complex or Complex_XY signal (ContinuousTimeContinuousAmplitude)

Output Signals

Number: 1

Type: Real, Complex or Complex_XY signal (ContinuousTimeContinuousAmplitude)

6.2 Bit Error Rate

| | | |
|--------------------|---|--|
| Header File | : | bit_error_rate.h |
| Source File | : | bit_error_rate.cpp |
| Version | : | 20171810 (Responsible: Daniel Pereira) |

Input Parameters

| Name | Type | Default Value |
|----------------|---------|---------------------|
| Confidence | double | 0.95 |
| MidReportSize | integer | 0 |
| LowestMinorant | double | 1×10^{-10} |

Input Signals

Number: 2

Type: Binary (DiscreteTimeDiscreteAmplitude)

Output Signals

Number: 1

Type: Binary (DiscreteTimeDiscreteAmplitude)

Functional Description

This block accepts two binary strings and outputs a binary string, outputting a 1 if the two input samples are equal to each other and 0 if not. This block also outputs .txt files with a report of the estimated Bit Error Rate (BER), $\widehat{\text{BER}}$ as well as the estimated confidence bounds for a given probability α .

The block allows for mid-reports to be generated, the number of bits between reports is customizable, if it is set to 0 then the block will only output the final report.

Theoretical Description

The $\widehat{\text{BER}}$ is obtained by counting both the total number received bits, N_T , and the number of coincidences, K , and calculating their relative ratio:

$$\widehat{\text{BER}} = 1 - \frac{K}{N_T}. \quad (6.1)$$

The upper and lower bounds, BER_{UB} and BER_{LB} respectively, are calculated using the Clopper-Pearson confidence interval, which returns the following simplified expression for

$N_T > 40$ [6]:

$$\text{BER}_{\text{UB}} = \widehat{\text{BER}} + \frac{1}{\sqrt{N_T}} z_{\alpha/2} \sqrt{\widehat{\text{BER}}(1 - \widehat{\text{BER}})} + \frac{1}{3N_T} \left[2 \left(\frac{1}{2} - \widehat{\text{BER}} \right) z_{\alpha/2}^2 + (2 - \widehat{\text{BER}}) \right] \quad (6.2)$$

$$\text{BER}_{\text{LB}} = \widehat{\text{BER}} - \frac{1}{\sqrt{N_T}} z_{\alpha/2} \sqrt{\widehat{\text{BER}}(1 - \widehat{\text{BER}})} + \frac{1}{3N_T} \left[2 \left(\frac{1}{2} - \widehat{\text{BER}} \right) z_{\alpha/2}^2 - (1 + \widehat{\text{BER}}) \right], \quad (6.3)$$

where $z_{\alpha/2}$ is the $100(1 - \frac{\alpha}{2})$ th percentile of a standard normal distribution.

Bibliografia

- [1] Thorlabs. *Thorlabs Balance Amplified Photodetectors: PDB4xx Series Operation Manual*, 2014.
- [2] Ryo Namiki and Takuya Hirano. Security of quantum cryptography using balanced homodyne detection. *Physical Review A*, 67(2):022308, 2003.
- [3] Tie-Ming Liu, Lie-hui Jiang, Hong-qi He, Ji-zhong Li, and Xian Yu. *Researching on Cryptographic Algorithm Recognition Based on Static Characteristic-Code*, pages 140–147. Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- [4] Gilles Brassard and Louis Salvail. *Secret-Key Reconciliation by Public Discussion*, pages 410–423. Springer Berlin Heidelberg, Berlin, Heidelberg, 1994.
- [5] Min Xu, Run-hua Shi, Zhen-yu Luo, and Zhen-wan Peng. Nearest private query based on quantum oblivious key distribution. *Quantum Information Processing*, 16(12):286, Oct 2017.
- [6] Álvaro J Almeida, Nelson J Muga, Nuno A Silva, João M Prata, Paulo S André, and Armando N Pinto. Continuous control of random polarization rotations for quantum communications. *Journal of Lightwave Technology*, 34(16):3914–3922, 2016.

6.3 Binary source

This block generates a sequence of binary values (1 or 0) and it can work in four different modes:

- 1. Random
- 3. DeterministicCyclic
- 2. PseudoRandom
- 4. DeterministicAppendZeros

This blocks doesn't accept any input signal. It produces any number of output signals.

Input Parameters

Parameter: mode{PseudoRandom}
 (Random, PseudoRandom, DeterministicCyclic, DeterministicAppendZeros)

Parameter: probabilityOfZero{0.5}
 (real $\in [0,1]$)

Parameter: patternLength{7}
 (integer $\in [1,32]$)

Parameter: bitStream{"0100011101010101"}
 (string of 0's and 1's)

Parameter: numberOfWorks{-1}
 (long int)

Parameter: bitPeriod{1.0/100e9}
 (double)

Methods

```
BinarySource(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig,
OutputSig){};
```

```
void initialize(void);
```

```
bool runBlock(void);
```

```
void setMode(BinarySourceMode m) BinarySourceMode const getMode(void)
```

```
void setProbabilityOfZero(double pZero)
```

```
double const getProbabilityOfZero(void)
```

```
void setBitStream(string bStream)
```

```

string const getBitStream(void)

void setNumberOfBits(long int nOfBits)

long int const getNumberOfBits(void)

void setPatternLength(int pLength)

int const getPatternLength(void)

void setBitPeriod(double bPeriod)

double const getBitPeriod(void)

```

Functional description

The *mode* parameter allows the user to select between one of the four operation modes of the binary source.

Random Mode Generates a 0 with probability *probabilityOfZero* and a 1 with probability $1 - \text{probabilityOfZero}$.

Pseudorandom Mode Generates a pseudorandom sequence with period $2^{patternLength} - 1$.

DeterministicCyclic Mode Generates the sequence of 0's and 1's specified by *bitStream* and then repeats it.

DeterministicAppendZeros Mode Generates the sequence of 0's and 1's specified by *bitStream* and then it fills the rest of the buffer space with zeros.

Input Signals

Number: 0

Type: Binary (DiscreteTimeDiscreteAmplitude)

Output Signals

Number: 1 or more

Type: Binary (DiscreteTimeDiscreteAmplitude)

Examples

Random Mode

PseudoRandom Mode As an example consider a pseudorandom sequence with *patternLength*=3 which contains a total of 7 ($2^3 - 1$) bits. In this sequence it is possible to find every combination of 0's and 1's that compose a 3 bit long subsequence with the exception of 000. For this example the possible subsequences are 010, 110, 101, 100, 111, 001 and 100 (they appear in figure 6.1 numbered in this order). Some of these require wrap.

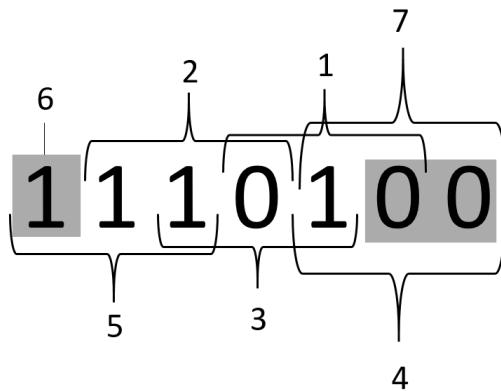


Figura 6.1: Example of a pseudorandom sequence with a pattern length equal to 3.

DeterministicCyclic Mode As an example take the *bit stream* '0100011101010101'. The generated binary signal is displayed in.

DeterministicAppendZeros Mode Take as an example the *bit stream* '0100011101010101'. The generated binary signal is displayed in 6.2.

Sugestions for future improvement

Implement an input signal that can work as trigger.

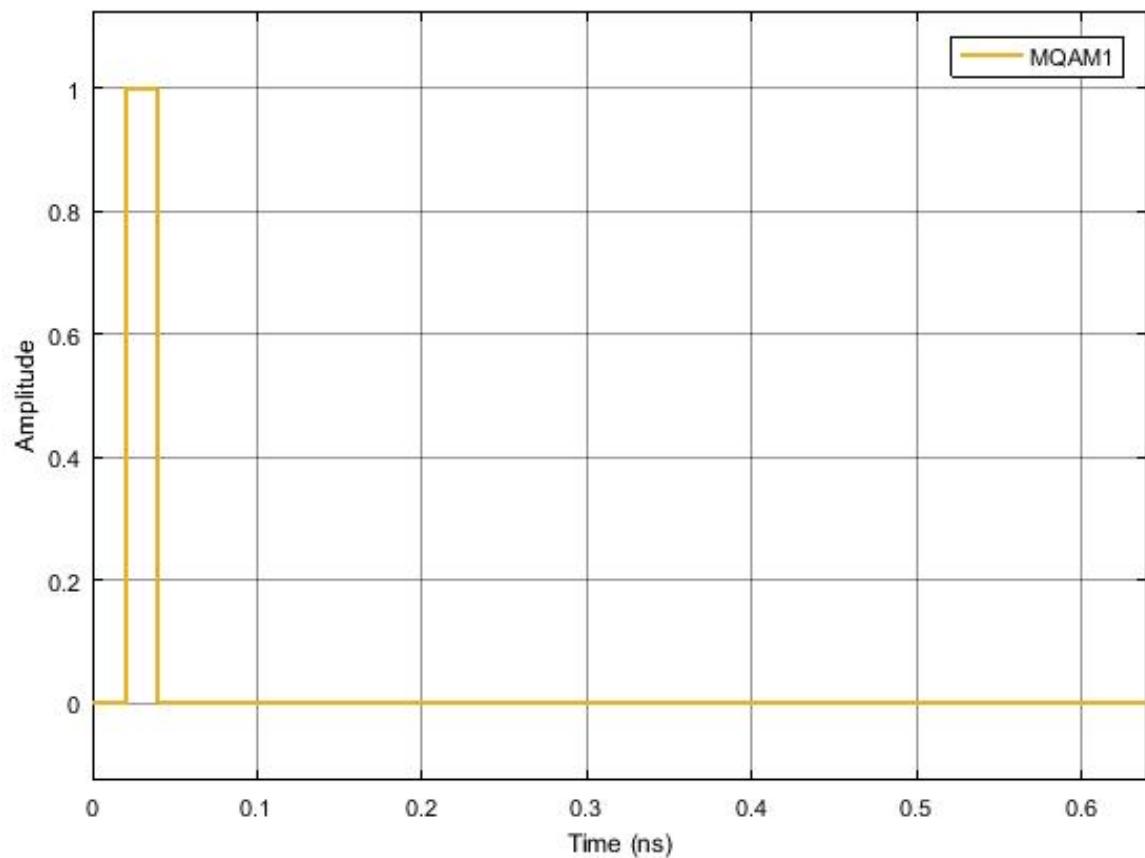


Figura 6.2: Binary signal generated by the block operating in the *Deterministic Append Zeros* mode with a binary sequence 01000...

6.4 Bit Decider

Input Parameters

Parameter: setPosReferenceValue

Parameter: setNegReferenceValue

Functional Description

This block accepts one real discrete signal and outputs a binary string, outputting a 1 if the input sample is above the predetermined reference level and 0 if it is below another reference value. The reference values are defined by the values of *PosReferenceValue* and *NegReferenceValue*.

Input Signals

Number: 1

Type: Real signal (DiscreteTimeContinuousAmplitude)

Output Signals

Number: 1

Type: Binary (DiscreteTimeDiscreteAmplitude)

6.5 Clock

This block doesn't accept any input signal. It outputs one signal that corresponds to a sequence of Dirac's delta functions with a user defined *period*.

Input Parameters

Parameter: period{ 0.0 };

Parameter: samplingPeriod{ 0.0 };

Methods

Clock()

Clock(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig, OutputSig)

void initialize(void)

bool runBlock(void)

void setClockPeriod(double per)

void setSamplingPeriod(double sPeriod)

Functional description

Input Signals

Number: 0

Output Signals

Number: 1

Type: Sequence of Dirac's delta functions.
(TimeContinuousAmplitudeContinuousReal)

Examples

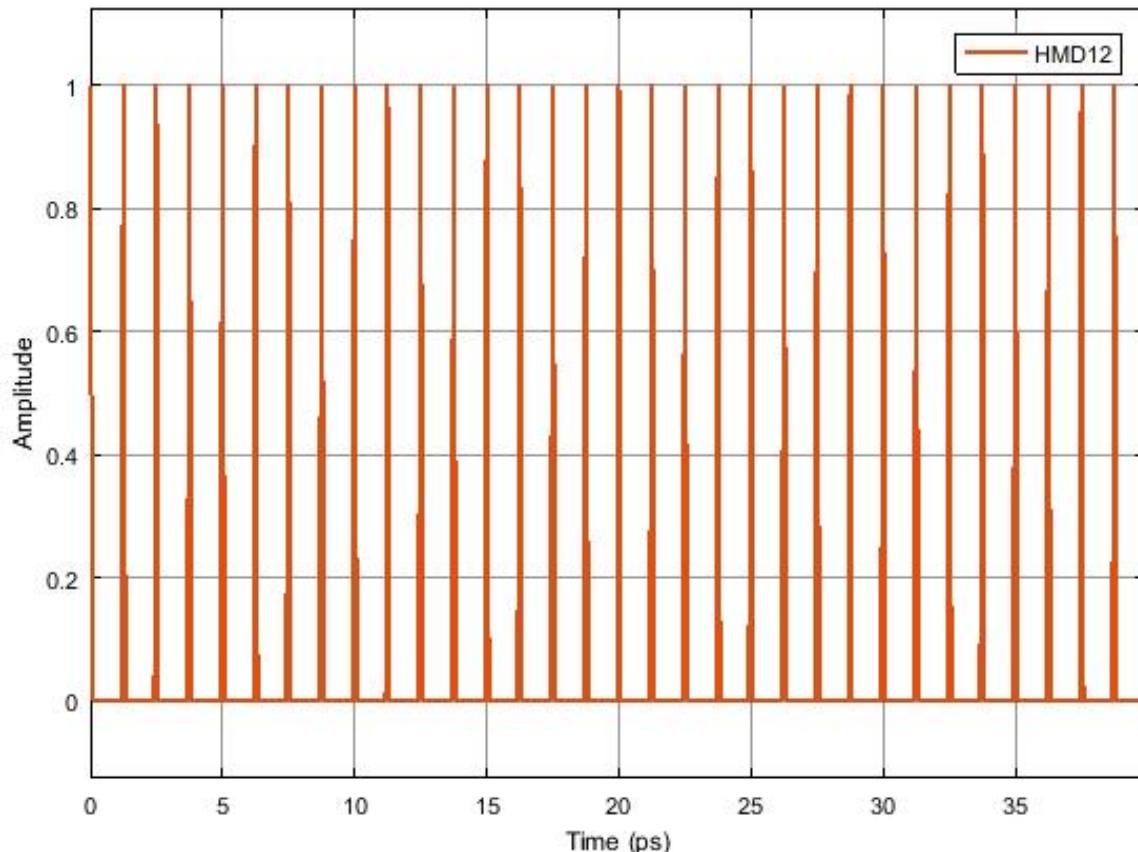


Figura 6.3: Example of the output signal of the clock

Sugestions for future improvement

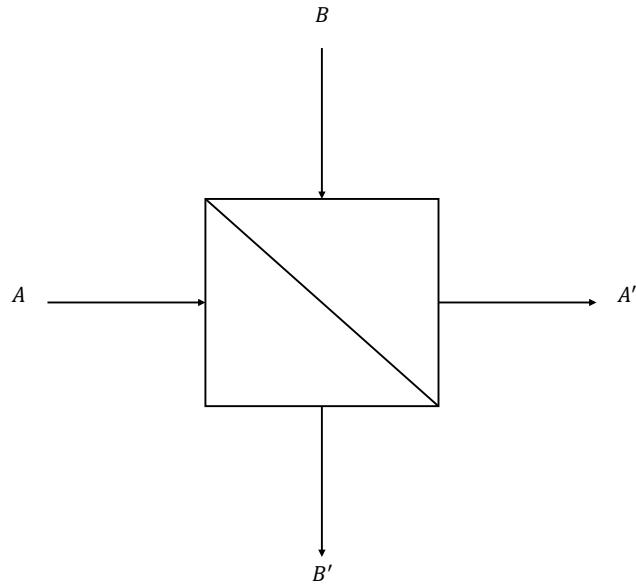


Figura 6.4: 2x2 coupler

6.6 Coupler 2 by 2

In general, the matrix representing 2x2 coupler can be summarized in the following way,

$$\begin{bmatrix} A' \\ B' \end{bmatrix} = \begin{bmatrix} T & iR \\ iR & T \end{bmatrix} \cdot \begin{bmatrix} A \\ B \end{bmatrix} \quad (6.4)$$

Where, A and B represent inputs to the 2x2 coupler and A' and B' represent output of the 2x2 coupler. Parameters T and R represent transmitted and reflected part respectively which can be quantified in the following form,

$$T = \sqrt{1 - \eta_R} \quad (6.5)$$

$$R = \sqrt{\eta_R} \quad (6.6)$$

Where, value of the $\sqrt{\eta_R}$ lies in the range of $0 \leq \sqrt{\eta_R} \leq 1$.

It is worth to mention that if we put $\eta_R = 1/2$ then it leads to a special case of "Balanced Beam splitter" which equally distribute the input power into both output ports.

6.7 Decoder

This block accepts a complex electrical signal and outputs a sequence of binary values (0's and 1's). Each point of the input signal corresponds to a pair of bits.

Input Parameters

Parameter: t_integer m{ 4 }

Parameter: vector<t_complex> iqAmplitudes{ { 1.0, 1.0 },{ -1.0, 1.0 },{ -1.0, -1.0 },{ 1.0, -1.0 } };

Methods

Decoder()

```
Decoder(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig,
OutputSig)
```

void initialize(void)

bool runBlock(void)

void setM(int mValue)

void getM()

void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues)

vector<t_iqValues>getIqAmplitudes()

Functional description

This block makes the correspondence between a complex electrical signal and pair of binary values using a predetermined constellation.

To do so it computes the distance in the complex plane between each value of the input signal and each value of the *iqAmplitudes* vector selecting only the shortest one. It then converts the point in the IQ plane to a pair of bits making the correspondence between the input signal and a pair of bits.

Input Signals

Number: 1

Type: Electrical complex (TimeContinuousAmplitudeContinuousReal)

Output Signals

Number: 1

Type: Binary

Examples

As an example take an input signal with positive real and imaginary parts. It would correspond to the first point of the *iqAmplitudes* vector and therefore it would be associated to the pair of bits 00.

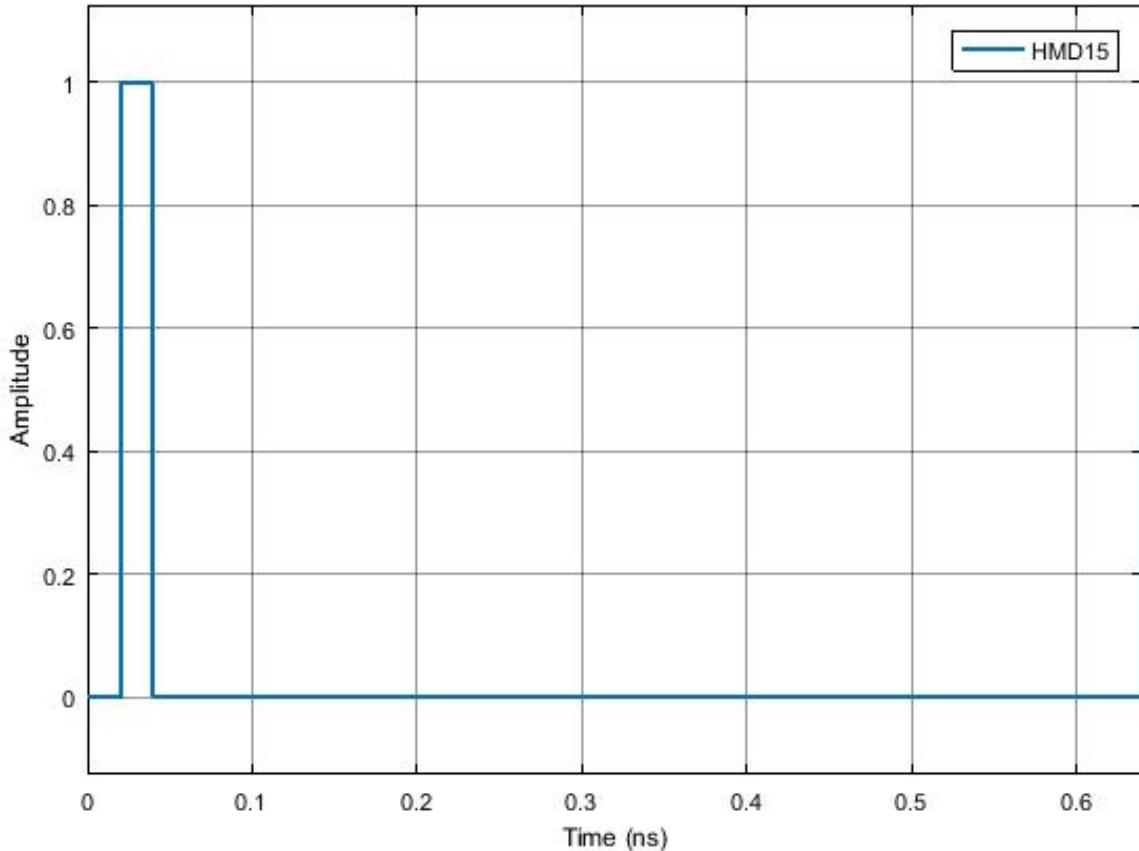


Figura 6.5: Example of the output signal of the decoder for a binary sequence 01. As expected it reproduces the initial bit stream

Sugestions for future improvement

6.8 Discrete to continuous time

This block converts a signal discrete in time to a signal continuous in time. It accepts one input signal that is a sequence of 1's and -1's and it produces one output signal that is a sequence of Dirac delta functions.

Input Parameters

Parameter: `numberOfSamplesPerSymbol{8}`
 (int)

Methods

```
DiscreteToContinuousTime(vector<Signal * > &inputSignals, vector<Signal * > &outputSignals) :Block(inputSignals, outputSignals){};
```

```
void initialize(void);
```

```
bool runBlock(void);
```

```
void setNumberOfSamplesPerSymbol(int nSamplesPerSymbol)
```

```
int const getNumberOfSamplesPerSymbol(void)
```

Functional Description

This block reads the input signal buffer value, puts it in the output signal buffer and it fills the rest of the space available for that symbol with zeros. The space available in the buffer for each symbol is given by the parameter *numberOfSamplesPerSymbol*.

Input Signals

Number : 1

Type : Sequence of 1's and -1's. (DiscreteTimeDiscreteAmplitude)

Output Signals

Number : 1

Type : Sequence of Dirac delta functions (ContinuousTimeDiscreteAmplitude)

Example

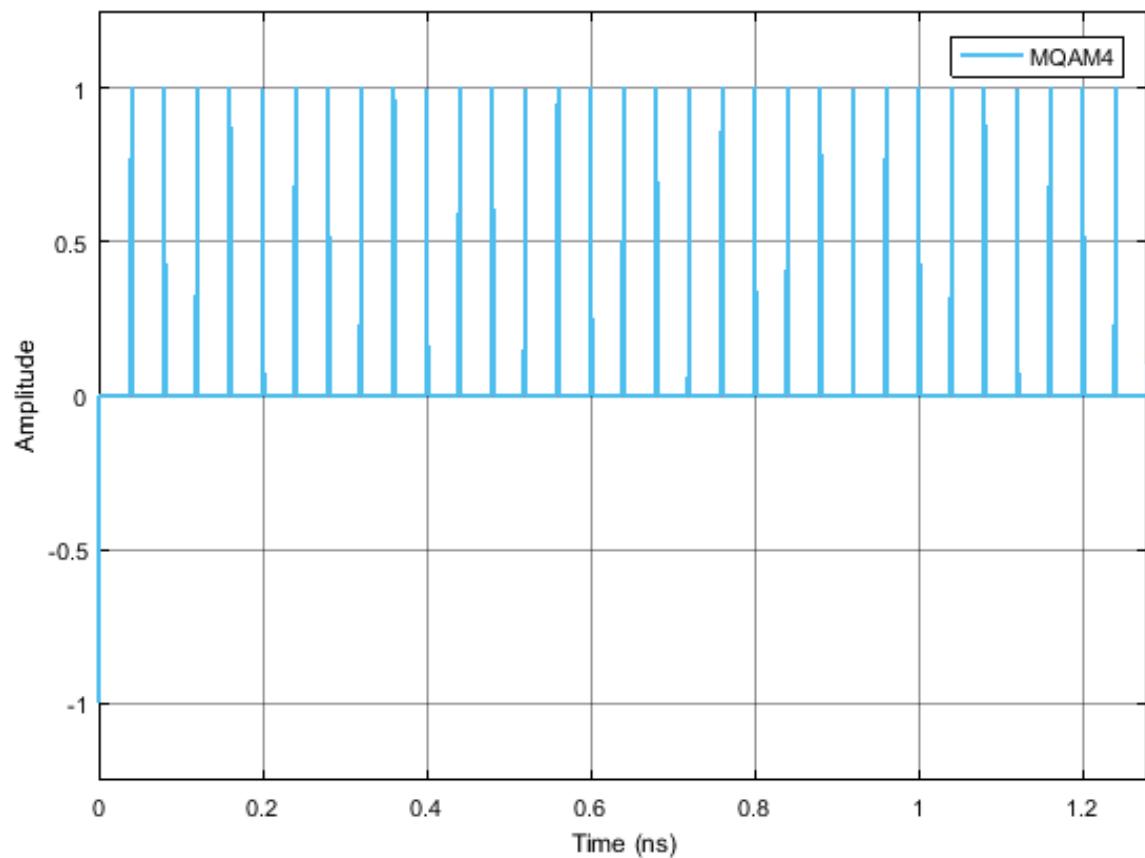


Figura 6.6: Example of the type of signal generated by this block for a binary sequence 0100...

6.9 Homodyne receiver

This block of code simulates the reception and demodulation of an optical signal (which is the input signal of the system) outputting a binary signal. A simplified schematic representation of this block is shown in figure 6.7.



Figura 6.7: Basic configuration of the MQAM receiver

Functional description

This block accepts one optical input signal and outputs one binary signal that corresponds to the M-QAM demodulation of the input signal. It is a complex block (as it can be seen from figure 6.8) of code made up of several simpler blocks whose description can be found in the *lib* repository.

In can also be seen from figure 6.8 that there's an extra internal (generated inside the homodyne receiver block) input signal generated by the *Clock*. This block is used to provide the sampling frequency to the *Sampler*.

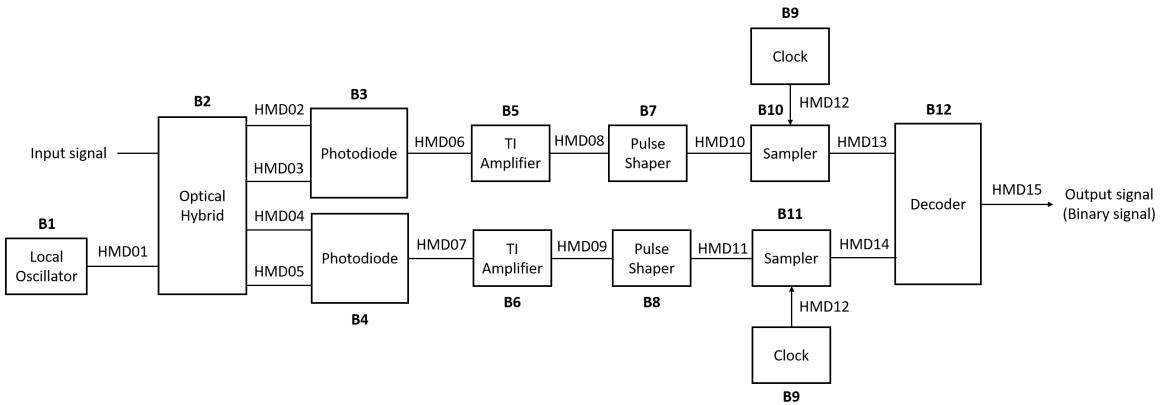


Figura 6.8: Schematic representation of the block homodyne receiver.

Input parameters

This block has some input parameters that can be manipulated by the user in order to change the basic configuration of the receiver. Each parameter has associated a function that allows for its change. In the following table (table 6.2) the input parameters and corresponding functions are summarized.

| Input parameters | Function | Type | Accepted values |
|--|------------------------------------|--|---|
| IQ amplitudes | setIqAmplitudes | Vector of coordinate points in the I-Q plane | Example for a 4-qam mapping: { { 1.0, 1.0 }, { -1.0, 1.0 }, { -1.0, -1.0 }, { 1.0, -1.0 } } |
| Local oscillator power (in dBm) | setLocalOscillatorOpticalPower_dBm | double(t_real) | Any double greater than zero |
| Local oscillator phase | setLocalOscillatorPhase | double(t_real) | Any double greater than zero |
| Responsivity of the photodiodes | setResponsivity | double(t_real) | $\in [0,1]$ |
| Amplification (of the TI amplifier) | setAmplification | double(t_real) | Positive real number |
| Noise amplitude (introduced by the TI amplifier) | setNoiseAmplitude | double(t_real) | Real number greater than zero |
| Samples to skip | setSamplesToSkip | int(t_integer) | |
| Save internal signals | setSaveInternalSignals | bool | True or False |
| Sampling period | setSamplingPeriod | double | Givem by symbolPeriod / samplesPerSymbol |

Tabela 6.1: List of input parameters of the block MQAM receiver

Methods

HomodyneReceiver(vector<Signal *> &inputSignal, vector<Signal *> &outputSignal)
(constructor)

```

void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues)
vector<t_iqValues> const getIqAmplitudes(void)
void setLocalOscillatorSamplingPeriod(double sPeriod)
void setLocalOscillatorOpticalPower(double opticalPower)
void setLocalOscillatorOpticalPower_dBm(double opticalPower_dBm)
void setLocalOscillatorPhase(double lOscillatorPhase)
void setLocalOscillatorOpticalWavelength(double lOscillatorWavelength)
void setSamplingPeriod(double sPeriod)

```

```
void setResponsivity(t_real Responsivity)  
void setAmplification(t_real Amplification)  
void setNoiseAmplitude(t_real NoiseAmplitude)  
void setImpulseResponseTimeLength(int impResponseTimeLength)  
void setFilterType(PulseShaperFilter fType)  
void setRollOffFactor(double rOffFactor)  
void setClockPeriod(double per)  
void setSamplesToSkip(int sToSkip)
```

Input Signals

Number: 1

Type: Optical signal

Output Signals

Number: 1

Type: Binary signal

Example

Sugestions for future improvement

6.10 IQ modulator

This blocks accepts one input signal continuous in both time and amplitude and it can produce either one or two output signals. It generates an optical signal and it can also generate a binary signal.

Input Parameters

Parameter: outputOpticalPower{1e-3}
(double)

Parameter: outputOpticalWavelength{1550e-9}
(double)

Parameter: outputOpticalFrequency{speed_of_light/outputOpticalWavelength}
(double)

Methods

```
IqModulator(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig,
OutputSig){};
```

```
void initialize(void);
```

```
bool runBlock(void);
```

```
void setOutputOpticalPower(double outOpticalPower)
```

```
void setOutputOpticalPower_dBm(double outOpticalPower_dBm)
```

```
void setOutputOpticalWavelength(double outOpticalWavelength)
```

```
void setOutputOpticalFrequency(double outOpticalFrequency)
```

Functional Description

This block takes the two parts of the signal: in phase and in amplitude and it combines them to produce a complex signal that contains information about the amplitude and the phase.

This complex signal is multiplied by $\frac{1}{2}\sqrt{outputOpticalPower}$ in order to reintroduce the information about the energy (or power) of the signal. This signal corresponds to an optical signal and it can be a scalar or have two polarizations along perpendicular axis. It is the signal that is transmitted to the receptor.

The binary signal is sent to the Bit Error Rate (BER) measurement block.

Input Signals

Number : 2

Type : Sequence of impulses modulated by the filter
 (ContinuousTimeContiousAmplitude))

Output Signals

Number : 1 or 2

Type : Complex signal (optical) (ContinuousTimeContinuousAmplitude) and binary signal (DiscreteTimeDiscreteAmplitude)

Example

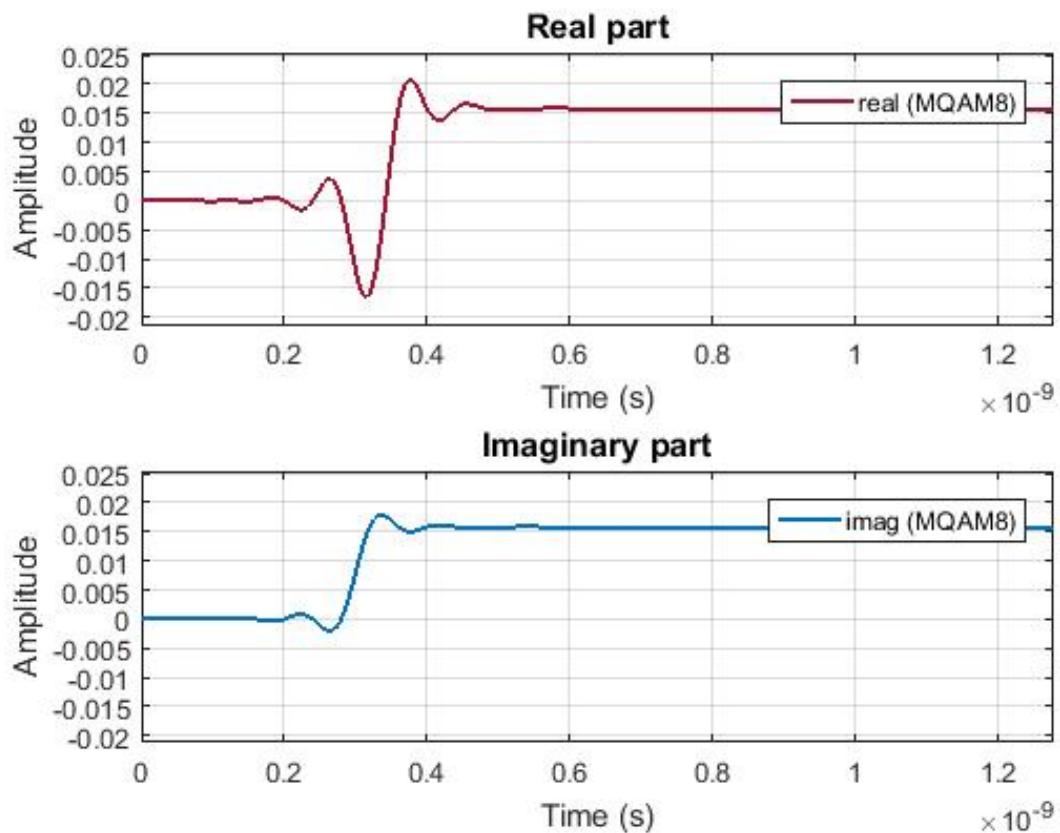


Figura 6.9: Example of a signal generated by this block for the initial binary signal 0100...

6.11 Local Oscillator

This block simulates a local oscillator with constant power and initial phase. It produces one output complex signal and it doesn't accept input signals.

Input Parameters

Parameter: opticalPower{ 1e-3 }

Parameter: wavelength{ 1550e-9 }

Parameter: frequency{ SPEED_OF_LIGHT / wavelength }

Parameter: phase{ 0 }

Parameter: samplingPeriod{ 0.0 }

Methods

LocalOscillator()

```
LocalOscillator(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig){};
```

void initialize(void);

bool runBlock(void);

void setSamplingPeriod(double sPeriod);

void setOpticalPower(double oPower);

void setOpticalPower_dBm(double oPower_dBm);

void setWavelength(double wlength);

void setPhase(double lOscillatorPhase);

Functional description

This block generates a complex signal with a specified phase given by the input parameter *phase*.

Input Signals

Number: 0

Output Signals

Number: 1

Type: Optical signal

Examples

Sugestions for future improvement

6.12 MQAM mapper

This block does the mapping of the binary signal using a m -QAM modulation. It accepts one input signal of the binary type and it produces two output signals which are a sequence of 1's and -1's.

Input Parameters

Parameter: m{4}
 (m should be of the form 2^n with n integer)

Parameter: iqAmplitudes{{ 1.0, 1.0 }, { -1.0, 1.0 }, { -1.0, -1.0 }, { 1.0, -1.0 }}

Methods

```
MQamMapper(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig) {};

void initialize(void);

bool runBlock(void);

void setM(int mValue);

void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues);
```

Functional Description

In the case of $m=4$ this block attributes to each pair of bits a point in the I-Q space. The constellation used is defined by the *iqAmplitudes* vector. The constellation used in this case is illustrated in figure 6.10.

Input Signals

Number : 1

Type : Binary (DiscreteTimeDiscreteAmplitude)

Output Signals

Number : 2

Type : Sequence of 1's and -1's (DiscreteTimeDiscreteAmplitude)

Example

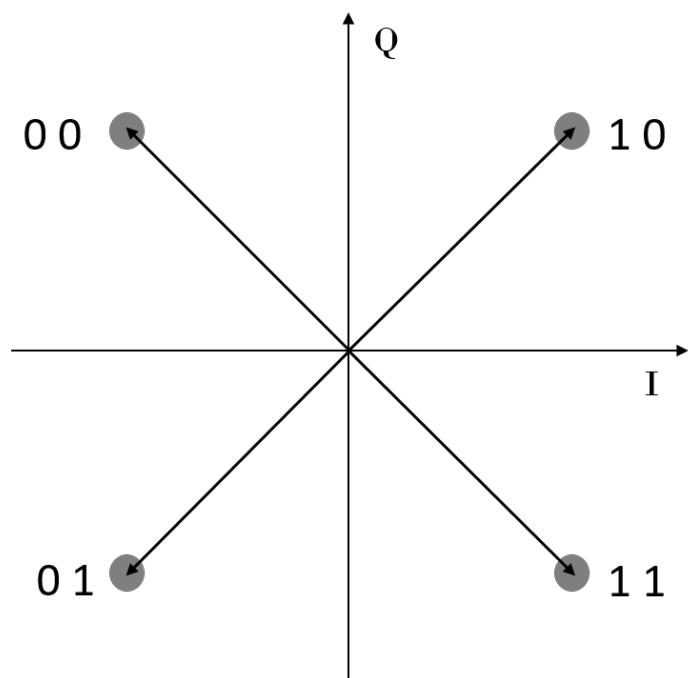


Figura 6.10: Constellation used to map the signal for $m=4$

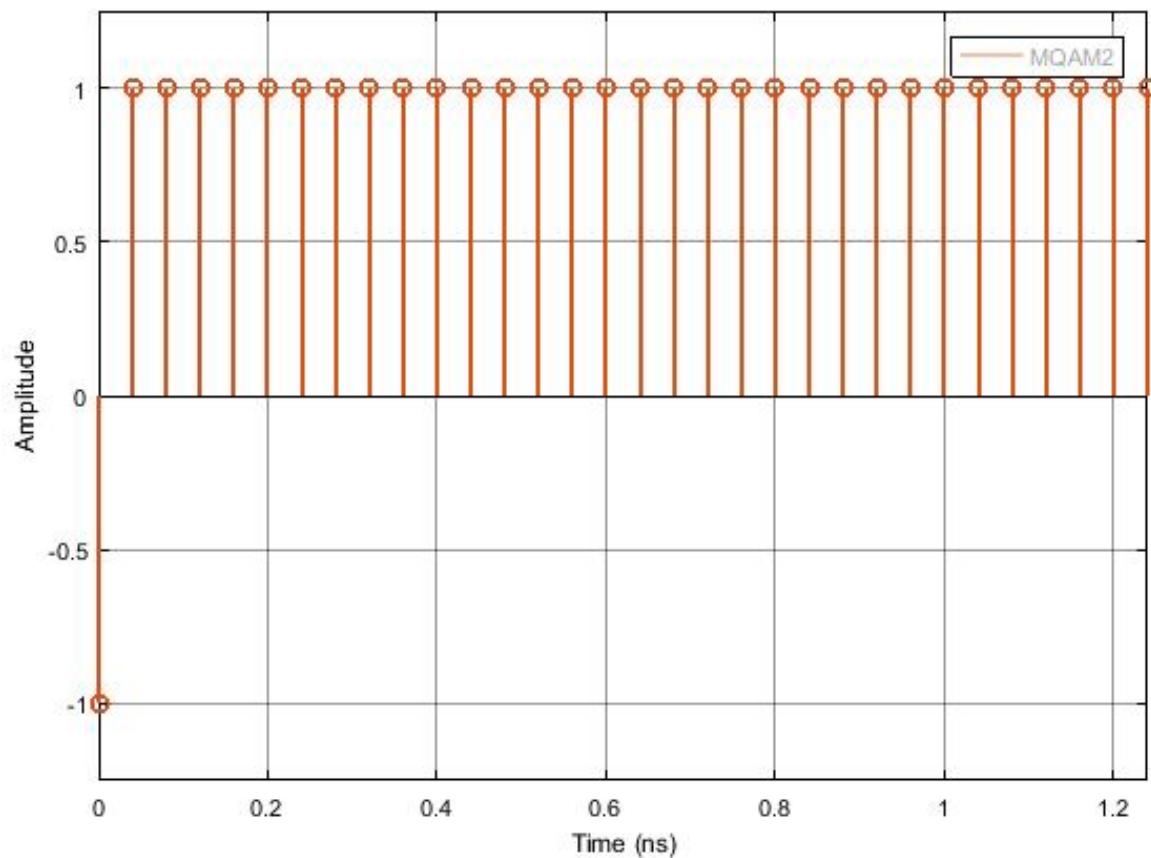


Figura 6.11: Example of the type of signal generated by this block for the initial binary signal 0100...

6.13 MQAM transmitter

This block generates a MQAM optical signal. It can also output the binary sequence. A schematic representation of this block is shown in figure 6.12.

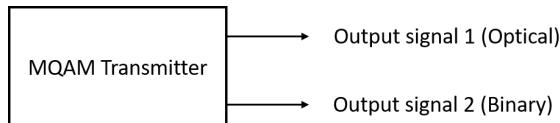


Figura 6.12: Basic configuration of the MQAM transmitter

Functional description

This block generates an optical signal (output signal 1 in figure 6.13). The binary signal generated in the internal block Binary Source (block B1 in figure 6.13) can be used to perform a Bit Error Rate (BER) measurement and in that sense it works as an extra output signal (output signal 2 in figure 6.13).

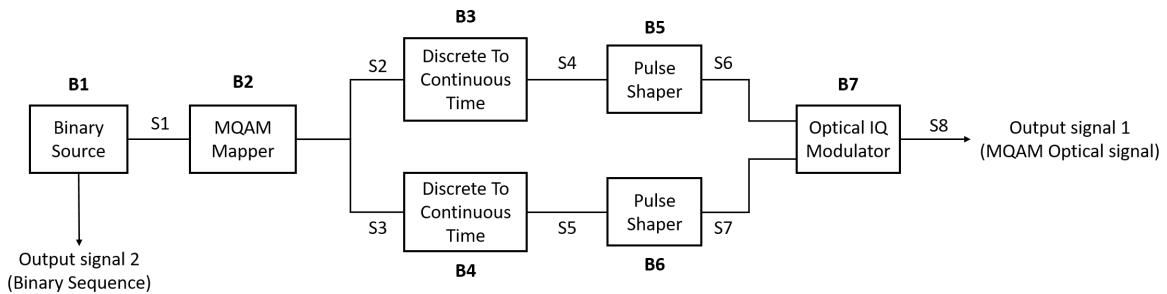


Figura 6.13: Schematic representation of the block MQAM transmitter.

Input parameters

This block has a special set of functions that allow the user to change the basic configuration of the transmitter. The list of input parameters, functions used to change them and the values that each one can take are summarized in table 6.2.

| Input parameters | Function | Type | Accepted values |
|------------------------------|-------------------------------|--|---|
| Mode | setMode() | string | PseudoRandom Random DeterministicAppendZeros DeterministicCyclic |
| Number of bits generated | setNumberOfBits() | int | Any integer |
| Pattern length | setPatternLength() | int | Real number greater than zero |
| Number of bits | setNumberOfBits() | long | Integer number greater than zero |
| Number of samples per symbol | setNumberOfSamplesPerSymbol() | int | Integer number of the type 2^n with n also integer |
| Roll off factor | setRollOffFactor() | double | $\in [0,1]$ |
| IQ amplitudes | setIqAmplitudes() | Vector of coordinate points in the I-Q plane | Example for a 4-qam mapping: { { 1.0, 1.0 }, { -1.0, 1.0 }, { -1.0, -1.0 }, { 1.0, -1.0 } } |
| Output optical power | setOutputOpticalPower() | int | Real number greater than zero |
| Save internal signals | setSaveInternalSignals() | bool | True or False |

Tabela 6.2: List of input parameters of the block MQAM transmitter

Methods

MQamTransmitter(vector<Signal *> &inputSignal, vector<Signal *> &outputSignal);
(constructor)

```

void set(int opt);

void setMode(BinarySourceMode m)

BinarySourceMode const getMode(void)

void setProbabilityOfZero(double pZero)

double const getProbabilityOfZero(void)

void setBitStream(string bStream)

string const getBitStream(void)

```

```
void setNumberOfBits(long int nOfBits)

long int const getNumberOfBits(void)

void setPatternLength(int pLength)

int const getPatternLength(void)

void setBitPeriod(double bPeriod)

double const getBitPeriod(void)

void setM(int mValue) int const getM(void)

void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues)

vector<t_iqValues> const getIqAmplitudes(void)

void setNumberOfSamplesPerSymbol(int n)

int const getNumberOfSamplesPerSymbol(void)

void setRollOffFactor(double rOffFactor)

double const getRollOffFactor(void)

void setSeeBeginningOfImpulseResponse(bool sBeginningOfImpulseResponse)

double const getSeeBeginningOfImpulseResponse(void)

void setOutputOpticalPower(t_real outOpticalPower)

t_real const getOutputOpticalPower(void)

void setOutputOpticalPower_dBm(t_real outOpticalPower_dBm)

t_real const getOutputOpticalPower_dBm(void)
```

Output Signals

Number: 1 optical and 1 binary (optional)

Type: Optical signal

Example

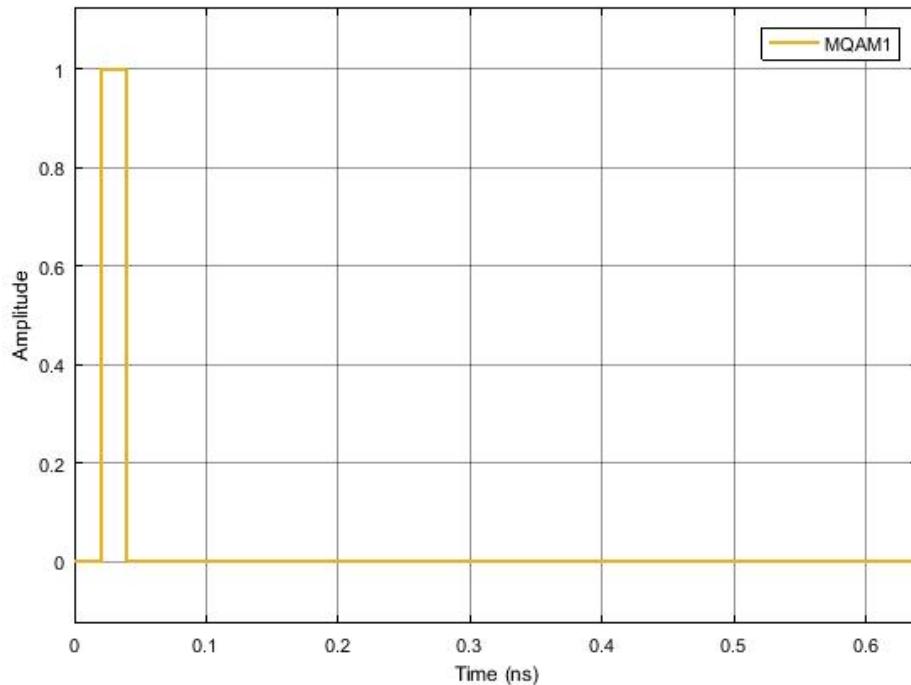


Figura 6.14: Example of the binary sequence generated by this block for a sequence 0100...

Sugestions for future improvement

Add to the system another block similar to this one in order to generate two optical signals with perpendicular polarizations. This would allow to combine the two optical signals and generate an optical signal with any type of polarization.

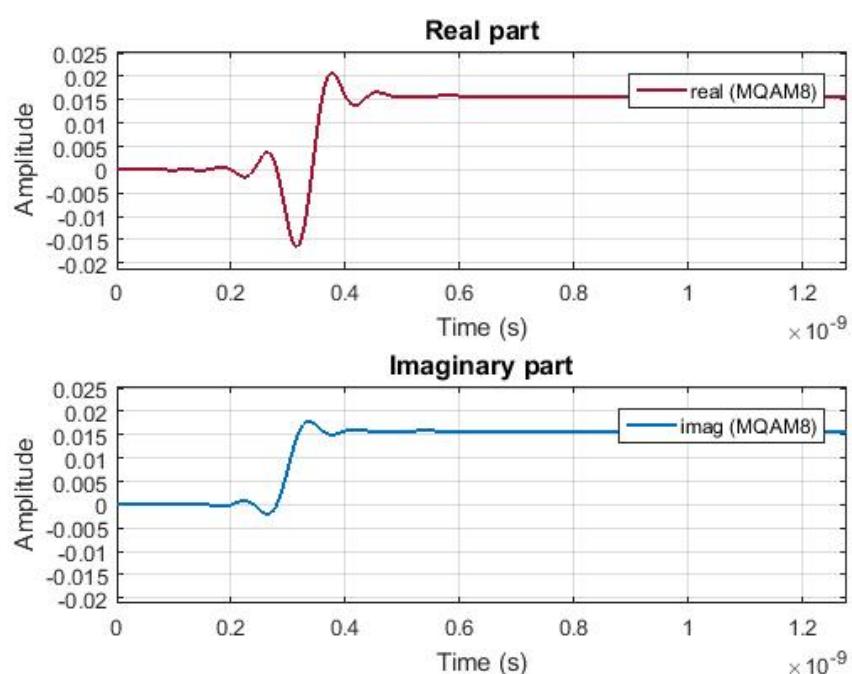


Figura 6.15: Example of the output optical signal generated by this block for a sequence 0100...

Capítulo 7

Mathlab Tools

7.1 Generation of AWG Compatible Signals

| | | |
|----------------------|---|--|
| Student Name | : | Francisco Marques dos Santos |
| Starting Date | : | September 1, 2017 |
| Goal | : | Convert simulation signals into waveform files compatible with the laboratory's Arbitrary Waveform Generator |
| Directory | : | mtools |

This section shows how to convert a simulation signal into an AWG compatible waveform file through the use of a matlab function called sgnToWfm. This allows the application of simulated signals into real world systems.

7.1.1 sgnToWfm

```
[data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] =  
sgnToWfm(fname_sgn, nReadr, fname_wfm);
```

Inputs

fname_sgn: Input filename of the signal (*.sgn) you want to convert. It must be a real signal (Type: TimeContinuousAmplitudeContinuousReal).

nReadr: Number of symbols you want to extract from the signal.

fname_wfm: Name that will be given to the waveform file.

Outputs

A waveform file will be created in the Matlab current folder. It will also return six variables in the workspace which are:

data: A vector with the signal data.

symbolPeriod: Equal to the symbol period of the corresponding signal.

samplingPeriod: Sampling period of the signal.

type: A string with the name of the signal type.

numberOfSymbols: Number of symbols retrieved from the signal.

samplingRate: Sampling rate of the signal.

Functional Description

This matlab function generates a *.wfm file given an input signal file (*.sgn). The waveform file is compatible with the laboratory's Arbitrary Waveform Generator (Tektronix AWG70002A). In order to recreate it appropriately, the signal must be real, not exceed 8×10^9 samples and have a sampling rate equal or bellow 16 GS/s.

This function can be called with one, two or three arguments:

Using one argument:

```
[data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] = sgnToWfm('S6.sgn');
```

This creates a waveform file with the same name as the *.sgn file and uses all of the samples it contains.

Using two arguments:

```
[data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] = sgnToWfm('S6.sgn',256);
```

This creates a waveform file with the same name as the signal file name and the number of samples used equals nReadr x samplesPerSymbol. The samplesPerSymbol constant is defined in the *.sgn file.

Using three arguments:

```
[data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] = sgnToWfm('S6.sgn',256,'myWaveform.wfm');
```

This creates a waveform file with the name "myWaveform"and the number of samples used equals nReadr x samplesPerSymbol. The samplesPerSymbol constant is defined in the *.sgn file.

7.1.2 Loading a signal to the Tektronix AWG70002A

The AWG we will be using is the Tektronix AWG70002A which has the following key specifications:

Sampling rate up to 16 GS/s: This is the most important characteristic because it determines the maximum sampling rate that your signal can have. It must not be over 16 GS/s or else the AWG will not be able to recreate it appropriately.

8 GSample waveform memory: This determines how many data points your signal can have.

After making sure this specifications are respected you can create your waveform using the function. When you load your waveform, the AWG will output it and repeat it constantly until you stop playing it.

1. Using the function sgnToWfm: Start up Matlab and change your current folder to mtools and add the signals folder that you want to convert to the Matlab search path. Use the function accordingly, putting as the input parameter the signal file name you want to convert.

2. AWG sampling rate: After calling the function there should be waveform file in the mtools folder, as well as a variable called samplingRate in the Matlab workspace. Make sure this is equal or bellow the maximum sampling frequency of the AWG (16 GS/s), or else the waveform can not be equal to the original signal. If it is higher you have to adjust the parameters in the simulation in order to decrease the sampling frequency of the signal(i.e. decreasing the bit period or reducing the samples per symbol).

3. Loading the waveform file to the AWG: Copy the waveform file to your pen drive and connect it to the AWG. With the software of the awg open, go to browse for waveform on the channel you want to use, and select the waveform file you created (Figure 7.1).

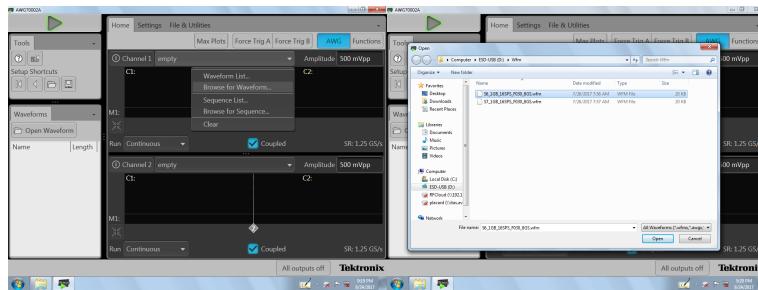


Figura 7.1: Selecting your waveform in the AWG

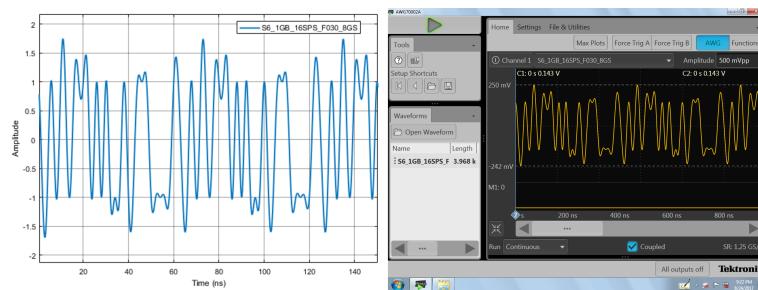


Figura 7.2: Comparison between the waveform in the AWG and the original signal before configuring the sampling rate

Now you should have the waveform displayed on the screen. Although it has the same shape, the waveform might not match the signal timing wise due to an incorrect sampling rate configured in the AWG. In this example (Figure 7.2), the original signal has a sample

rate of 8 GS/s and the AWG is configured to 1.25 GS/s. Therefore it must be changed to the correct value. To do this go to the settings tab, clock settings, and change the sampling rate to be equal to the one of the original signal, 8 GS/s (Figure 7.3). Compare the waveform in

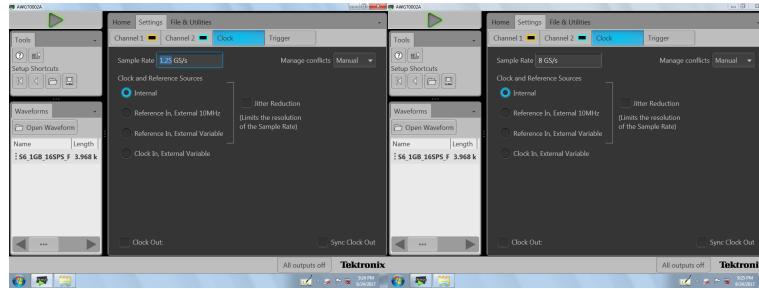


Figura 7.3: Configuring the right sampling rate

the AWG with the original signal, they should be identical (Figure 7.4).

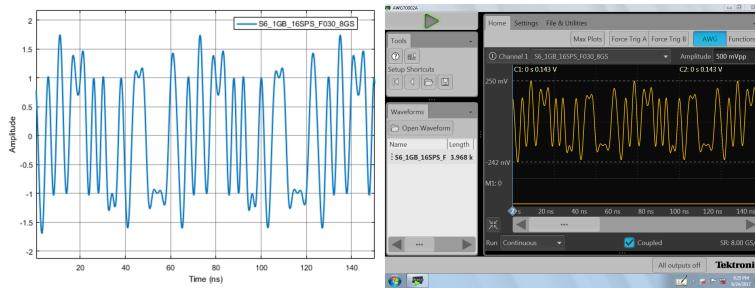


Figura 7.4: Comparison between the waveform in the AWG and the original signal after configuring the sampling rate

4. Generate the signal: Output the wave by enabling the channel you want and clicking on the play button.

