| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 5/12/06 | |

APPROVED: _____

DATE: _____ TITLE: _____

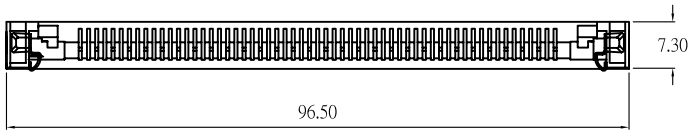





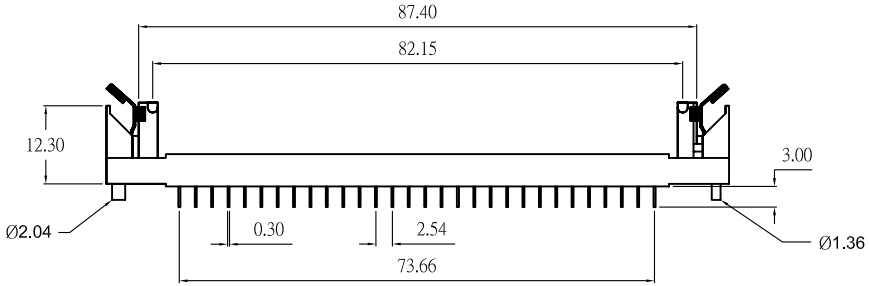


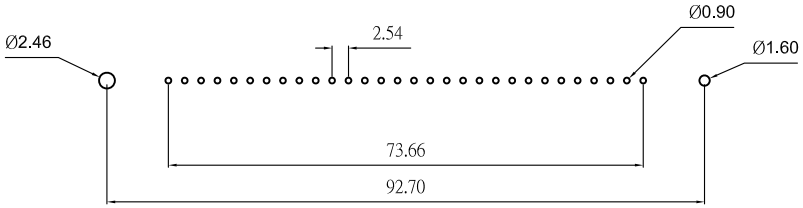


SPECIFICATIONS:
Material:
Insulator: LCP, glass reinforced, rated UL 94V-0
Insulator color: Natural
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1500 VAC for 1 minute
Operating temperature: −40˚C to +100˚C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260 for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | SS | 5/12/06 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710


TITLE
**SIMM Socket, Vertical Mount, Single Row, 30 Pos, Metal Latch , Thumb Lever**

| SIZE | PART NO. | REV. |
|---|---|---|
| X | **SIMM - 130 - VTL** | - |

REF: | SCALE: NTS | SHEET 1 OF 1