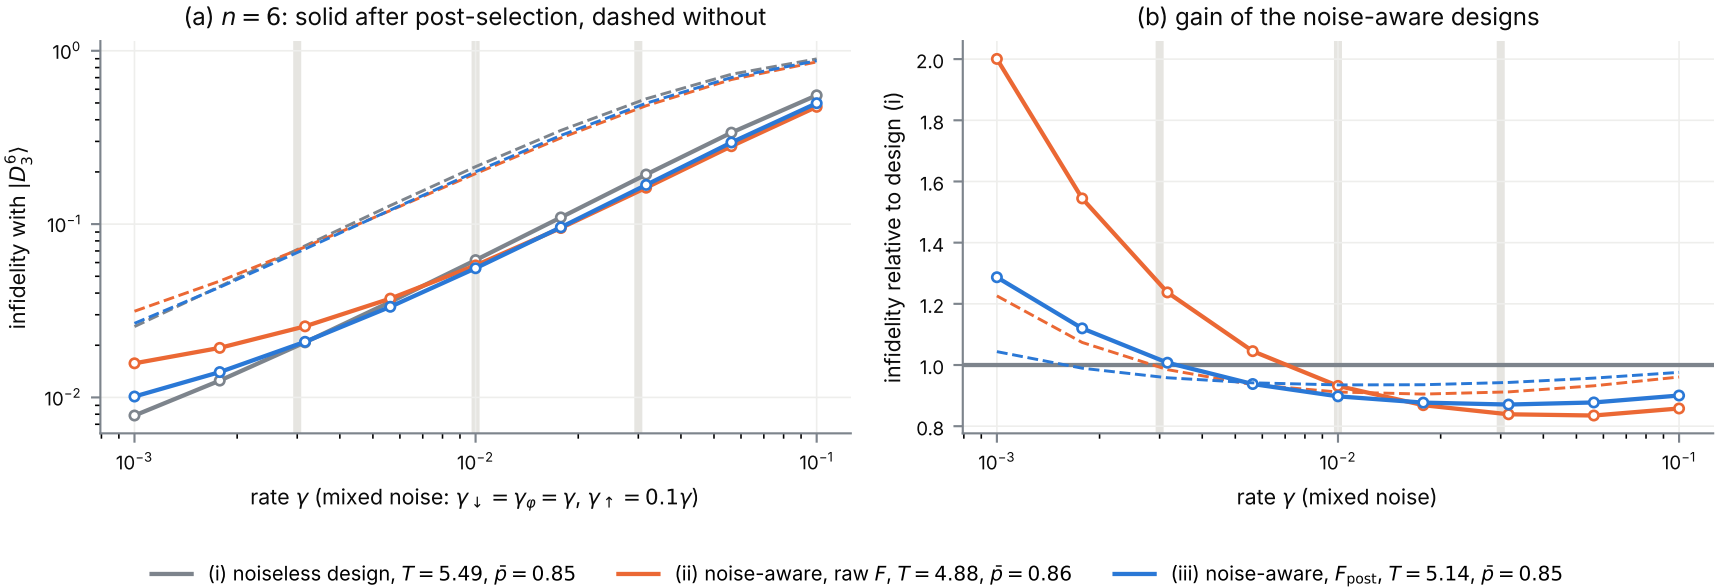
(a) $n = 6$: solid after post-selection, dashed without
infidelity with $|D_3^6\rangle$
10^0
10^{-1}
10^{-2}
10^{-3}
10^{-2}
10^{-1}
rate γ (mixed noise: $\gamma_\downarrow = \gamma_\varphi = \gamma$, $\gamma_\uparrow = 0.1\gamma$)
(b) gain of the noise-aware designs
infidelity relative to design (i)
2.0
1.8
1.6
1.4
1.2
1.0
0.8
10^{-3}
10^{-2}
10^{-1}
rate γ (mixed noise)
(i) noiseless design, $T = 5.49$, $\bar{p} = 0.85$
(ii) noise-aware, raw F, $T = 4.88$, $\bar{p} = 0.86$
(iii) noise-aware, F_{post}, $T = 5.14$, $\bar{p} = 0.85$