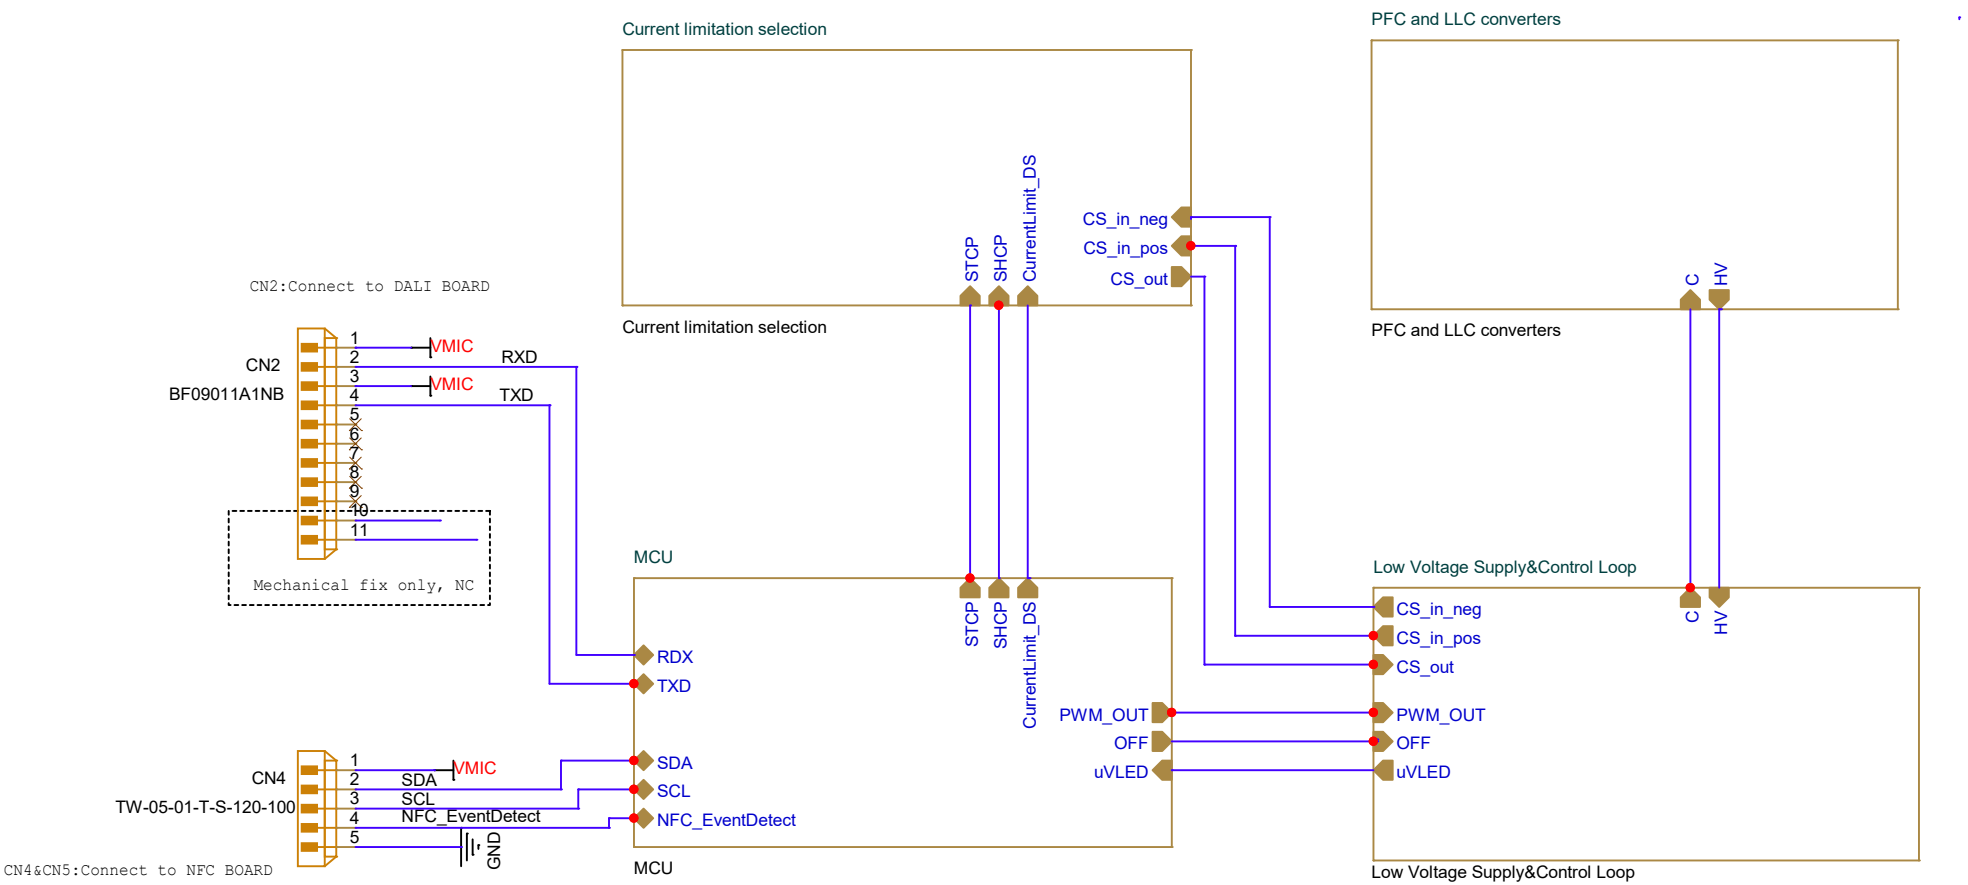

Current limitation selection
STCP
SHCP
CurrentLimit_DS
CS_in_neg
CS_in_pos
CS_out
Current limitation selection
PFC and LLC converters
C
HV
PFC and LLC converters
CN2:Connect to DALI BOARD
CN2
BF09011A1NB
1
2
3
4
5
6
7
8
9
10
11
VMIC
VMIC
RXD
TXD
Mechanical fix only, NC
MCU
RDX
TXD
SDA
SCL
NFC_EventDetect
STCP
SHCP
CurrentLimit_DS
PWM_OUT
OFF
uVLED
MCU
Low Voltage Supply&Control Loop
CS_in_neg
CS_in_pos
CS_out
PWM_OUT
OFF
uVLED
C
HV
Low Voltage Supply&Control Loop
CN4
TW-05-01-T-S-120-100
1
2
3
4
5
VMIC
SDA
SCL
NFC_EventDetect
GND
CN4&CN5:Connect to NFC BOARD

Connect to DALI BOARD

RDX — RXD

TXD — TXD

Connect to NFC BOARD

NFC_EventDetect — NFC_EventDetect

SDA — SDA

SCL — SCL

Connect to Low Voltage Supply&Control Loop

uVLED — uVLED

PWM_OUT — PWM_OUT


OFF — OFF

Connect to Current limitation selection


CurrentLimit_DS — CurrentLimit_DS

SHCP — SHCP

STCP — STCP

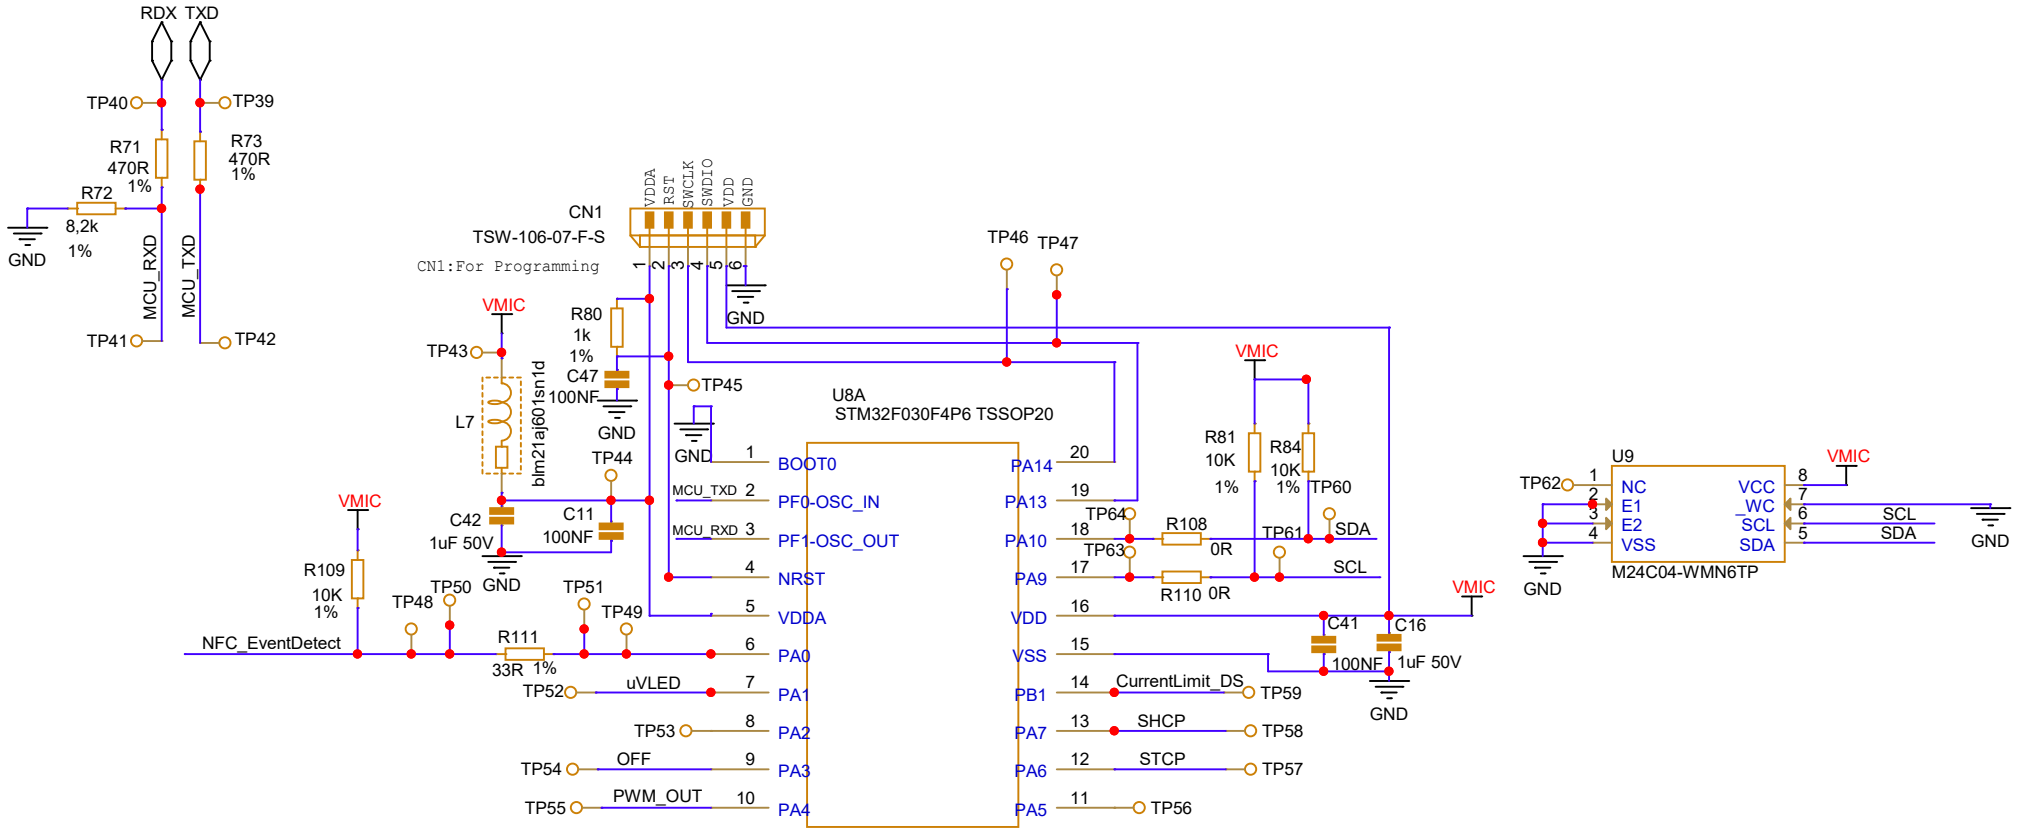

Note: Unspecified resistor/capacitor footprints on this page are 0805.

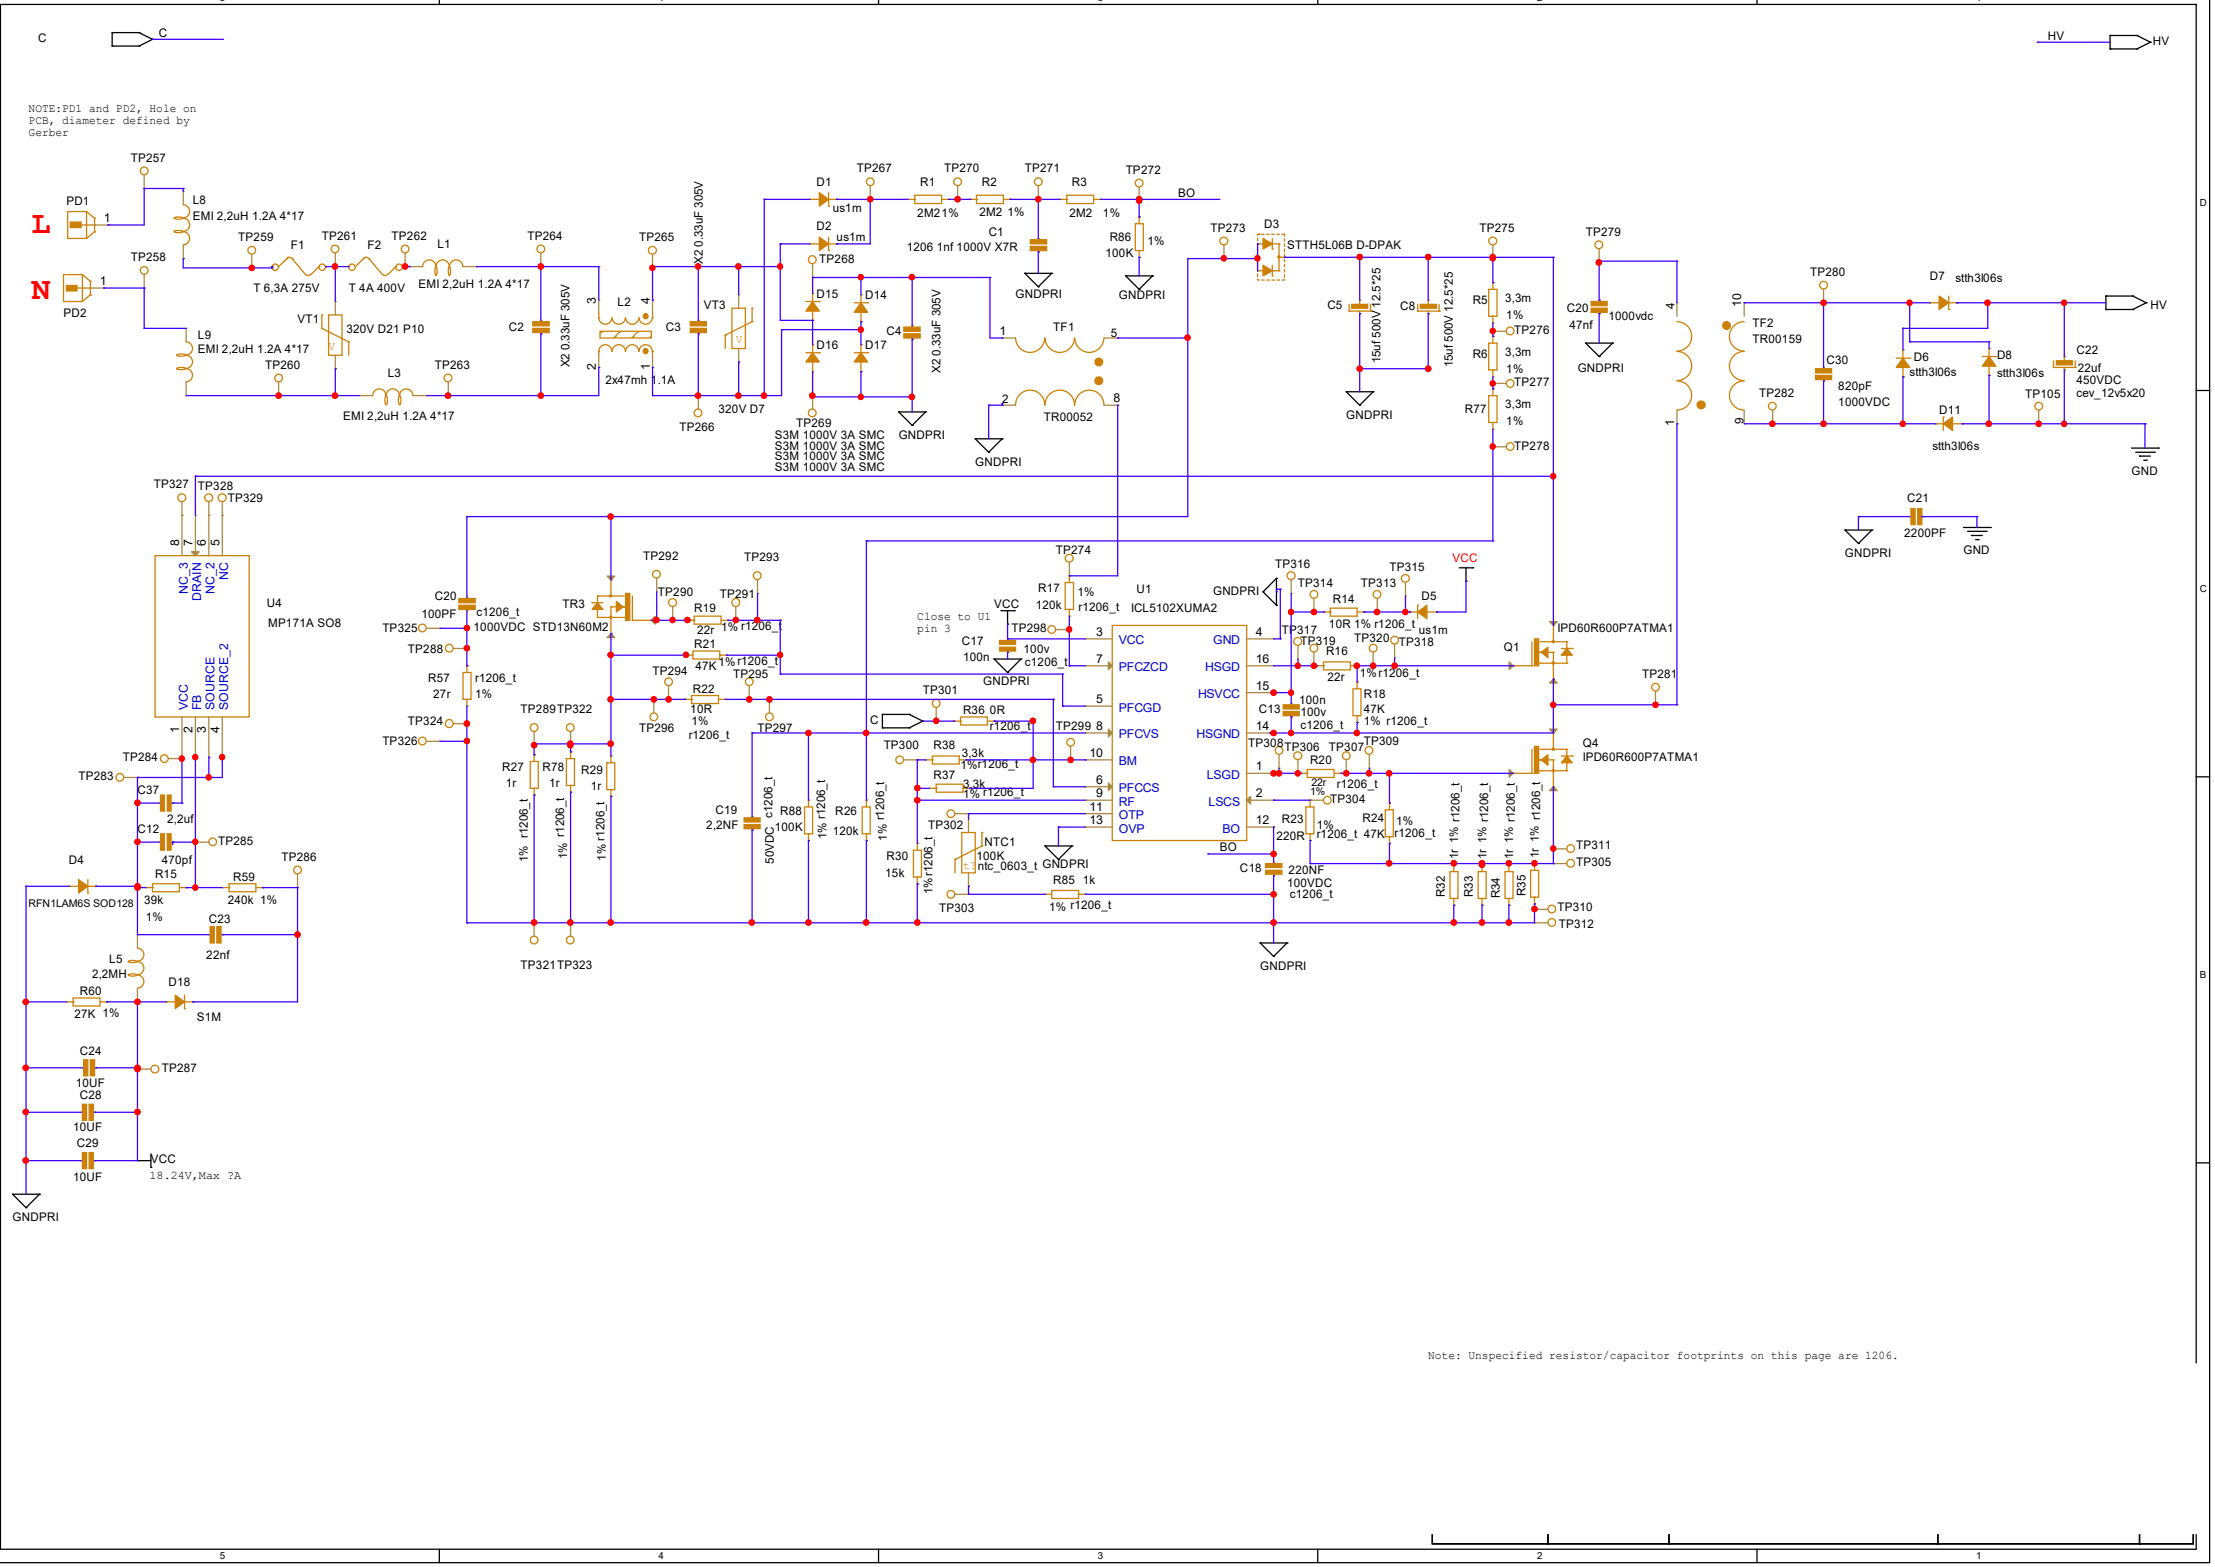

Note: Unspecified resistor/capacitor footprints on this page are 1206.

PWM_OUT
OFF
HV
CS_out

C
uVLED
CS_in_pos
CS_in_neg

HV
TP103
TP104
TP65
TP66
U6
MP171AGS-Z
NC_3
DRAIN
NC_2
NC
VCC
FB
SOURCE
SOURCE_2
TP67
TP68
C31
2,2uf
C32
470pf
TP69
TP70
TP71
D19
RFN1LAM6S SOD128
R67
39k 1%
R68
91k 1%
C33
22nf
L6
2,2MH
TP72
D20
S1M
R69
4,7K 1%
C34
10uF 25V
U5
TLVH431 SOT23-3
TP73
R42
33K 1%
TP74
C25
100n
100v c1206_t
Q3
BC846B
R47
10k 1%
R61
18K 1%
TP75
C27
1uF
VMIC
3.47V, Max ?A
GND

VMIC
R39
470R 1% r1206_t
TP90
C
R40
2K
1%
U2
TCLT1003
C19
3.3NF
GNDPRI
HV
TP80
R41
560k
1%
TP76
R44
620k
1%
TP77
R13
510K
1%
TP85
DIODE
D13
R51
3,6k
TP86
TP82
R43
10k
R7
10k
TP81
R48
33K
GND
OFF
TP79
TP78
R11
1K 1%
Q5
BC817-25
R28
47K
1% r1206_t
GND
U3
TSM103WIDT SO-8
OUT1
INVERTING IN1
NON-INVERTING IN1
VCC-
VCC+
OUT2
INVERTING IN2
NON-INVERTING IN2
C7
100n
100v
c1206_t
GND
D12
DIODE
C6
100n
100v
c1206_t
TP89
R12
39k
1%
TP87
TP88
TP84
R50
15k
1%
TP83
R46
10k
1%
TP91
CS_out
R45
3,3k
1%
TP94
TP93
TP92
PWM_OUT
R76
3,3k
1%
R75
3,3k
1%
R74
68k
1%
C2
1uF 100V
C3
1uF 100V
GND
GND

TSM103WIDT SO-8
Output 1
Inverting Input 1
Non-inverting Input 1
VCC-
OP1
OP2
VRef
VCC+
Output 2
Inverting Input 2
Non-inverting Input 2

Output to LED and CS
TP97
HV
NOTE:Connect to Current limitation selection
TP96
CS_in_neg
R52
0,75R 1%
CS_in_pos
TP95
R53
39r 1%
D10
S3JHE3
GND
L4
2x30uh 3A
C26
100nf
R64
430k
1%
TP99
R65
390k
1%
R66
6,2k
1%
GND
TP100
R31
0R r1206_t
TP101
R54
1k 1%
r1206_t
TP102
uVLED
C9
100n
100v
c1206_t
GND
TP98
PD4
PD5
+
−

NOTE:PD4 and PD5, Hole on PCB, diameter defined by Gerber

Note: Unspecified resistor/capacitor footprints on this page are 1206.


CS_in_pos
CS_in_neg
CurrentLimit_DS
SHCP
STCP


Close to U7
pin 6 and pin 2

Close to U8
pin 14 and pin 7

Close to U9
pin 14 and pin 7

NPIC6C596AD-SO16

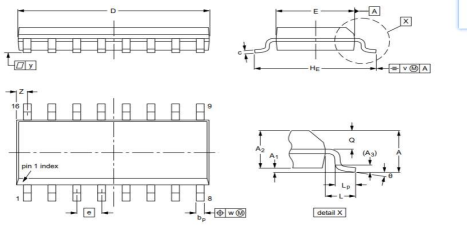





DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	$D^{(1)}$	$E^{(1)}$	e	H_E	L	L_p	Q	v	w	y	$Z^{(1)}$	θ
mm	1.75	0.25 0.10	1.45 1.25	0.25	0.49 0.36	0.25 0.19	10.0 9.8	4.0 3.8	1.27	6.2 5.8	1.05	1.0 0.4	0.7 0.6	0.25	0.25	0.1	0.7 0.3	8° 0°
inches	0.069	0.010 0.004	0.057 0.049	0.01	0.019 0.014	0.0100 0.0075	0.39 0.38	0.16 0.15	0.05	0.244 0.228	0.041	0.039 0.016	0.028 0.020	0.01	0.01	0.004	0.028 0.012	

CS_out

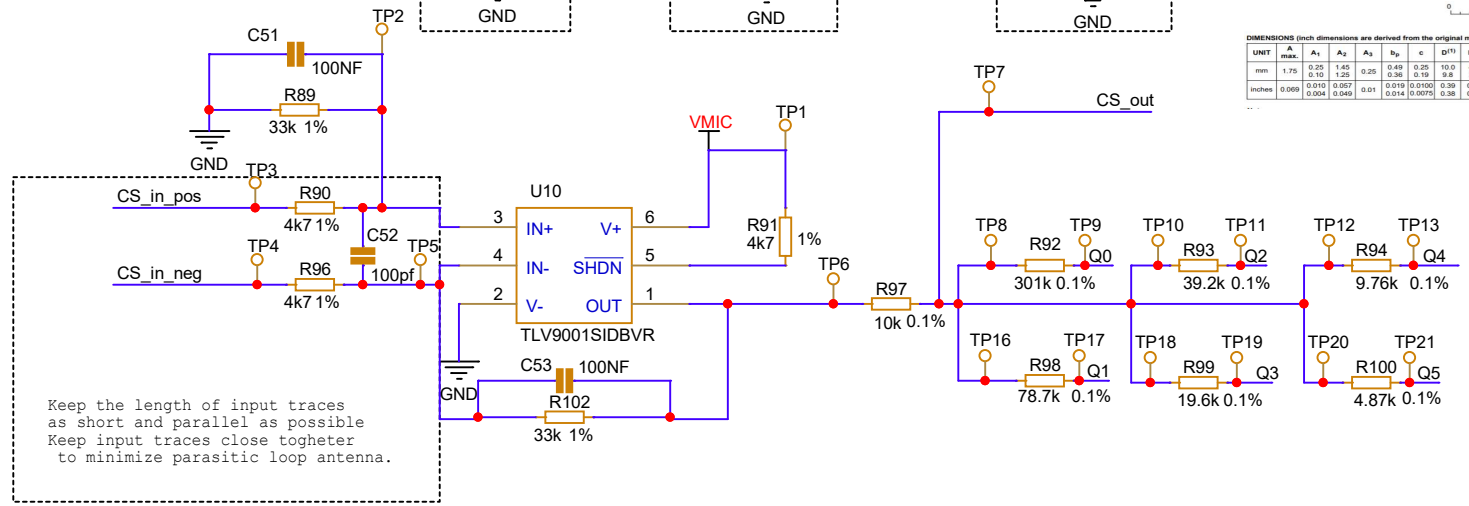

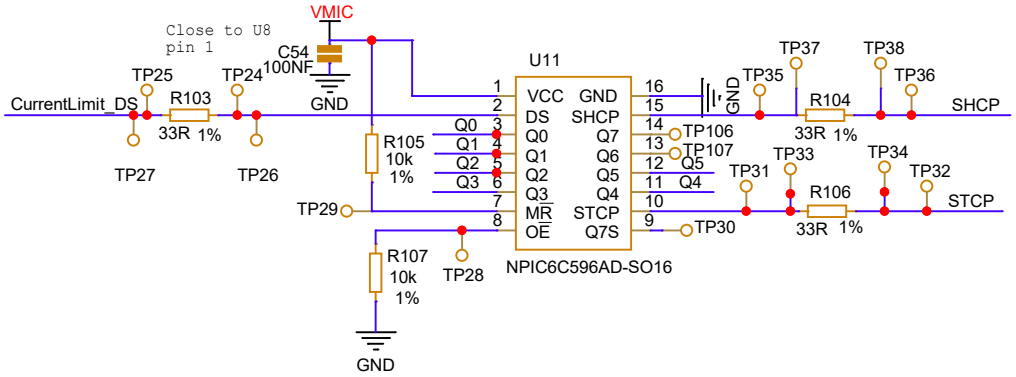

Note: Unspecified resistor/capacitor footprints on this page are 0805.