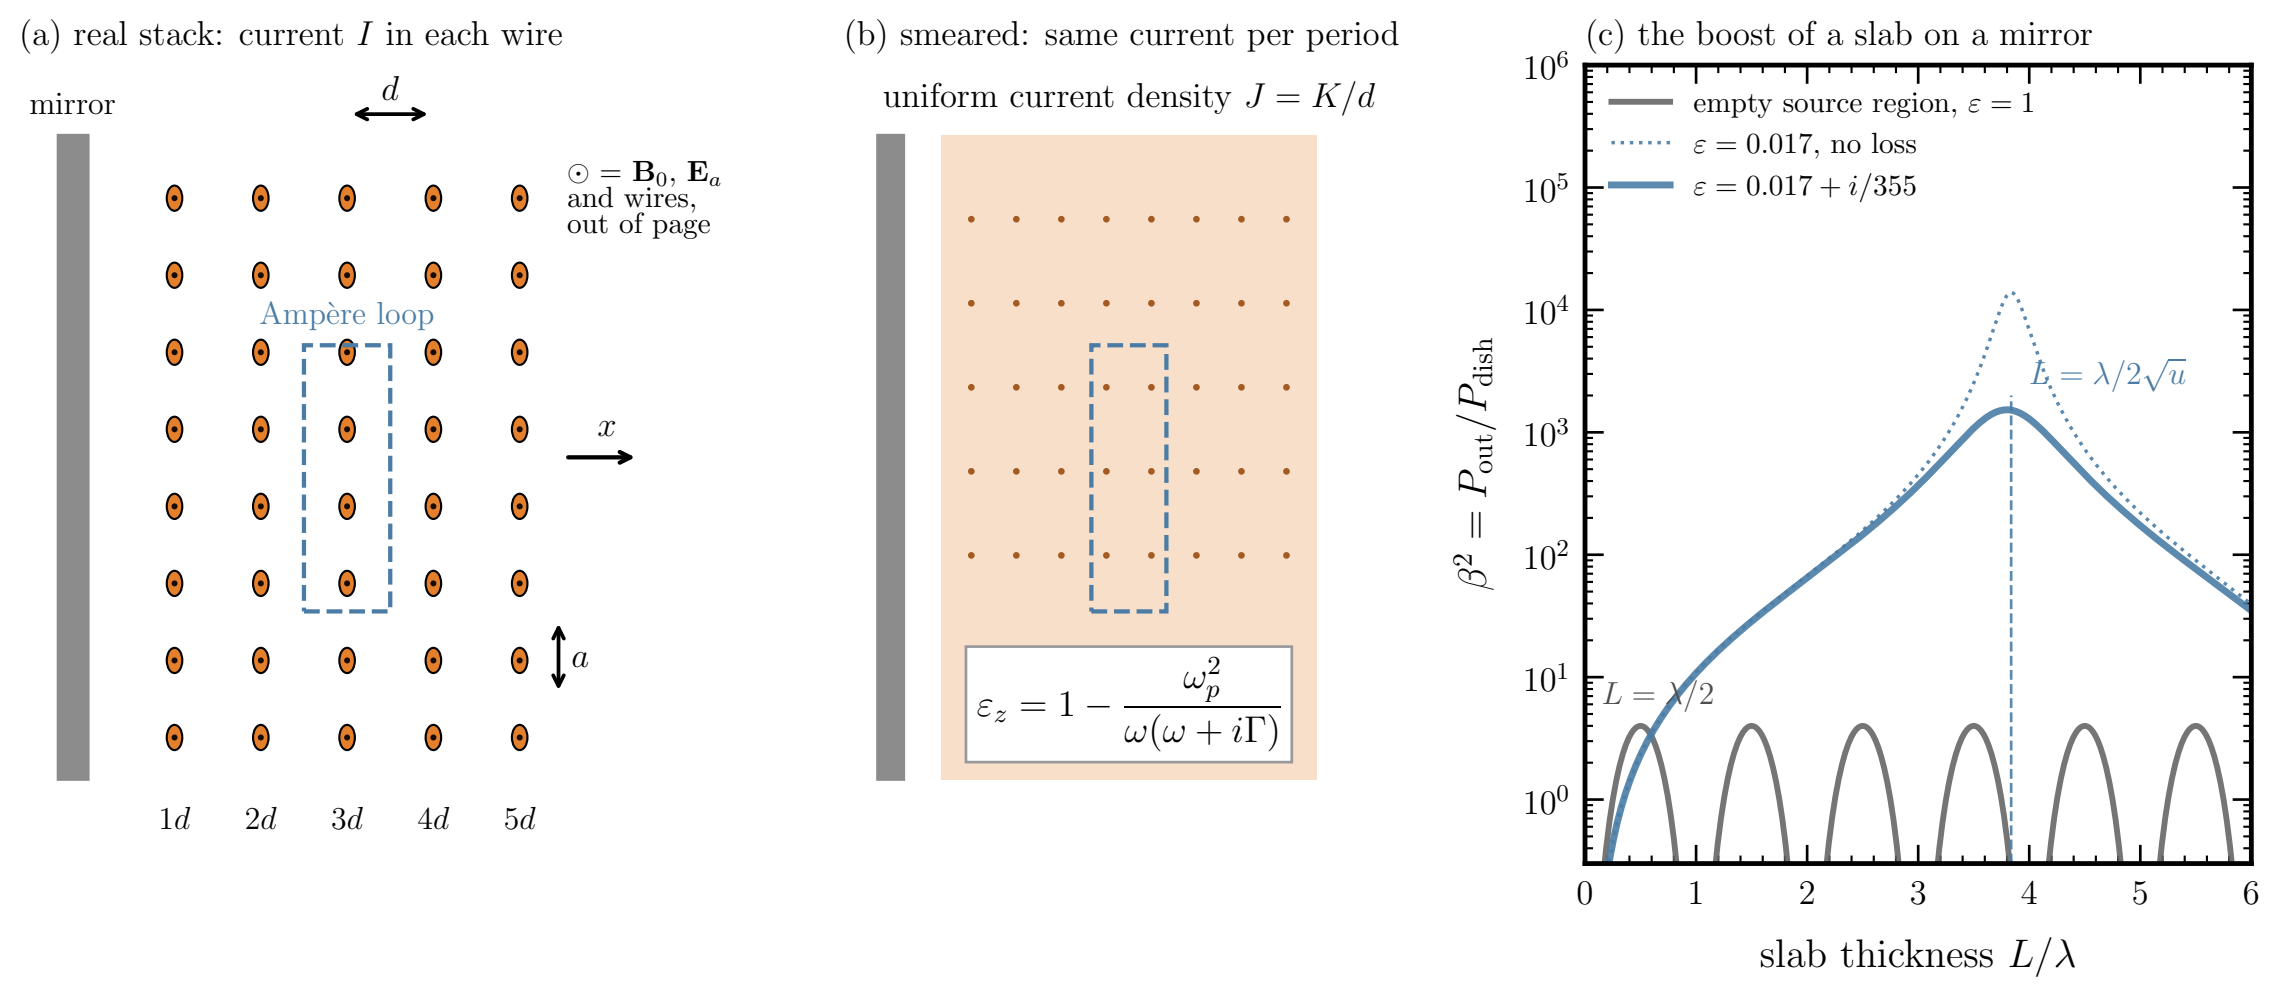

(a) real stack: current I in each wire
mirror
d
$\odot = \mathbf{B}_0, \mathbf{E}_a$ and wires, out of page
Ampère loop
x
a
$1d$
$2d$
$3d$
$4d$
$5d$
(b) smeared: same current per period
uniform current density $J = K/d$
$\varepsilon_z = 1 - \dfrac{\omega_p^2}{\omega(\omega + i\Gamma)}$
(c) the boost of a slab on a mirror
empty source region, $\varepsilon = 1$
$\varepsilon = 0.017$, no loss
$\varepsilon = 0.017 + i/355$
$L = \lambda/2\sqrt{u}$
$L = \lambda/2$
$\beta^2 = P_{\text{out}}/P_{\text{dish}}$
slab thickness L/λ