



THÈSE

En vue de l'obtention du

DOCTORAT DE L'UNIVERSITÉ DE TOULOUSE

Délivré par : *l'Institut Supérieur de l'Aéronautique et de l'Espace (ISAE)*

Présentée et soutenue le *30 Octobre 2020* par :

ANDREA BRUGNOLI

**A port-Hamiltonian formulation of flexible structures
Modelling and symplectic finite element discretization**

JURY

DANIEL ALAZARD	ISAE-Supaéro, Toulouse	Directeur
VALÉRIE P. BUDINGER	ISAE-Supaéro, Toulouse	Co-directeur
DENIS MATIGNON	ISAE-Supaéro, Toulouse	Examineur
THOMAS HÉLIE	Directeur des Recherches CNRS	Examineur
YANN LE GORREC	Institut FEMTO-ST	Rapporteur
ALESSANDRO MACCHELLI	Università di Bologna	Rapporteur
?????	?????	Président

École doctorale et spécialité :

EDSYS : Automatique

Unité de Recherche :

CSDV - Commande des Systèmes et Dynamique du Vol - ONERA - ISAE

Directeur de Thèse :

Daniel ALAZARD et Valérie POMMIER-BUDINGER

Rapporteurs :

Yann LE GORREC et Alessandro MACCHELLI

Abstract

3 This thesis aims at extending the port-Hamiltonian (pH) approach to continuum mechanics
 4 in higher geometrical dimensions (particularly in 2D). The pH formalism has a strong mul-
 5 tiphysics character and represents a unified framework to model, analyze and control both
 6 finite- and infinite-dimensional systems. Despite the large literature on this topic, elasticity
 7 problems in higher geometrical dimensions have almost never been considered. This work
 8 establishes the connection between port-Hamiltonian distributed systems and elasticity prob-
 9 lems. The originality resides in three major contributions. First, the novel pH formulation
 10 of plate models and coupled thermoelastic phenomena is presented. The use of tensor cal-
 11 culus is mandatory for continuum mechanical models and the inclusion of tensor variables is
 12 necessary to obtain an intrinsic, i.e. coordinate free, and equivalent pH description. Second,
 13 a finite element based discretization technique, capable of preserving the structure of the
 14 infinite-dimensional problem at a discrete level, is developed and validated. The discretiza-
 15 tion of elasticity problems in port-Hamiltonian form requires the use of non-standard finite
 16 elements. Nevertheless, the numerical implementation is performed thanks to well-established
 17 open-source libraries, providing external users with an easy to use tool for simulating flexible
 18 systems in pH form. Third, flexible multibody systems are recast in pH form by making use of
 19 a floating frame description valid under small deformations assumptions. This reformulation
 20 include all kinds of linear elastic models and exploits the intrinsic modularity of pH systems.

Résumé

22 Cette thèse vise à étendre l'approche port-Hamiltonienne (pH) à la mécanique des milieux
 23 continus dans des dimensions géométriques plus élevées (en particulier on se focalise sur la
 24 dimension 2). Le formalisme pH, avec son fort caractère multiphysique, représente un cadre
 25 unifié pour modéliser, analyser et contrôler les systèmes de dimension finie et infinie. Malgré
 26 l'abondante littérature sur ce sujet, les problèmes d'élasticité en deux ou trois dimensions
 27 géométriques n'ont presque jamais été considérés. Dans ce travail de thèse la connexion en-
 28 tre problèmes d'élasticité et systèmes distribués port-Hamiltoniens est établie. L'originalité
 29 apportée réside dans trois contributions majeures. Tout d'abord, une nouvelle formula-
 30 tion pH des modèles de plaques et des phénomènes thermoélastiques couplés est présen-
 31 tée. L'utilisation du calcul tensoriel est obligatoire pour modéliser les milieux continus et
 32 l'introduction de variables tensorielles est nécessaire pour obtenir une description pH équiva-
 33 lente qui soit intrinsèque, c'est-à-dire indépendante des coordonnées choisies. Deuxièmement,
 34 une technique de discrétisation basée sur les éléments finis et capable de préserver la structure
 35 du problème de la dimension infinie au niveau discret est développée et validée. La discrétis-
 36 sation des problèmes d'élasticité écrits en forme port-Hamiltonienne nécessite l'utilisation
 37 d'éléments finis non standards. Néanmoins, l'implémentation numérique est réalisée grâce
 38 à des bibliothèques open source bien établies, fournissant aux utilisateurs externes un outil
 39 facile à utiliser pour simuler des systèmes flexibles sous forme pH. Troisièmement, une nou-
 40 velle formulation pH de la dynamique multicorps flexible est dérivée. Cette reformulation,
 41 valable sous de petites hypothèses de déformations, inclut toutes sortes de modèles élastiques
 42 linéaires et exploite la modularité intrinsèque des systèmes pH.

Acknowledgments

Remerciements

Ringraziamenti

Contents

48	Abstract	i
49	Résumé	iii
50	Acknowledgments	v
51	Remerciements	vii
52	Ringraziamenti	ix
53	List of Acronyms	xxi
54	I Introduction and state of the art	1
55	1 Introduction	3
56	1.1 Motivation and context	3
57	1.2 Overview of chapters	3
58	1.3 Contributions	3
59	2 Literature review	5
60	2.1 Port-Hamiltonian distributed systems	5
61	2.2 Structure-preserving discretization	5
62	2.3 Mixed finite element for elasticity	5
63	2.4 Multibody dynamics	6
64	3 Reminder on port-Hamiltonian systems	7
65	3.1 Finite dimensional setting	8
66	3.1.1 Dirac structure	8

67	3.1.2	Finite dimensional port-Hamiltonian systems	9
68	3.2	Infinite dimensional setting	9
69	3.2.1	Linear differential operators	10
70	3.2.2	Constant Stokes-Dirac structures	12
71	3.2.3	Distributed port-Hamiltonian systems	14
72	3.3	Some examples of known distributed port-Hamiltonian systems	15
73	3.3.1	Wave equation	16
74	3.3.2	Euler Bernoulli beam	17
75	3.3.3	2D shallow water equations	19
76	3.4	Conclusion	21
77	II	Port-Hamiltonian elasticity and thermoelasticity	23
78	4	Elasticity in port-Hamiltonian form	25
79	4.1	Continuum mechanics	25
80	4.1.1	Non linear formulation of elasticity	25
81	4.1.2	The linear elastodynamics problem	27
82	4.2	Port-Hamiltonian formulation of linear elasticity	29
83	4.2.1	Energy and co-energy variables	29
84	4.2.2	Final system and associated Stokes-Dirac structure	31
85	4.3	Conclusion	35
86	5	Port-Hamiltonian plate theory	37
87	5.1	First order plate theory	38
88	5.1.1	Mindlin-Reissner model	39
89	5.1.2	Kirchhoff-Love model	40
90	5.2	Port-Hamiltonian formulation of isotropic plates	42
91	5.2.1	Port-Hamiltonian Mindlin plate	43

92	5.2.2	Port-Hamiltonian Kirchhoff plate	47
93	5.3	Laminated anisotropic plates	52
94	5.3.1	Port-Hamiltonian laminated Mindlin plate	54
95	5.3.2	Port-Hamiltonian laminated Kirchhoff plate	55
96	5.4	Conclusion	56
97	6	Thermoelasticity in port-Hamiltonian form	59
98	6.1	Port-Hamiltonian linear coupled thermoelasticity	59
99	6.1.1	The heat equation as a pH descriptor system	60
100	6.1.2	Classical thermoelasticity	61
101	6.1.3	Thermoelasticity as two coupled pHs	63
102	6.2	Thermoelastic port-Hamiltonian bending	65
103	6.2.1	Thermoelastic Euler-Bernoulli beam	65
104	6.2.2	Thermoelastic Kirchhoff plate	67
105	6.3	Conclusion	69
106	III	Finite element structure preserving discretization	71
107	7	Partitioned finite element method	73
108	7.1	Discretization under uniform boundary condition	73
109	7.1.1	General procedure	75
110	7.1.2	Linear case	84
111	7.1.3	Linear flexible structures	86
112	7.2	Mixed boundary conditions	95
113	7.2.1	Solution using Lagrange multipliers	97
114	7.2.2	Virtual domain decomposition	99
115	7.3	Conclusion	103
116	8	Numerical convergence study	105

117	8.1	Discretization of the Euler-Bernoulli beam	107
118	8.1.1	Mixed discretization for the free-free beam	107
119	8.1.2	Mixed discretization for the clamped-clamped beam	108
120	8.1.3	Mixed discretization with lower regularity requirement	108
121	8.2	Plate problems using known mixed finite elements	109
122	8.2.1	Mindlin plate mixed discretization	109
123	8.2.2	The Hellan-Herrmann-Johnson scheme for the Kirchhoff plate	112
124	8.3	Dual mixed discretization of plate problems	113
125	8.3.1	Dual mixed discretization of the Mindlin plate	113
126	8.3.2	Dual mixed discretization of the Kirchhoff plate	114
127	8.4	Numerical experiments	115
128	8.4.1	Numerical test for the Euler-Bernoulli beam	116
129	8.4.2	Numerical test for the Mindlin plate	118
130	8.4.3	Numerical test for the Kirchhoff plate	120
131	8.5	Conclusion	125
132	9	Numerical applications	127
133	9.1	Boundary stabilization	128
134	9.1.1	Cantilever Kirchhoff plate	128
135	9.1.2	Irrotational shallow water equations	130
136	9.2	Mixed boundary conditions enforcement	135
137	9.2.1	Motion planning of a thin beam	135
138	9.2.2	Vibroacoustics under mixed boundary conditions	136
139	9.3	Thermoelastic wave propagation	143
140	9.4	Modal analysis of plates	143

141	IV Port-Hamiltonian flexible multibody dynamics	145
142	10 Modular multibody systems in port-Hamiltonian form	147
143	10.1 Reminder of the rigid case	147
144	10.2 Flexible floating body	147
145	10.3 Modular construction of multibody systems	147
146	11 Validation	149
147	11.1 Beam systems	149
148	11.1.1 Modal analysis of a flexible mechanism	149
149	11.1.2 Non-linear crank slider	149
150	11.1.3 Hinged beam	149
151	11.2 Plate systems	149
152	11.2.1 Boundary interconnection with a rigid element	149
153	11.2.2 Actuated plate	149
154	Conclusions and future directions	153
155	A Mathematical tools	155
156	A.1 Differential operators	155
157	A.2 Integration by parts	156
158	A.3 Bilinear forms	157
159	B Supplementary material: tabulated results of Chapter 8	159
160	C Implementation using FEniCS and Firedrake	165
161	Bibliography	167

List of Figures

162

163	4.1	A 2D continuum with Neumann and Dirichlet boundary conditions	33
164	5.1	Kinematic assumption for the Kirchhoff plate	41
165	5.2	Cauchy law for momenta and forces at the boundary.	44
166	5.3	Reference frames and notations.	44
167	5.4	Boundary conditions for the Mindlin plate.	45
168	5.5	Boundary conditions for the Kirchhoff plate.	50
169	5.6	Laminated plate with 4 layers.	52
170	6.1	Boundary conditions for the thermoelastic problem.	62
171	7.1	Partition of boundary into two connected sets.	96
172	7.2	Splitting of the domain.	99
173	7.3	Interconnection at the interface Γ_{12}	99
174	8.1	Error for the Euler Bernoulli beam (HerDG1 elements).	116
175	8.2	Error for the Euler Bernoulli beam (DG1Her elements).	117
176	8.3	Error for the Euler Bernoulli beam (CGCG elements).	117
177	8.4	Error for the clamped Mindlin plate (BJT elements).	119
178	8.5	Error for the clamped Mindlin plate (AFW elements).	121
179	8.6	Error for the clamped Mindlin plate (CGDG elements).	122
180	8.7	Error for the simply supported Kirchhoff plate (HHJ elements).	123
181	8.8	Error for the SSSS Kirchhoff plate (BellDG3 elements).	124
182	8.9	Error for the CSFS Kirchhoff plate (HHJ elements)	125
183	8.10	Error for the CSFS Kirchhoff plate (BellDG3 elements).	126
184	9.1	Cantilever plate subjected to a control forces on the lateral sides.	128

185	9.2	Hamiltonian trend for the cantilever Kirchhoff plate.	130
186	9.3	Snapshots at different times of the simulation of the boundary controlled can-	
187		tilever Kirchhoff plate ($t_{\text{end}} = 5 [s]$).	131
188	9.4	Total energy and Lyapunov function for the Shallow water equations.	133
189	9.5	Snapshots at different times of the simulation for the boundary controlled ir-	
190		rotational shallow water equations ($t_{\text{end}} = 3 [s]$).	134
191	9.6	Boundary conditions for the motion planning problem.	135
192	9.7	Boundary conditions for the 3D vibroacoustic problem.	136
193	9.8	Boundary partition for the 2D vibroacoustic problem.	138
194	9.9	Virtual decomposition of the vibroacoustic domain.	139
195	9.10	Interconnection at the interface Γ_{int}	139

List of Tables

196

197	8.1	Physical parameters for the Euler Bernoulli beam.	116
198	8.2	Physical parameters for the Mindlin plate.	119
199	8.3	Physical parameters for the Kirchhoff plate.	123
200	9.1	Settings and parameters for the boundary control of the Kirchhoff plate. . . .	130
201	9.2	Settings and parameters for the irrotational shallow water equations.	133
202	9.3	Settings and parameters for the vibroacoustic problem.	140
203	9.4	Elapsed simulation time for the vibroacoustic experiment.	143
204	B.1	Euler Bernoulli convergence result for the HerDG1 scheme.	159
205	B.2	Euler Bernoulli convergence result for the DG1Her scheme.	159
206	B.3	Euler Bernoulli convergence result for the CGCG scheme $k = 1$	159
207	B.4	Euler Bernoulli convergence result for the CGCG scheme $k = 2$	160
208	B.5	Euler Bernoulli convergence result for the CGCG scheme $k = 3$	160
209	B.6	Mindlin plate convergence result for the BJT scheme $k = 1$	160
210	B.7	Mindlin plate convergence result for the BJT scheme $k = 2$	160
211	B.8	Mindlin plate convergence result for the BJT scheme $k = 3$	161
212	B.9	Mindlin plate convergence result for the AFW scheme $k = 1$	161
213	B.10	Mindlin plate convergence result for the AFW scheme $k = 2$	161
214	B.11	Mindlin plate convergence result for the AFW scheme $k = 3$	161
215	B.12	Mindlin plate convergence result for the Lagrange multiplier \mathbf{E}_r	161
216	B.13	Mindlin plate convergence result for the CGDG scheme $k = 1$	162
217	B.14	Mindlin plate convergence result for the CGDG scheme $k = 2$	162
218	B.15	Mindlin plate convergence result for the CGDG scheme $k = 3$	162
219	B.16	Kirchhoff plate convergence result for the HHJ scheme $k = 1$ (SSSS test). . . .	162

220	B.17 Kirchhoff plate convergence result for the HHJ scheme $k = 2$ (SSSS test). . . .	163
221	B.18 Kirchhoff plate convergence result for the HHJ scheme $k = 3$ (SSSS test). . . .	163
222	B.19 Kirchhoff plate convergence result for the BellDG3 scheme (SSSS test). . . .	163
223	B.20 Kirchhoff plate convergence result for the HHJ scheme $k = 1$ (CSFS test). . . .	163
224	B.21 Kirchhoff plate convergence result for the HHJ scheme $k = 2$ (CSFS test). . . .	164
225	B.22 Kirchhoff plate convergence result for the HHJ scheme $k = 3$ (CSFS test). . . .	164
226	B.23 Kirchhoff plate convergence result for the BellDG3 scheme (CSFS test). . . .	164

List of Acronyms

227

228	AFW	<i>Arnold-Falk-Winther</i>
229	BDM	<i>Brezzi-Douglas-Marini</i>
230	BJT	<i>Bécache-Joly-Tsogka</i>
231	CG	<i>Continuous Galerkin</i>
232	DAE	<i>Differential-Algebraic Equation</i>
233	DG	<i>Discontinuous Galerkin</i>
234	dpHs	<i>distributed port-Hamiltonian systems</i>
235	FEM	<i>Finite Element Method</i>
236	FMS	<i>Flexible Multibody System</i>
237	IDA-PBC	<i>Interconnection and Damping Assignment Passivity Based Control</i>
238	HHJ	<i>Hellan-Herrmann-Johnson</i>
239	PDE	<i>Partial Differential Equation</i>
240	PFEM	<i>Partitioned Finite Element Method</i>
241	pH	<i>port-Hamiltonian</i>
242	pHs	<i>port-Hamiltonian systems</i>
243	pHDAE	<i>port-Hamiltonian Descriptor System</i>
244	RT	<i>Raviart-Thomas</i>

245

Part I

Introduction and state of the art

248

249

Introduction

250

251

I was born not knowing and have had only a little time to change that
here and there.

Richard Feynman
Letter to Armando Garcia J.

252

Contents

253

254

255

256

257

258

259

1.1	Motivation and context	3
1.2	Overview of chapters	3
1.3	Contributions	3

260

1.1 Motivation and context

261

1.2 Overview of chapters

262

1.3 Contributions

Literature review

Books serve to show a man that those original thoughts of his aren't very new after all.

Abraham Lincoln

2.1 Port-Hamiltonian distributed systems

Differential geometry An interesting reference that can provide some ideas in this direction is [Yao11, NY04].

For 1D linear PH systems with a generalized skew-adjoint system operator, [LGZM05] gives conditions on the assignment of boundary inputs and outputs for the system operator to generate a contraction semigroup. The latter is instrumental to show well-posedness of a linear PH system, see [JZ12]. Essentially, at most half the number of boundary port variables can be imposed as control inputs for a well-posed PH system in one-dimensional domains. The complete characterization of pH in arbitrary dimension is still an open research field. Two notable exceptions [KZ15, Skr19] provide partial answers to this problem. The first demonstrate the well-posedness of the linear wave equation in arbitrary geometrical dimensions. The second generalizes this result to treat the case of generic first order linear pHs in arbitrary geometrical dimensions.

2.2 Structure-preserving discretization

2.3 Mixed finite element for elasticity

Thanks to [CRML18], it has become evident that there is a strict link between discretization of port-Hamiltonian (pH) systems and mixed finite elements. Velocity-stress formulation for the wave dynamics and elastodynamics problems are indeed Hamiltonian and their mixed discretization preserves such a structure. For instance in [KK15] the authors employed mixed finite elements to obtain a symplectic semi-discretization for the wave equation. This allows using known finite element scheme to preserve the pH structure at the discrete level.

289 Mixed finite elements for the wave equation have been studied in [Gev88, BJT00]. For
290 elastodynamics the construction of stable elements gets more complicated because of the
291 presence of the symmetric stress tensor. Existing elements enforce symmetry either strongly
292 [BJT01] or weakly [AL14].

293 2.4 Multibody dynamics

Reminder on port-Hamiltonian systems

Contents

3.1	Finite dimensional setting	8
3.1.1	Dirac structure	8
3.1.2	Finite dimensional port-Hamiltonian systems	9
3.2	Infinite dimensional setting	9
3.2.1	Linear differential operators	10
3.2.2	Constant Stokes-Dirac structures	12
3.2.3	Distributed port-Hamiltonian systems	14
3.3	Some examples of known distributed port-Hamiltonian systems	15
3.3.1	Wave equation	16
3.3.2	Euler Bernoulli beam	17
3.3.3	2D shallow water equations	19
3.4	Conclusion	21



The main mathematical aspects behind the pH formalism are recalled in this chapter. First, the finite dimensional case is considered. The geometric concept of Dirac structure [Cou90] is first presented. Finite dimensional port-Hamiltonian system are then introduced by making clear their intimate connection with the concept of Dirac structure. Second, the infinite dimensional case is recalled. The equivalent of Dirac structures for the infinite-dimensional case is the concept of Stokes-Dirac structure. Analogously to what happens in the finite-dimensional case, infinite-dimensional (or distributed) port-Hamiltonian systems are intimately related to the concept of Stokes-Dirac structure.

This notion of Stokes-Dirac structure was first introduced in the literature by making use of a differential geometry approach [vdSM02]. Despite being really insightful in terms of geometrical structure, this approach does not encompass the case of higher-order differential operators. An extension in this sense is still an open question. Since bending problems in elasticity introduce higher-order differential operators, the language of PDE will be privileged

over the one of differential forms.

In the last section some examples are presented to demonstrate the general character of the port-Hamiltonian formalism.

3.1 Finite dimensional setting

Finite dimensional port-Hamiltonian are characterized by geometrical structures called Dirac structures. It is important to define this geometric concept and see how pHs relate to it.

3.1.1 Dirac structure

Consider a finite dimensional space F over the field \mathbb{R} and $E \equiv F'$ its dual, i.e. the space of linear operator $\mathbf{e} : F \rightarrow \mathbb{R}$. The elements of F are called flows, while the elements of E are called efforts. Those are port variables and their combination gives the power flowing inside the system. The space $B := F \times E$ is called the bond space of power variables. Therefore the power is defined as $\langle \mathbf{e}, \mathbf{f} \rangle = \mathbf{e}(\mathbf{f})$, where $\langle \mathbf{e}, \mathbf{f} \rangle$ is the dual product between \mathbf{f} and \mathbf{e} .

Definition 1 (Dirac Structure [Cou90], Def. 1.1.1)

Given the finite-dimensional space F and its dual E with respect to the inner product $\langle \cdot, \cdot \rangle_{E \times F} : F \times E \rightarrow \mathbb{R}$, consider the symmetric bilinear form:

$$\langle \langle (\mathbf{f}_1, \mathbf{e}_1), (\mathbf{f}_2, \mathbf{e}_2) \rangle \rangle := \langle \mathbf{e}_1, \mathbf{f}_2 \rangle_{E \times F} + \langle \mathbf{e}_2, \mathbf{f}_1 \rangle_{E \times F}, \quad \text{where} \quad \mathbf{f}_i, \mathbf{e}_i \in B, \quad i = 1, 2 \quad (3.1)$$

A Dirac structure on $B := F \times E$ is a subspace $D \subset B$, which is maximally isotropic under $\langle \langle \cdot, \cdot \rangle \rangle$. Equivalently, a Dirac structure on $B := F \times E$ is a subspace $D \subset B$ which equals its orthogonal complement with respect to $\langle \langle \cdot, \cdot \rangle \rangle : D = D^\perp$.

This definition can be extended to consider distributed forces and dissipation [Vil07].

Proposition 1 (Characterization of Dirac structures)

Consider the space of power variables $F \times E$ and let X denote an n -dimensional space, the space of energy variables. Suppose that $F := F_s \times F_e$ and that $E := E_s \times E_e$, with $\dim F_s = \dim E_s = n$ and $\dim F_e = \dim E_e = m$. Moreover, let $\mathbf{J}(\mathbf{x})$ denote a skew-symmetric matrix of dimension n and $\mathbf{B}(\mathbf{x})$ a matrix of dimension $n \times m$. Then, the set

$$D := \left\{ (\mathbf{f}_s, \mathbf{f}_e, \mathbf{e}_s, \mathbf{e}_e) \in F \times E \mid \mathbf{f}_s = \mathbf{J}(\mathbf{x})\mathbf{e}_s + \mathbf{B}(\mathbf{x})\mathbf{f}_e, \mathbf{e}_e = -\mathbf{B}(\mathbf{x})^\top \mathbf{e}_s \right\} \quad (3.2)$$

is a Dirac structure.

It is now possible to make the connection between Dirac structures and pH system explicit.

3.1.2 Finite dimensional port-Hamiltonian systems

Consider the time-invariant dynamical system:

$$\begin{cases} \dot{\mathbf{x}} &= \mathbf{J}(\mathbf{x})\nabla H(\mathbf{x}) + \mathbf{B}(\mathbf{x})\mathbf{u}, \\ \mathbf{y} &= \mathbf{B}(\mathbf{x})^\top \nabla H(\mathbf{x}), \end{cases} \quad (3.3)$$

where $H(\mathbf{x}) : X \subset \mathbb{R}^n \rightarrow \mathbb{R}$, the Hamiltonian, is a real-valued function bounded from below. Such a system is called port-Hamiltonian, as it arises from the Hamiltonian modelling of a physical system and it interacts with the environment through the input \mathbf{u} and the output \mathbf{y} , included in the formulation. The connection with the concept of Dirac structure is achieved by considering the following port behavior:

$$\begin{aligned} \mathbf{f}_s &= \dot{\mathbf{x}}, & \mathbf{e}_s &= \nabla H(\mathbf{x}), \\ \mathbf{f}_e &= \mathbf{u}, & \mathbf{e}_e &= -\mathbf{y}. \end{aligned} \quad (3.4)$$

With this choice of the port variables, system (3.3) defines, by Proposition 1, a Dirac structure. Dissipation and distributed forces can be included and the corresponding system defines an extended Dirac structure, once the proper port variables have been introduced.

System 3.3 is a pH system in canonical form. Recently, finite dimensional differential algebraic port-Hamiltonian systems (pHDAE) have been introduced both for linear [BMXZ18] and non linear systems [MM19]. This enriched description share all the crucial features of ordinary pHs, but easily account for algebraic constraints, time-dependent transformations and explicit dependence on time in the Hamiltonian. The application of the proposed discretization method lead naturally to pHDAE systems.

3.2 Infinite dimensional setting

Infinite dimensional spaces appears whenever differential operators have to be considered. In this section we first explain what defines a differential operator. Then Stokes-Dirac structures, characterized by a skew-symmetric differential operator, are introduced. Finally distributed port-Hamiltonian systems and their connection to the concept of Stokes-Dirac structure are illustrated.

Before starting we recall how inner products of square integrable function are computed. Let Ω denote a compact subset of \mathbb{R}^d and let $L^2(\Omega, \mathbb{A})$ be the space of square integrable functions over the set \mathbb{A} in Ω , with inner product denoted by $\langle \cdot, \cdot \rangle_{L^2(\Omega, \mathbb{A})}$. The set \mathbb{A} can either denote scalars \mathbb{R} , vectors \mathbb{R}^d , tensors $\mathbb{R}^{d \times d}$ or a Cartesian product of those. For scalars

385 $(a, b) \in L^2(\Omega)$, vectors $(\mathbf{a}, \mathbf{b}) \in L^2(\Omega, \mathbb{R}^d)$ and tensors $(\mathbf{A}, \mathbf{B}) \in L^2(\Omega, \mathbb{R}^{d \times d})$ the L^2 inner
 386 product is given by

$$\langle a, b \rangle_{L^2(\Omega)} = \int_{\Omega} ab \, d\Omega, \quad \langle \mathbf{a}, \mathbf{b} \rangle_{L^2(\Omega, \mathbb{R}^d)} = \int_{\Omega} \mathbf{a} \cdot \mathbf{b} \, d\Omega, \quad \langle \mathbf{A}, \mathbf{B} \rangle_{L^2(\Omega, \mathbb{R}^{d \times d})} = \int_{\Omega} \mathbf{A} : \mathbf{B} \, d\Omega. \quad (3.5)$$

387 The notation $\mathbf{A} : \mathbf{B} = \sum_{i,j} A_{ij} B_{ij}$ denotes the tensor contraction. Furthermore, the space of
 388 square integrable vector-valued functions over the boundary of Ω is indicated by $L^2(\partial\Omega, \mathbb{R}^m)$.
 389 This space is endowed with the inner product

$$\langle \mathbf{a}_{\partial}, \mathbf{b}_{\partial} \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} = \int_{\partial\Omega} \mathbf{a}_{\partial} \cdot \mathbf{b}_{\partial} \, dS, \quad \mathbf{a}_{\partial}, \mathbf{b}_{\partial} \in \mathbb{R}^m. \quad (3.6)$$

390 3.2.1 Linear differential operators

391 Let Ω denote a compact subset of \mathbb{R}^d representing the spatial domain of the distributed
 392 parameter system. Consider two function spaces F_1, F_2 over the sets \mathbb{A}, \mathbb{B} defined on $\Omega \subset \mathbb{R}^d$
 393 and a map \mathcal{L} relating the two

$$\begin{aligned} \mathcal{L} : F_1(\Omega, \mathbb{A}) &\longrightarrow F_2(\Omega, \mathbb{B}), \\ \mathbf{u} &\longrightarrow \mathbf{v}. \end{aligned} \quad (3.7)$$

394 Sets \mathbb{A}, \mathbb{B} can either denote scalars \mathbb{R} , vectors \mathbb{R}^d , tensors $\mathbb{R}^{d \times d}$ or a Cartesian product
 395 of those. Given $\mathbf{u} \in F_1$, $\mathbf{v} \in F_2$ The map \mathcal{L} is a linear differential operator if it can be
 396 represented by a linear combination of derivatives of \mathbf{u}

$$\mathbf{v} = \mathcal{L}\mathbf{u} \iff \mathbf{v} := \sum_{|\alpha|=0}^n \mathcal{P}_{\alpha} \partial^{\alpha} \mathbf{u}, \quad (3.8)$$

397 where $\alpha := (\alpha_1, \dots, \alpha_d)$ is a multi-index of order $|\alpha| := \sum_{i=1}^d \alpha_i$ and $\partial^{\alpha} := \partial_{x_1}^{\alpha_1} \dots \partial_{x_d}^{\alpha_d}$
 398 is a differential operator of order $|\alpha|$ resulting from a combination of spatial derivatives.
 399 $\mathcal{P}_{\alpha} : \mathbb{A} \rightarrow \mathbb{B}$ is a constant algebraic operator from set \mathbb{A} to \mathbb{B} .

400 **Example 1** (Divergence operator in \mathbb{R}^d)

401 Given $\mathbf{u} \in C^{\infty}(\Omega, \mathbb{R}^d)$, $v \in C^{\infty}(\Omega)$, where $C^{\infty}(\Omega, \mathbb{R}^d)$, $C^{\infty}(\Omega)$ denotes the set of smooth
 402 vector- and scalar-valued function defined on Ω , the divergence operator in Cartesian coordi-
 403 nate is expressed as

$$v = \operatorname{div} \mathbf{u} = \sum_{i=1}^d \mathbf{e}_i \cdot \partial_{x_i} \mathbf{u}, \quad (3.9)$$

404 where \mathbf{e}_i is the i -th element of the canonical basis in \mathbb{R}^d .

405 The differential operators employed in this thesis are reported in Appendix A.
 406 A very important notion related to a differential operator is the one of formal adjoint.

Definition 2 (Formal Adjoint)

Let $\mathcal{L} = L^2(\Omega, \mathbb{A}) \rightarrow L^2(\Omega, \mathbb{B})$ be a differential operator and $\mathbf{u} \in C_0^\infty(\Omega, \mathbb{A})$, $\mathbf{v}(\Omega, \mathbb{B})$ be smooth variables with compact support on Ω . The formal adjoint of the differential operator \mathcal{L} , denoted by $\mathcal{L}^* = L^2(\Omega, \mathbb{B}) \rightarrow L^2(\Omega, \mathbb{A})$, is defined by the relation

$$\langle \mathcal{L}\mathbf{u}, \mathbf{v} \rangle_{L^2(\Omega, \mathbb{B})} = \langle \mathbf{u}, \mathcal{L}^*\mathbf{v} \rangle_{L^2(\Omega, \mathbb{A})}. \quad (3.10)$$

This definition represent an extension to generic sets \mathbb{A} , \mathbb{B} of Def. 5.80 in [RR04] (reported in Appendix A).

Remark 1 (Differences between adjoint and formal adjoint)

The definition of formal adjoint is such that the integration by parts formula is respected. Contrarily to the adjoint of an operator, the formal adjoint definition does not regard the actual domain of the operator nor the boundary conditions. For example, the differential operators div , grad are unbounded in the L^2 topology. Whenever unbounded operators are considered, it is important to define their domain. To avoid the need of specifying domains, the notion of formal adjoint is used. The formal adjoint respects the integration by parts formula and is defined only for sufficiently smooth functions with compact support. In this sense the formal adjoint of div is $-\text{grad}$, since for smooth functions with compact support, it holds

$$\langle \text{div } \mathbf{y}, x \rangle_{L^2(\Omega, \mathbb{R})} \underbrace{=}_{I.B.P.} - \langle \mathbf{y}, \text{grad } x \rangle_{L^2(\Omega, \mathbb{R}^d)},$$

for $\mathbf{y} \in C_0^\infty(\Omega, \mathbb{R}^d)$, $x \in C_0^\infty(\Omega)$ (I.B.P. stands for integration by parts). The definition of the domain of the operators, that requires the knowledge of the boundary conditions, has not been specified.

For pHs formally skew-adjoint operators (or simply skew-symmetric) plays a fundamental role.

Definition 3 (Formally skew-adjoint operator)

Let $\mathcal{J} : L^2(\Omega, \mathbb{F}) \rightarrow L^2(\Omega, \mathbb{F})$ be a linear differential operator. Notice that the set \mathbb{F} in the domain and co-domain is the same. Then, \mathcal{J} is formally skew-adjoint (or skew-symmetric) if and only if $\mathcal{J} = -\mathcal{J}^*$.

If functions with compact support are considered, i.e. $\mathbf{u}_1, \mathbf{u}_2 \in C_0^\infty(\Omega, \mathbb{F})$ a formally skew-adjoint operator is characterized by the relation

$$\langle \mathcal{J}\mathbf{u}_1, \mathbf{u}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{u}_1, \mathcal{J}\mathbf{u}_2 \rangle_{L^2(\Omega, \mathbb{A})} = 0. \quad (3.11)$$

3.2.2 Constant Stokes-Dirac structures

Constant Stokes-Dirac structures are the infinite-dimensional generalization of constant Dirac structures (i.e. Dirac structures for which the matrices \mathbf{J} , \mathbf{B} in (3.3) are constant). Stokes-Dirac structure are characterized by the fact that they equal their orthogonal complement with respect to a bilinear product. So we recall the definition of orthogonal companion for the case of smooth functions.

Definition 4 (Orthogonal complement)

Let $\Omega \subset \mathbb{R}^d$, $d \in \{1, 2, 3\}$ be an open connected set and $C^\infty(\partial\Omega, \mathbb{R}^m)$ the space of smooth functions over its boundary. Consider the space

$$B = C^\infty(\Omega, \mathbb{F}) \times C^\infty(\partial\Omega, \mathbb{R}^m) \times C^\infty(\Omega, \mathbb{F}) \times C^\infty(\partial\Omega, \mathbb{R}^m) \quad (3.12)$$

and the bilinear pairing defined by

$$\begin{aligned} \langle\langle \cdot, \cdot \rangle\rangle : B \times B &\longrightarrow \mathbb{R}, \\ (\mathbf{a}, \mathbf{a}_\partial, \mathbf{b}, \mathbf{b}_\partial) \times (\mathbf{c}, \mathbf{c}_\partial, \mathbf{d}, \mathbf{d}_\partial) &\longrightarrow \langle \mathbf{a}, \mathbf{d} \rangle_{L^2(\Omega, \mathbb{F})} + \langle \mathbf{b}, \mathbf{c} \rangle_{L^2(\Omega, \mathbb{F})} + \\ &\quad \langle \mathbf{a}_\partial, \mathbf{d}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \mathbf{b}_\partial, \mathbf{c}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \end{aligned} \quad (3.13)$$

Given a linear subspace $W \subset B$, its orthogonal complement is the set

$$W^\perp = \{\mathbf{v} \in B \mid \langle\langle \mathbf{v}, \mathbf{w} \rangle\rangle = 0, \forall \mathbf{w} \in W\} \quad (3.14)$$

We can now define what a Stokes-Dirac structure is.

Definition 5 (Stokes-Dirac structure)

A subset $D \subset B$, with B defined in (3.12), is a Stokes-Dirac structure iff

$$D = D^\perp, \quad (3.15)$$

where the orthogonal complement has been defined in Eq. (3.14)

For a subset to be a Stokes-Dirac structures a link between flow and effort variables must hold. Consider $\mathbf{f} \in C^\infty(\Omega, \mathbb{F})$ and $\mathbf{e} \in C^\infty(\Omega, \mathbb{F})$ and the following relation between the two

$$\mathbf{f} = \mathcal{J}\mathbf{e}, \quad \mathcal{J} = -\mathcal{J}^*, \quad (3.16)$$

where \mathcal{J} is a formally skew-adjoint operator. A Stokes-Dirac structure requires the specification of boundary variables in order to express a general power conservation property for open physical systems. We make therefore the following assumption, over the existence of appropriate boundary operators.

Assumption 1 (Existence of boundary operators)

Assume that exist two linear boundary operators $\mathcal{B}_\partial, \mathcal{C}_\partial$ such that for $\mathbf{u}_1, \mathbf{u}_2 \in C^\infty(\Omega, \mathbb{F})$ the following integration by parts formula holds

$$\langle \mathcal{J}\mathbf{u}_1, \mathbf{u}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{u}_1, \mathcal{J}\mathbf{u}_2 \rangle_{L^2(\Omega, \mathbb{A})} = \langle \mathcal{B}_\partial \mathbf{u}_1, \mathcal{C}_\partial \mathbf{u}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \mathcal{B}_\partial \mathbf{u}_2, \mathcal{C}_\partial \mathbf{u}_1 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \quad (3.17)$$

This assumption is necessary to appropriately define a Stokes-Dirac structure. Only few particular cases, like the transport equation, do not verify it. We can now characterize generic Stokes-Dirac structure for smooth functions spaces.

Proposition 2 (Characterization of Stokes-Dirac structures)

Let B be defined as in Eq. (3.12) and \mathcal{J} be a formally skew adjoint operator verifying Assumption 1. The set

$$D_{\mathcal{J}} = \{(\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial) \in B \mid \mathbf{f} = \mathcal{J}\mathbf{e}, \mathbf{f}_\partial = \mathcal{B}_\partial \mathbf{e}, \mathbf{e}_\partial = -\mathcal{C}_\partial \mathbf{e}\} \quad (3.18)$$

is a Stokes-Dirac structure with respect to the bilinear pairing (3.13).

Proof. A Stokes-Dirac is characterized by the fact that $D_{\mathcal{J}} = D_{\mathcal{J}}^\perp$. Then one has to show that $D_{\mathcal{J}} \subset D_{\mathcal{J}}^\perp$ and $D_{\mathcal{J}}^\perp \subset D_{\mathcal{J}}$. Following [LGZM05], the proof is obtained following three steps.

Step 1. To show that $D_{\mathcal{J}} \subset D_{\mathcal{J}}^\perp$, take $(\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial) \in D_{\mathcal{J}}$. Then

$$\begin{aligned} \langle (\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial), (\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial) \rangle &= 2 \langle \mathbf{e}, \mathbf{f} \rangle_{L^2(\Omega, \mathbb{F})} + 2 \langle \mathbf{e}_\partial, \mathbf{f}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ &= 2 \langle \mathbf{e}, \mathcal{J}\mathbf{e} \rangle_{L^2(\Omega, \mathbb{F})} + 2 \langle \mathbf{e}_\partial, \mathbf{f}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ &\stackrel{\text{Eq. (3.17)}}{=} 2 \langle \mathcal{B}_\partial \mathbf{e}, \mathcal{C}_\partial \mathbf{e} \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + 2 \langle \mathbf{e}_\partial, \mathbf{f}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ &\stackrel{\text{Eq. (3.18)}}{=} 2 \langle \mathcal{B}_\partial \mathbf{e}, \mathcal{C}_\partial \mathbf{e} \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} - 2 \langle \mathcal{B}_\partial \mathbf{e}, \mathcal{C}_\partial \mathbf{e} \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ &= 0. \end{aligned}$$

This implies $D_{\mathcal{J}} \subset D_{\mathcal{J}}^\perp$.

Step 2. Take $(\phi, \phi_\partial, \epsilon, \epsilon_\partial) \in D_{\mathcal{J}}^\perp$ and $\mathbf{e}_0 \in C_0^\infty(\Omega, \mathbb{F})$. This implies $\mathcal{B}_\partial \mathbf{e}_0 = (\mathbf{0}, \mathbf{0})$ and $\mathcal{C}_\partial \mathbf{e}_0 = (\mathbf{0}, \mathbf{0})$. Taking $(\mathcal{J}\mathbf{e}_0, \mathbf{0}, \mathbf{e}_0, \mathbf{0}) \in D_{\mathcal{J}}$ then

$$\langle (\phi, \phi_\partial, \epsilon, \epsilon_\partial), (\mathcal{J}\mathbf{e}_0, \mathbf{0}, \mathbf{e}_0, \mathbf{0}) \rangle = \langle \epsilon, \mathcal{J}\mathbf{e}_0 \rangle_{L^2(\Omega, \mathbb{F})} + \langle \mathbf{e}_0, \phi \rangle_{L^2(\Omega, \mathbb{F})} = 0, \quad \forall \mathbf{e}_0 \in C_0^\infty(\Omega, \mathbb{F}).$$

It follows that $\epsilon \in C_0^\infty(\Omega, \mathbb{F})$ and $\phi = \mathcal{J}\epsilon$.

Step 3. Take $(\phi, \phi_\partial, \epsilon, \epsilon_\partial) \in D_{\mathcal{J}}^\perp$ and $(\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial) \in D_{\mathcal{J}}$. From step 2 and (3.17)

$$\begin{aligned}
0 &= \langle \mathcal{J}e, \epsilon \rangle_{L^2(\Omega, \mathbb{F})} + \langle e, \mathcal{J}\epsilon \rangle_{L^2(\Omega, \mathbb{F})} + \langle e_\partial, \phi_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \epsilon_\partial, f_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\
&\stackrel{\text{Eq. (3.17)}}{=} \langle \mathcal{B}_\partial e, \mathcal{C}_\partial \epsilon \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \mathcal{B}_\partial \epsilon, \mathcal{C}_\partial e \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle e_\partial, \phi_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \epsilon_\partial, f_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\
&= \langle \mathcal{B}_\partial e, \mathcal{C}_\partial \epsilon \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \mathcal{B}_\partial \epsilon, \mathcal{C}_\partial e \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle -\mathcal{C}_\partial e, \phi_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \epsilon_\partial, \mathcal{B}_\partial e \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\
&= \langle \mathcal{B}_\partial e, \mathcal{C}_\partial \epsilon + \epsilon_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} + \langle \mathcal{B}_\partial \epsilon - \phi_\partial, \mathcal{C}_\partial e \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \quad \text{By linearity,} \\
&= \langle e_\partial, \mathcal{C}_\partial \epsilon + \epsilon_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} - \langle \mathcal{B}_\partial \epsilon - \phi_\partial, f_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}.
\end{aligned}$$

Given the fact that e_∂, f_∂ are arbitrary then

$$\phi_\partial = \mathcal{B}_\partial \epsilon, \quad \epsilon_\partial = -\mathcal{C}_\partial \epsilon,$$

464 meaning that $D_{\mathcal{J}}^\perp \subset D_{\mathcal{J}}$. This concludes the proof. \square

465 3.2.3 Distributed port-Hamiltonian systems

466 A distributed lossless port-Hamiltonian system is defined by a set of variables that describes
 467 the unknowns, by a formally skew-adjoint differential operator, an energy functional and a
 468 set of boundary inputs and corresponding conjugated outputs. Such a system is described by
 469 the following set of equations, defined on an open connected set $\Omega \subset \mathbb{R}^d$

$$\begin{aligned}
\partial_t \alpha &= \mathcal{J} \delta_\alpha H, & \alpha &\in C^\infty(\Omega, \mathbb{F}), \\
u_\partial &= \mathcal{B}_\partial \delta_\alpha H, & u_\partial &\in \mathbb{R}^m, \\
y_\partial &= \mathcal{C}_\partial \delta_\alpha H, & y_\partial &\in \mathbb{R}^m.
\end{aligned} \tag{3.19}$$

470 The unknowns α are called energy variables in the port-Hamiltonian framework, the formally
 471 skew-adjoint operator \mathcal{J} is named interconnection operator (see Def. 3 for a precise definition
 472 of formal skew adjointness). $\mathcal{B}_\partial, \mathcal{C}_\partial$ are boundary operators, that provide the boundary input
 473 u_∂ and output y_∂ [TW09, Chapter 4]. The functional $H(\alpha) : C^\infty(\Omega, \mathbb{F}) \rightarrow \mathbb{R}$ corresponds to
 474 the Hamiltonian functional and in all the examples considered in this thesis coincide with the
 475 total energy of the system. Notation $\delta_\alpha H$ indicates the variational derivative of H .

Definition 6 (Variational derivative, Def. 4.1 in [Olv93])

Consider a functional $H(\alpha) : C^\infty(\Omega, \mathbb{F}) \rightarrow \mathbb{R}$

$$H(\alpha) = \int_\Omega \mathcal{H}(\alpha) \, d\Omega.$$

Given a variation $\alpha = \bar{\alpha} + \eta \delta \alpha$ the variational derivative $\frac{\delta H}{\delta \alpha}$ is defined as

$$H(\bar{\alpha} + \eta \delta \alpha) = H(\bar{\alpha}) + \eta \langle \delta_\alpha H, \delta \alpha \rangle_{L^2(\Omega, \mathbb{F})} + O(\eta^2).$$

Remark 2

If the integrand does not contain derivative of the argument α then the variational derivative is equal to the partial derivative of the Hamiltonian density \mathcal{H}

$$\frac{\delta H}{\delta \alpha} = \frac{\partial \mathcal{H}}{\partial \alpha}.$$

Remark 3 (Co-energy variables)

The variational derivative of the Hamiltonian defines the co-energy variables $\mathbf{e} := \delta_{\alpha} H$. These are equivalent to the effort variables of the Stokes-Dirac structure as we will immediately show.

Suppose that operators \mathcal{J} , \mathcal{B}_{∂} , \mathcal{C}_{∂} in Eq. 3.19 verify Ass. 1. Then, System (3.19) is lossless since the energy rate is given by

$$\begin{aligned} \dot{H} &= \langle \delta_{\alpha} H, \partial_t \alpha \rangle_{L^2(\Omega, \mathbb{F})}, \\ &\stackrel{\text{Eq. (3.17)}}{=} \langle \mathcal{B}_{\partial} \delta_{\alpha} H, \mathcal{C}_{\partial} \delta_{\alpha} H \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ &= \langle \mathbf{u}_{\partial}, \mathbf{y}_{\partial} \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \end{aligned} \tag{3.20}$$

The connection between the concept of Stokes-Dirac structure and dpHs becomes clear if the following port behavior is considered

$$\begin{aligned} \mathbf{f} &= \partial_t \alpha, & \mathbf{e} &= \delta_{\alpha} H, \\ \mathbf{f}_{\partial} &= \mathbf{u}_{\partial}, & \mathbf{e}_{\partial} &= -\mathbf{y}_{\partial}. \end{aligned} \tag{3.21}$$

By proposition (2) System (3.19) under the port behavior (3.21) defines a Stokes-Dirac structure. No rigorous characterization has been given so far for operators \mathcal{J} , \mathcal{B}_{∂} , \mathcal{C}_{∂} in system (3.19). A formal characterization of these operators has been given in [LGZM05] for pH of generic order only in one geometrical dimensional. In Chapter 7 the operator \mathcal{J} will be better characterize using an appropriate partition. By applying a general integration by parts formula, the operators \mathcal{B}_{∂} , \mathcal{C}_{∂} associated to \mathcal{J} can be defined as well. The following examples clarifies this assertion for some known pHs.

3.3 Some examples of known distributed port-Hamiltonian systems

In this section the generality of the pH framework is illustrated through three different examples: the wave equation in a 2D geometry, the Euler-Bernoulli beam and the non linear Saint-Venant equations.

3.3.1 Wave equation

Given an open bounded connected set $\Omega \subset \mathbb{R}^d$, $d = \{2, 3\}$ with Lipschitz continuous boundary $\partial\Omega$, the propagation of sound in air can be described by the following model [TRLGK18]

$$\begin{aligned}\chi_s \partial_t p(\mathbf{x}, t) &= -\operatorname{div} \mathbf{v}, \\ \mu_0 \partial_t \mathbf{v}(\mathbf{x}, t) &= -\operatorname{grad} p,\end{aligned}\tag{3.22}$$

where the scalars χ_s, μ_0 are the constant adiabatic compressibility factor and the steady state mass density respectively. The scalar field $p \in \mathbb{R}$ and vector field $\mathbf{v} \in \mathbb{R}^d$ represents the variation of pressure and velocity from the steady state. The Hamiltonian (total energy) reads

$$H = \frac{1}{2} \int_{\Omega} \left\{ \chi_s p^2 + \mu_0 \|\mathbf{v}\|^2 \right\} d\Omega.$$

To recast (3.22) in pH form the energy variables has to be introduced $\boldsymbol{\alpha} = [\alpha_p, \boldsymbol{\alpha}_v]^\top$

$$\alpha_p := \chi_s p, \quad \boldsymbol{\alpha}_v := \mu_0 \mathbf{v}.$$

The Hamiltonian is rewritten as

$$H = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\chi_s} \alpha_p^2 + \frac{1}{\mu_0} \|\boldsymbol{\alpha}_v\|^2 \right\} d\Omega.$$

By definition, the co-energy are

$$e_p = \frac{\delta H}{\delta \alpha_p} = \frac{1}{\chi_s} \alpha_p = p, \quad \mathbf{e}_v = \frac{\delta H}{\delta \boldsymbol{\alpha}_v} = \frac{1}{\mu_0} \boldsymbol{\alpha}_v = \mathbf{v}.$$

Equation (3.22) can be recast in port-Hamiltonian form

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_p \\ \boldsymbol{\alpha}_v \end{pmatrix} = - \begin{bmatrix} 0 & \operatorname{div} \\ \operatorname{grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix}.\tag{3.23}$$

From the energy rate it is possible to identify the boundary variables.

$$\begin{aligned}\dot{H} &= + \int_{\Omega} \{e_p \partial_t \alpha_p + \mathbf{e}_v \cdot \partial_t \boldsymbol{\alpha}_v\} d\Omega, \\ &= - \int_{\Omega} \{e_p \operatorname{div} \mathbf{e}_v + \mathbf{e}_v \cdot \operatorname{grad} e_p\} d\Omega, && \text{Chain rule,} \\ &= - \int_{\Omega} \operatorname{div}(e_p \mathbf{e}_v) d\Omega, && \text{Stokes theorem,} \\ &= - \int_{\partial\Omega} e_p \mathbf{e}_v \cdot \mathbf{n} dS = - \langle e_p, \mathbf{e}_v \cdot \mathbf{n} \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}.\end{aligned}$$

The boundary term $\langle e_p, \mathbf{e}_v \cdot \mathbf{n} \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$ pairs two power variables. One is taken as control input, the other plays the role of power-conjugated output. The assignment of these roles to the boundary power variables is referred to as causality of the boundary port [KML18],[Kot19, Chapter 2]. Under uniform causality assumption, either e_p or \mathbf{e}_v can assume the role of

(distributed) boundary input, but not both. This leads to two possible selections:

- First case $u_\partial = e_p$, $y_\partial = \mathbf{e}_v \cdot \mathbf{n}$.

This imposes the variable $e_p := p$ as boundary input and corresponds to a classical Dirichlet condition. The boundary operator for this case are given by

$$\mathcal{B}_\partial \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix} = e_p|_{\partial\Omega}, \quad \mathcal{C}_\partial \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix} = \mathbf{e}_v \cdot \mathbf{n}|_{\partial\Omega},$$

corresponding to the standard trace and normal trace operators.

- Second case $u_\partial = \mathbf{e}_v \cdot \mathbf{n}$, $y_\partial = e_p$.

This imposes the variable $\mathbf{e}_v \cdot \mathbf{n} := \mathbf{v} \cdot \mathbf{n}$ as boundary input and corresponds to a Neumann condition. The boundary operators are therefore switched with respect to the previous case

$$\mathcal{B}_\partial \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix} = \mathbf{e}_v \cdot \mathbf{n}|_{\partial\Omega}, \quad \mathcal{C}_\partial \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix} = e_p|_{\partial\Omega}.$$

3.3.2 Euler Bernoulli beam

The Euler-Bernoulli beam model consists of one PDE, describing the vertical displacement along the beam length:

$$\rho A(x) \frac{\partial^2 w}{\partial t^2}(x, t) + \frac{\partial^2}{\partial x^2} \left(EI(x) \frac{\partial^2 w}{\partial x^2} \right) = 0, \quad x \in \Omega = \{0, L\}, \quad (3.24)$$

where $w(x, t)$ is the transverse displacement of the beam. The coefficients $\rho(x)$, $A(x)$, $E(x)$ and $I(x)$ are the mass density, cross section, Young's modulus of elasticity and the moment of inertia of a cross section. The energy variables are then chosen as follows:

$$\alpha_w = \rho A(x) \frac{\partial w}{\partial t}(x, t), \quad \text{Linear Momentum}, \quad \alpha_\kappa = \frac{\partial^2 w}{\partial x^2}(x, t), \quad \text{Curvature}. \quad (3.25)$$

Those variables are collected in the vector $\boldsymbol{\alpha} = (\alpha_w, \alpha_\kappa)^T$, so that the Hamiltonian can be written as a quadratic functional in the energy variables:

$$H = \frac{1}{2} \int_\Omega \left\{ \frac{1}{\rho A} \alpha_w^2 + EI \alpha_\kappa^2 \right\} d\Omega \quad (3.26)$$

The co-energy variables are found by computing the variational derivative of the Hamiltonian:

$$\begin{aligned} e_w &:= \frac{\delta H}{\delta \alpha_w} = \frac{\partial w}{\partial t}(x, t), & \text{Vertical velocity,} \\ e_\kappa &:= \frac{\delta H}{\delta \alpha_\kappa} = EI(x) \frac{\partial^2 w}{\partial x^2}(x, t), & \text{Flexural momentum.} \end{aligned} \quad (3.27)$$

The underlying interconnection structure is then found to be:

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \alpha_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} \\ \partial_{xx} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}. \quad (3.28)$$

The power flow gives access to the boundary variables:

$$\begin{aligned} \dot{H} &= \int_{\Omega} \{e_w \partial_t \alpha_w + e_\kappa \partial_t \alpha_\kappa\} \, d\Omega, \\ &= \int_{\Omega} \{-e_w \partial_{xx} e_\kappa + e_\kappa \partial_{xx} e_w\} \, d\Omega, \quad \text{Integration by parts,} \\ &= \int_{\partial\Omega} \{-e_w \partial_x e_\kappa + e_\kappa \partial_x e_w\} \, ds = \langle -e_w|_{\partial\Omega}, \partial_x e_\kappa|_{\partial\Omega} \rangle_{\mathbb{R}^4} + \langle e_\kappa|_{\partial\Omega}, \partial_x e_w|_{\partial\Omega} \rangle_{\mathbb{R}^4} \end{aligned} \quad (3.29)$$

Since the system is of differential order two, two pairing appears, giving rise to four combination of uniform boundary causality

- First case $u_{\partial,1} = e_w$, $u_{\partial,2} = \partial_x e_w$, $y_{\partial,1} = -\partial_x e_\kappa$, $y_{\partial,2} = e_\kappa$.
This imposes the vertical $e_w := \partial_t w$ and angular velocity $\partial_x e_w := \partial_{xt} w$ as boundary inputs

$$\mathcal{B}_{\partial} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} e_w(L) \\ -e_w(0) \\ \partial_x e_w(L) \\ -\partial_x e_w(0) \end{pmatrix} \in \mathbb{R}^4 \quad \mathcal{C}_{\partial} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} -\partial_x e_\kappa(L) \\ \partial_x e_\kappa(0) \\ e_\kappa(L) \\ -e_\kappa(0) \end{pmatrix} \in \mathbb{R}^4 \quad (3.30)$$

If the inputs are null a clamped boundary condition is obtained.

- Second case $u_{\partial,1} = e_w$, $u_{\partial,2} = e_\kappa$, $y_{\partial,1} = -\partial_x e_\kappa$, $y_{\partial,2} = \partial_x e_w$.
This imposes the vertical velocity and flexural momentum $e_\kappa := EI \partial_{xx} w$ as boundary inputs

$$\mathcal{B}_{\partial} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} e_w(L) \\ -e_w(0) \\ e_\kappa(L) \\ -e_\kappa(0) \end{pmatrix} \in \mathbb{R}^4 \quad \mathcal{C}_{\partial} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} -\partial_x e_\kappa(L) \\ \partial_x e_\kappa(0) \\ \partial_x e_w(L) \\ -\partial_x e_w(0) \end{pmatrix} \in \mathbb{R}^4 \quad (3.31)$$

Zero inputs lead to a simply supported condition.

- Third case $u_{\partial,1} = -\partial_x e_\kappa$, $u_{\partial,2} = e_\kappa$, $y_{\partial,1} = e_w$, $y_{\partial,2} = \partial_x e_w$.
This imposes the shear force $\partial_x e_\kappa := \partial_x (EI \partial_{xx} w)$ and flexural momentum as boundary inputs

$$\mathcal{B}_{\partial} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} -\partial_x e_\kappa(L) \\ \partial_x e_\kappa(0) \\ e_\kappa(L) \\ -e_\kappa(0) \end{pmatrix} \in \mathbb{R}^4 \quad \mathcal{C}_{\partial} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} e_w(L) \\ -e_w(0) \\ \partial_x e_w(L) \\ -\partial_x e_w(0) \end{pmatrix} \in \mathbb{R}^4 \quad (3.32)$$

Null inputs correspond to a free condition.

538

- Fourth case $u_{\partial,1} = -\partial_x e_\kappa$, $u_{\partial,2} = \partial_x e_w$, $y_{\partial,1} = e_w$, $y_{\partial,2} = e_\kappa$.

539

This imposes the shear force and angular velocity as boundary inputs

$$\mathcal{B}_\partial \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} -\partial_x e_\kappa(L) \\ \partial_x e_\kappa(0) \\ \partial_x e_w(L) \\ -\partial_x e_w(0) \end{pmatrix} \in \mathbb{R}^4 \quad \mathcal{C}_\partial \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{pmatrix} e_w(L) \\ -e_w(0) \\ e_\kappa(L) \\ -e_\kappa(0) \end{pmatrix} \in \mathbb{R}^4 \quad (3.33)$$

540

3.3.3 2D shallow water equations

This formulation may be found in [CR16, Section 6.2]. This model describes a thin fluid layer of constant density in hydrostatic balance, like the propagation of a tsunami wave far from shore. Consider an open bounded connected set $\Omega \subset \mathbb{R}^2$ and a constant bed profile. The mass conservation implies

$$\frac{\partial h}{\partial t} + \operatorname{div}(h\mathbf{v}) = 0,$$

where $h(x, y, t) \in \mathbb{R}$ is a scalar field representing the fluid height, $\mathbf{v}(x, y, t) \in \mathbb{R}^2$ is the fluid velocity field. The conservation of linear momentum reads

$$\frac{\partial \rho \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} + \nabla(\rho g h) = 0,$$

where ρ is the mass density and g the gravitational acceleration constant. Using the identity

$$(\mathbf{v} \cdot \nabla) \mathbf{v} = \frac{1}{2} \nabla(\|\mathbf{v}\|^2) + (\nabla \times \mathbf{v}) \times \mathbf{v},$$

where $\nabla \times$ is the rotational of \mathbf{v} (also denoted $\operatorname{curl} \mathbf{v}$), the momentum is rearranged as follows

$$\frac{\partial \rho \mathbf{v}}{\partial t} = -\nabla \left(\frac{1}{2} \rho \|\mathbf{v}\|^2 + \rho g h \right) - \rho(\nabla \times \mathbf{v}) \times \mathbf{v}.$$

The last term on the right-hand side can be rewritten

$$\rho(\nabla \times \mathbf{v}) \times \mathbf{v} = \begin{bmatrix} 0 & -\rho\omega \\ \rho\omega & 0 \end{bmatrix} \mathbf{v},$$

with $\omega = \partial_x v_y - \partial_y v_x$ the local vorticity term. To derive a suitable pH formulation, the total energy, made up of kinetic and potential contribution, has to be invoked

$$H = \frac{1}{2} \int_{\Omega} \{ \rho h \|\mathbf{v}\|^2 + \rho g h^2 \} \, d\Omega.$$

541

As energy variable the fluid height and the linear momentum are chosen

$$\alpha_h = h, \quad \alpha_v = \rho \mathbf{v}. \quad (3.34)$$

542 The Hamiltonian is a non separable functional of the energy variables

$$H(\alpha_h, \boldsymbol{\alpha}_v) = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho} \alpha_h \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h^2 \right\} d\Omega. \quad (3.35)$$

543 The co-energy variables are given by

$$e_h := \frac{\delta H}{\delta \alpha_h} = \frac{1}{2\rho} \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h, \quad \mathbf{e}_v := \frac{\delta H}{\delta \boldsymbol{\alpha}_v} = \frac{1}{\rho} \alpha_h \boldsymbol{\alpha}_v. \quad (3.36)$$

544 The mass and momentum conservation are then rewritten as follows

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_h \\ \boldsymbol{\alpha}_v \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div} \\ -\operatorname{grad} & \mathcal{G} \end{bmatrix} \begin{pmatrix} e_h \\ \mathbf{e}_v \end{pmatrix}, \quad (3.37)$$

The gyroscopic skew-symmetric term \mathcal{G} introduces a non-linearity as it depends on the energy variables

$$\mathcal{G}(\alpha_h, \boldsymbol{\alpha}_v) = \frac{\omega}{\alpha_h} \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}, \quad \omega = \partial_x \alpha_{v,y} - \partial_y \alpha_{v,x}.$$

545 Despite the non-standard formulation, the energy rate provides anyway the boundary vari-
546 ables

$$\begin{aligned} \dot{H} &= + \int_{\Omega} \{e_h \partial_t \alpha_h + \mathbf{e}_v \cdot \partial_t \boldsymbol{\alpha}_v\} d\Omega, \\ &= - \int_{\Omega} \{e_h \operatorname{div} \mathbf{e}_v + \mathbf{e}_v \cdot (\operatorname{grad} e_h - \mathcal{G} \mathbf{e}_v)\} d\Omega, && \text{skew-symmetry of } \mathcal{G}, \\ &= - \int_{\Omega} \{e_h \operatorname{div} \mathbf{e}_v + \mathbf{e}_v \cdot \operatorname{grad} e_h\} d\Omega, && \text{Chain rule,} \\ &= - \int_{\Omega} \operatorname{div}(e_h \mathbf{e}_v) d\Omega, && \text{Stokes theorem,} \\ &= - \int_{\partial\Omega} e_h \mathbf{e}_v \cdot \mathbf{n} dS = - \langle e_h, \mathbf{e}_v \cdot \mathbf{n} \rangle_{\partial\Omega}. \end{aligned} \quad (3.38)$$

547 Again two possible cases of uniform boundary causality arise:

- 548 • First case $u_{\partial} = e_h, \quad y_{\partial} = \mathbf{e}_v \cdot \mathbf{n}$.

549 This imposes the variable $e_h := h$ as boundary input and corresponds to a given water
550 level for a fluid boundary.

- 551 • Second case $u_{\partial} = \mathbf{e}_v \cdot \mathbf{n}, \quad y_{\partial} = e_p$.

552 This imposes the variable $\mathbf{e}_v \cdot \mathbf{n} := h v \cdot \mathbf{n}$ as boundary input and corresponds to a given
553 volumetric flow rate.

3.4 Conclusion

In this chapter, the main mathematical tools needed to understand infinite-dimensional pHs were recalled. A general characterization of the underlying operators behind a boundary control pH system is still an open topic. In Chapter 7, these operators are characterized, in connection to the discretization method developed.

559

Part II

560

Port-Hamiltonian elasticity and thermoelasticity

561

Elasticity in port-Hamiltonian form

I try not to break the rules but merely to test their elasticity.

Bill Veeck

Contents

4.1	Continuum mechanics	25
4.1.1	Non linear formulation of elasticity	25
4.1.2	The linear elastodynamics problem	27
4.2	Port-Hamiltonian formulation of linear elasticity	29
4.2.1	Energy and co-energy variables	29
4.2.2	Final system and associated Stokes-Dirac structure	31
4.3	Conclusion	35



Continuum mechanics is the mathematical description of how materials behave kinematically under external excitations. In this framework, the microscopic structure of a material body is neglected and a macroscopic viewpoint, that describes the body as a continuum, is adopted. This leads to a PDE based model. In this chapter, the general linear elastodynamics problem is recalled. A suitable port-Hamiltonian formulation is then derived.

4.1 Continuum mechanics

In this section, the main concepts behind a deformable continuum are briefly recalled following [Lee12]. For a detailed discussion on this topic, the reader may consult [Abe12, LPKL12].

4.1.1 Non linear formulation of elasticity

The bounded region of \mathbb{R}^d , $d \in \{2, 3\}$ occupied by a solid is called configuration. The reference configuration Ω is the domain that a body occupies at the initial state. To describe how the

body deforms in time the deformation map $\Phi : \Omega \times [0, T_f] \rightarrow \Omega' \subset \mathbb{R}^d$ is introduced. This map is differentiable and orientation preserving, and the image of Ω under $\Phi(\cdot, t) \forall t \in [0, T_f]$ is called the deformed configuration Ω_t . Given a specific point in the reference frame its image is denoted by $\mathbf{y} = \Phi(\mathbf{x}, t)$. The gradient of the deformation map is called the deformation gradient $\mathbf{F} := \nabla_{\mathbf{x}} \Phi = \frac{\partial \mathbf{y}}{\partial \mathbf{x}}$. A rigid deformation maps a point $\mathbf{x} \in \Omega \rightarrow \mathbf{A}(t)\mathbf{x} + \mathbf{b}(t)$, where $\mathbf{A}(t)$ is an orthogonal matrix and $\mathbf{b}(t) \in \mathbb{R}^d$ a vector. A differentiable deformation map Φ is a rigid deformation iff $\mathbf{F}^\top \mathbf{F} - \mathbf{I} = 0$, where \mathbf{I} is the identity in $\mathbb{R}^{d \times d}$ (for the proof see [Cia88], page 44). For this reason, a suitable measure of the deformation is the Green-St.Venant strain tensor $\frac{1}{2}(\mathbf{F}^\top \mathbf{F} - \mathbf{I})$.

A quantity of interest is the displacement $\mathbf{u} : \Omega \times [0, T_f] \rightarrow \mathbb{R}^d$ with respect to the reference configuration. It is defined as $\mathbf{u}(\mathbf{x}, t) = \Phi(\mathbf{x}, t) - \mathbf{x}$. The gradient of the displacement verifies $\nabla_{\mathbf{x}} \mathbf{u} = \mathbf{F} - \mathbf{I}$. The strain tensor can now be written in terms of the displacement

$$\begin{aligned} \frac{1}{2}(\mathbf{F}^\top \mathbf{F} - \mathbf{I}) &= \frac{1}{2} \left[(\nabla_{\mathbf{x}} \mathbf{u} + \mathbf{I})^\top (\nabla_{\mathbf{x}} \mathbf{u} + \mathbf{I}) - \mathbf{I} \right] \\ &= \frac{1}{2} \left[\nabla_{\mathbf{x}} \mathbf{u} + (\nabla_{\mathbf{x}} \mathbf{u})^\top + (\nabla_{\mathbf{x}} \mathbf{u})^\top (\nabla_{\mathbf{x}} \mathbf{u}) \right], \end{aligned}$$

or in components

$$\frac{1}{2}(F_{ik}^\top F_{kj} - I_{ij}) = \frac{1}{2} \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} + \frac{\partial u_i}{\partial x_j} \frac{\partial u_j}{\partial x_i} \right).$$

To state the balance laws the actual deformed configuration is considered. The linear and angular momenta in a subdomain $\omega_t \subset \Omega_t$ are computed as

$$\int_{\omega_t} \rho \mathbf{v} \, d\omega_t, \quad \text{and} \quad \int_{\omega_t} \rho \mathbf{y} \times \mathbf{v} \, d\omega_t,$$

where ρ is the mass density and the velocity $\mathbf{v} = \frac{D\mathbf{u}}{Dt}(\mathbf{y}, t) = \frac{\partial \mathbf{u}}{\partial t}(\mathbf{x}, t)$ is the material time derivative of the displacement (see [Abe12, Chapter 1]). Let $\omega_{t,1}, \omega_{t,2}$ be two subregions in a deformed continuum Ω_t with contacting surface S_{12} . There is a force acting on this surface for a continuum that is called stress vector. If \mathbf{n} is the outward normal at \mathbf{y} on S_{12} with respect to $\omega_{t,1}$, then the surface force that $\omega_{t,1}$ exerts on $\omega_{t,2}$ is denoted by $\mathbf{t}(\mathbf{y}, \mathbf{n}) \in \mathbb{R}^d$. By the Newton third law, the surface force that $\omega_{t,2}$ applies on $\omega_{t,1}$ is given by $\mathbf{t}(\mathbf{y}, -\mathbf{n}) = -\mathbf{t}(\mathbf{y}, \mathbf{n})$. It is assumed that the linear and angular momentum balances hold for any subregion $\omega_t \in \Omega_t$

$$\begin{aligned} \frac{d}{dt} \int_{\omega_t} \rho \mathbf{v} \, d\omega_t &= \int_{\partial\omega_t} \mathbf{t}(\mathbf{y}, \mathbf{n}) \, dS + \int_{\omega_t} \mathbf{f} \, d\omega_t, \\ \frac{d}{dt} \int_{\omega_t} \rho \mathbf{y} \times \mathbf{v} \, d\omega_t &= \int_{\partial\omega_t} \mathbf{y} \times \mathbf{t}(\mathbf{y}, \mathbf{n}) \, dS + \int_{\omega_t} \mathbf{y} \times \mathbf{f} \, d\omega_t, \end{aligned}$$

588 where $\partial\omega_t$ stands for the boundary surface of the subdomain ω_t , \mathbf{n} is the outward normal to
 589 the surface $\partial\omega_t$ and \mathbf{f} represents an exterior body force. The following theorem characterizes
 590 the stress vector (see [Cia88, Chapter 2]):

591 **Theorem 1** (Cauchy's theorem)

592 *If the linear and angular momenta balances hold, then there exists a matrix-valued function*
 593 *Σ from Ω_t to \mathbb{S} such that $\mathbf{t}(\mathbf{y}, \mathbf{n}) = \Sigma(\mathbf{y})\mathbf{n}$, $\forall \mathbf{y} \in \Omega_t$ where the right-hand side is the matrix-*
 594 *vector multiplication.*

The set $\mathbb{S} = \mathbb{R}_{\text{sym}}^{d \times d}$ denotes the field of symmetric matrices in $\mathbb{R}^{d \times d}$. The symmetry of the stress tensor Σ is due to the balance of angular momentum. The divergence theorem can then be applied

$$\int_{\partial\omega_t} \Sigma \mathbf{n} \, dS = \int_{\omega_t} \nabla_y \cdot \Sigma \, d\omega_t,$$

where $\nabla_y \cdot$ is the tensor divergence with respect to the deformed configuration, $\nabla_y \cdot \Sigma = \sum_{i=1}^d \frac{\partial \Sigma_{ij}}{\partial y_i}$. Because the considered subregion ω_t is arbitrary, using the linear balance momentum and the conservation of mass, the following PDE is found

$$\rho \frac{D\mathbf{v}}{Dt} - \nabla_y \cdot \Sigma = \mathbf{f}, \quad \mathbf{y} \in \Omega_t.$$

595 This equation is written with respect to the deformed configuration Ω_t . For a detailed deriva-
 596 tion of this equation the reader may consult [Abe12, Chapter 4]. To obtain a closed formula-
 597 tion, the constitutive law, namely the link between the stress tensor Σ and the strain tensor
 598 $\frac{1}{2}(\mathbf{F}^\top \mathbf{F} - \mathbf{I})$, has to be introduced. In the next section such relation will be discussed for the
 599 case of linear elasticity.

600 4.1.2 The linear elastodynamics problem

Whenever deformations are small, $\|\nabla_x \mathbf{u}\| \ll 1$, then the reference and deformed configurations are almost indistinguishable $\mathbf{y} = \mathbf{x} + \mathbf{u} = \mathbf{x} + O(\nabla_x \mathbf{u}) \approx \mathbf{x}$. This allows writing the linear momentum balance in the reference configuration

$$\rho \frac{\partial \mathbf{v}}{\partial t}(\mathbf{x}, t) - \text{Div } \Sigma(\mathbf{x}, t) = \mathbf{f}, \quad \mathbf{x} \in \Omega.$$

The material derivative simplifies to a partial one. The operator Div is the divergence of a tensor field with respect to the reference configuration (see Appendix A for a description of the differential operators)

$$\text{Div } \Sigma(\mathbf{x}, t) = \nabla_x \cdot \Sigma(\mathbf{x}, t) = \left(\sum_{i=1}^d \frac{\partial \Sigma_{ij}}{\partial x_i} \right)_{1 \leq j \leq d}.$$

Furthermore, the non-linear terms in the Green-St. Venant strain tensor can be dropped

$$\frac{1}{2}(\mathbf{F}^\top \mathbf{F} - \mathbf{I}) = \frac{1}{2} \left[\nabla_x \mathbf{u} + (\nabla_x \mathbf{u})^\top + (\nabla_x \mathbf{u})^\top (\nabla_x \mathbf{u}) \right] \approx \frac{1}{2} \left[\nabla_x \mathbf{u} + (\nabla_x \mathbf{u})^\top \right].$$

601 The linearized strain tensor (also called infinitesimal strain tensor) is the symmetric gradient
 602 of the displacement

$$\boldsymbol{\varepsilon} := \text{Grad } \mathbf{u}, \quad \text{where} \quad \text{Grad } \mathbf{u} = \frac{1}{2} \left[\nabla_x \mathbf{u} + (\nabla_x \mathbf{u})^\top \right]. \quad (4.1)$$

To obtain a closed system of equations, it is now necessary to characterize the relation between stress and strain. This relation is normally called *constitutive law*. In the following, the particular case of elastic materials is considered. These materials are able to return back to their original size and shapes after forces are removed. For this class of materials, the stress tensor is solely determined from the deformed configuration at a given time (Hooke's law)

$$\boldsymbol{\Sigma}(\mathbf{x}) = \boldsymbol{\mathcal{D}}(\mathbf{x}) \boldsymbol{\varepsilon}(\mathbf{u}(\mathbf{x})).$$

The *stiffness tensor* or *elasticity tensor* $\boldsymbol{\mathcal{D}} : \mathbb{S} \rightarrow \mathbb{S}$ is a rank 4 tensor that is symmetric positive definite and uniformly bounded above and below. Because of symmetry, its components satisfy

$$\mathcal{D}_{ijkl} = \mathcal{D}_{jikl} = \mathcal{D}_{klij}.$$

603 From the uniform boundedness of $\boldsymbol{\mathcal{D}}$, the map $\boldsymbol{\mathcal{D}} : L^2(\Omega, \mathbb{S}) \rightarrow L^2(\Omega, \mathbb{S})$ is a symmetric positive
 604 definite bounded linear operator ($L^2(\Omega, \mathbb{S})$ is the space of square integrable symmetric tensor-
 605 valued functions). The compliance tensor $\boldsymbol{\mathcal{C}}$ is defined by $\boldsymbol{\mathcal{C}} = \boldsymbol{\mathcal{D}}^{-1}$. Thus $\boldsymbol{\mathcal{C}} : \mathbb{S} \rightarrow \mathbb{S}$ is as
 606 well symmetric positive definite and uniformly bounded above and below. An isotropic elastic
 607 medium has the same kinematic properties in any direction and at each point. If an elastic
 608 medium is isotropic, then the stiffness and compliance tensors assume the form

$$\boldsymbol{\mathcal{D}}(\cdot) = 2\mu(\cdot) \mathbf{I} + \lambda \text{Tr}(\cdot) \mathbf{I}, \quad \boldsymbol{\mathcal{C}}(\cdot) = \frac{1}{2\mu} \left[(\cdot) - \frac{\lambda}{2\mu + d\lambda} \text{Tr}(\cdot) \mathbf{I} \right], \quad d = \{2, 3\}, \quad (4.2)$$

609 where Tr is the trace operator and the positive scalar functions μ, λ , defined on Ω , are called
 610 the Lamé coefficients. In engineering applications it is easier to compute experimentally two
 611 other parameters: the Young modulus E and Poisson's ratio ν . Those are expressed in terms
 612 of the Lamé coefficients as

$$\nu = \frac{\lambda}{2(\lambda + \mu)}, \quad E = \frac{\mu(3\lambda + 2\mu)}{\lambda + \mu}, \quad (4.3)$$

613 and conversely

$$\lambda = \frac{E\nu}{(1 + \nu)(1 - 2\nu)}, \quad \mu = \frac{E}{2(1 + \nu)}. \quad (4.4)$$

The stiffness and compliant tensor are expressed as

$$\boldsymbol{\mathcal{D}}(\cdot) = \frac{E}{1 + \nu} \left[(\cdot) + \frac{\nu}{1 - 2\nu} \text{Tr}(\cdot) \mathbf{I} \right], \quad (4.5)$$

$$\boldsymbol{\mathcal{C}}(\cdot) = \frac{1 + \nu}{E} \left[(\cdot) - \frac{\nu}{1 + \nu(d - 2)} \text{Tr}(\cdot) \mathbf{I} \right]. \quad (4.6)$$

The linear elastodynamics problem is formulated through a vector-valued PDE

$$\rho \frac{\partial^2 \mathbf{u}}{\partial t^2} - \text{Div}(\mathcal{D} \text{Grad } \mathbf{u}) = \mathbf{f}. \quad (4.7)$$

The classical elastodynamics problem is expressed considering the displacement \mathbf{u} as the unknown. This PDE goes together with appropriate boundary conditions that will be specified in 4.2.

4.2 Port-Hamiltonian formulation of linear elasticity

In this section a port-Hamiltonian formulation for elasticity is deduced from the classical elastodynamics problem. It must be highlighted that already in the seventies a purely hyperbolic formulation for elasticity was detailed [HM78]. The missing point is the clear connection with the theory of Hamiltonian PDEs. An Hamiltonian formulation can be found in [Gri15, Chapter 16], but without any connection to the concept of Stokes-Dirac structure induced by the underlying geometry.

4.2.1 Energy and co-energy variables

Consider an open connected set $\Omega \subset \mathbb{R}^d$, $d \in \{2, 3\}$. The displacement within a deformable continuum is given by Eq. (4.7).

$$\rho \frac{\partial^2 \mathbf{u}}{\partial t^2} - \text{Div}(\mathcal{D} \text{Grad } \mathbf{u}) = 0, \quad \mathbf{x} \in \Omega. \quad (4.8)$$

The contribution of the body force \mathbf{f} has been removed for ease of presentation. To derive a pH formulation, the total energy, that includes the kinetic and deformation energy, is needed

$$H = \frac{1}{2} \int_{\Omega} \left\{ \rho \|\partial_t \mathbf{u}\|^2 + \mathbf{\Sigma} : \mathbf{\varepsilon} \right\} d\Omega. \quad (4.9)$$

The notation $\mathbf{A} : \mathbf{B} = \text{Tr}(\mathbf{A}^\top \mathbf{B}) = \sum_{i,j} A_{ij} B_{ij}$ denotes the tensor contraction. Recall that $\mathbf{\varepsilon} = \text{Grad } \mathbf{u}$ and $\mathbf{\Sigma} = \mathcal{D} \mathbf{\varepsilon}$. The energy variables are then the linear momentum and the deformation field

$$\boldsymbol{\alpha}_v = \rho \mathbf{v}, \quad \mathbf{A}_\varepsilon = \mathbf{\varepsilon},$$

where $\mathbf{v} := \partial_t \mathbf{u}$. The Hamiltonian can be rewritten as a quadratic functional in the energy variables

$$H = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho} \boldsymbol{\alpha}_v^2 + (\mathcal{D} \mathbf{A}_\varepsilon) : \mathbf{A}_\varepsilon \right\} d\Omega. \quad (4.10)$$

The co-energy variables are given by

$$\mathbf{e}_v := \frac{\delta H}{\delta \boldsymbol{\alpha}_v} = \mathbf{v}, \quad \mathbf{E}_\varepsilon := \frac{\delta H}{\delta \mathbf{A}_\varepsilon} = \mathbf{\Sigma}. \quad (4.11)$$

The tensor-valued co-energy \mathbf{E}_ε is obtained by taking the variational derivative with respect to a tensor.

Proposition 3

The variational derivative of the Hamiltonian with respect to the strain tensor is the stress tensor $\delta_{\mathbf{A}_\varepsilon} H = \boldsymbol{\Sigma}$.

Proof. Let $\mathbb{S} : \mathbb{R}_{\text{sym}}^{d \times d}$ be the space of symmetric tensor and $L^2(\Omega, \mathbb{S})$ the space of the square integrable symmetric tensors endowed with the tensor contraction as inner product

$$\langle \mathbf{A}, \mathbf{B} \rangle_{L^2(\Omega, \mathbb{S})} = \int_{\Omega} \mathbf{A} : \mathbf{B} \, d\Omega. \quad (4.12)$$

The contribution due to the deformation part in Hamiltonian is given by:

$$H_{\text{def}}(\mathbf{A}_\varepsilon) = \frac{1}{2} \int_{\Omega} (\mathcal{D} \mathbf{A}_\varepsilon) : \mathbf{A}_\varepsilon \, d\Omega.$$

A variation $\Delta \mathbf{A}_\varepsilon$ of the strain tensor with respect to a given value $\bar{\mathbf{A}}_\varepsilon$ leads to:

$$\begin{aligned} H_{\text{def}}(\bar{\mathbf{A}}_\varepsilon + \eta \Delta \mathbf{A}_\varepsilon) &= + \frac{1}{2} \int_{\Omega} (\mathcal{D} \bar{\mathbf{A}}_\varepsilon) : \bar{\mathbf{A}}_\varepsilon \, d\Omega \\ &+ \eta \frac{1}{2} \int_{\Omega} \left\{ (\mathcal{D} \bar{\mathbf{A}}_\varepsilon) : \Delta \mathbf{A}_\varepsilon + (\mathcal{D} \Delta \mathbf{A}_\varepsilon) : \bar{\mathbf{A}}_\varepsilon \right\} \, d\Omega + O(\eta^2). \end{aligned}$$

The term $(\mathcal{D} \Delta \mathbf{A}_\varepsilon) : \bar{\mathbf{A}}_\varepsilon$ can be further rearranged using the symmetry of \mathcal{D} and the commutativity of the tensor contraction

$$(\mathcal{D} \Delta \mathbf{A}_\varepsilon) : \bar{\mathbf{A}}_\varepsilon = (\mathcal{D} \bar{\mathbf{A}}_\varepsilon) : \Delta \mathbf{A}_\varepsilon,$$

so that

$$H_{\text{def}}(\bar{\mathbf{A}}_\varepsilon + \eta \Delta \mathbf{A}_\varepsilon) = \frac{1}{2} \int_{\Omega} (\mathcal{D} \bar{\mathbf{A}}_\varepsilon) : \bar{\mathbf{A}}_\varepsilon \, d\Omega + \eta \int_{\Omega} (\mathcal{D} \bar{\mathbf{A}}_\varepsilon) : \Delta \mathbf{A}_\varepsilon \, d\Omega + O(\eta^2).$$

By definition of variational derivative it can be written:

$$H_{\text{def}}(\bar{\mathbf{A}}_\varepsilon + \eta \Delta \mathbf{A}_\varepsilon) = H_{\text{def}}(\bar{\mathbf{A}}_\varepsilon) + \eta \left\langle \frac{\delta H}{\delta \mathbf{A}_\varepsilon}, \Delta \mathbf{A}_\varepsilon \right\rangle_{L^2(\Omega, \mathbb{S})} + O(\eta^2),$$

Then, by identification

$$\frac{\delta H_{\text{def}}}{\delta \mathbf{A}_\varepsilon} = \mathcal{D} \bar{\mathbf{A}}_\varepsilon = \boldsymbol{\Sigma}.$$

Since the Hamiltonian is separable then $\delta_{\mathbf{A}_\varepsilon} H_{\text{def}} = \delta_{\mathbf{A}_\varepsilon} H$, leading to the final result. \square

4.2.2 Final system and associated Stokes-Dirac structure

It is now possible to state the final pH form

$$\frac{\partial}{\partial t} \begin{pmatrix} \boldsymbol{\alpha}_v \\ \mathbf{A}_\varepsilon \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \text{Div} \\ \text{Grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_v \\ \mathbf{E}_\varepsilon \end{pmatrix}. \quad (4.13)$$

The first equation of the system is the conservation of linear momentum. The second represents a compatibility condition

$$\begin{aligned} \partial_t \mathbf{A}_\varepsilon &= \text{Grad}(\mathbf{e}_v), \\ \partial_t \boldsymbol{\varepsilon} &= \text{Grad}(\mathbf{v}), \\ \partial_t \text{Grad } \mathbf{u} &= \text{Grad}(\partial_t \mathbf{u}). \end{aligned} \quad (4.14)$$

Assuming that $\mathbf{u} \in C^2$, higher order derivatives commute (Clairaut's theorem). Hence, the equation is verified. The following theorem ensures the differential operator is formally skew-adjoint (one can also find this result in the recent article [PZ20, Lemma 3.3], available as arXiv preprint).

Theorem 2

The formal adjoint of the tensor divergence Div is $-\text{Grad}$, the opposite of the symmetric gradient.

Proof. We denote by $\mathbb{V} = \mathbb{R}^d$ the space of vector field in \mathbb{R}^d and by $\mathbb{S} = \mathbb{R}^{d \times d}$ the space of symmetric tensor field in $\mathbb{R}^{d \times d}$. Let us consider the Hilbert space of the square integrable symmetric tensors $L^2(\Omega, \mathbb{S})$ with scalar product defined in (4.12). Moreover consider the Hilbert space of the square integrable vector function $L^2(\Omega, \mathbb{V})$, endowed with the usual scalar product

$$\langle \mathbf{a}, \mathbf{b} \rangle_{L^2(\Omega, \mathbb{V})} = \int_{\Omega} \mathbf{a} \cdot \mathbf{b} \, d\Omega.$$

Let us consider the tensor divergence operator defined as:

$$\begin{aligned} \text{Div} : L^2(\Omega, \mathbb{S}) &\rightarrow L^2(\Omega, \mathbb{V}), \\ \boldsymbol{\Psi} &\rightarrow \text{Div } \boldsymbol{\Psi} = \boldsymbol{\psi}, \end{aligned} \quad \text{with } \psi_j = \text{div}(\Psi_{ij}) = \sum_{i=1}^d \frac{\partial \Psi_{ij}}{\partial x_i}.$$

We try to identify Div^*

$$\begin{aligned} \text{Div}^* : L^2(\Omega, \mathbb{V}) &\rightarrow L^2(\Omega, \mathbb{S}), \\ \boldsymbol{\phi} &\rightarrow \text{Div}^* \boldsymbol{\phi} = \boldsymbol{\Phi}, \end{aligned}$$

such that

$$\begin{aligned} \langle \text{Div } \boldsymbol{\Psi}, \boldsymbol{\phi} \rangle_{L^2(\Omega, \mathbb{V})} &= \langle \boldsymbol{\Psi}, \text{Div}^* \boldsymbol{\phi} \rangle_{L^2(\Omega, \mathbb{S})}, & \forall \boldsymbol{\Psi} \in \text{Dom}(\text{Div}) \subset L^2(\Omega, \mathbb{S}), \\ & & \forall \boldsymbol{\phi} \in \text{Dom}(\text{Div}^*) \subset L^2(\Omega, \mathbb{V}). \end{aligned}$$

Now let us take $\boldsymbol{\Psi} \in C_0^1(\Omega, \mathbb{S}) \subset \text{Domain}(\text{Div})$ the space of differentiable symmetric tensors

with compact support in Ω . Additionally ϕ will belong to $C_0^1(\Omega, \mathbb{V}) \subset \text{Dom}(\text{Div}^*)$, the space of differentiable vector functions with compact support in Ω . Then

$$\begin{aligned}
 \langle \text{Div } \Psi, \phi \rangle_{L^2(\Omega, \mathbb{V})} &= \int_{\Omega} \psi \cdot \phi \, d\Omega, \\
 &= \int_{\Omega} \sum_{i=1}^d \sum_{j=1}^d \frac{\partial \Psi_{ij}}{\partial x_i} \phi_j \, d\Omega, \\
 &= - \int_{\Omega} \sum_{i=1}^d \sum_{j=1}^d \Psi_{ij} \frac{\partial \phi_j}{\partial x_i} \, d\Omega, \quad \text{since the functions vanish at the boundary,} \\
 &= - \int_{\Omega} \sum_{i=1}^d \sum_{j=1}^d \Psi_{ij} F_{ij} \, d\Omega, \quad \text{where } F_{ij} = \frac{\partial \phi_j}{\partial x_i}, \\
 &= - \langle \Psi, \mathbf{F} \rangle_{L^2(\Omega, \mathbb{S})}, \quad \mathbf{F} = \text{grad } \phi.
 \end{aligned}$$

653 But in this latter case, it could not be stated that $\mathbf{F} \in L^2(\Omega, \mathbb{S})$. Now, since $\Psi \in L^2(\Omega, \mathbb{S})$,
 654 $\Psi_{ji} = \Psi_{ij}$, thus the last equality can be further decomposed as

$$\sum_{i,j} \Psi_{ij} \frac{\partial \phi_j}{\partial x_i} = \sum_{i,j} \Psi_{ij} \frac{1}{2} \left(\frac{\partial \phi_i}{\partial x_j} + \frac{\partial \phi_j}{\partial x_i} \right) = \sum_{i,j} \Psi_{ij} \Phi_{ij}, \quad \text{with } \Phi_{ij} := \frac{1}{2} \left(\frac{\partial \phi_i}{\partial x_j} + \frac{\partial \phi_j}{\partial x_i} \right).$$

Thus $\Phi = \text{Grad } \phi \in L^2(\Omega, \mathbb{S})$ and it can be stated that:

$$\begin{aligned}
 \langle \text{Div } \Psi, \phi \rangle_{L^2(\Omega, \mathbb{V})} &= - \int_{\Omega} \sum_{i,j} \Psi_{ij} \frac{1}{2} \left(\frac{\partial \phi_i}{\partial x_j} + \frac{\partial \phi_j}{\partial x_i} \right) \, d\Omega \\
 &= - \int_{\Omega} \sum_{i,j} \Psi_{ij} \Phi_{ij} \, d\Omega = \langle \Psi, -\text{Grad } \phi \rangle_{L^2(\Omega, \mathbb{S})}.
 \end{aligned}$$

655 It can be concluded that the formal adjoint of Div is $\text{Div}^* = -\text{Grad}$. □

656 The boundary values are then found by evaluating the energy rate

$$\begin{aligned}
 \dot{H} &= \int_{\Omega} \{ \mathbf{e}_v \cdot \partial_t \boldsymbol{\alpha}_v + \mathbf{E}_{\varepsilon} : \partial_t \mathbf{A}_{\varepsilon} \} \, d\Omega, \\
 &= \int_{\Omega} \{ \mathbf{e}_v \cdot \text{Div } \mathbf{E}_{\varepsilon} + \mathbf{E}_{\varepsilon} : \text{Grad } \mathbf{e}_v \} \, d\Omega, \\
 &= \int_{\Omega} \text{div}(\mathbf{E}_{\varepsilon} \mathbf{e}_v) \, d\Omega, \quad \text{Stokes theorem (see Appendix A Eq. (A.6)),} \\
 &= \int_{\partial\Omega} \mathbf{e}_v \cdot (\mathbf{E}_{\varepsilon} \mathbf{n}) \, dS = \langle \mathbf{e}_v, \mathbf{E}_{\varepsilon} \mathbf{n} \rangle_{L^2(\partial\Omega, \mathbb{R}^d)}.
 \end{aligned} \tag{4.15}$$

657 The imposition of the velocity field along the boundary $\mathbf{e}_v = \partial_t \mathbf{u}$ corresponds to a Dirichlet
 658 condition. Setting $\mathbf{E}_{\varepsilon} \mathbf{n} = \boldsymbol{\Sigma} \mathbf{n} = \mathbf{t}$ (the traction) corresponds to a Neumann condition.

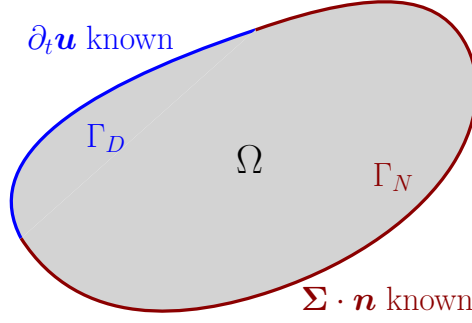


Figure 4.1: A 2D continuum with Neumann and Dirichlet boundary conditions

659 Consider a partition of the boundary $\partial\Omega = \bar{\Gamma}_N \cup \bar{\Gamma}_D$ and $\Gamma_N \cap \Gamma_D = \{\emptyset\}$, where a Dirichlet
 660 and a Neumann condition applies on the open subset Γ_D and Γ_N respectively (see Fig. 4.1).
 661 Then the final pH formulation reads

$$\begin{aligned}
 \frac{\partial}{\partial t} \begin{pmatrix} \alpha_v \\ \mathbf{A}_\varepsilon \end{pmatrix} &= \underbrace{\begin{bmatrix} \mathbf{0} & \text{Div} \\ \text{Grad} & \mathbf{0} \end{bmatrix}}_{\mathcal{J}} \begin{pmatrix} e_v \\ \mathbf{E}_\varepsilon \end{pmatrix}, \\
 \mathbf{u}_\partial &= \underbrace{\begin{bmatrix} \gamma_0^{\Gamma_D} & \mathbf{0} \\ \mathbf{0} & \gamma_n^{\Gamma_N} \end{bmatrix}}_{\mathcal{B}_\partial} \begin{pmatrix} e_v \\ \mathbf{E}_\varepsilon \end{pmatrix}, \\
 \mathbf{y}_\partial &= \underbrace{\begin{bmatrix} \mathbf{0} & \gamma_n^{\Gamma_D} \\ \gamma_0^{\Gamma_N} & \mathbf{0} \end{bmatrix}}_{\mathcal{C}_\partial} \begin{pmatrix} e_v \\ \mathbf{E}_\varepsilon \end{pmatrix},
 \end{aligned} \tag{4.16}$$

662 where $\gamma_0^{\Gamma_*}$ denotes the trace over the set Γ_* , namely $\gamma_0^{\Gamma_*} e_v = e_v|_{\Gamma_*}$. Furthermore, $\gamma_n^{\Gamma_*}$ denotes
 663 the normal trace over the set Γ_* , namely $\gamma_n^{\Gamma_*} \mathbf{E}_\varepsilon = \mathbf{E}_\varepsilon \mathbf{n}|_{\Gamma_*}$.

Conjecture 1 (Stokes-Dirac structure for elastodynamics)

Let $H^{\text{Grad}}(\Omega, \mathbb{V})$ denote the space of vectors with symmetric gradient in $L^2(\Omega, \mathbb{S})$ and $H^{\text{Div}}(\Omega, \mathbb{S})$ be the space of symmetric tensors with divergence in $L^2(\Omega, \mathbb{V})$. Consider the following definitions

$$\begin{aligned}
 H &:= H^{\text{Grad}}(\Omega, \mathbb{V}) \times H^{\text{Div}}(\Omega, \mathbb{S}), \\
 F &:= L^2(\Omega, \mathbb{V}) \times L^2(\Omega, \mathbb{S}), \\
 F_\partial &:= L^2(\Gamma_D, \mathbb{V}) \times L^2(\Gamma_N, \mathbb{V}).
 \end{aligned}$$

664 The set

$$D_{\mathcal{J}} = \left\{ \begin{pmatrix} \mathbf{f} \\ \mathbf{f}_\partial \\ \mathbf{e} \\ \mathbf{e}_\partial \end{pmatrix} \mid \mathbf{e} \in H, \mathbf{f} = \mathcal{J}\mathbf{e}, \mathbf{f}_\partial = \mathcal{B}_\partial \mathbf{e}, \mathbf{e}_\partial = -\mathcal{C}_\partial \mathbf{e} \right\}, \tag{4.17}$$

where $\mathbf{e} = (\mathbf{e}_v, \mathbf{E}_\varepsilon)$ and $\mathcal{J}, \mathcal{B}_\partial, \mathcal{C}_\partial$ are defined in (4.16), is a Stokes–Dirac structure with respect to the pairing

$$\langle\langle (\mathbf{f}^1, \mathbf{f}_\partial^1, \mathbf{e}^1, \mathbf{e}_\partial^1), (\mathbf{f}^2, \mathbf{f}_\partial^2, \mathbf{e}^2, \mathbf{e}_\partial^2) \rangle\rangle := \langle \mathbf{e}^1, \mathbf{f}^2 \rangle_F + \langle \mathbf{e}^2, \mathbf{f}^1 \rangle_F + \langle \mathbf{e}_\partial^1, \mathbf{f}_\partial^2 \rangle_{F_\partial} + \langle \mathbf{e}_\partial^2, \mathbf{f}_\partial^1 \rangle_{F_\partial}, \quad (4.18)$$

where

$$\langle\langle (\mathbf{a}, \mathbf{b}), (\mathbf{c}, \mathbf{d}) \rangle\rangle_{F_\partial} = \int_{\Gamma_D} \mathbf{a} \cdot \mathbf{c} \, dS + \int_{\Gamma_N} \mathbf{b} \cdot \mathbf{d} \, dS, \quad \mathbf{a}, \mathbf{b}, \mathbf{c}, \mathbf{d} \in \mathbb{V}.$$

Crucial points to obtain a rigorous proof The crucial point that needs to be elucidated is where the boundary variables live. These variables belong to the fractional Sobolev spaces $H^{\frac{1}{2}}(\partial\Omega, \mathbb{V})$, $H^{-\frac{1}{2}}(\partial\Omega, \mathbb{V})$ linked by duality with respect to the pivot space $L^2(\partial\Omega, \mathbb{V})$. This is why a L^2 inner product has been assumed as boundary inner product. Furthermore, the partition of the boundary due to the non uniform boundary control complicates the proof, since one has to properly connect the two partitions at their interconnection.

Elements to support the conjecture A Stokes–Dirac is characterized by the fact that $D_{\mathcal{J}} = D_{\mathcal{J}}^\perp$. Then one has to show that $D_{\mathcal{J}} \subset D_{\mathcal{J}}^\perp$ and $D_{\mathcal{J}}^\perp \subset D_{\mathcal{J}}$. The main steps of Theorem 3.6 in [LGZM05] are followed here to support the substantiation of the conjecture. The integration by parts formula is applied as in (4.15).

Step 1. To show that $D_{\mathcal{J}} \subset D_{\mathcal{J}}^\perp$, take $(\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial) \in D_{\mathcal{J}}$. Then

$$\begin{aligned} \langle\langle (\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial), (\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial) \rangle\rangle &= 2 \langle \mathbf{e}, \mathbf{f} \rangle_F + 2 \langle \mathbf{e}_\partial, \mathbf{f}_\partial \rangle_{F_\partial}, \\ &= 2 \langle \mathbf{e}, \mathcal{J}\mathbf{e} \rangle_F + 2 \langle \mathbf{e}_\partial, \mathbf{f}_\partial \rangle_{F_\partial}, \\ &= 2 \int_{\Omega} \{ \mathbf{e}_v \cdot \text{Div } \mathbf{E}_\varepsilon + \mathbf{E}_\varepsilon : \text{Grad } \mathbf{e}_v \} \, d\Omega \\ &\quad - 2 \int_{\Gamma_D} \mathbf{e}_v \cdot (\mathbf{E}_\varepsilon \mathbf{n}) \, dS - 2 \int_{\Gamma_N} \mathbf{e}_v \cdot (\mathbf{E}_\varepsilon \mathbf{n}) \, dS, \\ &= 2 \int_{\Omega} \{ \mathbf{e}_v \cdot \text{Div } \mathbf{E}_\varepsilon + \mathbf{E}_\varepsilon : \text{Grad } \mathbf{e}_v \} \, d\Omega \\ &\quad - 2 \int_{\partial\Omega} \mathbf{e}_v \cdot (\mathbf{E}_\varepsilon \mathbf{n}) \, dS = 0, \quad \text{from (4.15)}. \end{aligned}$$

This implies $D_{\mathcal{J}} \subset D_{\mathcal{J}}^\perp$.

Step 2. Take $(\phi, \phi_\partial, \epsilon, \epsilon_\partial) \in D_{\mathcal{J}}^\perp$ and $\mathbf{e}_0 \in H$ with compact support on Ω . This implies $\mathcal{B}_\partial \mathbf{e}_0 = (\mathbf{0}, \mathbf{0})$ and $\mathcal{C}_\partial \mathbf{e}_0 = (\mathbf{0}, \mathbf{0})$. Taking $(\mathcal{J}\mathbf{e}_0, \mathbf{0}, \mathbf{e}_0, \mathbf{0}) \in D_{\mathcal{J}}$ then

$$\langle\langle (\phi, \phi_\partial, \epsilon, \epsilon_\partial), (\mathcal{J}\mathbf{e}_0, \mathbf{0}, \mathbf{e}_0, \mathbf{0}) \rangle\rangle = \langle \epsilon, \mathcal{J}\mathbf{e}_0 \rangle_F + \langle \mathbf{e}_0, \phi \rangle_F = 0, \quad \forall \mathbf{e}_0 \in H.$$

It follows that $\epsilon \in H$ and $\phi = \mathcal{J}\epsilon$.

Step 3. Take $(\phi, \phi_\partial, \epsilon, \epsilon_\partial) \in D_{\mathcal{J}}^\perp$ and $(\mathbf{f}, \mathbf{f}_\partial, \mathbf{e}, \mathbf{e}_\partial) \in D_{\mathcal{J}}$. Variables \mathbf{e}, ϵ are indeed tuples containing a vector and a tensor, namely $\mathbf{e} = (\mathbf{e}_v, \mathbf{E}_\epsilon)$, $\epsilon = (\epsilon_v, \mathcal{E}_\epsilon)$. From step 2 and (4.18)

$$\begin{aligned} 0 &= \langle \mathbf{e}, \mathcal{J}\epsilon \rangle_F + \langle \mathcal{J}\mathbf{e}, \epsilon \rangle_F + \langle \mathbf{e}_\partial, \phi_\partial \rangle_{F_\partial} + \langle \epsilon_\partial, \mathbf{f}_\partial \rangle_{F_\partial}, \\ &= \int_{\partial\Omega} \{ \mathbf{e}_v \cdot (\mathcal{E}_\epsilon \cdot \mathbf{n}) + \epsilon_v \cdot (\mathbf{E}_\epsilon \cdot \mathbf{n}) \} \, dS + \langle -\mathcal{C}_\partial \mathbf{e}, \phi_\partial \rangle_{F_\partial} + \langle \epsilon_\partial, \mathcal{B}_\partial \mathbf{e} \rangle_{F_\partial} \end{aligned}$$

Consider the splitting of the boundary $\partial\Omega = \bar{\Gamma}_N \cup \bar{\Gamma}_D$

$$\begin{aligned} \int_{\partial\Omega} \{ \mathbf{e}_v \cdot (\mathcal{E}_\epsilon \cdot \mathbf{n}) + \epsilon_v \cdot (\mathbf{E}_\epsilon \cdot \mathbf{n}) \} \, dS &= + \int_{\Gamma_N} \{ \mathbf{e}_{\partial,2} \cdot (\mathcal{E}_\epsilon \cdot \mathbf{n}) + \epsilon_v \cdot \mathbf{f}_{\partial,2} \} \, dS, \\ &+ \int_{\Gamma_D} \{ \mathbf{f}_{\partial,1} \cdot (\mathcal{E}_\epsilon \cdot \mathbf{n}) + \epsilon_v \cdot \mathbf{e}_{\partial,1} \} \, dS, \end{aligned}$$

where the elements of the vectors $\mathbf{f}_\partial = (\mathbf{f}_{\partial,1}, \mathbf{f}_{\partial,2})$, $\mathbf{e}_\partial = (\mathbf{e}_{\partial,1}, \mathbf{e}_{\partial,2})$ have been considered. By expanding of the terms $\langle \mathbf{e}_\partial, \phi_\partial \rangle_{F_\partial} + \langle \epsilon_\partial, \mathbf{f}_\partial \rangle_{F_\partial}$ and given the fact that \mathbf{e} is arbitrary then

$$\phi_\partial = \begin{bmatrix} \gamma_0^{\Gamma_D} & \mathbf{0} \\ \mathbf{0} & \gamma_n^{\Gamma_N} \end{bmatrix} \begin{pmatrix} \epsilon_v \\ \mathcal{E}_\epsilon \end{pmatrix}, \quad \epsilon_\partial = - \begin{bmatrix} \mathbf{0} & \gamma_n^{\Gamma_D} \\ \gamma_0^{\Gamma_N} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \epsilon_v \\ \mathcal{E}_\epsilon \end{pmatrix},$$

meaning that $D_{\mathcal{J}}^\perp \subset D_{\mathcal{J}}$.

Linear elasticity falls within the assumption of [Skr19]. Therefore, it is a well posed boundary control pH system. A question that naturally arises is how to reformulate this system using the language of differential geometry. This is possible through the usage of vector-valued differential forms. The interested reader may consult [Bre08].

4.3 Conclusion

In this chapter, the pH formulation of elasticity has been obtained. This model represents a generalization of the wave equation to higher dimensional variables. This leads to the introduction of symmetric tensorial quantities describing the state of stress and deformation within the body.

For a plane continuum with moderate thickness, it is possible to reduce the general three-dimensional mode to two uncoupled systems: one representing the in-plane behavior ruled by 2D elasticity and one representing the out-of-plane deflection. This will be the object of the next chapter dedicated to the study of a pH formulation of plate bending. It is important to remember that plate models are just particular cases of three-dimensional elasticity.

Port-Hamiltonian plate theory

You get tragedy where the tree, instead of bending, breaks.

Culture and Value
Ludwig Wittgenstein

Contents

5.1	First order plate theory	38
------------	---	-----------

5.1.1	Mindlin-Reissner model	39
-------	----------------------------------	----

5.1.2	Kirchhoff-Love model	40
-------	--------------------------------	----

5.2	Port-Hamiltonian formulation of isotropic plates	42
------------	---	-----------

5.2.1	Port-Hamiltonian Mindlin plate	43
-------	--	----

5.2.2	Port-Hamiltonian Kirchhoff plate	47
-------	--	----

5.3	Laminated anisotropic plates	52
------------	---	-----------

5.3.1	Port-Hamiltonian laminated Mindlin plate	54
-------	--	----

5.3.2	Port-Hamiltonian laminated Kirchhoff plate	55
-------	--	----

5.4	Conclusion	56
------------	-----------------------------	-----------



lates are plane structural elements with a small thickness compared to the planar dimensions. Thanks to this feature, it is not necessary to model plate structures using three-dimensional elasticity. Dimensional reduction strategies are employed to describe plate structures as two-dimensional problems. These strategies rely on an educated guess of the displacement field. For beams and plates this field is expressed in terms of unknown functions $\phi_i^j(x, y, t)$ that solely depends on the midplane coordinates (x, y)

$$u_i(x, y, z, t) = \sum_{j=0}^m (z)^j \phi_i^j(x, y, t).$$

where u_i , $i = \{x, y, z\}$ are the components of the displacement field. A first-order approximation is commonly used, meaning that a linear dependence on z is considered. Two main models arise from such a framework:

- the Mindlin-Reissner model for thick plates;

- the Kirchhoff-Love model for thin plates.

In this chapter it is shown how to formulate first-order plate models as pHs.

5.1 First order plate theory

As previously stated, first order theories assume a linear dependence on the vertical coordinate (cf. [Red06])

$$u_i(x, y, z, t) = \phi_i^0(x, y, t) + z\phi_i^1(x, y, t).$$

This hypothesis implies that the fibers, i.e. segments perpendicular to the mid-plane before deformation, remain straight after deformation. Additionally, for plate with moderate thickness the fibers are considered inextensible, meaning that $\phi_z^1 = 0$. These assumptions lead to the following displacement field

$$\begin{aligned} u_x(x, y, z, t) &= u_x^0(x, y, t) - z\theta_x(x, y, t), \\ u_y(x, y, z, t) &= u_y^0(x, y, t) - z\theta_y(x, y, t), \\ u_z(x, y, z, t) &= u_z^0(x, y, t), \end{aligned} \quad (5.1)$$

where $u_i^0(x, y, t) = \phi_i^0(x, y, t)$, $\theta_i(x, y, t) = -\phi_i^1(x, y, t)$. Assuming a linear elastic behavior, the 3D strain tensors for such a displacement field takes the form

$$\varepsilon_{\alpha\beta} = \frac{1}{2}(\partial_\beta u_\alpha + \partial_\alpha u_\beta) - z\frac{1}{2}(\partial_\beta \theta_\alpha + \partial_\alpha \theta_\beta) = \varepsilon_{\alpha\beta}^0 - z\kappa_{\alpha\beta}, \quad (5.2)$$

$$\varepsilon_{\alpha z} = \frac{1}{2}(\partial_\alpha u_z - \theta_\alpha) = \frac{1}{2}\gamma_\alpha, \quad (5.3)$$

where $\alpha = \{x, y\}$, $\beta = \{x, y\}$. The tensors ε^0 , κ , γ are called membrane, bending (or curvature) and shear strain tensor

$$\varepsilon^0 = \text{Grad } \mathbf{u}^0, \quad (5.4)$$

$$\kappa = \text{Grad } \boldsymbol{\theta}, \quad (5.5)$$

$$\gamma = \text{grad } u_z - \boldsymbol{\theta}. \quad (5.6)$$

where $\mathbf{u}^0 = (u_x, u_y)^\top$, $\boldsymbol{\theta} = (\theta_x, \theta_y)^\top$. For now, it is assumed that the material is isotropic, linear elastic (in Section §5.3 this hypothesis is removed). Recall the Hooke's law for 3D continua (see Eq. (4.5))

$$\boldsymbol{\Sigma} = \frac{E}{1+\nu} \left[\boldsymbol{\varepsilon} + \frac{\nu}{1-2\nu} \text{Tr}(\boldsymbol{\varepsilon}) \mathbf{I}_{3 \times 3} \right].$$

where E , ν are the Young modulus and Poisson ratio. The hypothesis of inextensible fibers implies $\varepsilon_{zz} = 0$. However, imposing a plane strain condition provides a model that is too stiff. Rather than a plain strain assumption, a plain stress hypothesis is used to derive the constitutive law for plates. The displacement field (5.1) is left unchanged, but, instead of ε_{zz} ,

Σ_{zz} is set to zero. If $\Sigma_{zz} = 0$, one gets

$$\varepsilon_{zz} = -\frac{\nu}{1-\nu}(\varepsilon_{xx} + \varepsilon_{yy}).$$

Consequently, it is computed

$$\text{Tr}(\boldsymbol{\varepsilon}) = \frac{1-2\nu}{1-\nu}(\varepsilon_{xx} + \varepsilon_{yy}).$$

The constitutive law for the in-plane stress takes the form

$$\boldsymbol{\Sigma}_{2D} = \boldsymbol{\mathcal{D}}_{2D} \boldsymbol{\varepsilon}_{2D},$$

729 where $\boldsymbol{\Sigma}_{2D} = \Sigma_{\alpha\beta}$, $\boldsymbol{\varepsilon}_{2D} = \varepsilon_{\alpha\beta}$ and

$$\boldsymbol{\mathcal{D}}_{2D} = \frac{E}{1-\nu^2} [(1-\nu)(\cdot) + \nu \text{Tr}(\cdot) \mathbf{I}_{2 \times 2}]. \quad (5.7)$$

730 Concerning the shear deformation, the constitutive law reduces to

$$\boldsymbol{\sigma}_s = G\boldsymbol{\gamma}, \quad (5.8)$$

731 where $\boldsymbol{\sigma}_s := \boldsymbol{\Sigma}_{\alpha,3}$ and $G = \frac{E}{2(1+\nu)}$ is the shear modulus. In the following sections, the most
732 common plate models will be presented.

733 5.1.1 Mindlin-Reissner model

734 The Mindlin-Reissner model [Rei47, Min51] represents a first-order shear deformation theory
735 for describing the bending of plate. The in-plane midplane displacement are zero $\mathbf{u}^0(x, y) = \mathbf{0}$
736 for an isotropic plate that experiences only bending. Hence, the displacement field reduces to

$$\begin{aligned} u_x(x, y, z) &= -z\partial_x\theta_x, \\ u_y(x, y, z) &= -z\partial_y\theta_y, \\ u_z(x, y, z) &= u_z^0(x, y). \end{aligned} \quad (5.9)$$

In pure bending, the strain tensor is given by

$$\boldsymbol{\varepsilon}_b := \boldsymbol{\varepsilon}_{2D}(\mathbf{u}^0 = \mathbf{0}) = -z\boldsymbol{\kappa},$$

with $\boldsymbol{\kappa}$ given by (5.5). Consequently, the stress tensor reads

$$\boldsymbol{\Sigma}_b := \boldsymbol{\Sigma}_{2D}(\mathbf{u}^0 = \mathbf{0}) = -z\boldsymbol{\mathcal{D}}_{2D}\boldsymbol{\kappa},$$

737 where $\boldsymbol{\mathcal{D}}_{2D}$ is defined in Eq. (5.7).
738

739 The undeformed middle plane of the plate is denoted by Ω . The total domain of the

plate is the product $\Omega \times (-h/2, h/2)$, where h is the constant thickness. To effectively reduce the problem from three- to two-dimensional, the stresses have to be integrated along the fibers. Since the stress varies linearly across the thickness, the stress has to be multiplied by z before the integration to get a non null contribution. The resulting quantity is called bending momenta tensor and is given by

$$\mathbf{M} := - \int_{-h/2}^{h/2} z \boldsymbol{\Sigma}_b \, dz = \mathcal{D}_b \boldsymbol{\kappa}, \quad (5.10)$$

where

$$\mathcal{D}_b = D_b [(1 - \nu)(\cdot) + \nu \operatorname{Tr}(\cdot) \mathbf{I}_{2 \times 2}], \quad \text{where} \quad D_b = \frac{Eh^3}{12(1 - \nu^2)}. \quad (5.11)$$

The shear stress has to be integrated along the fibers as well. Given the excessive rigidity of the shear contribution, a correction factor $K_{\text{sh}} = 5/6$ [Red06, Chapter 10] is introduced

$$\mathbf{q} = \int_{-h/2}^{h/2} K_{\text{sh}} \boldsymbol{\sigma}_s \, dz = K_{\text{sh}} Gh \boldsymbol{\gamma}, \quad (5.12)$$

where $\boldsymbol{\gamma}$ is defined in Eq. (5.6). The equations of motion can be obtained using Hamilton's principle. It consists in minimizing the total Lagrangian, given by $L = E_{\text{def}} - E_{\text{kin}}$, where E_{def} and E_{kin} are the deformation and kinetic energies

$$E_{\text{def}} = \frac{1}{2} \int_{\Omega} \int_{-h/2}^{h/2} \boldsymbol{\Sigma} : \boldsymbol{\varepsilon} \, d\Omega \, dz = \frac{1}{2} \int_{\Omega} \{ \mathbf{M} : \boldsymbol{\kappa} + \mathbf{q} \cdot \boldsymbol{\gamma} \} \, d\Omega, \quad (5.13)$$

$$E_{\text{kin}} = \frac{1}{2} \int_{\Omega} \int_{-h/2}^{h/2} \rho \|\partial_t \mathbf{u}\|^2 \, d\Omega \, dz = \frac{1}{2} \int_{\Omega} \left\{ \frac{\rho h^3}{12} \|\partial_t \boldsymbol{\theta}\|^2 + \rho h (\partial_t u_z)^2 \right\} \, d\Omega, \quad (5.14)$$

where ρ is the mass density. The Hamilton principle states that

$$\int_0^T \delta L \, dt = \int_0^T \{ \delta E_{\text{def}} - \delta E_{\text{kin}} \} \, dt = 0.$$

The final result is the following system of PDEs (for the detailed computations see [Red06, Chapter 10])

$$\begin{aligned} \rho h \frac{\partial^2 u_z}{\partial t^2} &= \operatorname{div} \mathbf{q}, & (x, y) \in \Omega, \\ \frac{\rho h^3}{12} \frac{\partial^2 \boldsymbol{\theta}}{\partial t^2} &= \operatorname{Div} \mathbf{M} + \mathbf{q}, \end{aligned} \quad (5.15)$$

with $\mathbf{M} = \mathcal{D}_b \operatorname{Grad} \boldsymbol{\theta}$ and $\mathbf{q} = K_{\text{sh}} Gh (\operatorname{grad} u_z - \boldsymbol{\theta})$. This PDE goes together with specified boundary conditions. Those will be detailed in 5.2.1.

5.1.2 Kirchhoff-Love model

The Kirchhoff model was formulated around 1850 and it is referred to as classical plate theory. The hypotheses on the displacement field consist of the following three points (see Fig. 5.1):

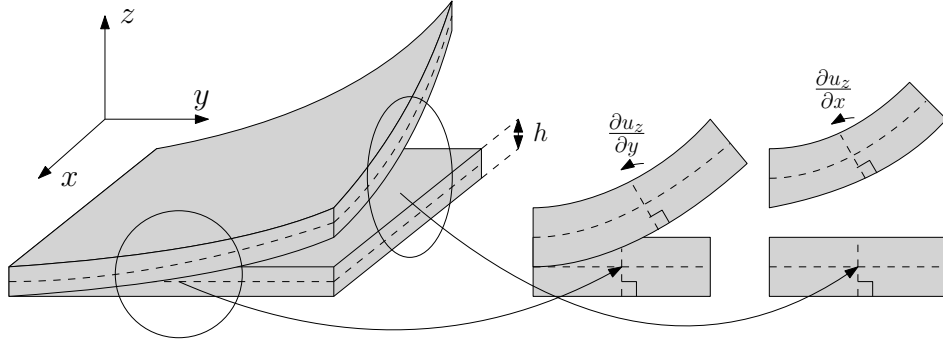


Figure 5.1: Kinematic assumption for the Kirchhoff plate

1. The fibers, segments perpendicular to the mid-plane before deformation, remain straight after deformation.
2. The fibers are inextensible.
3. While rotating, fibers remain perpendicular to the middle surface after deformation.

While the first two points are valid also for the Mindlin plate, the third assumption is specific to the Kirchhoff-Love model. Such an approximation is valid for plates having span-to-thickness ratio of the order of $L/h \approx 100 - 1000$ and implies zero transverse shear deformation

$$\gamma = 0 \implies \varepsilon_{xz} = -\theta_x + \frac{\partial u_z}{\partial x} = 0, \quad \varepsilon_{yz} = -\theta_y + \frac{\partial u_z}{\partial y} = 0.$$

The rotation vector is then related to the vertical displacement $\boldsymbol{\theta} = \text{grad } u_z$. Plugging this into (5.5), it is found

$$\boldsymbol{\kappa} = \text{Grad grad } u_z = \text{Hess } u_z. \quad (5.16)$$

Since the focus is on bending behavior, the in-plane displacement of the mid-plane are assumed to be zero $\mathbf{u}^0(x, y) = \mathbf{0}$. Hence, the displacement field assumes the form

$$\begin{aligned} u_x(x, y, z) &= -z \partial_x u_z, \\ u_y(x, y, z) &= -z \partial_y u_z, \\ u_z(x, y, z) &= u_z^0(x, y). \end{aligned} \quad (5.17)$$

For the Kirchhoff plate, the same link between the momenta and bending tensor holds

$$\mathbf{M} = \mathcal{D}_b \boldsymbol{\kappa},$$

where \mathcal{D}_b and $\boldsymbol{\kappa}$ are given in (5.11), (5.16) respectively. The equations of motion can be obtained using Hamilton's principle [Red06, Chapter 2]. The deformation energy, kinetic

energy and external work read

$$E_{\text{def}} = \frac{1}{2} \int_{\Omega} \int_{-h/2}^{h/2} \boldsymbol{\Sigma} : \boldsymbol{\varepsilon} \, d\Omega \, dz = \frac{1}{2} \int_{\Omega} \{ \mathbf{M} : \boldsymbol{\kappa} \} \, d\Omega, \quad (5.18)$$

$$E_{\text{kin}} = \frac{1}{2} \int_{\Omega} \int_{-h/2}^{h/2} \rho \, \|\partial_t \mathbf{u}\|^2 \, d\Omega \, dz \approx \frac{1}{2} \int_{\Omega} \rho h (\partial_t u_z)^2 \, d\Omega. \quad (5.19)$$

Remark 4 (Rotational energy)

For the kinetic energy the rotational contribution

$$E_{\text{rot}} = \frac{1}{2} \int_{\Omega} \int_{-h/2}^{h/2} \left\{ \rho (\partial_t u_x)^2 + (\partial_t u_y)^2 \right\} \, d\Omega \, dz = \frac{h^3}{24} \int_{\Omega} \rho \left\{ (\partial_{tx} u_z)^2 + (\partial_{ty} u_z)^2 \right\} \, d\Omega = O(h^3),$$

is neglected given the small thickness assumption.

The final result from the Hamilton's principle is the following PDE (for the detailed computations the reader may consult [Red06, Chapter 3])

$$\rho h \frac{\partial^2 u_z}{\partial t^2} = -\operatorname{div} \operatorname{Div}(\mathcal{D}_b \operatorname{Grad} \operatorname{grad} u_z), \quad (x, y) \in \Omega. \quad (5.20)$$

Developing the calculations, one obtains

$$\rho h \frac{\partial^2 u_z}{\partial t^2} = -D_b \Delta^2 u_z, \quad (x, y) \in \Omega,$$

where $\Delta^2 = \frac{\partial^4}{\partial x^4} + 2 \frac{\partial^2}{\partial x^2} \frac{\partial^2}{\partial y^2} + \frac{\partial^4}{\partial y^4}$ is the bi-Laplacian. Appropriate boundary conditions for this problem will be detailed in 5.2.2.

5.2 Port-Hamiltonian formulation of isotropic plates

In this section the pH formulation of the isotropic Mindlin and Kirchhoff plate models is detailed. In [MMB05], the Mindlin plate model was put in pH form by appropriate selection of the energy variables. However, the final system does not consider the nature of the different variables that come into play, leading to a non intrinsic final formulation. Additionally, this model was presented using the jet bundle formalism in [SS17]. The Kirchhoff model was never explored in the pH framework and represents an original contribution of this thesis. The interested reader can find in [RZ18] a rigorous mathematical treatment of the biharmonic problem and its decomposition in 2D geometries, but only for the static case (the 3D case, that does not relate to plate bending, is treated in [PZ18]).

5.2.1 Port-Hamiltonian Mindlin plate

Let $w := u_z$ denote the vertical displacement of the plate. Consider a bounded, connected domain $\Omega \subset \mathbb{R}^2$ and the Hamiltonian (total energy)

$$H = \frac{1}{2} \int_{\Omega} \left\{ \rho h \left(\frac{\partial w}{\partial t} \right)^2 + \frac{\rho h^3}{12} \left\| \frac{\partial \boldsymbol{\theta}}{\partial t} \right\|^2 + \mathbf{M} : \boldsymbol{\kappa} + \mathbf{q} \cdot \boldsymbol{\gamma} \right\} d\Omega, \quad (5.21)$$

where \mathbf{M} , $\boldsymbol{\kappa}$, \mathbf{q} , $\boldsymbol{\gamma}$ are defined in Eqs. (5.10), (5.5), (5.12), (5.6) respectively. The choice of the energy variables is the same as in [MMB05] but here scalar-, vector- and tensor-valued variables are gathered together:

$$\begin{aligned} \alpha_w &= \rho h \frac{\partial w}{\partial t}, & \text{Linear momentum,} & & \alpha_{\theta} &= \frac{\rho h^3}{12} \frac{\partial \boldsymbol{\theta}}{\partial t}, & \text{Angular momentum,} \\ \mathbf{A}_{\kappa} &= \boldsymbol{\kappa}, & \text{Curvature tensor,} & & \boldsymbol{\alpha}_{\gamma} &= \boldsymbol{\gamma}. & \text{Shear deformation.} \end{aligned} \quad (5.22)$$

The energy is now a quadratic function of the energy variables

$$H = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho h} \alpha_w^2 + \frac{12}{\rho h^3} \|\alpha_{\theta}\|^2 + (\mathcal{D}_b \mathbf{A}_{\kappa}) : \mathbf{A}_{\kappa} + (\mathcal{D}_s \boldsymbol{\alpha}_{\gamma}) \cdot \boldsymbol{\alpha}_{\gamma} \right\} d\Omega, \quad (5.23)$$

where $\mathcal{D}_s := GhK_{\text{sh}} \mathbf{I}_{2 \times 2}$, G is the shear modulus and K_{sh} the correction factor. The co-energy variables are found by computing the variational derivative of the Hamiltonian:

$$\begin{aligned} e_w &:= \frac{\delta H}{\delta \alpha_w} = \frac{\partial w}{\partial t}, & \text{Linear velocity,} & & e_{\theta} &:= \frac{\delta H}{\delta \alpha_{\theta}} = \frac{\partial \boldsymbol{\theta}}{\partial t}, & \text{Angular velocity,} \\ \mathbf{E}_{\kappa} &:= \frac{\delta H}{\delta \mathbf{A}_{\kappa}} = \mathbf{M}, & \text{Momenta tensor,} & & \mathbf{e}_{\gamma} &:= \frac{\delta H}{\delta \boldsymbol{\alpha}_{\gamma}} = \mathbf{q} & \text{Shear stress.} \end{aligned} \quad (5.24)$$

Proposition 4

The variational derivative of the Hamiltonian with respect to the curvature tensor is the momenta tensor $\frac{\delta H}{\delta \mathbf{A}_{\kappa}} = \mathbf{M}$.

Proof. The proof is analogous to the one already detailed in Prop. 3 □

Once the variables are concatenated together, the pH system is expressed as follows

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \alpha_{\theta} \\ \mathbf{A}_{\kappa} \\ \boldsymbol{\alpha}_{\gamma} \end{pmatrix} = \begin{bmatrix} 0 & 0 & 0 & \text{div} \\ \mathbf{0} & \mathbf{0} & \text{Div} & \mathbf{I}_{2 \times 2} \\ \mathbf{0} & \text{Grad} & \mathbf{0} & \mathbf{0} \\ \text{grad} & -\mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ e_{\theta} \\ \mathbf{E}_{\kappa} \\ e_{\gamma} \end{pmatrix}. \quad (5.25)$$

The first two equations are equivalent to (5.15). The last two equations, like (4.14) for 3D elasticity, represent the fact that the higher order derivatives commute. We shall now establish the total energy balance in terms of boundary variables as they will be part of the

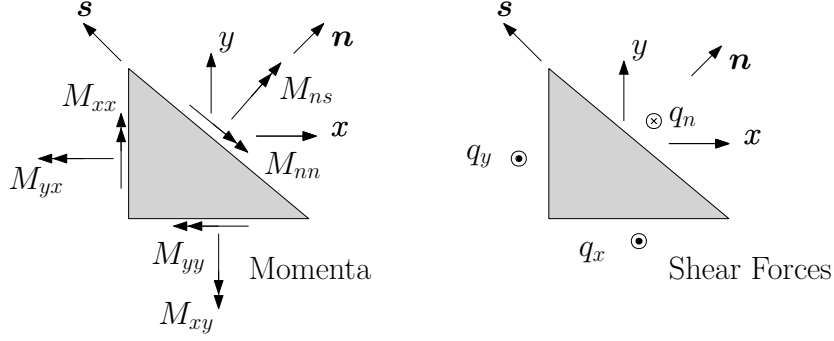


Figure 5.2: Cauchy law for momenta and forces at the boundary.

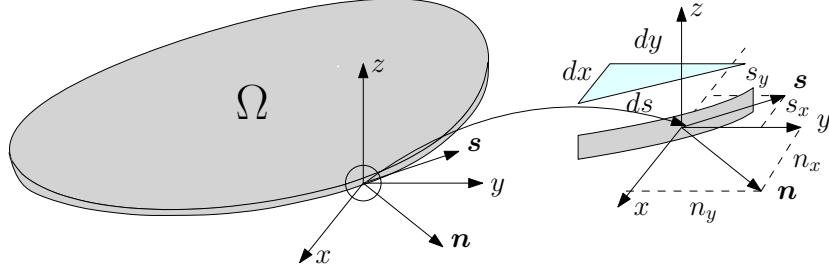


Figure 5.3: Reference frames and notations.

underlying Stokes-Dirac structure of this model. The energy rate reads

$$\begin{aligned}
 \dot{H} &= \int_{\Omega} \left\{ \frac{\partial \alpha_w}{\partial t} e_w + \frac{\partial \alpha_\theta}{\partial t} \cdot \mathbf{e}_\theta + \frac{\partial \mathbf{A}_\kappa}{\partial t} : \mathbf{E}_\kappa + \frac{\partial \alpha_\gamma}{\partial t} \cdot \mathbf{e}_\gamma \right\} d\Omega \\
 &= \int_{\Omega} \{ \operatorname{div}(\mathbf{e}_\gamma) e_w + \operatorname{Div}(\mathbf{E}_\kappa) \cdot \mathbf{e}_\theta + \operatorname{Grad}(\mathbf{e}_\theta) : \mathbf{E}_\kappa + \operatorname{grad}(e_w) \cdot \mathbf{e}_\gamma \} d\Omega \quad \text{Stokes theorem,} \\
 &= \int_{\partial\Omega} \{ w_t q_n + \omega_n M_{nn} + \omega_s M_{ns} \} ds,
 \end{aligned} \tag{5.26}$$

where s is the curvilinear abscissa. The last integral is obtained by applying the Stokes theorem. The boundary variables appearing in the last line of (5.26) and illustrated in Fig. 5.2 are defined as follows:

$$\begin{aligned}
 \text{Shear force} \quad q_n &:= \mathbf{q} \cdot \mathbf{n} = \mathbf{e}_\gamma \cdot \mathbf{n}, \\
 \text{Flexural momentum} \quad M_{nn} &:= \mathbf{M} : (\mathbf{n} \otimes \mathbf{n}) = \mathbf{E}_\kappa : (\mathbf{n} \otimes \mathbf{n}), \\
 \text{Torsional momentum} \quad M_{ns} &:= \mathbf{M} : (\mathbf{s} \otimes \mathbf{n}) = \mathbf{E}_\kappa : (\mathbf{s} \otimes \mathbf{n}),
 \end{aligned} \tag{5.27}$$

Given two vectors $\mathbf{a} \in \mathbb{R}^n$, $\mathbf{b} \in \mathbb{R}^m$, the notation $\mathbf{a} \otimes \mathbf{b} = \mathbf{a}\mathbf{b}^\top \in \mathbb{R}^{n \times m}$ denotes the outer (or dyadic) product of two vectors. Vectors \mathbf{n} and \mathbf{s} designate the normal and tangential unit vectors to the boundary, as shown in Fig. 5.3. The corresponding power conjugated



Figure 5.4: Boundary conditions for the Mindlin plate.

802 variables are

$$\begin{aligned}
 \text{Vertical velocity} \quad w_t &:= \frac{\partial w}{\partial t} = e_w, \\
 \text{Flexural rotation} \quad \omega_n &:= \frac{\partial \theta}{\partial t} \cdot \mathbf{n} = \mathbf{e}_\theta \cdot \mathbf{n}, \\
 \text{Torsional rotation} \quad \omega_s &:= \frac{\partial \theta}{\partial t} \cdot \mathbf{s} = \mathbf{e}_\theta \cdot \mathbf{s}.
 \end{aligned} \tag{5.28}$$

803 Consider a partition of the boundary $\partial\Omega = \bar{\Gamma}_C \cup \bar{\Gamma}_S \cup \bar{\Gamma}_F$, $\Gamma_C \cap \Gamma_S \cap \Gamma_F = \{\emptyset\}$. The open
 804 subset $\Gamma_C, \Gamma_S, \Gamma_F$ could be empty. Given definitions (5.27), (5.28), the boundary conditions
 805 for the Mindlin plate [DHNLS99] (see Fig. 5.4) that are considered are:

- 806 • Clamped (C) on $\Gamma_C \subseteq \partial\Omega$: w_t, ω_n, ω_s known;
- 807 • Simply supported hard (S) on $\Gamma_S \subseteq \partial\Omega$: w_t, ω_s, M_{nn} known;
- 808 • Free (F) on $\Gamma_F \subseteq \partial\Omega$: M_{nn}, M_{ns}, q_n known.

809 Then the final pH formulation reads

$$\begin{aligned}
\frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \boldsymbol{\alpha}_\theta \\ \mathbf{A}_\kappa \\ \boldsymbol{\alpha}_\gamma \end{pmatrix} &= \underbrace{\begin{bmatrix} 0 & 0 & 0 & \text{div} \\ \mathbf{0} & \mathbf{0} & \text{Div} & \mathbf{I}_{2 \times 2} \\ \mathbf{0} & \text{Grad} & \mathbf{0} & \mathbf{0} \\ \text{grad} & -\mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} \end{bmatrix}}_{\mathcal{J}} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ e_\gamma \end{pmatrix}, \\
\mathbf{u}_\partial &= \underbrace{\begin{bmatrix} \gamma_0^{\Gamma^C} & 0 & 0 & 0 \\ 0 & \gamma_n^{\Gamma^C} & 0 & 0 \\ 0 & \gamma_s^{\Gamma^C} & 0 & 0 \\ \gamma_0^{\Gamma^S} & 0 & 0 & 0 \\ 0 & \gamma_s^{\Gamma^S} & 0 & 0 \\ 0 & 0 & \gamma_{nn}^{\Gamma^S} & 0 \\ 0 & 0 & \gamma_{nn}^{\Gamma^F} & 0 \\ 0 & 0 & \gamma_{ns}^{\Gamma^F} & 0 \\ 0 & 0 & 0 & \gamma_n^{\Gamma^F} \end{bmatrix}}_{\mathcal{B}_\partial} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ e_\gamma \end{pmatrix}, \\
\mathbf{y}_\partial &= \underbrace{\begin{bmatrix} 0 & 0 & 0 & \gamma_n^{\Gamma^C} \\ 0 & 0 & \gamma_{nn}^{\Gamma^C} & 0 \\ 0 & 0 & \gamma_{ns}^{\Gamma^C} & 0 \\ 0 & 0 & 0 & \gamma_n^{\Gamma^S} \\ 0 & 0 & \gamma_{ns}^{\Gamma^S} & 0 \\ 0 & \gamma_n^{\Gamma^S} & 0 & 0 \\ 0 & \gamma_n^{\Gamma^F} & 0 & 0 \\ 0 & \gamma_s^{\Gamma^F} & 0 & 0 \\ \gamma_0^{\Gamma^F} & 0 & 0 & 0 \end{bmatrix}}_{\mathcal{C}_\partial} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ e_\gamma \end{pmatrix},
\end{aligned} \tag{5.29}$$

810 where $\gamma_0^{\Gamma^*} a = a|_{\Gamma^*}$ denotes the trace over the set Γ^* . Furthermore, notations $\gamma_n^{\Gamma^*} \mathbf{a} = \mathbf{a} \cdot$
 811 $\mathbf{n}|_{\Gamma^*}$, $\gamma_s^{\Gamma^*} \mathbf{a} = \mathbf{a} \cdot \mathbf{s}|_{\Gamma^*}$ indicate respectively the normal and tangential traces over the set
 812 Γ^* . Symbols $\gamma_{nn}^{\Gamma^*}, \gamma_{ns}^{\Gamma^*}$ denote the normal-normal trace and the normal-tangential trace of
 813 tensor-valued functions and $\gamma_{nn}^{\Gamma^*} \mathbf{A} = \mathbf{A} : (\mathbf{n} \otimes \mathbf{n})|_{\Gamma^*}$, $\gamma_{ns}^{\Gamma^*} \mathbf{A} = \mathbf{A} : (\mathbf{n} \otimes \mathbf{s})|_{\Gamma^*}$.

814 **Remark 5**

815 It can be observed that the interconnection structure given by \mathcal{J} in (5.29) mimics that of the
 816 Timoshenko beam [JZ12, Chapter 7].

Conjecture 2 (Stokes-Dirac structure for the Mindlin plate)

Consider $\mathbb{V} = \mathbb{R}^2$, $\mathbb{S} = \mathbb{R}_{sym}^{2 \times 2}$ and let $H^1(\Omega)$ be the space of functions with gradient in $L^2(\Omega, \mathbb{V})$
 and $H^{\text{div}}(\Omega, \mathbb{V})$ the space of vector-valued functions with divergence in $L^2(\Omega)$. Furthermore,
 $H^1(\Omega, \mathbb{V})$ is the space of vectors with symmetric gradient in $L^2(\Omega, \mathbb{S})$ and $H^{\text{Div}}(\Omega, \mathbb{S})$ denotes

the space of symmetric tensors with divergence in $L^2(\Omega, \mathbb{V})$. Consider the definitions

$$\begin{aligned} H &:= H^1(\Omega) \times H^{\text{Grad}}(\Omega, \mathbb{V}) \times H^{\text{Div}}(\Omega, \mathbb{S}) \times H^{\text{div}}(\Omega, \mathbb{V}), \\ F &:= L^2(\Omega) \times L^2(\Omega, \mathbb{V}) \times L^2(\Omega, \mathbb{S}) \times L^2(\Omega, \mathbb{V}), \\ F_\partial &:= L^2(\Gamma_C, \mathbb{R}^3) \times L^2(\Gamma_S, \mathbb{R}^3) \times L^2(\Gamma_F, \mathbb{R}^3). \end{aligned}$$

The set

$$D_{\mathcal{J}} = \left\{ \begin{pmatrix} \mathbf{f} \\ \mathbf{f}_\partial \\ \mathbf{e} \\ \mathbf{e}_\partial \end{pmatrix} \mid \mathbf{e} \in H, \mathbf{f} = \mathcal{J}\mathbf{e}, \mathbf{f}_\partial = \mathcal{B}_\partial \mathbf{e}, \mathbf{e}_\partial = -\mathcal{C}_\partial \mathbf{e} \right\}, \quad (5.30)$$

where $\mathbf{e} = (e_w, \mathbf{e}_\theta, \mathbf{E}_\kappa, \mathbf{e}_\gamma)$ and $\mathcal{J}, \mathcal{B}_\partial, \mathcal{C}_\partial$ are defined in (5.29), is a Stokes–Dirac structure with respect to the pairing

$$\langle \langle (\mathbf{f}^1, \mathbf{f}_\partial^1, \mathbf{e}^1, \mathbf{e}_\partial^1), (\mathbf{f}^2, \mathbf{f}_\partial^2, \mathbf{e}^2, \mathbf{e}_\partial^2) \rangle \rangle := \langle \mathbf{e}^1, \mathbf{f}^2 \rangle_F + \langle \mathbf{e}^2, \mathbf{f}^1 \rangle_F + \langle \mathbf{e}_\partial^1, \mathbf{f}_\partial^2 \rangle_{F_\partial} + \langle \mathbf{e}_\partial^2, \mathbf{f}_\partial^1 \rangle_{F_\partial}, \quad (5.31)$$

where $\mathbf{e}_\partial^i = (e_{\partial,1}^i, e_{\partial,2}^i, e_{\partial,3}^i)$, $\mathbf{f}_\partial^i = (f_{\partial,1}^i, f_{\partial,2}^i, f_{\partial,3}^i)$ and

$$\langle (\mathbf{a}, \mathbf{b}, \mathbf{c}), (\mathbf{d}, \mathbf{e}, \mathbf{f}) \rangle_{F_\partial} = \int_{\Gamma_C} \mathbf{a} \cdot \mathbf{d} \, dS + \int_{\Gamma_S} \mathbf{b} \cdot \mathbf{e} \, dS + \int_{\Gamma_F} \mathbf{c} \cdot \mathbf{f} \, dS, \quad \mathbf{a}, \mathbf{b}, \mathbf{c}, \mathbf{d}, \mathbf{e}, \mathbf{f} \in \mathbb{R}^3.$$

Crucial points and elements in favor of the conjecture Analogously to what was stated in Conjecture 1, the boundary spaces have to properly defined. If the integration by parts is carried out as in Eq. (5.26), one can follow the same lines of Conjecture 1 to support the present Conjecture.

The Mindlin plate falls within the assumption of [Skr19], hence it is a well posed boundary control pH systems.

5.2.2 Port-Hamiltonian Kirchhoff plate

Again the starting point is the Hamiltonian (total energy)

$$H = \frac{1}{2} \int_{\Omega} \left\{ \rho h \left(\frac{\partial w}{\partial t} \right)^2 + \mathbf{M} : \boldsymbol{\kappa} \right\} \, d\Omega, \quad (5.32)$$

where \mathbf{M} , $\boldsymbol{\kappa}$ are defined in Eqs. (5.10), (5.16). For what concerns the choice of the energy variables, a scalar and a tensor variable are considered:

$$\alpha_w = \rho h \frac{\partial w}{\partial t}, \quad \text{Linear momentum}, \quad \mathbf{A}_\kappa = \boldsymbol{\kappa}, \quad \text{Curvature tensor.} \quad (5.33)$$

830 The co-energy variables are found by computing the variational derivative of the Hamiltonian:

$$e_w := \frac{\delta H}{\delta \alpha_w} = \frac{\partial w}{\partial t}, \quad \text{Linear velocity}, \quad \mathbf{E}_\kappa := \frac{\delta H}{\delta \mathbf{A}_\kappa} = \mathbf{M}, \quad \text{Curvature tensor.} \quad (5.34)$$

831 The port-Hamiltonian system is then written as

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \mathbf{A}_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\text{div} \circ \text{Div} \\ \text{Grad} \circ \text{grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix}. \quad (5.35)$$

The first equation is equivalent to (5.20). The last equation represents the fact that higher order derivatives commute

$$\begin{aligned} \partial_t \mathbf{A}_\kappa &= \text{Grad grad } e_w, \\ \partial_t \kappa &= \text{Grad grad } \partial_t w, \\ \partial_t \text{Grad grad } w &= \text{Grad grad } \partial_t w. \end{aligned}$$

832 The last equation holds for $w \in C^3(\Omega)$.

833 Theorem 3

834 *The operator $\text{Grad} \circ \text{grad}$, corresponding to the Hessian operator, is the adjoint of the double*
 835 *divergence $\text{div} \circ \text{Div}$.*

Proof. Let $\mathbb{S} = \mathbb{R}_{\text{sym}}^{d \times d}$ and consider the Hilbert space of the square integrable symmetric square tensors $L^2(\Omega, \mathbb{S})$ over an open connected set Ω (its inner product is defined in (4.12)). Consider the Hilbert space $L^2(\Omega)$ of scalar square integrable functions, endowed with the standard inner product. Consider the double divergence operator defined as:

$$\begin{aligned} \text{div Div} : L^2(\Omega, \mathbb{S}) &\rightarrow L^2(\Omega), \\ \Psi &\rightarrow \text{div Div } \Psi = \psi, \end{aligned} \quad \text{with } \psi = \text{div Div } \Psi = \sum_{i=1}^d \sum_{j=1}^d \frac{\partial^2 \Psi_{ij}}{\partial x_i \partial x_j}.$$

We shall identify div Div^*

$$\begin{aligned} \text{div Div}^* : L^2(\Omega) &\rightarrow L^2(\Omega, \mathbb{S}), \\ f &\rightarrow \text{div Div}^* f = \mathbf{F}, \end{aligned}$$

such that

$$\begin{aligned} \langle \text{div Div } \Psi, f \rangle_{L^2(\Omega)} &= \langle \Psi, \text{div Div}^* f \rangle_{L^2(\Omega, \mathbb{S})}, & \forall \Psi \in \text{Dom}(\text{div Div}) \subset L^2(\Omega, \mathbb{S}) \\ & & \forall f \in \text{Dom}(\text{div Div}^*) \subset L^2(\Omega) \end{aligned}$$

The function has to belong to the operator domain, so for instance $f \in C_0^2(\Omega) \in \text{Dom}(\text{div Div}^*)$ the space of twice differentiable scalar functions with compact support and Ψ can be chosen in the set $C_0^2(\Omega, \mathbb{S}) \in \text{Dom}(\text{div Div})$, the space of twice differentiable symmetric tensors with

compact support on Ω . A classical result is the fact that the adjoint of the vector divergence is $\operatorname{div}^* = -\operatorname{grad}$ as stated in [KZ15]. By theorem 2, it holds $\operatorname{Div}^* = -\operatorname{Grad}$. Considering that $\operatorname{div} \operatorname{Div} = \operatorname{div} \circ \operatorname{Div}$ is the composition of two different operators and that the adjoint of a composed operator is the adjoint of each operator in reverse order, i.e. $(B \circ C)^* = C^* \circ B^*$, then it can be stated

$$(\operatorname{div} \circ \operatorname{Div})^* = \operatorname{Div}^* \circ \operatorname{div}^* = \operatorname{Grad} \circ \operatorname{grad}.$$

836 Since only formal adjoints are being looked for, this concludes the proof. \square

837 The energy rate provides the boundary port variables

$$\begin{aligned} \dot{H} &= \int_{\Omega} \{ \partial_t \alpha_w e_w + \partial_t \mathbf{A}_{\kappa} : \mathbf{E}_{\kappa} \} \, d\Omega \\ &= \int_{\Omega} \{ -\operatorname{div} \operatorname{Div} \mathbf{E}_{\kappa} e_w + \operatorname{Grad} \operatorname{grad} e_w : \mathbf{E}_{\kappa} \} \, d\Omega, & \text{Stokes theorem} \\ &= \int_{\partial\Omega} \{ -\mathbf{n} \cdot \operatorname{Div} \mathbf{E}_{\kappa} e_w + (\mathbf{n} \otimes \operatorname{grad} e_w) : \mathbf{E}_{\kappa} \} \, ds, \\ &= \int_{\partial\Omega} \{ -\mathbf{n} \cdot \operatorname{Div} \mathbf{E}_{\kappa} e_w + \partial_{\mathbf{n}} e_w (\mathbf{n} \otimes \mathbf{n}) : \mathbf{E}_{\kappa} + \partial_s e_w (\mathbf{n} \otimes \mathbf{s}) : \mathbf{E}_{\kappa} \} \, ds, & \text{Dyadic properties} \\ &= \int_{\partial\Omega} \{ \hat{q}_n w_t + \partial_{\mathbf{n}} w_t M_{nn} + \partial_s w_t M_{ns} \} \, ds. \end{aligned} \tag{5.36}$$

838 where s is the curvilinear abscissa, $w_t := \partial_t w$ and $\partial_s w_t$ denotes the directional derivative
839 along the tangential versor at the boundary. Additionally, the following definitions have been
840 introduced

$$\hat{q}_n := -\mathbf{n} \cdot \operatorname{Div}(\mathbf{E}_{\kappa}), \quad M_{nn} := (\mathbf{n} \otimes \mathbf{n}) : \mathbf{E}_{\kappa}, \quad M_{ns} := (\mathbf{n} \otimes \mathbf{s}) : \mathbf{E}_{\kappa}. \tag{5.37}$$

841 Variables w_t and $\partial_s w_t$ are not independent as they are differentially related with respect to
842 derivation along \mathbf{s} (see for instance [TWK59, Chapter 4]). The tangential derivative has to be
843 moved on the torsional momentum M_{ns} . For sake of simplicity, $\partial\Omega$ is supposed to be regular.
844 Then the integration by parts provides

$$\int_{\partial\Omega} \partial_s w_t M_{ns} \, ds = - \int_{\partial\Omega} \partial_s M_{ns} w_t \, ds. \tag{5.38}$$

845 The final energy balance reads

$$\dot{H} = \int_{\partial\Omega} \{ w_t \tilde{q}_n + \partial_{\mathbf{n}} w_t M_{nn} \} \, ds, \tag{5.39}$$

846 where the boundary variables are

$$\begin{aligned} \text{Effective shear force} \quad \tilde{q}_n &:= \hat{q}_n - \partial_s M_{ns}, \\ \text{Flexural momentum} \quad M_{nn} &:= \mathbf{M} : (\mathbf{n} \otimes \mathbf{n}) = \mathbf{E}_{\kappa} : (\mathbf{n} \otimes \mathbf{n}), \end{aligned} \tag{5.40}$$

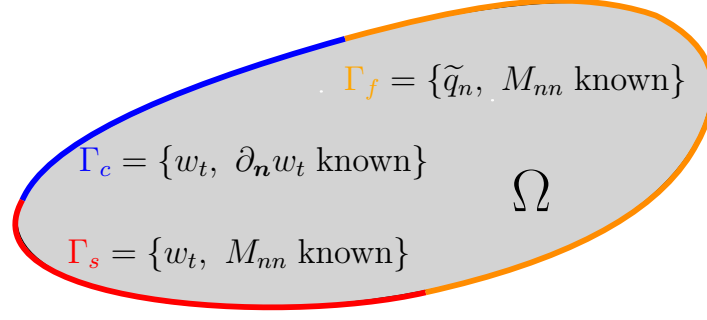


Figure 5.5: Boundary conditions for the Kirchhoff plate.

and \hat{q}_n is defined in (5.37). The corresponding power conjugated variables are:

$$\begin{aligned} \text{Vertical velocity} \quad w_t &:= \frac{\partial w}{\partial t} = e_w, \\ \text{Flexural rotation} \quad \partial_n w_t &:= \nabla e_w \cdot \mathbf{n}. \end{aligned} \tag{5.41}$$

Consider a partition of the boundary $\partial\Omega = \bar{\Gamma}_C \cup \bar{\Gamma}_S \cup \bar{\Gamma}_F$, $\Gamma_C \cap \Gamma_S \cap \Gamma_F = \{\emptyset\}$, where $\Gamma_C, \Gamma_S, \Gamma_F$ are open subset of $\partial\Omega$. Given definitions (5.40), (5.41), the boundary conditions for the Kirchhoff plate [GSV18] are the following (see Fig. 5.5):

- Clamped (C) on $\Gamma_C \subseteq \partial\Omega$: $w_t, \partial_n w_t$ known;
- Simply supported (S) on $\Gamma_S \subseteq \partial\Omega$: w_t, M_{nn} known;
- Free (F) on $\Gamma_F \subseteq \partial\Omega$: \tilde{q}_n, M_{nn} known.

Then the final pH formulation reads

$$\begin{aligned}
\frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \mathbf{A}_\kappa \end{pmatrix} &= \underbrace{\begin{bmatrix} 0 & -\operatorname{div} \circ \operatorname{Div} \\ \operatorname{Grad} \circ \operatorname{grad} & \mathbf{0} \end{bmatrix}}_{\mathcal{J}} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix}, \\
\mathbf{u}_\partial &= \underbrace{\begin{bmatrix} \gamma_0^{\Gamma_C} & 0 \\ \gamma_1^{\Gamma_C} & 0 \\ \gamma_0^{\Gamma_S} & 0 \\ 0 & \gamma_{nn}^{\Gamma_S} \\ 0 & \gamma_{nn,1}^{\Gamma_F} \\ 0 & \gamma_{nn}^{\Gamma_F} \end{bmatrix}}_{\mathcal{B}_\partial} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix}, \\
\mathbf{y}_\partial &= \underbrace{\begin{bmatrix} 0 & \gamma_{nn,1}^{\Gamma_C} \\ 0 & \gamma_{nn}^{\Gamma_C} \\ 0 & \gamma_{nn,1}^{\Gamma_S} \\ \gamma_1^{\Gamma_S} & 0 \\ \gamma_0^{\Gamma_F} & 0 \\ \gamma_1^{\Gamma_F} & 0 \end{bmatrix}}_{\mathcal{C}_\partial} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix},
\end{aligned} \tag{5.42}$$

where $\gamma_0^{\Gamma_*} a = a|_{\Gamma_*}$ and $\gamma_1^{\Gamma_*} a = \partial_{\mathbf{n}} a|_{\Gamma_*}$ denote the standard and the normal derivative trace over the set Γ_* respectively. The symbol $\gamma_{nn,1}^{\Gamma_*}$ denotes the map $\gamma_{nn,1}^{\Gamma_*} \mathbf{A} = -\mathbf{n} \cdot \operatorname{Div} \mathbf{A} - \partial_s(\mathbf{A} : (\mathbf{n} \otimes \mathbf{s}))|_{\Gamma_*}$, while $\gamma_{nn}^{\Gamma_*} \mathbf{A} = \mathbf{A} : (\mathbf{n} \otimes \mathbf{n})|_{\Gamma_*}$ indicates the normal-normal trace of a tensor-valued function.

Remark 6

The interconnection structure \mathcal{J} in (5.42) mimics that of the Bernoulli beam [CRMPB17]. The double divergence and the Hessian coincide, in dimension one, with the second derivative.

Conjecture 3 (Stokes-Dirac structure for the Kirchhoff plate)

Consider $\mathbb{S} = \mathbb{R}_{sym}^{2 \times 2}$ and let $H^2(\Omega)$ be the space of functions with Hessian in $L^2(\Omega, \mathbb{S})$ and $H^{\operatorname{div} \operatorname{Div}}(\Omega, \mathbb{S})$ the space of vector-valued functions with double divergence in $L^2(\Omega)$. Consider the definitions

$$\begin{aligned}
H &:= H^2(\Omega) \times H^{\operatorname{div} \operatorname{Div}}(\Omega, \mathbb{S}), \\
F &:= L^2(\Omega) \times L^2(\Omega, \mathbb{S}), \\
F_\partial &:= L^2(\Gamma_C, \mathbb{R}^2) \times L^2(\Gamma_S, \mathbb{R}^2) \times L^2(\Gamma_F, \mathbb{R}^2).
\end{aligned}$$

The set

$$D_{\mathcal{J}} = \left\{ \begin{pmatrix} \mathbf{f} \\ \mathbf{f}_\partial \\ \mathbf{e} \\ \mathbf{e}_\partial \end{pmatrix} \mid \mathbf{e} \in H, \mathbf{f} = \mathcal{J}\mathbf{e}, \mathbf{f}_\partial = \mathcal{B}_\partial \mathbf{e}, \mathbf{e}_\partial = -\mathcal{C}_\partial \mathbf{e} \right\}, \tag{5.43}$$

where $\mathbf{e} = (e_w, \mathbf{E}_\kappa)$ and $\mathcal{J}, \mathcal{B}_\partial, \mathcal{C}_\partial$ are defined in (5.42), is a Stokes-Dirac structure with

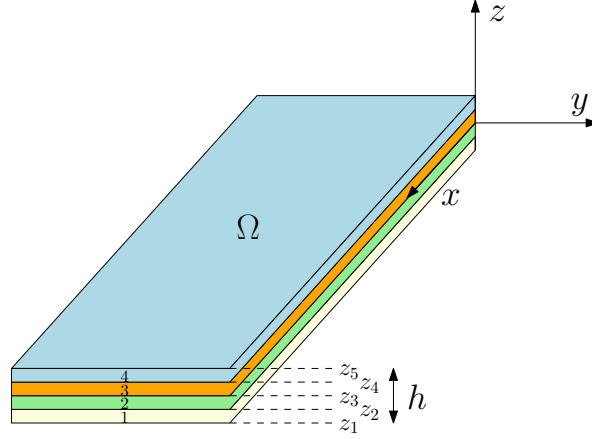


Figure 5.6: Laminated plate with 4 layers.

864 respect to the pairing

$$\langle\langle (\mathbf{f}^1, \mathbf{f}_\partial^1, \mathbf{e}^1, \mathbf{e}_\partial^1), (\mathbf{f}^2, \mathbf{f}_\partial^2, \mathbf{e}^2, \mathbf{e}_\partial^2) \rangle\rangle := \langle \mathbf{e}^1, \mathbf{f}^2 \rangle_F + \langle \mathbf{e}^2, \mathbf{f}^1 \rangle_F + \langle \mathbf{e}_\partial^1, \mathbf{f}_\partial^2 \rangle_{F_\partial} + \langle \mathbf{e}_\partial^2, \mathbf{f}_\partial^1 \rangle_{F_\partial}, \quad (5.44)$$

where $\mathbf{e}_\partial^i = (\mathbf{e}_{\partial,1}^i, \mathbf{e}_{\partial,2}^i)$, $\mathbf{f}_\partial^i = (\mathbf{f}_{\partial,1}^i, \mathbf{f}_{\partial,2}^i)$ and

$$\langle (\mathbf{a}, \mathbf{b}, \mathbf{c}), (\mathbf{d}, \mathbf{e}, \mathbf{f}) \rangle_{F_\partial} = \int_{\Gamma_C} \mathbf{a} \cdot \mathbf{d} \, dS + \int_{\Gamma_S} \mathbf{b} \cdot \mathbf{e} \, dS + \int_{\Gamma_F} \mathbf{c} \cdot \mathbf{f} \, dS, \quad \mathbf{a}, \mathbf{b}, \mathbf{c}, \mathbf{d}, \mathbf{e}, \mathbf{f} \in \mathbb{R}^2.$$

865 **Validity of the conjecture** The integration by parts has to be carried as in Eq. (5.36) to
 866 retrieve a similar discussion to the one in Conjecture 1.

867 5.3 Laminated anisotropic plates

868 Until now homogeneous isotropic materials have been considered. For this class of materials,
 869 the membrane and bending problems are decoupled. In aeronautical applications, structure
 870 are made up of laminae of different materials to enhance the mechanical properties of the
 871 resulting structure. In some cases, a certain coupling is desired, to increase the aerodynamical
 872 performance of the wing as it deforms.

873 Consider again the deformation field given by (5.1)

$$\begin{aligned} \mathbf{u}(x, y, z, t) &= \mathbf{u}^0(x, y, t) - z\boldsymbol{\theta}(x, y, t), \\ u_z(x, y, z, t) &= u_z^0(x, y, t), \end{aligned}$$

874 where $\mathbf{u} = (u_x, u_y)$. The link between in-plane deformation (5.2) and the membrane and

bending contribution (5.4), (5.5).

$$\varepsilon_{2D} = \varepsilon^0 - z\kappa \quad \text{where} \quad \varepsilon^0 = \text{Grad } \mathbf{u}^0, \quad \kappa = \text{Grad } \boldsymbol{\theta}. \quad (5.45)$$

Assume that each layer is an anisotropic material under plane stress condition. Then, it holds (see [Red03, Chapter 1] for details)

$$\boldsymbol{\Sigma}_{2D}^i = \mathcal{D}_{2D}^i \boldsymbol{\varepsilon}_{2D}^i,$$

where i indicates the layer under consideration. The matrix \mathcal{D}_{2D}^i depends on the properties of each material. To reduce the problem to bi-dimensional, the stresses have to be integrated along the thickness. Consider the membrane and bending resultant of the stress

$$\mathbf{N} := \sum_{i=1}^{n_{\text{layer}}} \int_{z_i}^{z_{i+1}} \boldsymbol{\Sigma}_{2D}^i \, dz, \quad \mathbf{M} := \sum_{i=1}^{n_{\text{layer}}} \int_{z_i}^{z_{i+1}} -z \boldsymbol{\Sigma}_{2D}^i \, dz. \quad (5.46)$$

where n_{layer} is the number of layers and z_i represents the height of the i^{th} layer (see Fig. 5.6). Since the stress are discontinuous due to the change of constitutive law along the thickness, the integration has to be performed lamina-wise. Once the computations are carried out, it is found

$$\begin{pmatrix} \mathbf{N} \\ \mathbf{M} \end{pmatrix} = \begin{bmatrix} \mathcal{D}_m & \mathcal{D}_c \\ \mathcal{D}_c & \mathcal{D}_b \end{bmatrix} \begin{pmatrix} \varepsilon^0 \\ \kappa \end{pmatrix}, \quad (5.47)$$

where

$$\mathcal{D}_m = \sum_{i=1}^{n_{\text{layer}}} \mathcal{D}_{2D}^i (z_{i+1} - z_i), \quad \mathcal{D}_c = -\frac{1}{2} \sum_{i=1}^{n_{\text{layer}}} \mathcal{D}_{2D}^i (z_{i+1}^2 - z_i^2), \quad \mathcal{D}_b = \frac{1}{3} \sum_{i=1}^{n_{\text{layer}}} \mathcal{D}_{2D}^i (z_{i+1}^3 - z_i^3), \quad (5.48)$$

Differently from isotropic plate, for laminated anisotropic plates the membrane and bending behavior are coupled. The coupling term \mathcal{D}_c disappears if a symmetric configuration is considered. For the shear contribution it is obtained

$$\mathbf{q} := \int_{-h/2}^{h/2} \boldsymbol{\sigma}_s \, dz = \mathcal{D}_s \boldsymbol{\gamma}, \quad \text{where} \quad \boldsymbol{\gamma} = \text{grad } u_z - \boldsymbol{\theta}. \quad (5.49)$$

The tensor \mathcal{D}_s is not diagonal as in the isotropic case, cf. §5.2.1.

In the following section it is shown how anisotropic laminated plates can be formulated as pHs.

5.3.1 Port-Hamiltonian laminated Mindlin plate

For a shear deformable laminated plate the kinetic and deformation energy read

$$E_{\text{kin}} = \frac{1}{2} \int_{\Omega} \left\{ \rho h \left\| \frac{\partial \mathbf{u}^0}{\partial t} \right\|^2 + \rho h \left(\frac{\partial u_z}{\partial t} \right)^2 + \frac{\rho h^3}{12} \left\| \frac{\partial \boldsymbol{\theta}}{\partial t} \right\|^2 \right\} d\Omega,$$

$$E_{\text{def}} = \frac{1}{2} \int_{\Omega} \left\{ \mathbf{N} : \boldsymbol{\varepsilon}^0 + \mathbf{M} : \boldsymbol{\kappa} + \mathbf{q} \cdot \boldsymbol{\gamma} \right\} d\Omega.$$

By using Hamilton's principle the equations of motion are retrieved (see [Red03, Chapter 3] for an exhaustive explanation)

$$\begin{aligned} \rho h \frac{\partial^2 \mathbf{u}^0}{\partial t^2} &= \text{Div } \mathbf{N}, \\ \rho h \frac{\partial^2 u_z}{\partial t^2} &= \text{div } \mathbf{q}, \\ \frac{\rho h^3}{12} \frac{\partial^2 \boldsymbol{\theta}}{\partial t^2} &= \text{Div } \mathbf{M} + \mathbf{q}, \end{aligned} \tag{5.50}$$

where \mathbf{N} , \mathbf{M} , \mathbf{q} are defined in Eqs. (5.47), (5.49). To get a port-Hamiltonian formulation, the following energy variables are chosen

$$\begin{aligned} \boldsymbol{\alpha}_u &= \rho h \frac{\partial \mathbf{u}^0}{\partial t}, & \alpha_w &= \rho h \frac{\partial u_z}{\partial t}, & \boldsymbol{\alpha}_\theta &= \frac{\rho h^3}{12} \frac{\partial \boldsymbol{\theta}}{\partial t}, \\ \mathbf{A}_{\varepsilon^0} &= \boldsymbol{\varepsilon}^0, & \mathbf{A}_\kappa &= \boldsymbol{\kappa}, & \boldsymbol{\alpha}_\gamma &= \boldsymbol{\gamma}. \end{aligned} \tag{5.51}$$

This choice highlights the nature of the problem in which the membrane part (equivalent to a 2D elasticity problem) and the bending part interact. The total energy $H = E_{\text{kin}} + E_{\text{def}}$ is now a quadratic function of the energy variables

$$E_{\text{kin}} = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho h} \left\| \frac{\partial \boldsymbol{\alpha}_u}{\partial t} \right\|^2 + \frac{1}{\rho h} \left(\frac{\partial \alpha_w}{\partial t} \right)^2 + \frac{12}{\rho h^3} \left\| \frac{\partial \boldsymbol{\alpha}_\theta}{\partial t} \right\|^2 \right\} d\Omega,$$

$$E_{\text{def}} = \frac{1}{2} \int_{\Omega} \left\{ (\mathcal{D}_m \mathbf{A}_{\varepsilon^0} + \mathcal{D}_c \mathbf{A}_\kappa) : \mathbf{A}_{\varepsilon^0} + (\mathcal{D}_c \mathbf{A}_{\varepsilon^0} + \mathcal{D}_b \mathbf{A}_\kappa) : \mathbf{A}_\kappa + (\mathcal{D}_s \boldsymbol{\alpha}_\gamma) \cdot \boldsymbol{\alpha}_\gamma \right\} d\Omega,$$

The co-energies are equal to

$$\begin{aligned} e_w &:= \frac{\delta H}{\delta \alpha_w} = \frac{\partial u_z}{\partial t}, & e_\theta &:= \frac{\delta H}{\delta \boldsymbol{\alpha}_\theta} = \frac{\partial \boldsymbol{\theta}}{\partial t}, \\ \mathbf{E}_\kappa &:= \frac{\delta H}{\delta \mathbf{A}_\kappa} = \mathbf{M}, & e_\gamma &:= \frac{\delta H}{\delta \boldsymbol{\alpha}_\gamma} = \mathbf{q} \end{aligned} \tag{5.52}$$

The final pH formulation is found as usual considering the dynamics (5.50) and Clairaut's theorem

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_u \\ \alpha_w \\ \alpha_\theta \\ \mathbf{A}_{\varepsilon^0} \\ \mathbf{A}_\kappa \\ \alpha_\gamma \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & \text{Div} & \mathbf{0} & \mathbf{0} \\ 0 & 0 & 0 & 0 & 0 & \text{div} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \text{Div} & \mathbf{I}_{2 \times 2} \\ \text{Grad} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \text{Grad} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \text{grad} & -\mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_u \\ e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_{\varepsilon^0} \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}. \quad (5.53)$$

The coupling between the membrane and bending part is clear when considering the link between energy and co-energy variables

$$\begin{pmatrix} \mathbf{e}_u \\ e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_{\varepsilon^0} \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix} = \begin{bmatrix} \frac{1}{\rho h} \mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ 0 & \frac{1}{\rho h} & 0 & 0 & 0 & 0 \\ \mathbf{0} & \mathbf{0} & \frac{12}{\rho h^3} \mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathcal{D}_m & \mathcal{D}_c & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathcal{D}_c & \mathcal{D}_b & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathcal{D}_s \end{bmatrix} \begin{pmatrix} \alpha_u \\ \alpha_w \\ \alpha_\theta \\ \mathbf{A}_{\varepsilon^0} \\ \mathbf{A}_\kappa \\ \alpha_\gamma \end{pmatrix}. \quad (5.54)$$

Again appropriate boundary variables and a suitable Stokes-Dirac structure can be found for this model. The final formulation is just a superposition of systems (4.16) and (5.29).

5.3.2 Port-Hamiltonian laminated Kirchhoff plate

According to the Kirchhoff hypotheses the kinetic and deformation energies reduce to

$$E_{\text{kin}} = \frac{1}{2} \int_{\Omega} \left\{ \rho h \left\| \frac{\partial \mathbf{u}^0}{\partial t} \right\|^2 + \rho h \left(\frac{\partial u_z}{\partial t} \right)^2 \right\} d\Omega,$$

$$E_{\text{def}} = \frac{1}{2} \int_{\Omega} \left\{ \mathbf{N} : \varepsilon^0 + \mathbf{M} : \kappa \right\} d\Omega,$$

where κ is defined in Eq. (5.5). Furthermore, as stated in Remark 4, the rotational contribution in the kinetic energy has been neglected. The equations of motion are (see [Red03, Chapter 3] for an exhaustive explanation)

$$\rho h \frac{\partial^2 \mathbf{u}^0}{\partial t^2} = \text{Div } \mathbf{N},$$

$$\rho h \frac{\partial^2 u_z}{\partial t^2} = -\text{div Div } \mathbf{M},$$

where \mathbf{N} , \mathbf{M} are defined in Eqs. (5.47). To get a port-Hamiltonian formulation, the following energy variables are chosen

$$\begin{aligned}\alpha_u &= \rho h \frac{\partial \mathbf{u}^0}{\partial t}, & \alpha_w &= \rho h \frac{\partial u_z}{\partial t}, \\ \mathbf{A}_{\varepsilon^0} &= \boldsymbol{\varepsilon}^0, & \mathbf{A}_\kappa &= \boldsymbol{\kappa}.\end{aligned}\tag{5.56}$$

The total energy $H = E_{\text{kin}} + E_{\text{def}}$ is now a quadratic function of the energy variables

$$\begin{aligned}E_{\text{kin}} &= \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho h} \left\| \frac{\partial \alpha_u}{\partial t} \right\|^2 + \frac{1}{\rho h} \left(\frac{\partial \alpha_w}{\partial t} \right)^2 \right\} d\Omega, \\ E_{\text{def}} &= \frac{1}{2} \int_{\Omega} \{ (\mathcal{D}_m \mathbf{A}_{\varepsilon^0} + \mathcal{D}_c \mathbf{A}_\kappa) : \mathbf{A}_{\varepsilon^0} + (\mathcal{D}_c \mathbf{A}_{\varepsilon^0} + \mathcal{D}_b \mathbf{A}_\kappa) : \mathbf{A}_\kappa \} d\Omega,\end{aligned}$$

The co-energies are equal to

$$\begin{aligned}e_w &:= \frac{\delta H}{\delta \alpha_w} = \frac{\partial u_z}{\partial t}, & e_u &:= \frac{\delta H}{\delta \alpha_u} = \frac{\partial \mathbf{u}^0}{\partial t}, \\ \mathbf{E}_\kappa &:= \frac{\delta H}{\delta \mathbf{A}_\kappa} = \mathbf{M}, & \mathbf{E}_{\varepsilon^0} &:= \frac{\delta H}{\delta \mathbf{A}_{\varepsilon^0}} = \mathbf{N},\end{aligned}\tag{5.57}$$

The final pH formulation is found to be

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_u \\ \alpha_w \\ \mathbf{A}_{\varepsilon^0} \\ \mathbf{A}_\kappa \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{0} & \text{Div} & \mathbf{0} \\ 0 & 0 & 0 & -\text{div} \circ \text{Div} \\ \text{Grad} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \text{Grad} \circ \text{grad} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_u \\ e_w \\ \mathbf{E}_{\varepsilon^0} \\ \mathbf{E}_\kappa \end{pmatrix}.\tag{5.58}$$

Again, the coupling appears when considering the link between energy and co-energy variables

$$\begin{pmatrix} e_u \\ e_w \\ \mathbf{E}_{\varepsilon^0} \\ \mathbf{E}_\kappa \end{pmatrix} = \begin{bmatrix} \frac{1}{\rho h} \mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ 0 & \frac{1}{\rho h} & 0 & 0 \\ \mathbf{0} & \mathbf{0} & \mathcal{D}_m & \mathcal{D}_c \\ \mathbf{0} & \mathbf{0} & \mathcal{D}_c & \mathcal{D}_b \end{bmatrix} \begin{pmatrix} \alpha_u \\ \alpha_w \\ \mathbf{A}_{\varepsilon^0} \\ \mathbf{A}_\kappa \end{pmatrix}.\tag{5.59}$$

The energy rate provides the appropriate boundary conditions from which one can construct the Stokes-Dirac structure. The necessary computations are not performed here as the final result is just a juxtaposition of systems (4.16), (5.42).

5.4 Conclusion

In this chapter, a pH formulation for the most commonly used plate models has been detailed. Many open questions remain. In particular, how to generalize the results to shell problems, for which the domain is a surface embedded in the three dimensional space (a manifold). Computations get more involved in this case since the usage of differential geometry concepts is unavoidable. These models are important since they are widely used in the aerospace in-

dustry and ubiquitous in nature.

The reformulation of plate models using the language of differential geometry is another open research topic. Indeed, while for the Mindlin plate it should be possible to use vector-valued forms to obtain an equivalent system, for the Kirchhoff plate higher order Stokes-Dirac structure are needed [\[NY04\]](#).

Thermoelasticity in port-Hamiltonian form

Eh bien, mon ami, la terre sera un jour ce cadavre refroidi. Elle deviendra inhabitable et sera inhabitée comme la lune, qui depuis longtemps a perdu sa chaleur vitale.

Vingt mille lieues sous les mers
Jules Verne

Contents

6.1 Port-Hamiltonian linear coupled thermoelasticity	59
6.1.1 The heat equation as a pH descriptor system	60
6.1.2 Classical thermoelasticity	61
6.1.3 Thermoelasticity as two coupled pHs	63
6.2 Thermoelastic port-Hamiltonian bending	65
6.2.1 Thermoelastic Euler-Bernoulli beam	65
6.2.2 Thermoelastic Kirchhoff plate	67
6.3 Conclusion	69



Thermoelasticity is the study of deformable bodies undergoing thermal excitations. It is a clear example of a multiphysics phenomenon since the heat transfer and elastic vibrations within the body mutually interact. In this chapter, a linear model of thermoelasticity is obtained under the pH formalism. Each physics is described separately and the final system is obtained considering a power-preserving interconnection of two pHs.

6.1 Port-Hamiltonian linear coupled thermoelasticity

In this section, a pH formulation of heat transfer is first introduced. The classical model of thermoelasticity is then recalled. The same model is found by interconnecting the heat equation and the linear elastodynamics problem seen as pHs. It is shown that the interconnection

preserves a quadratic functional that plays the role of a fictitious energy. The resulting system is dissipative with respect to this functional. The construction makes use of the intrinsic modularity of pHs [KZvdSB10].

6.1.1 The heat equation as a pH descriptor system

Consider the heat equation in a bounded connected set $\Omega \subset \mathbb{R}^d$, $d \in \{1, 2, 3\}$, describing the evolution of the temperature field $T(\mathbf{x}, t)$

$$\rho c_\epsilon \frac{\partial T}{\partial t} = k \Delta T + r_Q, \quad \mathbf{x} \in \Omega, \quad (6.1)$$

where ρ , c_ϵ , k , r_Q are the mass density, the specific heat density at constant strain, the thermal diffusivity and an heat source. Symbol Δ denotes the Laplacian in \mathbb{R}^d . The Dirichlet and Neumann condition of this problem are

$$\begin{aligned} T \text{ known on } \Gamma_D^T, & \quad \text{Dirichlet condition,} \\ -k \text{ grad } T \cdot \mathbf{n} \text{ known on } \Gamma_N^T, & \quad \text{Neumann condition,} \end{aligned}$$

where a partition of the boundary $\partial\Omega = \Gamma_D^T \cup \Gamma_N^T$ has been considered. This model can be put in pH form by means of a canonical interconnection structure. An algebraic relationship that describes the Fourier law has to be incorporated in the model (cf. [Kot19, Chapter 2]). Here, a differential-algebraic formulation is exploited to obtain the same system.

Let T_0 be a constant reference temperature (the introduction of this variables is instrumental for coupled thermoelasticity). The functional

$$H_T = \frac{1}{2} \int_{\Omega} \rho c_\epsilon T_0 \left(\frac{T - T_0}{T_0} \right)^2 d\Omega$$

has the physical dimension of an energy and represents a Lyapunov functional of this system. Even though it does not represent the internal energy, it has some important properties. Select as energy variable

$$\alpha_T := \rho c_\epsilon (T - T_0),$$

whose corresponding co-energy is

$$e_T := \frac{\delta H_T}{\delta \alpha_T} = \frac{\alpha_T}{\rho c_\epsilon T_0} = \frac{T - T_0}{T_0} =: \theta.$$

Introducing the heat flux $\mathbf{j}_Q := -k \text{ grad } T$ as additional variable, the heat equation (6.1) is

equivalently reformulated as

$$\begin{aligned} \begin{bmatrix} 1 & 0 \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_T \\ \mathbf{j}_Q \end{pmatrix} &= \begin{bmatrix} 0 & -\operatorname{div} \\ -\operatorname{grad} & -(T_0 k)^{-1} \end{bmatrix} \begin{pmatrix} e_T \\ \mathbf{j}_Q \end{pmatrix} + \begin{bmatrix} 1 \\ \mathbf{0} \end{bmatrix} u_T, \\ y_T &= \begin{bmatrix} 1 & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_T \\ \mathbf{j}_Q \end{pmatrix}. \end{aligned} \quad (6.2)$$

with $u_T := r_Q$ and y_T represents the corresponding power-conjugated variable. In matrix notation, it is obtained

$$\begin{aligned} \mathcal{E}_T \partial_t \boldsymbol{\alpha}_T &= (\mathcal{J}_T - \mathcal{R}_T) \mathbf{e}_T + \mathcal{B}_T u_T, \\ y_d &= \mathcal{B}_T^* \mathbf{e}_T \end{aligned} \quad (6.3)$$

where $\boldsymbol{\alpha}_T = (\alpha_T, \mathbf{j}_Q)$, $\mathbf{e}_T = (e_T, \mathbf{j}_Q)$ and

$$\mathcal{E}_T = \begin{bmatrix} 1 & 0 \\ \mathbf{0} & \mathbf{0} \end{bmatrix}, \quad \mathcal{J}_T = \begin{bmatrix} 0 & -\operatorname{div} \\ -\operatorname{grad} & \mathbf{0} \end{bmatrix}, \quad \mathcal{R}_T = \begin{bmatrix} 0 & 0 \\ \mathbf{0} & (T_0 k)^{-1} \end{bmatrix}, \quad \mathcal{B}_T = \begin{bmatrix} 1 \\ \mathbf{0} \end{bmatrix}.$$

The system is an example of pH descriptor system (cf. [BMXZ18] for the finite dimensional case). The Hamiltonian reads

$$H_T = \frac{1}{2} \int_{\Omega} \mathbf{e}_T \cdot \mathcal{E}_T \boldsymbol{\alpha}_T \, d\Omega. \quad (6.4)$$

The power rate is then deduced

$$\begin{aligned} \dot{H}_T &= \int_{\Omega} \mathbf{e}_T \cdot \mathcal{E}_T \partial_t \boldsymbol{\alpha}_T \, d\Omega, \\ &= \int_{\Omega} \mathbf{e}_T \cdot \{(\mathcal{J}_T - \mathcal{R}_T) \mathbf{e} + \mathcal{B}_T u_T\} \, d\Omega, \\ &= \int_{\Omega} u_T y_T \, d\Omega - \int_{\Omega} \left(e_T \operatorname{div} \mathbf{j}_Q + \mathbf{j}_Q \operatorname{grad} e_T + \frac{\|\mathbf{j}_Q\|^2}{k T_0} \right) \, d\Omega, \\ &\leq \int_{\Omega} u_T y_T \, d\Omega - \int_{\partial\Omega} e_T \mathbf{j}_Q \cdot \mathbf{n} \, dS. \end{aligned} \quad (6.5)$$

This choice of Hamiltonian allows retrieving the classical boundary conditions and leads to a dissipative system. Other formulations, based on an entropy or internal energy functionals, are possible for the heat equation [DMSB09, SHM19a]. These provide an accrescent or a lossless system. Unfortunately these formulations are non linear and their discretization is a difficult task [SHM19b].

6.1.2 Classical thermoelasticity

The derivation of the classical theory of thermoelasticity is not carried out here. The reader may consult in [HE09, Chapter 1] or [Abe12, Chapter 8] for a detailed discussion on this topic.

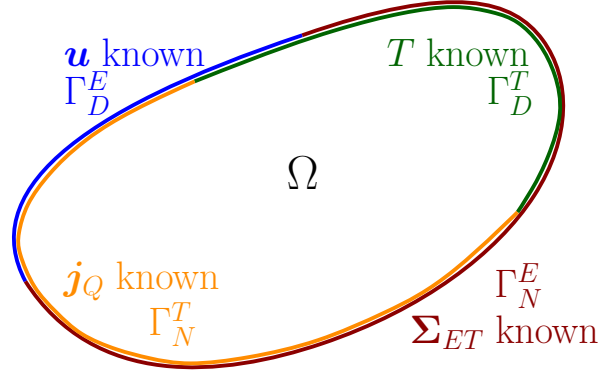


Figure 6.1: Boundary conditions for the thermoelastic problem.

984 Consider a bounded connected set $\Omega \subset \mathbb{R}^d$, $d \in \{1, 2, 3\}$. The classical equations for linear
 985 fully-coupled thermoelasticity for an isotropic thermoelastic material are [Bio56, Car73]

$$\begin{aligned}
 \rho \frac{\partial^2 \mathbf{u}}{\partial t^2} &= \text{Div}(\boldsymbol{\Sigma}_{ET}), \\
 \rho c_\epsilon \frac{\partial T}{\partial t} &= -\text{div}(\mathbf{j}_Q) - \mathcal{C}_\beta : \frac{\partial \boldsymbol{\varepsilon}}{\partial t}, \\
 \boldsymbol{\Sigma}_{ET} &= \boldsymbol{\Sigma}_E + \boldsymbol{\Sigma}_T, \\
 \boldsymbol{\Sigma}_E &= 2\mu \boldsymbol{\varepsilon} + \lambda \text{Tr}(\boldsymbol{\varepsilon}) \mathbf{I}_{d \times d}, \\
 \boldsymbol{\Sigma}_T &= -\mathcal{C}_\beta \theta, \\
 \boldsymbol{\varepsilon} &= \text{Grad}(\mathbf{u}), \\
 \mathbf{j}_Q &= -k \text{grad } T.
 \end{aligned} \tag{6.6}$$

986 For simplicity the coupling term

$$\mathcal{C}_\beta := T_0 \beta (2\mu + d\lambda) \mathbf{I}_{d \times d}$$

987 has been introduced. Field \mathbf{u} is the displacement, $\boldsymbol{\varepsilon}$ is the infinitesimal strain tensor, $\boldsymbol{\Sigma}_E, \boldsymbol{\Sigma}_T$
 988 are the stress tensor contribution due to mechanical deformation and a thermal field. Co-
 989 efficients λ, μ are the Lamé parameters, and β the thermal expansion coefficient. Given a
 990 partition of the boundary $\partial\Omega = \Gamma_D^E \cup \Gamma_N^E = \Gamma_D^T \cup \Gamma_N^T$ for the elastic and thermal domain. The
 991 general boundary conditions read (see Fig. 6.1)

$$\begin{aligned}
 \mathbf{u} \text{ known on } \Gamma_D^E \times (0, +\infty), & \quad T \text{ known on } \Gamma_D^T \times (0, +\infty), \\
 \boldsymbol{\Sigma}_{ET} \cdot \mathbf{n} \text{ known on } \Gamma_N^E \times (0, +\infty), & \quad \mathbf{j}_Q \cdot \mathbf{n} \text{ known on } \Gamma_N^T \times (0, +\infty).
 \end{aligned} \tag{6.7}$$

992 In the following section an equivalent system is constructed by interconnecting the heat
 993 equation and the elastodynamics system in a structured manner.

6.1.3 Thermoelasticity as two coupled pHs

Consider again the equation of elasticity on $\Omega \subset \mathbb{R}^d$, $d \in \{1, 2, 3\}$ (cf. Eq. (4.16)), together with a distributed input \mathbf{u}_E that plays the role of a distributed force

$$\begin{aligned} \frac{\partial}{\partial t} \begin{pmatrix} \boldsymbol{\alpha}_v \\ \mathbf{A}_\varepsilon \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \text{Div} \\ \text{Grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_v \\ \mathbf{E}_\varepsilon \end{pmatrix} + \begin{bmatrix} \mathbf{I}_{d \times d} \\ \mathbf{0} \end{bmatrix} \mathbf{u}_E, \\ \mathbf{y}_E &= \begin{bmatrix} \mathbf{I}_{d \times d} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_v \\ \mathbf{E}_\varepsilon \end{pmatrix}, \end{aligned} \quad (6.8)$$

with Hamiltonian

$$H_E = \frac{1}{2} \int_{\Omega} \{ \boldsymbol{\alpha}_v \cdot \mathbf{e}_v + \mathbf{A}_\varepsilon : \mathbf{E}_\varepsilon \} \, d\Omega.$$

Recall the pH formulation of the heat equation (6.2)

$$\begin{aligned} \begin{bmatrix} 1 & 0 \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_T \\ \mathbf{j}_Q \end{pmatrix} &= \begin{bmatrix} 0 & -\text{div} \\ -\text{grad} & -(T_0 k)^{-1} \end{bmatrix} \begin{pmatrix} e_T \\ \mathbf{j}_Q \end{pmatrix} + \begin{bmatrix} 1 \\ \mathbf{0} \end{bmatrix} u_T, \\ \mathbf{y}_T &= \begin{bmatrix} 1 & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_T \\ \mathbf{j}_Q \end{pmatrix}, \end{aligned} \quad (6.9)$$

with Hamiltonian H_T defined in (6.4). The linear thermoelastic problem can be expressed as a coupled port-Hamiltonian system. Consider the following interconnection

$$\mathbf{u}_E = -\text{Div}(\mathcal{C}_\beta \mathbf{y}_T), \quad u_T = -\mathcal{C}_\beta : \text{Grad}(\mathbf{y}_E). \quad (6.10)$$

The interconnection is power preserving as it can be compactly written as

$$\mathbf{u}_E = \mathcal{A}_\beta(\mathbf{y}_T), \quad u_T = -\mathcal{A}_\beta^*(\mathbf{y}_E).$$

where \mathcal{A}_β^* denotes the formal adjoint. The assertion is justified by the following proposition.

Proposition 5

Let $C_0^\infty(\Omega)$, $C_0^\infty(\Omega, \mathbb{R}^d)$ be the space of smooth functions and vector-valued functions respectively. Given $y_T \in C_0^\infty(\Omega)$, $\mathbf{y}_E \in C_0^\infty(\Omega, \mathbb{R}^d)$, the coupling operator

$$\begin{aligned} \mathcal{A}_\beta : C_0^\infty(\Omega) &\rightarrow C_0^\infty(\Omega, \mathbb{R}^d), \\ y_T &\rightarrow -\text{Div}(\mathcal{C}_\beta y_T) \end{aligned} \quad (6.11)$$

has formal adjoint

$$\begin{aligned} \mathcal{A}_\beta^* : C_0^\infty(\Omega, \mathbb{R}^d) &\rightarrow C_0^\infty(\Omega) \\ \mathbf{y}_E &\rightarrow +\mathcal{C}_\beta : \text{Grad}(\mathbf{y}_E) \end{aligned} \quad (6.12)$$

Proof. It is necessary to show

$$\langle \mathbf{y}_E, \mathcal{A}_\beta y_T \rangle_{L^2(\Omega, \mathbb{R}^d)} = \langle \mathcal{A}_\beta^* \mathbf{y}_E, y_T \rangle_{L^2(\Omega)}, \quad (6.13)$$

1007 where for $\mathbf{u}_E, \mathbf{y}_E \in C_0^\infty(\Omega)$, $u_T, y_T \in C_0^\infty(\Omega)$

$$\langle \mathbf{u}_E, \mathbf{y}_E \rangle_{L^2(\Omega, \mathbb{R}^d)} = \int_{\Omega_E} \mathbf{u}_E \cdot \mathbf{y}_E \, d\Omega, \quad \langle u_T, y_T \rangle_{L^2(\Omega)} = \int_{\Omega_T} u_T y_T \, d\Omega. \quad (6.14)$$

1008 The proof is a simple application of Theorem 5

$$\begin{aligned} \langle \mathbf{y}_E, \mathcal{A}_\beta y_T \rangle_{L^2(\Omega, \mathbb{R}^d)} &= - \int_{\Omega} \mathbf{y}_E \cdot \text{Div}(\mathcal{C}_\beta y_T) \, d\Omega, \\ &= \int_{\Omega} \text{Grad}(\mathbf{y}_E) : \mathcal{C}_\beta y_T \, d\Omega, \\ &= \int_{\Omega} \mathcal{A}_\beta^*(\mathbf{y}_E) y_T \, d\Omega, \\ &= \langle \mathcal{A}_\beta^* \mathbf{y}_E, y_T \rangle_{L^2(\Omega)}. \end{aligned} \quad (6.15)$$

1009 This concludes the proof. \square

1010 If the compact support assumption is removed, it is obtained

$$\begin{aligned} \langle u_T, y_T \rangle_{L^2(\Omega)} + \langle \mathbf{u}_E, \mathbf{y}_E \rangle_{L^2(\Omega, \mathbb{R}^3)} &= - \int_{\Omega} \{ (\mathcal{C}_\beta : \text{Grad} \, \mathbf{e}_v) e_T + \text{Div}(\mathcal{C}_\beta e_T) \cdot \mathbf{e}_v \} \, d\Omega, \\ &= - \int_{\Omega} \text{div}(e_T \mathcal{C}_\beta \cdot \mathbf{e}_v) \, d\Omega, \\ &= - \int_{\partial\Omega} (e_T \mathcal{C}_\beta \cdot \mathbf{n}) \cdot \mathbf{e}_v \, dS. \end{aligned} \quad (6.16)$$

Using the expression of y_T, \mathbf{y}_E , considering that T_0 is constant and applying Schwarz theorem for smooth function, the inputs are equal to

$$\mathbf{u}_E = \text{Div}(\boldsymbol{\Sigma}_T), \quad u_T = -\mathcal{C}_\beta : \text{Grad}(\mathbf{v}) = -\mathcal{C}_\beta : \frac{\partial \boldsymbol{\varepsilon}}{\partial t}.$$

1011 The coupled thermoelastic problem can now be written as

$$\begin{bmatrix} \mathbf{1} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{1} & \mathbf{0} & \mathbf{0} \\ 0 & 0 & 1 & 0 \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \boldsymbol{\alpha}_v \\ \mathbf{A}_\varepsilon \\ \alpha_T \\ \mathbf{j}_Q \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \text{Div} & \mathcal{A}_\beta & \mathbf{0} \\ \text{Grad} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ -\mathcal{A}_\beta^* & 0 & 0 & -\text{div} \\ \mathbf{0} & \mathbf{0} & -\text{grad} & -(T_0 k)^{-1} \end{bmatrix} \begin{pmatrix} \mathbf{e}_v \\ \mathbf{E}_\varepsilon \\ e_T \\ \mathbf{j}_Q \end{pmatrix}, \quad (6.17)$$

with total energy given by $H = H_E + H_T$. The power balance for each subsystem is given by

$$\dot{H}_E = \int_{\Omega} \mathbf{u}_E \cdot \mathbf{y}_E \, d\Omega + \int_{\partial\Omega} \mathbf{e}_v \cdot (\mathbf{E}_\varepsilon \cdot \mathbf{n}) \, dS, \quad (6.18)$$

$$\dot{H}_T \leq \int_{\Omega} u_T y_T \, d\Omega - \int_{\partial\Omega} \theta \mathbf{j}_Q \cdot \mathbf{n} \, dS, \quad (6.19)$$

The overall power balance is easily computed considering Eqs. (6.18) (6.19) and (6.16)

$$\dot{H} = \dot{H}_E + \dot{H}_T \leq \int_{\partial\Omega} \{[\mathbf{E}_\varepsilon - e_T \mathcal{C}_\beta] \cdot \mathbf{n}\} \cdot \mathbf{e}_v \, dS - \int_{\partial\Omega} \theta \, \mathbf{j}_Q \cdot \mathbf{n} \, dS. \quad (6.20)$$

This result is the same stated in [Car73], page 332. From the power balance the classical boundary conditions are retrieved. This allows defining appropriate boundary operators for the thermoelastic problem

$$\mathbf{u}_\partial = \underbrace{\begin{bmatrix} \gamma_0^{\Gamma_D^E} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \gamma_n^{\Gamma_N^E} & -\gamma_n^{\Gamma_N^E}(\mathcal{C}_\beta \cdot) & \mathbf{0} \\ 0 & 0 & \gamma_0^{\Gamma_D^T} & 0 \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \gamma_n^{\Gamma_N^T} \end{bmatrix}}_{\mathcal{B}_\partial} \begin{pmatrix} \mathbf{e}_v \\ \mathbf{E}_\varepsilon \\ e_T \\ \mathbf{j}_Q \end{pmatrix}, \quad \mathbf{y}_\partial = \underbrace{\begin{bmatrix} \mathbf{0} & \gamma_n^{\Gamma_D^E} & -\gamma_n^{\Gamma_D^E}(\mathcal{C}_\beta \cdot) & \mathbf{0} \\ \gamma_0^{\Gamma_N^E} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \gamma_n^{\Gamma_D^T} \\ 0 & 0 & \gamma_0^{\Gamma_N^T} & 0 \end{bmatrix}}_{\mathcal{C}_\partial} \begin{pmatrix} \mathbf{e}_v \\ \mathbf{E}_\varepsilon \\ e_T \\ \mathbf{j}_Q \end{pmatrix}. \quad (6.21)$$

System (6.17) together with (6.21) is a pH system with boundary control and observation. Indeed, the classical thermoelastic problem can be modeled as two coupled systems, demonstrating the modularity of the pH paradigm.

6.2 Thermoelastic port-Hamiltonian bending

In this section, the thermoelastic bending of thin beam and plate structures is described as coupled interconnection of pHs. Starting from classical thermoelastic models a suitable pH formulation can be obtained. This couples a mechanical system defined on a reduced domain (uni-dimensional for beams, bi-dimensional for plates), to a thermal domain defined in the three-dimensional space.

6.2.1 Thermoelastic Euler-Bernoulli beam

The model for the linear thermoelastic vibrations of an isotropic thin rod is detailed in [Cha62, LR00]. The domain of the beam is uni-dimensional $\Omega_E = \{0, L\}$, while the thermal domain is three-dimensional $\Omega_T = \{0, L\} \times S$, where S is the set representing the beam cross section. The set S is assumed to be constant along the axis for simplicity. The ruling equations are

$$\begin{aligned} \rho A \frac{\partial^2 w}{\partial t^2} &= -EI \frac{\partial^4 w}{\partial x^4} - \beta E T_0 \frac{\partial^2}{\partial x^2} \int_S z \theta \, dx \, dy, & x \in \{0, L\} &= \Omega_E, \\ \rho c_{\epsilon, B} T_0 \frac{\partial \theta}{\partial t} &= k T_0 \Delta \theta + \beta T_0 E z \frac{\partial^3 w}{\partial x^2 \partial t}, & (x, y, z) \in \Omega_E \times S &= \Omega_T, \end{aligned} \quad (6.22)$$

where $w(x, t)$ is the vertical displacement of the beam $I = \int_S z^2 \, dx \, dy$ the second moment of area, E the Young modulus and A the cross section. The constant $c_{\epsilon, B}$ is due to the thermoelastic coupling (cf. [Cha62, LR00] for a detailed explanation). The other terms have

meaning than in Section §6.1. Since the normalized temperature $\theta(x, y, z, t)$ depends on all spatial coordinates, the symbol $\Delta = \partial_{xx} + \partial_{yy} + \partial_{zz}$ is the Laplacian in three dimensions. The physical constants are assumed to be constant for simplicity.

The coupling operator is defined as

$$\mathcal{A}_{\beta,B}(y_T) := -\beta ET_0 \partial_{xx} \left(\int_S z y_T \, dx \, dy \right). \quad (6.23)$$

To unveil an interconnection that is power with respect to a certain function, the formal adjoint of the coupling operator is needed.

Proposition 6

Let $C_0^\infty(\Omega_T)$, $C_0^\infty(\Omega_E)$ be the space of smooth functions with compact support defined on Ω_T and Ω_E respectively. Given $y_T \in C_0^\infty(\Omega_T)$, $y_E \in C_0^\infty(\Omega_E)$ the formal adjoint of the coupling operator is

$$\mathcal{A}_{\beta,B}^*(y_E) = -\beta ET_0 z \partial_{xx} y_E. \quad (6.24)$$

Proof. The formal adjoint is defined by the relation

$$\langle y_E, \mathcal{A}_{\beta,B} y_T \rangle_{L^2(\Omega_E)} = \langle \mathcal{A}_{\beta,B}^* y_E, y_T \rangle_{L^2(\Omega_T)}, \quad (6.25)$$

where for $u_E, y_E \in C_0^\infty(\Omega_E)$, $u_T, y_T \in C_0^\infty(\Omega_T)$

$$\langle u_E, y_E \rangle_{L^2(\Omega_E)} = \int_{\Omega_E} u_E y_E \, dx, \quad \langle u_T, y_T \rangle_{L^2(\Omega_T)} = \int_{\Omega_T} y_T y_T \, dx \, dy \, dz. \quad (6.26)$$

Using Def. (6.23) and the integration by parts, one finds

$$\begin{aligned} \langle y_E, \mathcal{A}_{\beta,B} y_T \rangle_{L^2(\Omega_E)} &= \int_{\Omega_E} y_E \mathcal{A}_{\beta,B} y_T \, dx, \\ &= - \int_{\Omega_E} y_E \beta ET_0 \partial_{xx} \left(\int_S z y_T \, dx \, dy \right) \, dx, \\ &= - \int_{\Omega_E} (\partial_{xx} y_E) \beta ET_0 \left(\int_S z y_T \, dx \, dy \right) \, dx, \end{aligned} \quad (6.27)$$

Since $\Omega_T = \Omega_E \times S$ and from the properties of multiple integrals, it is found

$$\begin{aligned} - \int_{\Omega_E} \partial_{xx} (y_E) \beta ET_0 \left(\int_S z y_T \, dx \, dy \right) \, dx &= - \int_{\Omega_E} \int_S (\partial_{xx} y_E) \beta ET_0 z y_T \, dx \, dx \, dy, \\ &= - \int_{\Omega_T} (\partial_{xx} y_E) \beta ET_0 z y_T \, dx \, dx \, dy, \\ &= \langle \mathcal{A}_{\beta,B}^* y_E, y_T \rangle_{L^2(\Omega_T)}. \end{aligned} \quad (6.28)$$

This concludes the proof. □

Using Eqs. (6.23) and (6.24), System (6.22), is rewritten as

$$\begin{aligned}\rho A \frac{\partial^2 w}{\partial t^2} &= -EI \frac{\partial^4 w}{\partial x^4} + \mathcal{A}_{\beta,B} \theta, \\ \rho c_{\epsilon,B} T_0 \frac{\partial \theta}{\partial t} &= k T_0 \Delta \theta - \mathcal{A}_{\beta,B}^* \frac{\partial w}{\partial t}.\end{aligned}\quad (6.29)$$

Consider the Hamiltonian functional

$$H = H_E + H_T = \frac{1}{2} \int_{\Omega_E} \left\{ \rho A \left(\frac{\partial w}{\partial t} \right)^2 + EI \left(\frac{\partial^2 w}{\partial x^2} \right)^2 \right\} dx + \frac{1}{2} \int_{\Omega_T} \rho c_{\epsilon,B} T_0 \theta^2 dx dy dz. \quad (6.30)$$

The energy variables are chosen to make the Hamiltonian functional quadratic

$$\alpha_w = \rho A \partial_t w, \quad \alpha_\kappa = \partial_{xx} w, \quad \alpha_T = \rho c_{\epsilon,B} T_0 \theta. \quad (6.31)$$

The corresponding co-energy variables evaluate to

$$e_w := \frac{\delta H}{\delta \alpha_w} = \partial_t w, \quad e_\kappa := \frac{\delta H}{\delta \alpha_\kappa} = EI \partial_{xx} w, \quad e_T := \frac{\delta H}{\delta \alpha_T} = \theta. \quad (6.32)$$

System (6.29) can now be rewritten as

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \alpha_\kappa \\ \alpha_T \\ j_Q \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} & \mathcal{A}_{\beta,B} & 0 \\ \partial_{xx} & 0 & 0 & 0 \\ -\mathcal{A}_{\beta,B}^* & 0 & 0 & -\text{div} \\ 0 & 0 & -\text{grad} & -(kT_0)^{-1} \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \\ e_T \\ j_Q \end{pmatrix}, \quad (6.33)$$

This system is the equivalent of (6.17) for bending of beams. Hence, following the same reasoning, it can be obtained starting from each subsystem in pH form by means of an appropriate interconnection.

6.2.2 Thermoelastic Kirchhoff plate

For the bending of thin plate, several different models have been proposed [Cha62, Lag89, Sim99, Nor06]. Here, the Chadwick model [Cha62] is considered. The thin plate occupies the open connected set $\Omega_E \times \left\{ -\frac{h}{2}, \frac{h}{2} \right\}$, where h is the plate thickness. The system of equations describe the midplane vertical displacement and the evolution of the temperature in the 3D domain

$$\begin{aligned}\rho h \frac{\partial^2 w}{\partial t^2} &= -D_b \Delta_{2D}^2 w - \frac{\beta T_0 E}{1-\nu} \Delta_{2D} \left(\int_{-h/2}^{h/2} z \theta dz \right), & (x, y) \in \Omega_E, \\ \rho c_{\epsilon,P} T_0 \frac{\partial \theta}{\partial t} &= -k T_0 \Delta_{3D} + \frac{\beta T_0 E z}{1-\nu} \Delta_{2D} \left(\frac{\partial w}{\partial t} \right), & (x, y, z) \in \Omega_E \times \left\{ -\frac{h}{2}, \frac{h}{2} \right\} = \Omega_T,\end{aligned}\quad (6.34)$$

where $w(x, y, t)$ is the vertical deflection, $D_b = \frac{E h^3}{12(1-\nu^2)}$ the bending rigidity (cf. Eq. (5.11)), ν the Poisson modulus and $c_{\epsilon,P}$ a constant (depending on the heat capacity at constant strain

and other coupling parameters, cf. [Cha62]). Symbols $\Delta_{2D} = \partial_{xx} + \partial_{yy}$, $\Delta_{3D} = \partial_{xx} + \partial_{yy} + \partial_{zz}$ are the two- and three-dimensional Laplacian.

1067

1068 The coupling operator is here defined as

$$\mathcal{A}_{\beta,P}(y_T) := -\frac{\beta T_0 E}{1-\nu} \Delta_{2D} \left(\int_{-h/2}^{h/2} z y_T \, dz \right). \quad (6.35)$$

1069 Analogously with respect to the Euler-Bernoulli beam its formal adjoint is sought for.

1070 **Proposition 7**

1071 Let $C_0^\infty(\Omega_T)$, $C_0^\infty(\Omega_E)$ be the space of smooth functions with compact support defined on Ω_T
1072 and Ω_E respectively. Given $y_T \in C_0^\infty(\Omega_T)$, $y_E \in C_0^\infty(\Omega_E)$ the formal adjoint of the coupling
1073 operator is

$$\mathcal{A}_{\beta,B}^*(y_E) = -\frac{\beta T_0 E z}{1-\nu} \Delta_{2D} y_E. \quad (6.36)$$

1074 *Proof.* The proof is completely identical to Prop. 6. □

1075 System 6.34 is rewritten as

$$\begin{aligned} \rho h \frac{\partial^2 w}{\partial t^2} &= -D_b \Delta_{2D}^2 w + \mathcal{A}_{\beta,P} \theta, \\ \rho c_{\epsilon,P} T_0 \frac{\partial \theta}{\partial t} &= -k T_0 \Delta_{3D} \theta - \mathcal{A}_{\beta,P}^* \left(\frac{\partial w}{\partial t} \right), \end{aligned} \quad (6.37)$$

1076 The Hamiltonian functional equals

$$\begin{aligned} H = H_E + H_T &= \frac{1}{2} \int_{\Omega_E} \left\{ \rho h \left(\frac{\partial w}{\partial t} \right)^2 + (\mathcal{D}_b \text{Hess}_{2D} w) : \text{Hess}_{2D} w \right\} \, dx \, dy \\ &+ \frac{1}{2} \int_{\Omega_T} \rho c_{\epsilon,P} T_0 \theta^2 \, dx \, dy \, dz, \end{aligned} \quad (6.38)$$

1077 where Hess_{2D} is the Hessian in two dimensions and \mathcal{D}_b was defined in (5.11) (cf. Sec. §5.1.1).

1078 The energy and co-energy variables are

$$\begin{aligned} \alpha_w &= \rho h \partial_t w, & \mathbf{A}_\kappa &= \text{Hess}_{2D} w, & \alpha_T &= \rho c_{\epsilon,P} T_0 \theta, \\ e_w &= \partial_t w, & \mathbf{E}_\kappa &= \mathcal{D}_b \text{Hess}_{2D} w, & e_T &= \theta. \end{aligned} \quad (6.39)$$

1079 System (6.37) is rewritten as

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \mathbf{A}_\kappa \\ \alpha_T \\ j_Q \end{pmatrix} = \begin{bmatrix} 0 & -\text{div Div}_{2D} & \mathcal{A}_{\beta,P} & 0 \\ \text{Hess}_{2D} & \mathbf{0} & \mathbf{0} & 0 \\ -\mathcal{A}_{\beta,P}^* & 0 & 0 & -\text{div}_{3D} \\ \mathbf{0} & \mathbf{0} & -\text{grad}_{3D} & -(kT_0)^{-1} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \\ e_T \\ j_Q \end{pmatrix}, \quad (6.40)$$

1080 The subscript $2D$, $3D$ refers to two- and three-dimensional operators respectively. The final
 1081 system reproduces the same structured coupling already observed for (6.17), (6.33).

1082 **Remark 7**

1083 *The thermoelastic bending can be reduced to two problems defined on the same domain (cf.*
 1084 *[HZ97] for beams and [AL00] for plates) by introducing the following approximation of the*
 1085 *temperature field*

$$\theta(x, y, z) = \theta_0 + z\theta_1, \quad (6.41)$$

1086 *where $\theta_0 = \theta_0(x)$, $\theta_1 = \theta_1(x)$ for beams and $\theta_0 = \theta_0(x, y)$, $\theta_1 = \theta_1(x, y)$ for plates. However,*
 1087 *this introducing a strong simplification as the thermal phenomena typically occur in the whole*
 1088 *three-dimensional space.*

1089 **6.3 Conclusion**

1090 In this chapter, it was shown classical linear thermoelastic problem are equivalent to two
 1091 coupled port-Hamiltonian systems. This is especially interesting for the simulation of ther-
 1092 moelastic phenomena: each subsystem can be discretized separately and then coupled to the
 1093 other using the discretized coupling operator. This allows to track easily how the energy flows
 1094 within the two physics.

1095

Part III

1096

Finite element structure preserving discretization

1097

Partitioned finite element method

Every truth is simple... is that not doubly a lie?

Twilight of the Idols
Friedrich Nietzsche

Contents

7.1	Discretization under uniform boundary condition	73
7.1.1	General procedure	75
7.1.2	Linear case	84
7.1.3	Linear flexible structures	86
7.2	Mixed boundary conditions	95
7.2.1	Solution using Lagrange multipliers	97
7.2.2	Virtual domain decomposition	99
7.3	Conclusion	103



Discretization is the process of transferring continuous models into discrete counterparts. The discrete model should be faithful to the continuous one. To this aim, it is usually essential that the main properties of the continuous system are preserved at the discrete level. An algorithm that is capable of conserving properties at the discrete level is called structure-preserving [CMKO11]. In this chapter, a method to spatially discretize infinite-dimensional pHs into finite-dimensional ones in a structure preserving manner is illustrated.

7.1 Discretization under uniform boundary condition

A discrete version of a infinite-dimensional pH system is meant to preserve the underlying properties related to power continuity. To achieve this purpose, the discretization procedure consists of two steps [KML18]:

- Finite-dimensional approximation of the Stokes-Dirac structure, i.e. the formally skew symmetric differential operator that defines the structure. The duality of the power

variables has to be mapped onto the finite approximation. The subspace of the discrete variables will be represented by a Dirac structure.

- The Hamiltonian requires as well a suitable discretization, which gives rise to a discrete Hamiltonian.

A structure-preserving discretization is able to construct an equivalent pH system that possesses the structural properties of the original model:

Infinite dimensional pH system	Structure-preserving discretization
<p>PDE with distributed inputs:</p> $\frac{\partial \alpha}{\partial t}(\mathbf{x}, t) = \mathcal{J} \frac{\delta H}{\delta \alpha} + \mathcal{B} \mathbf{u}_\Omega(\mathbf{x}, t),$ $\mathbf{y}_\Omega(\mathbf{x}, t) = \mathcal{B}^* \frac{\delta H}{\delta \alpha}.$ <p>Boundary conditions:</p> $\mathbf{u}_\partial = \mathcal{B}_\partial \frac{\delta H}{\delta \alpha}, \quad \mathbf{y}_\partial = \mathcal{C}_\partial \frac{\delta H}{\delta \alpha}.$ <p>Power balance (Stokes Theorem):</p> $\dot{H} = \int_{\partial\Omega} \mathbf{u}_\partial \cdot \mathbf{y}_\partial \, dS + \int_{\Omega} \mathbf{u}_\Omega \cdot \mathbf{y}_\Omega \, d\Omega.$	<p>Resulting ODE:</p> $\dot{\alpha}_d = \mathbf{J} \nabla H_d + \mathbf{B}_\Omega \mathbf{u}_\Omega + \mathbf{B}_\partial \mathbf{u}_\partial,$ $\mathbf{y}_\Omega = \mathbf{B}_\Omega^\top \nabla H_d,$ $\mathbf{y}_\partial = \mathbf{B}_\partial^\top \nabla H_d.$ <p>Discretized Hamiltonian:</p> $H_d := H(\alpha \equiv \alpha_d).$ <p>Power balance:</p> $\dot{H} = \mathbf{u}_\partial^\top \mathbf{y}_\partial + \mathbf{u}_\Omega^\top \mathbf{y}_\Omega.$

In this thesis the Partitioned Finite Element Method (PFEM), originally presented in [CRML18, CRML19], is chosen to obtain discretized models of dpHs. This procedure boils down to three simple steps

1. The system is written in weak form;
2. An integration by parts is applied to highlight the appropriate boundary control;
3. A Galerkin method is employed to obtain a finite-dimensional system. For the approximation basis the finite element method is here employed but spectral methods can be used as well.

Once the system has been put into weak form, a subset of the equations is integrated by parts, so that boundary variables are naturally included into the formulation and appear as control inputs, the collocated outputs being defined accordingly. The discretization of energy and co-energy variables (and the associated test functions) leads directly to a full rank representation for the finite-dimensional pH system. This approach makes possible the usage of FEM software, like FEniCS [LMW⁺12], or Firedrake [RHM⁺17]. The procedure is universal, as it relies on a general integration by parts formula that characterizes multi-dimensional pHs. This is why the methodology is illustrated in all its generality and then detailed for

some particular examples.

This methodology is easily applicable under a uniform causality assumption. The case of mixed boundary conditions requires additional care and will be treated in the subsequent Section §7.2.

7.1.1 General procedure

Given an open connected set $\Omega \in \mathbb{R}^d$, $d \in \{1, 2, 3\}$, consider a generic pH system defined on Ω

$$\partial_t \alpha = \mathcal{J}e, \quad \alpha \in L^2(\Omega, \mathbb{F}), \quad \mathcal{J} : L^2(\Omega, \mathbb{F}) \rightarrow L^2(\Omega, \mathbb{F}) \mid \mathcal{J} = -\mathcal{J}^*, \quad (7.1a)$$

$$e := \delta_\alpha H, \quad e \in H^\mathcal{J} := \left\{ e \in L^2(\Omega, \mathbb{F}) \mid \mathcal{J}e \in L^2(\Omega, \mathbb{F}) \right\}, \quad (7.1b)$$

$$u_\partial = \mathcal{B}_\partial e, \quad u_\partial \in \mathbb{R}^m, \quad (7.1c)$$

$$y_\partial = \mathcal{C}_\partial e, \quad y_\partial \in \mathbb{R}^m. \quad (7.1d)$$

The operator $\mathcal{J} : L^2(\Omega, \mathbb{F}) \rightarrow L^2(\Omega, \mathbb{F})$ is a differential, formally skew adjoint operator $\mathcal{J} = -\mathcal{J}^*$ over the space $L^2(\Omega, \mathbb{F})$. The set \mathbb{F} is an appropriate Cartesian product of either scalar, vectorial or tensorial quantities. Its precise definition depends on the example upon consideration. For scalars $(a, b) \in L^2(\Omega)$, vectors $(\mathbf{a}, \mathbf{b}) \in L^2(\Omega, \mathbb{R}^d)$ and tensors $(\mathbf{A}, \mathbf{B}) \in L^2(\Omega, \mathbb{R}^{d \times d})$ the L^2 inner product is given by

$$\langle a, b \rangle_{L^2(\Omega)} = \int_\Omega ab \, d\Omega, \quad \langle \mathbf{a}, \mathbf{b} \rangle_{L^2(\Omega, \mathbb{R}^d)} = \int_\Omega \mathbf{a} \cdot \mathbf{b} \, d\Omega, \quad \langle \mathbf{A}, \mathbf{B} \rangle_{L^2(\Omega, \mathbb{R}^{d \times d})} = \int_\Omega \mathbf{A} : \mathbf{B} \, d\Omega. \quad (7.2)$$

For scalars $a_\partial, b_\partial \in L^2(\partial\Omega)$ and vectors $\mathbf{a}_\partial, \mathbf{b}_\partial \in L^2(\partial\Omega, \mathbb{R}^m)$ defined on the boundary the inner product is defined as

$$\langle a_\partial, b_\partial \rangle_{L^2(\partial\Omega)} = \int_{\partial\Omega} a_\partial b_\partial \, dS, \quad \langle \mathbf{a}_\partial, \mathbf{b}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} = \int_{\partial\Omega} \mathbf{a}_\partial \cdot \mathbf{b}_\partial \, dS. \quad (7.3)$$

The Hamiltonian functional of Eq. (7.1b) is allowed to be non linear in the energy variables

$$H = \int_\Omega \mathcal{H}(\alpha) \, d\Omega,$$

where $\mathcal{H}(\alpha) : L^2(\Omega, \mathbb{F}) \rightarrow \mathbb{R}$ is a non linear function.

To applied this methodology the non linearities are restricted to the Hamiltonian and a uniform causality condition is supposed to characterize the system. It is required as well that the system admits a partition of the variables. This requirement is always encountered in the following examples. These hypotheses are resumed in the following assumptions.

Assumption 2 (Partitioning of the system)

1171 Consider system (7.1a). It is assumed that the Hilbert space $L^2(\Omega, \mathbb{F}) := L^2(\Omega, \mathbb{F})$ admits the
 1172 splitting $L^2(\Omega, \mathbb{F}) = L^2(\Omega, \mathbb{A}) \times L^2(\Omega, \mathbb{B})$. This means that $\mathbb{F} = \mathbb{A} \times \mathbb{B}$.
 1173

1174 The operator \mathcal{J} is assumed to be skew-symmetric (or formally skew-adjoint) on $L^2(\Omega, \mathbb{F})$
 1175 and linear:

$$\mathcal{J} = \mathcal{J}_a + \mathcal{J}_d, \quad (7.4)$$

1176 where \mathcal{J}_a is the algebraic contribution (a skew-symmetric matrix) and \mathcal{J}_d the differential
 1177 contribution. The algebraic part is assumed to take the form

$$\mathcal{J}_a = \begin{bmatrix} 0 & -\mathbf{L}^\top \\ \mathbf{L} & 0 \end{bmatrix}, \quad \begin{array}{l} \mathbf{L}^\top : L^2(\Omega, \mathbb{B}) \rightarrow L^2(\Omega, \mathbb{A}), \\ \mathbf{L} : L^2(\Omega, \mathbb{A}) \rightarrow L^2(\Omega, \mathbb{B}), \end{array} \quad (7.5)$$

1178 where \mathbf{L} is a bounded operator. Analogously, the linear differential operator \mathcal{J}_d is assumed to
 1179 be of the form

$$\mathcal{J}_d = \begin{bmatrix} 0 & -\mathcal{L}^* \\ \mathcal{L} & 0 \end{bmatrix}, \quad \begin{array}{l} \mathcal{L}^* : L^2(\Omega, \mathbb{B}) \rightarrow L^2(\Omega, \mathbb{A}), \\ \mathcal{L} : L^2(\Omega, \mathbb{A}) \rightarrow L^2(\Omega, \mathbb{B}), \end{array} \quad (7.6)$$

1180 where \mathcal{L}^* denotes the formal adjoint of the linear differential operator \mathcal{L} . The operator \mathcal{L} is
 1181 unbounded and can be either a first or a second order differential operator (in the latter case
 1182 it can be expressed as $\mathcal{L} = \mathcal{L}_1 \circ \mathcal{L}_2$). Given the splitting $L^2(\Omega, \mathbb{A}) \times L^2(\Omega, \mathbb{B}) = L^2(\Omega, \mathbb{F})$ the
 1183 Hilbert space $H^\mathcal{J}$ can be split as well as

$$H^\mathcal{J} = H^\mathcal{L} \times H^{-\mathcal{L}^*}, \quad \begin{array}{l} H^\mathcal{L} := \{ \mathbf{u}_1 \in L^2(\Omega, \mathbb{A}) \mid \mathcal{L}\mathbf{u}_1 \in L^2(\Omega, \mathbb{B}) \}, \\ H^{-\mathcal{L}^*} := \{ \mathbf{u}_2 \in L^2(\Omega, \mathbb{B}) \mid -\mathcal{L}^*\mathbf{u}_2 \in L^2(\Omega, \mathbb{A}) \} \end{array} \quad (7.7)$$

1184 Remark 8

1185 Notice that this assumption is also made in [Skr19] (using a vectorial notation for tensors)
 1186 to demonstrate the well-posedness of linear pHs in arbitrary geometrical domains.

1187 The boundary operators are then supposed to fulfill the following assumption, that guar-
 1188 antees a uniform causality condition.

1189 Assumption 3 (Abstract integration by parts formula)

1190 Assume that there exist two boundary operators $\mathcal{N}_{\partial,1}$, $\mathcal{N}_{\partial,2}$ such that for $(\mathbf{u}_1, \mathbf{u}_2) \in H^\mathcal{L} \times H^{-\mathcal{L}^*}$
 1191 a general integration by parts formula holds

$$\langle \mathbf{u}_2, \mathcal{L}\mathbf{u}_1 \rangle_{L^2(\Omega, \mathbb{B})} - \langle \mathcal{L}^*\mathbf{u}_2, \mathbf{u}_1 \rangle_{L^2(\Omega, \mathbb{A})} = \langle \mathcal{N}_{\partial,1}\mathbf{u}_1, \mathcal{N}_{\partial,2}\mathbf{u}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \quad (7.8)$$

1192 The boundary operators \mathcal{B}_∂ , \mathcal{C}_∂ of Eqs. (7.1c), (7.1d), are then assumed to verify, in an
 1193 exclusive manner, either

$$\mathcal{B}_\partial = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2} \end{bmatrix}, \quad \mathcal{C}_\partial = \begin{bmatrix} \mathcal{N}_{\partial,1} & 0 \end{bmatrix}, \quad (7.9)$$

1194 or

$$\mathcal{B}_\partial = \begin{bmatrix} \mathcal{N}_{\partial,1} & 0 \end{bmatrix}, \quad \mathcal{C}_\partial = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2} \end{bmatrix}. \quad (7.10)$$

1195 **Remark 9** (Duality pairing for rigged Hilbert spaces)

1196 *The integration by part formula establishes a duality pairing between Sobolev spaces. This*
 1197 *duality pairing is then compatible with an L^2 inner product in presence of a rigged Hilbert*
 1198 *space (or Gelfand triple [GV64]). Without entering into technical details, we shall always*
 1199 *use this equivalence of representation. Therefore, the boundary integrals are expressed as L^2*
 1200 *inner product over the boundary.*

Thanks to Assumption 2, System (7.1) is rewritten as

$$\partial_t \begin{pmatrix} \alpha_1 \\ \alpha_2 \end{pmatrix} = \begin{bmatrix} 0 & -\mathbf{L}^\top - \mathcal{L}^* \\ \mathbf{L} + \mathcal{L} & 0 \end{bmatrix} \begin{pmatrix} e_1 \\ e_2 \end{pmatrix}, \quad \begin{matrix} \alpha_1 \in L^2(\Omega, \mathbb{A}), \\ \alpha_2 \in L^2(\Omega, \mathbb{B}), \end{matrix} \quad (7.11a)$$

$$\begin{pmatrix} e_1 \\ e_2 \end{pmatrix} := \begin{pmatrix} \delta_{\alpha_1} H \\ \delta_{\alpha_2} H \end{pmatrix}, \quad \begin{matrix} e_1 \in H^{\mathcal{L}}, \\ e_2 \in H^{-\mathcal{L}^*}. \end{matrix} \quad (7.11b)$$

1201 In light of Assumption 3, if Eq. (7.9) holds the boundary variables are given by

$$\mathbf{u}_\partial = \mathcal{N}_2 \mathbf{e}_2, \quad \mathbf{y}_\partial = \mathcal{N}_1 \mathbf{e}_1, \quad \mathbf{u}_\partial, \mathbf{y}_\partial \in \mathbb{R}^m. \quad (7.12)$$

1202 Otherwise, if Eq. (7.10) applies, then

$$\mathbf{u}_\partial = \mathcal{N}_1 \mathbf{e}_1, \quad \mathbf{y}_\partial = \mathcal{N}_2 \mathbf{e}_2, \quad \mathbf{u}_\partial, \mathbf{y}_\partial \in \mathbb{R}^m. \quad (7.13)$$

1203 In both cases, the power balance reads

$$\begin{aligned} \dot{H} &= \langle \mathbf{e}_1, \partial_t \alpha_1 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathbf{e}_2, \partial_t \alpha_2 \rangle_{L^2(\Omega, \mathbb{B})}, \\ &= \langle \mathbf{e}_1, -\mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathbf{e}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}, \\ &= \langle \mathcal{N}_{\partial,1} \mathbf{e}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ &= \langle \mathbf{y}_\partial, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \end{aligned} \quad (7.14)$$

1204 We are now in a position to illustrate the methodology.

1205 **Step 1** First consider the weak form of system (7.11a), obtained by taking the L^2 inner
 1206 product introducing an appropriate test function $\mathbf{v} = (\mathbf{v}_1, \mathbf{v}_2) \in \mathbb{A} \times \mathbb{B} = \mathbb{F}$ and integrating
 1207 over the domain Ω

$$\begin{aligned} \langle \mathbf{v}_1, \partial_t \alpha_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})}, \\ \langle \mathbf{v}_2, \partial_t \alpha_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}. \end{aligned} \quad (7.15)$$

1208 To obtain a closed system, the constitutive law (7.11b) and the output variables (7.1d)

are put in weak form

$$\begin{aligned}\langle \mathbf{v}_1, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= \langle \mathbf{v}_1, \delta_{\alpha_1} H \rangle_{L^2(\Omega, \mathbb{A})}, \\ \langle \mathbf{v}_2, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \delta_{\alpha_2} H \rangle_{L^2(\Omega, \mathbb{B})}, \\ \langle \mathbf{v}_\partial, \mathbf{y}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} &= \langle \mathbf{v}_\partial, \mathcal{C}_\partial \mathbf{e} \rangle_{L^2(\partial\Omega, \mathbb{R}^m)},\end{aligned}\tag{7.16}$$

where the test function $\mathbf{v}_\partial \in L^2(\partial\Omega, \mathbb{R}^m)$ is defined on the boundary $\partial\Omega$ and \mathcal{C}_∂ is defined either by Eq. (7.9) or (7.10).

Step 2 Next the integration by part has to be carried out. The choice is dictated by the boundary control to be imposed on the system. Consider again Eq. (7.15). The integration by parts can be carried out either on term $-\langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})}$, or on term $\langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}$. Depending on which line undergoes the integration by parts (this is why the name Partitioned Finite Element method), two structure preserving weak forms are obtained. These differ by the boundary causality imposed to the system.

Integration by parts of the term $-\langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})}$ In this case case, using Eq. (7.8), it is obtained

$$-\langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} = -\langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}.\tag{7.17}$$

Then the weak form of the system dynamics reads

$$\begin{aligned}\langle \mathbf{v}_1, \partial_t \alpha_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ \langle \mathbf{v}_2, \partial_t \alpha_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})},\end{aligned}\tag{7.18}$$

The following proposition is crucial as the lossless character of the infinite-dimensional system (due to the formally skew-adjoint operator) translates into an equivalent property for the corresponding bilinear form in the weak form.

Proposition 8

Given the Hilbert space $H_2^\mathcal{L} := H^\mathcal{L} \times L^2(\Omega, \mathbb{B})$ and variables $\mathbf{v} = (\mathbf{v}_1, \mathbf{v}_2) \in H_2^\mathcal{L}$, $\mathbf{e} = (\mathbf{e}_1, \mathbf{e}_2) \in H_2^\mathcal{L}$, the bilinear form

$$\begin{aligned}j_\mathcal{L} : H_2^\mathcal{L} \times H_2^\mathcal{L} &\longrightarrow \mathbb{R}, \\ (\mathbf{v}, \mathbf{e}) &\longrightarrow -\langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}\end{aligned}$$

is skew-symmetric.

Proof. The proof is obtained by the following computation

$$\begin{aligned}j_\mathcal{L}(\mathbf{v}, \mathbf{e}) &= -\langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}, \\ &= -\left(-\langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} \right), \\ &= -\left(-\langle \mathcal{L} \mathbf{e}_1, \mathbf{v}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{e}_2, \mathcal{L} \mathbf{v}_1 \rangle_{L^2(\Omega, \mathbb{B})} \right) = -j_\mathcal{L}(\mathbf{e}, \mathbf{v}).\end{aligned}$$

1225

□

1226 Now assume that the system satisfies the boundary causality condition 7.12. Then, this
 1227 choice of the integration by parts leads to the following weak formulation

$$\begin{aligned}
 \langle \mathbf{v}_1, \partial_t \boldsymbol{\alpha}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\
 \langle \mathbf{v}_2, \partial_t \boldsymbol{\alpha}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}, \\
 \langle \mathbf{v}_1, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= \langle \mathbf{v}_1, \delta_{\boldsymbol{\alpha}_1} H \rangle_{L^2(\Omega, \mathbb{A})}, \\
 \langle \mathbf{v}_2, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \delta_{\boldsymbol{\alpha}_2} H \rangle_{L^2(\Omega, \mathbb{B})}, \\
 \langle \mathbf{v}_\partial, \mathbf{y}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} &= \langle \mathbf{v}_\partial, \mathcal{N}_{\partial,1} \mathbf{e}_1 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}.
 \end{aligned} \tag{7.19}$$

1228 **Integration by parts of the term $\langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}$** Using Eq. (7.8), it is obtained

$$\langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} = \langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathcal{N}_{\partial,2} \mathbf{v}_2, \mathcal{N}_{\partial,1} \mathbf{e}_1 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \tag{7.20}$$

1229 Then the weak form of the system dynamics reads

$$\begin{aligned}
 \langle \mathbf{v}_1, \partial_t \boldsymbol{\alpha}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})}, \\
 \langle \mathbf{v}_2, \partial_t \boldsymbol{\alpha}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathcal{N}_{\partial,2} \mathbf{v}_2, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)},
 \end{aligned} \tag{7.21}$$

1230 Again the bilinear form arising from the formally skew-adjoint operator is skew-symmetric.

Proposition 9

Given the Hilbert space $H_1^{-\mathcal{L}^*} = L^2(\Omega, \mathbb{A}) \times H^{-\mathcal{L}^*}$ and variables $\mathbf{v} = (\mathbf{v}_1, \mathbf{v}_2) \in H_1^{-\mathcal{L}^*}$, $\mathbf{e} = (\mathbf{e}_1, \mathbf{e}_2) \in H_1^{-\mathcal{L}^*}$, the bilinear form

$$\begin{aligned}
 j_{-\mathcal{L}^*} : H_1^{-\mathcal{L}^*} \times H_1^{-\mathcal{L}^*} &\longrightarrow \mathbb{R}, \\
 (\mathbf{v}, \mathbf{e}) &\longrightarrow -\langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})}
 \end{aligned}$$

1231 is skew-symmetric.

Proof. The proof follows from the computation

$$\begin{aligned}
 j_{-\mathcal{L}^*}(\mathbf{v}, \mathbf{e}) &= -\langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})}, \\
 &= -\left(-\langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} \right), \\
 &= -\left(-\langle \mathbf{e}_1, \mathcal{L}^* \mathbf{v}_2 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathcal{L}^* \mathbf{e}_2, \mathbf{v}_1 \rangle_{L^2(\Omega, \mathbb{A})} \right) = -j_{-\mathcal{L}^*}(\mathbf{e}, \mathbf{v}).
 \end{aligned}$$

1232

□

1233 Now assume that the system satisfies the boundary causality condition (7.13). Then, the

1234 final weak formulation reads

$$\begin{aligned}
\langle \mathbf{v}_1, \partial_t \boldsymbol{\alpha}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})}, \\
\langle \mathbf{v}_2, \partial_t \boldsymbol{\alpha}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathcal{N}_{\partial, 2} \mathbf{v}_2, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\
\langle \mathbf{v}_1, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= \langle \mathbf{v}_1, \delta_{\alpha_1} H \rangle_{L^2(\Omega, \mathbb{A})}, \\
\langle \mathbf{v}_2, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \delta_{\alpha_2} H \rangle_{L^2(\Omega, \mathbb{B})}, \\
\langle \mathbf{v}_\partial, \mathbf{y}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} &= \langle \mathbf{v}_\partial, \mathcal{N}_{\partial, 2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}.
\end{aligned} \tag{7.22}$$

1235 **Galerkin discretization** To conclude the illustration of this methodology, a Galerkin dis-
 1236 cretization is introduced. This means that test, energy and co-energy functions are discretized
 1237 using the same basis. Furthermore the boundary variables are discretized as well using bases
 1238 defined over the boundary

$$\begin{aligned}
\mathbf{v}_1 &\approx \sum_{i=1}^{n_1} \phi_1^i(\mathbf{x}) v_1^i, & \boldsymbol{\alpha}_1 &\approx \sum_{i=1}^{n_1} \phi_1^i(\mathbf{x}) \alpha_1^i(t), & \mathbf{e}_1 &\approx \sum_{i=1}^{n_1} \phi_1^i(\mathbf{x}) \mathbf{e}_1^i(t), & \mathbf{x} &\in \Omega, \\
\mathbf{v}_2 &\approx \sum_{i=1}^{n_2} \phi_2^i(\mathbf{x}) v_2^i, & \boldsymbol{\alpha}_2 &\approx \sum_{i=1}^{n_2} \phi_2^i(\mathbf{x}) \alpha_2^i(t), & \mathbf{e}_2 &\approx \sum_{i=1}^{n_2} \phi_2^i(\mathbf{x}) \mathbf{e}_2^i(t), & \mathbf{x} &\in \Omega, \\
\mathbf{v}_\partial &\approx \sum_{i=1}^{n_\partial} \phi_\partial^i(\mathbf{s}) v_\partial^i, & \mathbf{u}_\partial &\approx \sum_{i=1}^{n_\partial} \phi_\partial^i(\mathbf{s}) u_\partial^i(t), & \mathbf{y}_\partial &\approx \sum_{i=1}^{n_\partial} \phi_\partial^i(\mathbf{s}) y_\partial^i(t), & \mathbf{s} &\in \partial\Omega,
\end{aligned} \tag{7.23}$$

1239 where $\phi_1^i \in \mathbb{A}$, $\phi_2^i \in \mathbb{B}$, $\phi_\partial^i \in \mathbb{R}^m$.

1240 **Discretization of the weak form (7.19)** Plugging the approximation into the weak
 1241 form (7.19) and considering that the resulting equation holds $\forall v_1^i, v_2^j, v_\partial^k$ ($i \in \{1, n_1\}$, $j \in$
 1242 $\{1, n_2\}$, $k \in \{1, n_\partial\}$), the finite dimensional system is obtained

$$\begin{aligned}
\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \dot{\boldsymbol{\alpha}}_{d,1} \\ \dot{\boldsymbol{\alpha}}_{d,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_\mathcal{L}^\top \\ \mathbf{D}_0 + \mathbf{D}_\mathcal{L} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{B}_1 \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\
\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} &= \begin{bmatrix} \partial_{\alpha_{d,1}} H_d(\boldsymbol{\alpha}_d) \\ \partial_{\alpha_{d,2}} H_d(\boldsymbol{\alpha}_d) \end{bmatrix}, \\
\mathbf{M}_{\partial} \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{B}_1^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}.
\end{aligned} \tag{7.24}$$

1243 Vectors $\boldsymbol{\alpha}_{d,1}$, $\boldsymbol{\alpha}_{d,2}$, \mathbf{e}_1 , \mathbf{e}_2 , \mathbf{u}_∂ , \mathbf{y}_∂ are given by the column-wise concatenation of their respec-
 1244 tive degrees of freedom. The matrices are defined as follows

$$\begin{aligned}
M_1^{ij} &= \langle \phi_1^i, \phi_1^j \rangle_{L^2(\Omega, \mathbb{A})}, & D_0^{mi} &= \langle \phi_2^m, \mathbf{L} \phi_1^i \rangle_{L^2(\Omega, \mathbb{B})}, & B_1^{ik} &= \langle \mathcal{N}_{\partial, 1} \phi_1^i, \phi_\partial^k \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\
M_2^{mn} &= \langle \phi_2^m, \phi_2^n \rangle_{L^2(\Omega, \mathbb{B})}, & D_\mathcal{L}^{mi} &= \langle \phi_2^m, \mathcal{L} \phi_1^i \rangle_{L^2(\Omega, \mathbb{B})}, & M_\partial^{lk} &= \langle \phi_\partial^l, \phi_\partial^k \rangle_{L^2(\partial\Omega, \mathbb{R}^m)},
\end{aligned} \tag{7.25}$$

where $i, j \in \{1, n_1\}$, $m, n \in \{1, n_2\}$, $l, k \in \{1, n_\partial\}$. Introducing the definitions

$$\begin{aligned}\delta_{\alpha_{d,1}} H_d &:= \delta_{\alpha_1} H \left(\alpha_1 = \sum_{i=1}^{n_1} \phi_1^i \alpha_1^i, \alpha_2 = \sum_{i=1}^{n_1} \phi_2^i \alpha_2^i \right), \\ \delta_{\alpha_{d,2}} H_d &:= \delta_{\alpha_2} H \left(\alpha_1 = \sum_{i=1}^{n_1} \phi_1^i \alpha_1^i, \alpha_2 = \sum_{i=1}^{n_1} \phi_2^i \alpha_2^i \right),\end{aligned}$$

the discretized gradient of the Hamiltonian reads

$$\begin{aligned}\partial_{\alpha_{d,1}^i} H_d(\alpha_d) &= \left\langle \phi_1^i, \delta_{\alpha_{d,1}} H_d \right\rangle_{L^2(\Omega, \mathbb{A})}, \quad i \in \{1, n_1\}, \\ \partial_{\alpha_{d,2}^j} H_d(\alpha_d) &= \left\langle \phi_2^j, \delta_{\alpha_{d,2}} H_d \right\rangle_{L^2(\Omega, \mathbb{B})}, \quad j \in \{1, n_2\}.\end{aligned}\tag{7.26}$$

A pH system in canonical form is found observing that Sys. (7.24) is compactly rewritten as

$$\mathbf{M} \dot{\alpha}_d = \mathbf{J}_{\mathcal{L}} \mathbf{e} + \mathbf{B} \mathbf{u}_\partial, \tag{7.27}$$

$$\mathbf{M} \mathbf{e} = \nabla H_d(\alpha_d), \tag{7.28}$$

$$\mathbf{M}_\partial \mathbf{y}_\partial = \mathbf{B}^\top \mathbf{e}, \tag{7.29}$$

where $\alpha_d = (\alpha_{d,1}^\top \ \alpha_{d,2}^\top)^\top$, $\mathbf{e} = (\mathbf{e}_1^\top \ \mathbf{e}_2^\top)^\top$, $\nabla H_d(\alpha_d) = (\partial_{\alpha_{d,1}}^\top H_d(\alpha_d) \ \partial_{\alpha_{d,2}}^\top H_d(\alpha_d))^\top$ and

$$\mathbf{M} = \begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix}, \quad \mathbf{J}_{\mathcal{L}} = \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_{\mathcal{L}}^\top \\ \mathbf{D}_0 + \mathbf{D}_{\mathcal{L}} & \mathbf{0} \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} \mathbf{B}_1 \\ \mathbf{0} \end{bmatrix}. \tag{7.30}$$

Plugging (7.28) into (7.27), a pH system in canonical form is obtained

$$\begin{aligned}\dot{\alpha}_d &= \mathbf{J} \nabla H_d(\alpha_d) + \mathbf{B} \mathbf{u}_\partial, & \text{where} \quad \mathbf{J} &= \mathbf{M}^{-1} \mathbf{J}_{\mathcal{L}} \mathbf{M}^{-1}, \\ \hat{\mathbf{y}}_\partial &= \mathbf{B}^\top \nabla H_d(\alpha_d), & \text{where} \quad \hat{\mathbf{y}}_\partial &= \mathbf{M}_\partial \mathbf{y}_\partial.\end{aligned}\tag{7.31}$$

The structure preserving character of the method is evident from the preservation at the discrete level of the power balance. The finite dimensional counterpart of the energy rate is given by

$$\begin{aligned}\dot{H}_d &= \nabla^\top H_d(\alpha_d) \dot{\alpha}_d, \\ &= \nabla^\top H_d(\alpha_d) \mathbf{J} \nabla H_d(\alpha_d) + \nabla^\top H_d(\alpha_d) \mathbf{B} \mathbf{u}_\partial, & \text{Skew-symmetry of } \mathbf{J} \\ &= \mathbf{y}_\partial^\top \mathbf{M}_\partial \mathbf{u}_\partial = \hat{\mathbf{y}}_\partial^\top \mathbf{u}_\partial.\end{aligned}\tag{7.32}$$

This result mimics its infinite dimensional equivalent (7.14).

Discretization of the weak form (7.22) Plugging the approximation into the weak form (7.22) a finite dimensional system with a different causality is obtained

$$\begin{aligned}
\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \dot{\boldsymbol{\alpha}}_{d,1} \\ \dot{\boldsymbol{\alpha}}_{d,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top + \mathbf{D}_{-\mathcal{L}^*} \\ \mathbf{D}_0 - \mathbf{D}_{-\mathcal{L}^*}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{0} \\ \mathbf{B}_2 \end{bmatrix} \mathbf{u}_\partial, \\
\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} &= \begin{pmatrix} \partial_{\boldsymbol{\alpha}_{d,1}} H_d(\boldsymbol{\alpha}_d) \\ \partial_{\boldsymbol{\alpha}_{d,2}} H_d(\boldsymbol{\alpha}_d) \end{pmatrix}, \\
\mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{0} & \mathbf{B}_2^\top \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}.
\end{aligned} \tag{7.33}$$

1254 The differences with respect to formulation (7.24) reside in matrices $\mathbf{D}_{-\mathcal{L}^*}$, \mathbf{B}_2 , whose defi-
 1255 nitions are

$$D_{-\mathcal{L}^*}^{im} = \langle \phi_1^i, -\mathcal{L}^* \phi_2^m \rangle_{L^2(\Omega, \mathbb{A})}, \quad B_2^{mk} = \langle \mathcal{N}_{\partial,2} \phi_2^m, \phi_\partial^k \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \tag{7.34}$$

1256 where $i \in \{1, n_1\}$, $m \in \{1, n_2\}$, $k \in \{1, n_\partial\}$. System (7.33) can be put in canonical form by
 1257 replacing the co-energy variables by the discretized gradient.

1258 **Example: the irrotational shallow water equations** Consider as an example the shal-
 1259 low water equations detailed in Sec. §3.3.3. The flow is assumed to be irrotational ($\nabla \times \mathbf{v} = 0$).
 1260 As a consequence the term \mathcal{G} in Eq. (3.37) vanishes. To fulfill Assumption 3, the incoming
 1261 volumetric flow is known at the boundary, so that a uniform Neumann condition is imposed.
 1262 This leads to the following boundary control system, defined on an open connected set $\Omega \subset \mathbb{R}^2$

$$\begin{aligned}
\frac{\partial}{\partial t} \begin{pmatrix} \alpha_h \\ \boldsymbol{\alpha}_v \end{pmatrix} &= - \begin{bmatrix} 0 & \text{div} \\ \text{grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_h \\ \mathbf{e}_v \end{pmatrix}, & \alpha_h &\in L^2(\Omega), \\
& & \boldsymbol{\alpha}_v &\in L^2(\Omega, \mathbb{R}^2), \\
\begin{pmatrix} e_h \\ \mathbf{e}_v \end{pmatrix} &:= \begin{pmatrix} \delta_{\alpha_h} H \\ \delta_{\boldsymbol{\alpha}_v} H \end{pmatrix} = \begin{pmatrix} \frac{1}{2\rho} \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h \\ \frac{1}{\rho} \alpha_h \boldsymbol{\alpha}_v \end{pmatrix}, & e_h &\in H^1(\Omega), \\
& & \mathbf{e}_v &\in H^{\text{div}}(\Omega, \mathbb{R}^2), \\
u_\partial &= -\mathbf{e}_v \cdot \mathbf{n}, & u_\partial &\in \mathbb{R}, \\
y_\partial &= e_h, & y_\partial &\in \mathbb{R},
\end{aligned} \tag{7.35}$$

where the Hamiltonian is a non linear functional in the energy variables

$$H(\alpha_h, \boldsymbol{\alpha}_v) = \frac{1}{2} \int_\Omega \left\{ \frac{1}{\rho} \alpha_h \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h^2 \right\} d\Omega.$$

1263 The energy and co-energy variables are related to the physical variables (fluid height and
 1264 velocity) through Eqs. (3.34), (3.36). In this case $\mathbb{A} = \mathbb{R}$, $\mathbb{B} = \mathbb{R}^2$ and $\mathcal{L} = \text{grad}$, $-\mathcal{L}^* = \text{div}$.
 1265 This implies $H^\mathcal{L} = H^1(\Omega)$, $H^{-\mathcal{L}^*} = H^{\text{div}}(\Omega, \mathbb{R}^2)$. As shown in (3.38), the energy rate equals

$$\dot{H} = -\langle \mathbf{e}_v, \text{grad } e_h \rangle_{L^2(\Omega, \mathbb{R}^2)} - \langle \text{div } \mathbf{e}_v, e_h \rangle_{L^2(\Omega)} = \langle -\mathbf{e}_v \cdot \mathbf{n}, e_h \rangle_{L^2(\partial\Omega)}. \tag{7.36}$$

1266 The boundary operators are therefore given by

$$\begin{aligned}
u_\partial &= \mathcal{N}_{\partial,2} \mathbf{e}_v = -\gamma_n \mathbf{e}_v = -\mathbf{e}_v \cdot \mathbf{n}|_{\partial\Omega}, \\
y_\partial &= \mathcal{N}_{\partial,1} e_h = \gamma_0 e_h = e_h|_{\partial\Omega}.
\end{aligned} \tag{7.37}$$

1267 This system represents a particular example of the general formulation of the general frame-
 1268 work (7.11), together with boundary conditions (7.12). To obtain a finite dimensional system,
 1269 the test variables v_h , \mathbf{v}_v are introduced and the integration by parts is performed on the div
 1270 operator, leading to the weak form

$$\begin{aligned}
 \langle v_h, \partial_t \alpha_h \rangle_{L^2(\Omega)} &= \langle \text{grad } v_h, \mathbf{e}_v \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \gamma_0 v_h, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega)}, \\
 \langle \mathbf{v}_v, \partial_t \alpha_v \rangle_{L^2(\Omega, \mathbb{R}^2)} &= - \langle \mathbf{v}_v, \text{grad } e_h \rangle_{L^2(\Omega, \mathbb{R}^2)}, \\
 \langle v_h, e_h \rangle_{L^2(\Omega)} &= \left\langle v_h, \frac{1}{2\rho} \|\alpha_v\|^2 + \rho g \alpha_h \right\rangle_{L^2(\Omega)}, \\
 \langle \mathbf{v}_v, \mathbf{e}_v \rangle_{L^2(\Omega, \mathbb{R}^2)} &= \left\langle \mathbf{v}_v, \frac{1}{\rho} \alpha_h \alpha_v \right\rangle_{L^2(\Omega, \mathbb{R}^2)}, \\
 \langle v_\partial, y_\partial \rangle_{L^2(\partial\Omega)} &= \langle v_\partial, \gamma_0 e_h \rangle_{L^2(\partial\Omega)}.
 \end{aligned} \tag{7.38}$$

1271 Introducing a Galerkin approximation as in (7.23)

$$\begin{aligned}
 v_h &\approx \sum_{i=1}^{n_h} \phi_h^i(\mathbf{x}) v_h^i, & \alpha_h &\approx \sum_{i=1}^{n_h} \phi_h^i(\mathbf{x}) \alpha_h^i(t), & e_h &\approx \sum_{i=1}^{n_h} \phi_h^i(\mathbf{x}) e_h^i(t), & \mathbf{x} \in \Omega, \\
 \mathbf{v}_v &\approx \sum_{i=1}^{n_v} \phi_v^i(\mathbf{x}) \mathbf{v}_v^i, & \alpha_v &\approx \sum_{i=1}^{n_v} \phi_v^i(\mathbf{x}) \alpha_v^i(t), & \mathbf{e}_v &\approx \sum_{i=1}^{n_v} \phi_v^i(\mathbf{x}) \mathbf{e}_v^i(t), & \mathbf{x} \in \Omega, \\
 v_\partial &\approx \sum_{i=1}^{n_\partial} \phi_\partial^i(s) v_\partial^i, & u_\partial &\approx \sum_{i=1}^{n_\partial} \phi_\partial^i(s) u_\partial^i(t), & y_\partial &\approx \sum_{i=1}^{n_\partial} \phi_\partial^i(s) y_\partial^i(t), & s \in \partial\Omega,
 \end{aligned} \tag{7.39}$$

1272 the finite dimensional system is obtained

$$\begin{aligned}
 \begin{bmatrix} \mathbf{M}_h & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_v \end{bmatrix} \begin{pmatrix} \dot{\alpha}_{d,h} \\ \dot{\alpha}_{d,v} \end{pmatrix} &= - \begin{bmatrix} \mathbf{0} & -\mathbf{D}_{\text{grad}}^\top \\ \mathbf{D}_{\text{grad}} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_h \\ \mathbf{e}_v \end{pmatrix} + \begin{bmatrix} \mathbf{B}_h \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\
 \begin{bmatrix} \mathbf{M}_h & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_v \end{bmatrix} \begin{pmatrix} \mathbf{e}_h \\ \mathbf{e}_v \end{pmatrix} &= \begin{bmatrix} \partial_{\alpha_{d,h}} H_d(\alpha_{d,h}, \alpha_{d,v}) \\ \partial_{\alpha_{d,v}} H_d(\alpha_{d,h}, \alpha_{d,v}) \end{bmatrix}, \\
 \mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{B}_h^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_h \\ \mathbf{e}_v \end{pmatrix}.
 \end{aligned} \tag{7.40}$$

1273 The matrices are defined as follows

$$\begin{aligned}
 M_h^{ij} &= \langle \phi_h^i, \phi_h^j \rangle_{L^2(\Omega)}, & D_{\text{grad}}^{mi} &= \langle \phi_v^m, \text{grad } \phi_h^i \rangle_{L^2(\Omega, \mathbb{R}^2)}, \\
 M_v^{mn} &= \langle \phi_v^m, \phi_v^n \rangle_{L^2(\Omega, \mathbb{R}^2)}, & B_h^{ik} &= \langle \gamma_0 \phi_h^i, \phi_\partial^k \rangle_{L^2(\partial\Omega)}, \\
 M_\partial^{lk} &= \langle \phi_\partial^l, \phi_\partial^k \rangle_{L^2(\partial\Omega)},
 \end{aligned} \tag{7.41}$$

where $i, j \in \{1, n_h\}$, $m, n \in \{1, n_v\}$, $l, k \in \{1, n_\partial\}$. The discretized gradient of the Hamiltonian reads

$$\begin{aligned} \partial_{\alpha_{d,h}^i} H_d(\alpha_{d,h}, \alpha_{d,v}) &= \left\langle \phi_h^i, \frac{1}{2\rho} \left\| \sum_{r=1}^{n_v} \phi_v^r \alpha_v^r \right\|^2 + \rho g \sum_{r=1}^{n_h} \phi_h^r \alpha_h^r \right\rangle_{L^2(\Omega)}, \quad i \in \{1, n_h\}, \\ \partial_{\alpha_{d,v}^m} H_d(\alpha_{d,h}, \alpha_{d,v}) &= \left\langle \phi_v^m, \frac{1}{\rho} \left(\sum_{r=1}^{n_h} \phi_h^r \alpha_h^r \right) \left(\sum_{r=1}^{n_v} \phi_v^r \alpha_v^r \right) \right\rangle_{L^2(\Omega, \mathbb{R}^2)}, \quad m \in \{1, n_v\}. \end{aligned} \quad (7.42)$$

One possible finite element discretization for this problem can be found in [Pir89]. The non linear nature of the problem strongly complicates the analysis. The presence of shocks has to be accounted for in the numerical discretization. The proposed methodology has to cope with finite time shocks to become a valid alternative to already well established strategies.

7.1.2 Linear case

The general framework detailed in Sec. 7.1.1 is valid for both linear and non linear systems. However, in the linear case a major simplification occurs since the constitutive law connecting energy and co-energy variables is easily invertible. This allows a description based on co-energy variables only.

To make the system linear, the additional assumption is introduced.

Assumption 4 (Quadratic separable Hamiltonian)

The Hamiltonian is assumed to be a positive quadratic functional in the energy variables α_1, α_2 . Furthermore, the Hamiltonian is considered to be separable with respect to α_1, α_2 (this hypothesis is always met for the systems under consideration). Therefore, it can be expressed as

$$H = \frac{1}{2} \langle \alpha_1, \mathcal{Q}_1 \alpha_1 \rangle_{L^2(\Omega, \mathbb{A})} + \frac{1}{2} \langle \alpha_2, \mathcal{Q}_2 \alpha_2 \rangle_{L^2(\Omega, \mathbb{B})}, \quad (7.43)$$

where $\mathcal{Q}_1, \mathcal{Q}_2$ are positive symmetric operators, bounded from below and above

$$m_1 \mathbf{I}_{\mathbb{A}} \leq \mathcal{Q}_1 \leq M_1 \mathbf{I}_{\mathbb{A}}, \quad m_2 \mathbf{I}_{\mathbb{B}} \leq \mathcal{Q}_2 \leq M_2 \mathbf{I}_{\mathbb{B}}, \quad m_1 > 0, m_2 > 0, M_1 > 0, M_2 > 0,$$

where $\mathbf{I}_{\mathbb{A}}, \mathbf{I}_{\mathbb{B}}$ are the identity operators in \mathbb{A}, \mathbb{B} respectively. Because of Assumption 4, the co-energy variables are given by

$$e_1 := \delta_{\alpha_1} H = \mathcal{Q}_1 \alpha_1, \quad e_2 := \delta_{\alpha_2} H = \mathcal{Q}_2 \alpha_2 \quad (7.44)$$

Since $\mathcal{Q}_1, \mathcal{Q}_2$ are positive bounded from below and above, it is possible to invert them to obtain

$$\alpha_1 = \mathcal{Q}_1^{-1} e_1 = \mathcal{M}_1 e_1, \quad \alpha_2 = \mathcal{Q}_2^{-1} e_2 = \mathcal{M}_2 e_2, \quad \mathcal{M}_1 := \mathcal{Q}_1^{-1}, \mathcal{M}_2 := \mathcal{Q}_2^{-1}. \quad (7.45)$$

1296 The Hamiltonian is then written in terms of co-energy variables as

$$H = \frac{1}{2} \langle \mathbf{e}_1, \mathcal{M}_1 \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} + \frac{1}{2} \langle \mathbf{e}_2, \mathcal{M}_2 \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})}. \quad (7.46)$$

1297 Under assumptions 2, 3, 4, a pH linear system is expressed as

$$\begin{bmatrix} \mathcal{M}_1 & 0 \\ 0 & \mathcal{M}_2 \end{bmatrix} \partial_t \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} = \begin{bmatrix} 0 & -\mathbf{L}^\top - \mathcal{L}^* \\ \mathbf{L} + \mathcal{L} & 0 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}, \quad \begin{matrix} \mathbf{e}_1 \in H^\mathcal{L}, \\ \mathbf{e}_2 \in H^{-\mathcal{L}^*}. \end{matrix} \quad (7.47)$$

1298 If Eq. (7.9) holds the boundary variables equal

$$\mathbf{u}_\partial = \mathcal{N}_2 \mathbf{e}_2, \quad \mathbf{y}_\partial = \mathcal{N}_1 \mathbf{e}_1, \quad \mathbf{u}_\partial, \mathbf{y}_\partial \in \mathbb{R}^m. \quad (7.48)$$

1299 Whereas if Eq. (7.10) holds, then

$$\mathbf{u}_\partial = \mathcal{N}_1 \mathbf{e}_1, \quad \mathbf{y}_\partial = \mathcal{N}_2 \mathbf{e}_2, \quad \mathbf{u}_\partial, \mathbf{y}_\partial \in \mathbb{R}^m. \quad (7.49)$$

1300 From equation (7.46), the power balance reads

$$\begin{aligned} \dot{H} &= \langle \mathbf{e}_1, \mathcal{M}_1 \partial_t \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathbf{e}_2, \mathcal{M}_2 \partial_t \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})}, \\ &= \langle \mathbf{e}_1, -\mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathbf{e}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}, \\ &= \langle \mathcal{N}_{\partial,1} \mathbf{e}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ &= \langle \mathbf{y}_\partial, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \end{aligned} \quad (7.50)$$

1301 To get a finite dimensional approximation the same procedure detailed in Sec. §7.1.1 is
1302 followed. The only difference is that there is no need to discretize the constitutive relations
1303 as those are already incorporated in the dynamics.

1304 Once the system is put into weak form, if the operator $-\mathcal{L}^*$ is integrated by parts, one
1305 obtains the weak form

$$\begin{aligned} \langle \mathbf{v}_1, \mathcal{M}_1 \partial_t \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ \langle \mathbf{v}_2, \mathcal{M}_2 \partial_t \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}, \\ \langle \mathbf{v}_\partial, \mathbf{y}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} &= \langle \mathbf{v}_\partial, \mathcal{N}_{\partial,1} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \end{aligned} \quad (7.51)$$

1306 Otherwise, if operator \mathcal{L} is integrated by parts, it is computed

$$\begin{aligned} \langle \mathbf{v}_1, \mathcal{M}_1 \partial_t \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})}, \\ \langle \mathbf{v}_2, \mathcal{M}_2 \partial_t \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} + \langle \mathcal{N}_{\partial,2} \mathbf{v}_2, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ \langle \mathbf{v}_\partial, \mathbf{y}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} &= \langle \mathbf{v}_\partial, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}. \end{aligned} \quad (7.52)$$

1307 After introducing a Galerkin approximation as in (7.23), the discretized version of the weak
1308 form (7.51) reads

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{M}_2} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_{\mathcal{L}}^\top \\ \mathbf{D}_0 + \mathbf{D}_{\mathcal{L}} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{B}_1 \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\ \mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{B}_1^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}. \end{aligned} \quad (7.53)$$

1309 The only difference with respect to Eq. (7.24) concerns the mass matrices

$$M_{\mathcal{M}_1}^{ij} = \langle \phi_1^i, \mathcal{M}_1 \phi_1^j \rangle_{L^2(\Omega, \mathbb{A})}, \quad M_{\mathcal{M}_2}^{mn} = \langle \phi_2^m, \mathcal{M}_2 \phi_2^n \rangle_{L^2(\Omega, \mathbb{B})} \quad i, j \in \{1, n_1\}, \quad m, n \in \{1, n_2\}. \quad (7.54)$$

1310 If the Galerkin approximation is applied to the weak form (7.52), it is obtained

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{M}_2} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top + \mathbf{D}_{-\mathcal{L}^*}^\top \\ \mathbf{D}_0 - \mathbf{D}_{-\mathcal{L}^*}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{0} \\ \mathbf{B}_2 \end{bmatrix} \mathbf{u}_\partial, \\ \mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{0} & \mathbf{B}_2^\top \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}. \end{aligned} \quad (7.55)$$

1311 In both cases, it is easy to verify that the Hamiltonian

$$H_d = \frac{1}{2} \mathbf{e}_1^\top \mathbf{M}_{\mathcal{M}_1} \mathbf{e}_1 + \frac{1}{2} \mathbf{e}_2^\top \mathbf{M}_{\mathcal{M}_2} \mathbf{e}_2, \quad (7.56)$$

1312 once differentiated in time, provides the energy rate

$$\dot{H}_d = \mathbf{y}_\partial^\top \mathbf{M}_\partial \mathbf{u}_\partial = \hat{\mathbf{y}}_\partial^\top \mathbf{u}_\partial, \quad \text{where} \quad \hat{\mathbf{y}}_\partial := \mathbf{M}_\partial \mathbf{y}_\partial. \quad (7.57)$$

1313 This result mimics its finite dimensional counterpart (7.50).

1314 7.1.3 Linear flexible structures

1315 In this section, some linear examples from the elasticity realms are considered. We restrict
1316 the discussion to linear problems. This case is anyway significant, as these examples are
1317 frequently encountered in engineering applications.

1318 7.1.3.1 Euler-Bernoulli beam

1319 We reconsider the example discussed in Sec. §3.3.2. The relation between energy and co-
1320 energy variables is given by Eqs. (3.25), (3.27)

$$\alpha_w = \rho A e_w, \quad \alpha_\kappa = \frac{1}{EI} e_\kappa \quad (7.58)$$

1321 The coefficients ρ, A, E and I are the mass density, the cross section area, Young's modulus
1322 of elasticity and the moment of inertia of the cross section.

1323 **Control through forces and torques** Given an interval $\Omega = (0, L)$, a thin beam under
 1324 free boundary condition (forces and torques imposed at the boundary) can be modeled in
 1325 terms of co-energy variables by the following system

$$\begin{bmatrix} \rho A & 0 \\ 0 & (EI)^{-1} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} \\ \partial_{xx} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \quad \begin{matrix} e_w \in H^2(\Omega), \\ e_\kappa \in H^2(\Omega), \end{matrix} \quad (7.59a)$$

$$\mathbf{u}_\partial = \begin{bmatrix} 0 & \gamma_0 \\ 0 & -\gamma_1 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \quad \mathbf{u}_\partial \in \mathbb{R}^4, \quad (7.59b)$$

$$\mathbf{y}_\partial = \begin{bmatrix} \gamma_1 & 0 \\ \gamma_0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \quad \mathbf{y}_\partial \in \mathbb{R}^4. \quad (7.59c)$$

1326 The boundary operators γ_0, γ_1 denote the trace and the first derivative trace along the
 1327 boundary. In a one-dimensional domain the boundary degenerates to two single points

$$\gamma_0 a = a|_{\partial\Omega} = \begin{pmatrix} -a(0) \\ +a(L) \end{pmatrix}, \quad \gamma_1 a = \partial_n a|_{\partial\Omega} = \begin{pmatrix} -\partial_x a(0) \\ +\partial_x a(L) \end{pmatrix}. \quad (7.60)$$

1328 In this case $\mathbb{A} = \mathbb{B} = \mathbb{R}$. The operators $\mathcal{M}_1, \mathcal{M}_2, \mathcal{L}, N_{\partial,1}, N_{\partial,2}$ read

$$\mathcal{M}_1 = \rho A, \quad \mathcal{M}_2 = (EI)^{-1}, \quad \mathcal{L} = \partial_{xx}, \quad N_{\partial,1} = \begin{bmatrix} \gamma_1 \\ \gamma_0 \end{bmatrix}, \quad N_{\partial,2} = \begin{bmatrix} \gamma_0 \\ -\gamma_1 \end{bmatrix}. \quad (7.61)$$

1329 The Hamiltonian is given by

$$H = \frac{1}{2} \int_{\Omega} \left\{ \rho A e_w^2 + (EI)^{-1} e_\kappa^2 \right\} d\Omega. \quad (7.62)$$

1330 Applying twice the integration by parts formula, one obtains the power balance

$$\begin{aligned} \dot{H} &= \langle e_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} + \langle e_\kappa, (EI)^{-1} \partial_t e_\kappa \rangle_{L^2(\Omega)}, \\ &= \langle e_w, -\partial_{xx} e_\kappa \rangle_{L^2(\Omega)} + \langle e_\kappa, \partial_{xx} e_w \rangle_{L^2(\Omega)}, \\ &= \langle \gamma_1 e_w, \gamma_0 e_\kappa \rangle_{\mathbb{R}^2} + \langle \gamma_0 e_w, -\gamma_1 e_\kappa \rangle_{\mathbb{R}^2}, \\ &= \langle \mathbf{y}_\partial, \mathbf{u}_\partial \rangle_{\mathbb{R}^4}. \end{aligned} \quad (7.63)$$

1331 Given the test functions v_w, v_κ , the weak form is readily obtained as

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= \langle v_w, -\partial_{xx} e_\kappa \rangle_{L^2(\Omega)}, \\ \langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \rangle_{L^2(\Omega)} &= \langle v_\kappa, \partial_{xx} e_w \rangle_{L^2(\Omega)}. \end{aligned} \quad (7.64)$$

1332 If the integration by parts is applied twice to the first line of Eq. (7.59a), it is obtained

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= -\langle \partial_{xx} v_w, e_\kappa \rangle_{L^2(\Omega)} + \langle \gamma_1 v_w, (u_{\partial,1}, u_{\partial,2}) \rangle_{\mathbb{R}^2} + \langle \gamma_0 v_w, (u_{\partial,3}, u_{\partial,4}) \rangle_{\mathbb{R}^2}, \\ \langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \rangle_{L^2(\Omega)} &= \langle v_\kappa, \partial_{xx} e_w \rangle_{L^2(\Omega)}. \end{aligned} \quad (7.65)$$

1333 Introducing a Galerkin discretization for test and efforts functions

$$v_w = \sum_{i=1}^{n_w} \phi_w^i v_w^i, \quad e_w = \sum_{i=1}^{n_w} \phi_w^i e_w^i(t), \quad v_\kappa = \sum_{i=1}^{n_\kappa} \phi_\kappa^i v_\kappa^i, \quad e_\kappa = \sum_{i=1}^{n_\kappa} \phi_\kappa^i e_\kappa^i(t), \quad (7.66)$$

1334 and considering that $\mathbf{u}_\partial \in \mathbb{R}^4$, $\mathbf{y}_\partial \in \mathbb{R}^4$, the following is obtained

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\rho A} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{EI^{-1}} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_{\partial xx}^\top \\ \mathbf{D}_{\partial xx} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix} + \begin{bmatrix} \mathbf{B}_w \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\ \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{B}_w^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix}. \end{aligned} \quad (7.67)$$

1335 The matrices $\mathbf{M}_{\rho A}$, $\mathbf{M}_{EI^{-1}}$, $\mathbf{D}_{\partial xx}$ are defined as ($i, j \in \{1, n_w\}$, $m, n \in \{1, n_\kappa\}$)

$$M_{\rho A}^{ij} = \langle \phi_w^i, \rho A \phi_w^j \rangle_{L^2(\Omega)}, \quad M_{EI^{-1}}^{mn} = \langle \phi_\kappa^m, (EI)^{-1} \phi_\kappa^n \rangle_{L^2(\Omega)}, \quad D_{\partial xx}^{mi} = \langle \phi_\kappa^m, \partial_{xx} \phi_w^i \rangle_{L^2(\Omega)}. \quad (7.68)$$

1336 The \mathbf{B}_w is composed of four column vectors $\mathbf{B}_w = [\mathbf{b}_w^1 \ \mathbf{b}_w^2 \ \mathbf{b}_w^3 \ \mathbf{b}_w^4]$

$$b_w^{1,i} = -\partial_x \phi_w^i(0), \quad b_w^{2,i} = \partial_x \phi_w^i(L), \quad b_w^{3,i} = -\phi_w^i(0), \quad b_w^{4,i} = \phi_w^i(L), \quad i \in \{1, n_w\}. \quad (7.69)$$

Control through linear and angular velocities Equivalently, the second line of Eq. (7.59a) could have been integrated by parts to control using the linear and angular velocities at the extremities. Consider the system with known forces and torques at the extremities

$$\begin{bmatrix} \rho A & 0 \\ 0 & (EI)^{-1} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} \\ \partial_{xx} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \quad \begin{aligned} e_w &\in H^2(\Omega), \\ e_\kappa &\in H^2(\Omega), \end{aligned} \quad (7.70a)$$

$$\mathbf{u}_\partial = \begin{bmatrix} \gamma_1 & 0 \\ \gamma_0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \quad \mathbf{u}_\partial \in \mathbb{R}^4, \quad (7.70b)$$

$$\mathbf{y}_\partial = \begin{bmatrix} 0 & \gamma_0 \\ 0 & -\gamma_1 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \quad \mathbf{y}_\partial \in \mathbb{R}^4. \quad (7.70c)$$

1337 Once the system is put into weak form and the second line of Eq. (7.70a) is integrated twice,
1338 it is computed

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= \langle v_w, -\partial_{xx} e_\kappa \rangle_{L^2(\Omega)}, \\ \langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \rangle_{L^2(\Omega)} &= \langle \partial_{xx} v_\kappa, e_w \rangle_{L^2(\Omega)} + \langle \gamma_0 v_\kappa, (u_{\partial,1}, u_{\partial,2}) \rangle_{\mathbb{R}^2} + \langle -\gamma_1 v_\kappa, (u_{\partial,3}, u_{\partial,4}) \rangle_{\mathbb{R}^2}. \end{aligned} \quad (7.71)$$

1339 Replacing a Galerkin approximation, it is obtained

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\rho A} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{EI^{-1}} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{D}_{-\partial_{xx}} \\ -\mathbf{D}_{-\partial_{xx}}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix} + \begin{bmatrix} \mathbf{0} \\ \mathbf{B}_\kappa \end{bmatrix} \mathbf{u}_\partial, \\ \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{0} & \mathbf{B}_\kappa^\top \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix}. \end{aligned} \quad (7.72)$$

1340 The matrix $\mathbf{D}_{-\partial_{xx}}$ is defined as

$$D_{-\partial_{xx}}^{im} = \left\langle \phi_w^i, -\partial_{xx}\phi_\kappa^m \right\rangle_{L^2(\Omega)}, \quad i, \in \{1, n_w\}, \quad m \in \{1, n_\kappa\}. \quad (7.73)$$

1341 The \mathbf{B}_κ is composed of four column vectors $\mathbf{B}_\kappa = [\mathbf{b}_\kappa^1 \mathbf{b}_\kappa^2 \mathbf{b}_\kappa^3 \mathbf{b}_\kappa^4]$

$$b_\kappa^{1,m} = -\phi_\kappa^m(0), \quad b_\kappa^{2,m} = \phi_\kappa^m(L), \quad b_\kappa^{3,m} = \partial_x \phi_\kappa^m(0), \quad b_\kappa^{4,m} = -\partial_x \phi_\kappa^m(L), \quad m \in \{1, n_\kappa\}. \quad (7.74)$$

1342 Both discretizations require the use of Hermite polynomials to meet the regularity re-
1343 quirement. Indeed, to lower the regularity requirement for the finite elements employed in
1344 the discretization, both lines can be integrated by parts. This will be discussed in Chap. 8.

1345 7.1.3.2 Kirchhoff plate

1346 The link between the energy and co-energy variables for the isotropic Kirchhoff model is the
1347 following (5.33)

$$\alpha_w = \rho h e_w, \quad \mathbf{A}_\kappa = \mathbf{C}_b \mathbf{E}_\kappa, \quad \text{where} \quad \mathbf{C}_b := \mathbf{D}_b^{-1} \quad (7.75)$$

1348 where ρ is the mass density, h the plate thickness and \mathbf{D}_b , the bending rigidity tensor, cf. Eq.
1349 (5.11). The bending compliance is given by

$$\mathbf{C}_b = \frac{12}{Eh^3} [(1 + \nu)(\cdot) - \nu \text{Tr}(\cdot) \mathbf{I}_{2 \times 2}]. \quad (7.76)$$

Given an open connected set $\Omega \subset \mathbb{R}^2$, the Kirchhoff plate model (5.42) in co-energy form controlled by forces and momenta is then expressed as

$$\begin{bmatrix} \rho h & 0 \\ 0 & \mathbf{C}_b \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\text{div Div} \\ \text{Hess} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix}, \quad \begin{aligned} e_w &\in H^2(\Omega), \\ \mathbf{E}_\kappa &\in H^{\text{div Div}}(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2}), \end{aligned} \quad (7.77a)$$

$$\mathbf{u}_\partial = \begin{bmatrix} 0 & \gamma_{nn,1} \\ 0 & \gamma_{nn} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix}, \quad \mathbf{u}_\partial \in \mathbb{R}^2, \quad (7.77b)$$

$$\mathbf{y}_\partial = \begin{bmatrix} \gamma_0 & 0 \\ \gamma_1 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix}, \quad \mathbf{y}_\partial \in \mathbb{R}^2, \quad (7.77c)$$

1350 We recall the expressions of the trace maps

$$\begin{aligned}\gamma_0 a &= a|_{\partial\Omega}, & \gamma_{nn,1} \mathbf{A} &= -\mathbf{n} \cdot \text{Div } \mathbf{A} - \partial_s(\mathbf{A} : (\mathbf{n} \otimes \mathbf{s}))|_{\partial\Omega}, \\ \gamma_1 a &= \partial_{\mathbf{n}} a|_{\partial\Omega}, & \gamma_{nn} \mathbf{A} &= \mathbf{A} : (\mathbf{n} \otimes \mathbf{n})|_{\partial\Omega}.\end{aligned}\quad (7.78)$$

1351 In this case, the sets are $\mathbb{A} = \mathbb{R}$, $\mathbb{B} = \mathbb{R}_{\text{sym}}^{2 \times 2}$. The operators $\mathcal{M}_1, \mathcal{M}_2, \mathcal{L}, N_{\partial,1}, N_{\partial,2}$ are

$$\mathcal{M}_1 = \rho h, \quad \mathcal{M}_2 = \mathbf{C}_b, \quad \mathcal{L} = \text{Hess}, \quad N_{\partial,1} = \begin{bmatrix} \gamma_0 \\ \gamma_1 \end{bmatrix}, \quad N_{\partial,2} = \begin{bmatrix} \gamma_{nn,1} \\ \gamma_{nn} \end{bmatrix}. \quad (7.79)$$

1352 The energy rate from Eq. (5.39) equals $\dot{H} = \langle \mathbf{y}_{\partial}, \mathbf{u}_{\partial} \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$. Introducing the test
1353 functions $(v_w, \mathbf{V}_{\kappa})$ and integrating by parts twice the first line of (7.77a) one gets

$$\begin{aligned}\langle v_w, \rho h \partial_t e_w \rangle_{L^2(\Omega)} &= -\langle \text{Hess } v_w, \mathbf{E}_{\kappa} \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} + \langle \gamma_0 v_w, u_{\partial,1} \rangle_{L^2(\partial\Omega)} + \langle \gamma_1 v_w, u_{\partial,2} \rangle_{L^2(\partial\Omega)}, \\ \langle \mathbf{V}_{\kappa}, \mathbf{C}_b \partial_t \mathbf{V}_{\kappa} \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} &= \langle \mathbf{V}_{\kappa}, \text{Hess } e_w \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})}.\end{aligned}\quad (7.80)$$

1354 Introducing a Galerkin discretization for test and efforts functions

$$\begin{aligned}v_w &= \sum_{i=1}^{n_w} \phi_w^i v_w^i, & \mathbf{V}_{\kappa} &= \sum_{i=1}^{n_{\kappa}} \Phi_{\kappa}^i v_{\kappa}^i, & v_{\partial} &= \sum_{i=1}^{n_{\partial}} \phi_{\partial}^i v_{\partial}^i, & \mathbf{y}_{\partial} &= \sum_{i=1}^{n_{\partial}} \phi_{\partial}^i y_{\partial}^i, \\ e_w &= \sum_{i=1}^{n_w} \phi_w^i e_w^i, & \mathbf{E}_{\kappa} &= \sum_{i=1}^{n_{\kappa}} \Phi_{\kappa}^i e_{\kappa}^i, & \mathbf{u}_{\partial} &= \sum_{i=1}^{n_{\partial}} \phi_{\partial}^i u_{\partial}^i,\end{aligned}\quad (7.81)$$

1355 the following finite dimensional system is obtained

$$\begin{aligned}\begin{bmatrix} \mathbf{M}_{\rho h} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathbf{C}_b} \end{bmatrix} \begin{pmatrix} \dot{e}_w \\ \dot{e}_{\kappa} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_{\text{Hess}}^{\top} \\ \mathbf{D}_{\text{Hess}} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_{\kappa} \end{pmatrix} + \begin{bmatrix} \mathbf{B}_w & \mathbf{B}_{\partial_n w} \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{u}_{\partial}, \\ \mathbf{M}_{\partial} \mathbf{y}_{\partial} &= \begin{bmatrix} \mathbf{B}_w^{\top} & \mathbf{0} \\ \mathbf{B}_{\partial_n w}^{\top} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_{\kappa} \end{pmatrix}.\end{aligned}\quad (7.82)$$

1356 The matrices $\mathbf{M}_{\rho h}, \mathbf{M}_{\mathbf{C}_b}, \mathbf{D}_{\text{Hess}}$ are defined as $(i, j \in \{1, n_w\}, m, n \in \{1, n_{\kappa}\})$

$$M_{\rho h}^{ij} = \langle \phi_w^i, \rho h \phi_w^j \rangle_{L^2(\Omega)}, \quad M_{\mathbf{C}_b}^{mn} = \langle \Phi_{\kappa}^m, \mathbf{C}_b \Phi_{\kappa}^n \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})}, \quad D_{\text{Hess}}^{mi} = \langle \Phi_{\kappa}^m, \text{Hess } \phi_w^i \rangle_{L^2(\Omega)}. \quad (7.83)$$

1357 Matrices $\mathbf{B}_w, \mathbf{B}_{\partial_n w}$ are given by

$$B_w^{il} = \langle \gamma_0 \phi_w^i, \phi_{\partial,1}^l \rangle_{L^2(\partial\Omega)}, \quad B_{\partial_n w}^{il} = \langle \gamma_1 \phi_w^i, \phi_{\partial,2}^l \rangle_{L^2(\partial\Omega)}, \quad l \in \{1, n_{\partial}\}. \quad (7.84)$$

1358 This kind of discretization requires H^2 conforming elements. The construction of those
1359 is rather involved [AFS68, Bel69] and they are computationally expensive. Nevertheless, this
1360 kind of discretization is able to handle generic boundary conditions [GSV18]. For this reason,
1361 it is the most adapted for the pH framework.

To lower the regularity requirement for the finite elements many non conforming elements have been proposed. The most employed is the Hellan-Herrmann-Johnson element [AB85, BR90]. However, this method does not handle generic non homogeneous boundary conditions. Given the unavailability of the boundary for interconnections, the modularity feature of pHs cannot be fully exploited.

Remark 10 (On the $H^{\text{div Div}}$ space)

Equivalently, the second line of Eq. (7.77a) can be integrated by parts twice to obtain a discretized system whose inputs are the linear velocity and the angular velocity at the boundary. However, while for the H^2 space conforming finite elements are available, for the $H^{\text{div Div}}$ no conforming finite elements have been proposed. This makes the discretization unfeasible.

7.1.3.3 Mindlin plate

Using Eqs. (5.22) and (5.24), the relation between co-energy and energy variables for the isotropic Mindlin plate is found to be

$$\begin{aligned} \alpha_w &= \rho h e_w, & \alpha_\theta &= I_\theta e_\theta, & I_\theta &:= \rho h^3 / 12, \\ \mathbf{A}_\kappa &= \mathbf{C}_b \mathbf{E}_\kappa, & \alpha_\gamma &= C_s e_\gamma, & C_s &:= 1 / (K_{\text{sh}} G h), \end{aligned} \quad (7.85)$$

where K_{sh} is the shear correction factor, G the shear modulus. The other variables have the same meaning as in Sec. §7.1.3.2.

Control through forces and torques A pH representation in co-energy variables with known forces and momenta at the boundary is given by the system

$$\begin{bmatrix} \rho h & 0 & 0 & 0 \\ \mathbf{0} & I_\theta & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{C}_b & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & C_s \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix} = \begin{bmatrix} 0 & 0 & 0 & \text{div} \\ \mathbf{0} & \mathbf{0} & \text{Div} & \mathbf{I}_{2 \times 2} \\ \mathbf{0} & \text{Grad} & \mathbf{0} & \mathbf{0} \\ \text{grad} & -\mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}, \quad \begin{aligned} e_w &\in H^1(\Omega), \\ \mathbf{e}_\theta &\in H^{\text{Grad}}(\Omega, \mathbb{R}^2), \\ \mathbf{E}_\kappa &\in H^{\text{Div}}(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2}), \\ \mathbf{e}_\gamma &\in H^{\text{div}}(\Omega, \mathbb{R}^2), \end{aligned} \quad (7.86a)$$

$$\mathbf{u}_\partial = \begin{bmatrix} 0 & 0 & 0 & \gamma_n \\ 0 & 0 & \gamma_{nn} & 0 \\ 0 & 0 & \gamma_{ns} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}, \quad \mathbf{u}_\partial \in \mathbb{R}^3, \quad (7.86b)$$

$$\mathbf{y}_\partial = \begin{bmatrix} \gamma_0 & 0 & 0 & 0 \\ 0 & \gamma_n & 0 & 0 \\ 0 & \gamma_s & 0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}, \quad \mathbf{y}_\partial \in \mathbb{R}^3. \quad (7.86c)$$

1381 The trace operators are defined as

$$\begin{aligned} \gamma_0 a &= a|_{\partial\Omega}, & \gamma_n \mathbf{a} &= \mathbf{a} \cdot \mathbf{n}|_{\partial\Omega}, & \gamma_{nn} \mathbf{A} &= \mathbf{A} : (\mathbf{n} \otimes \mathbf{n})|_{\partial\Omega}, \\ \gamma_s \mathbf{a} &= \mathbf{a} \cdot \mathbf{s}|_{\partial\Omega}, & \gamma_{ns} \mathbf{A} &= \mathbf{A} : (\mathbf{n} \otimes \mathbf{s})|_{\partial\Omega}. \end{aligned} \quad (7.87)$$

1382 The variables assume values in the sets $\mathbb{A} = \mathbb{R} \times \mathbb{R}^2$, $\mathbb{B} = \mathbb{R}_{\text{sym}}^{2 \times 2} \times \mathbb{R}^2$. The mass operators
1383 are given by

$$\mathcal{M}_1 = \begin{bmatrix} \rho h & 0 \\ \mathbf{0} & I_\theta \end{bmatrix}, \quad \mathcal{M}_2 = \begin{bmatrix} \mathbf{C}_b & \mathbf{0} \\ \mathbf{0} & C_s \end{bmatrix}. \quad (7.88)$$

1384 The \mathbf{L} , \mathcal{L} , $\mathcal{N}_{\partial,1}$, $\mathcal{N}_{\partial,1}$ operators are

$$\mathbf{L} = \begin{bmatrix} \mathbf{0} & \mathbf{0} \\ \mathbf{0} & -\mathbf{I}_{2 \times 2} \end{bmatrix}, \quad \mathcal{L} = \begin{bmatrix} \mathbf{0} & \text{Grad} \\ \text{grad} & \mathbf{0} \end{bmatrix}, \quad \mathcal{N}_{\partial,1} = \begin{bmatrix} \gamma_0 & 0 \\ 0 & \gamma_n \\ 0 & \gamma_s \end{bmatrix}, \quad \mathcal{N}_{\partial,2} = \begin{bmatrix} 0 & \gamma_n \\ \gamma_{nn} & 0 \\ \gamma_{ns} & 0 \end{bmatrix}. \quad (7.89)$$

1385 The energy rate is retrieved from Eq. (5.26) $\dot{H} = \langle \mathbf{y}_\partial, \mathbf{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$. Introducing the test
1386 functions $(v_w, \mathbf{v}_\theta, \mathbf{V}_\kappa, \mathbf{v}_\gamma)$ and integrating by parts the first two lines of (7.86a) one gets

$$\begin{aligned} \langle v_w, \rho h \partial_t e_w \rangle_{L^2(\Omega)} &= -\langle \text{grad } v_w, \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \gamma_0 v_w, u_{\partial,1} \rangle_{L^2(\partial\Omega)}, \\ \langle \mathbf{v}_\theta, I_\theta \partial_t \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} &= -\langle \text{Grad } \mathbf{v}_\theta, \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} + \langle \mathbf{v}_\theta, \mathbf{e}_\gamma \rangle_{L^2(\Omega)} + \langle \gamma_0 \mathbf{v}_\theta, \gamma_n \mathbf{E}_\kappa \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}, \\ \langle \mathbf{V}_\kappa, \mathbf{C}_b \partial_t \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} &= \langle \mathbf{V}_\kappa, \text{Grad } \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})}, \\ \langle \mathbf{v}_\gamma, C_s \partial_t \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)} &= \langle \mathbf{v}_\gamma, \text{grad } e_w \rangle_{L^2(\Omega, \mathbb{R}^2)} - \langle \mathbf{v}_\gamma, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)}. \end{aligned} \quad (7.90)$$

1387 The term $\langle \gamma_0 \mathbf{v}_\theta, \gamma_n \mathbf{E}_\kappa \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$ can be decomposed in its tangential and normal components

$$\langle \gamma_0 \mathbf{v}_\theta, \gamma_n \mathbf{E}_\kappa \rangle_{L^2(\partial\Omega, \mathbb{R}^2)} = \langle \gamma_n \mathbf{v}_\theta, u_{\partial,2} \rangle_{L^2(\partial\Omega)} + \langle \gamma_s \mathbf{v}_\theta, u_{\partial,3} \rangle_{L^2(\partial\Omega)} \quad (7.91)$$

1388 Introducing a Galerkin discretization for test and efforts functions

$$\begin{aligned} v_w &= \sum_{i=1}^{n_w} \phi_w^i v_w^i, & \mathbf{v}_\theta &= \sum_{i=1}^{n_\theta} \phi_\theta^i v_\theta^i, & \mathbf{V}_\kappa &= \sum_{i=1}^{n_\kappa} \Phi_\kappa^i v_\kappa^i, & \mathbf{v}_\gamma &= \sum_{i=1}^{n_\gamma} \phi_\gamma^i v_\gamma^i, & \mathbf{v}_\partial &= \sum_{i=1}^{n_\partial} \phi_\partial^i v_\partial^i, \\ e_w &= \sum_{i=1}^{n_w} \phi_w^i e_w^i, & \mathbf{e}_\theta &= \sum_{i=1}^{n_\theta} \phi_\theta^i e_\theta^i, & \mathbf{E}_\kappa &= \sum_{i=1}^{n_\kappa} \Phi_\kappa^i e_\kappa^i, & \mathbf{e}_\gamma &= \sum_{i=1}^{n_\gamma} \phi_\gamma^i e_\gamma^i, & \mathbf{u}_\partial &= \sum_{i=1}^{n_\partial} \phi_\partial^i u_\partial^i, \\ & & & & & & & & \mathbf{y}_\partial &= \sum_{i=1}^{n_\partial} \phi_\partial^i y_\partial^i. \end{aligned} \quad (7.92)$$

1389 the following finite dimensional system is obtained

$$\begin{aligned} \text{Diag} \begin{bmatrix} \mathbf{M}_{\rho h} \\ \mathbf{M}_{I_\theta} \\ \mathbf{M}_{\mathbf{C}_b} \\ \mathbf{M}_{C_s} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\theta \\ \dot{\mathbf{e}}_\kappa \\ \dot{\mathbf{e}}_\gamma \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & -\mathbf{D}_{\text{grad}}^\top \\ \mathbf{0} & \mathbf{0} & -\mathbf{D}_{\text{Grad}}^\top & -\mathbf{D}_0^\top \\ \mathbf{0} & \mathbf{D}_{\text{Grad}} & \mathbf{0} & \mathbf{0} \\ \mathbf{D}_{\text{grad}} & \mathbf{D}_0 & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix} + \begin{bmatrix} \mathbf{B}_w & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\theta_n} & \mathbf{B}_{\theta_s} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\ \mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{B}_w^\top & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\theta_n}^\top & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\theta_s}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}. \end{aligned} \quad (7.93)$$

1390 The notation Diag denotes a block diagonal matrix. The mass matrices $\mathbf{M}_{\rho h}$, \mathbf{M}_{I_θ} , $\mathbf{M}_{\mathbf{C}_b}$, \mathbf{M}_{C_s}
1391 are computed as

$$\begin{aligned} M_{\rho h}^{ij} &= \langle \phi_w^i, \rho h \phi_w^j \rangle_{L^2(\Omega)}, & M_{\mathbf{C}_b}^{pq} &= \langle \Phi_\kappa^p, \mathbf{C}_b \Phi_\kappa^q \rangle_{L^2(\Omega, \mathbb{R}^{2 \times 2})}, \\ M_{I_\theta}^{mn} &= \langle \phi_\kappa^m, I_\theta \phi_\kappa^n \rangle_{L^2(\Omega, \mathbb{R}^2)}, & M_{C_s}^{rs} &= \langle \phi_\gamma^r, C_s \phi_\gamma^s \rangle_{L^2(\Omega, \mathbb{R}^2)}, \end{aligned} \quad (7.94)$$

1392 where $i, j \in \{1, n_w\}$, $m, n \in \{1, n_\theta\}$, $p, q \in \{1, n_\kappa\}$, $r, s \in \{1, n_\gamma\}$. Matrices \mathbf{D}_{grad} , \mathbf{D}_{Grad} , \mathbf{D}_0
1393 assume the form

$$\begin{aligned} D_{\text{grad}}^{rj} &= \langle \phi_\gamma^r, \text{grad} \phi_w^j \rangle_{L^2(\Omega, \mathbb{R}^2)}, & D_0^{rn} &= -\langle \phi_\gamma^r, \phi_\theta^n \rangle_{L^2(\Omega, \mathbb{R}^2)}, \\ D_{\text{Grad}}^{pn} &= \langle \Phi_\kappa^p, \text{Grad} \phi_\theta^n \rangle_{L^2(\Omega, \mathbb{R}^{2 \times 2})}, \end{aligned} \quad (7.95)$$

1394 Matrices \mathbf{B}_w , \mathbf{B}_{θ_n} , \mathbf{B}_{θ_s} are computed as ($l \in \{1, n_\partial\}$)

$$B_w^{il} = \langle \gamma_0 \phi_w^i, \phi_{\partial,1}^l \rangle_{L^2(\partial\Omega)}, \quad B_{\theta_n}^{ml} = \langle \gamma_n \phi_\theta^m, \phi_{\partial,2}^l \rangle_{L^2(\partial\Omega)}, \quad B_{\theta_s}^{ml} = \langle \gamma_s \phi_\theta^m, \phi_{\partial,3}^l \rangle_{L^2(\partial\Omega)}. \quad (7.96)$$

Control through linear and angular velocities If instead the opposite causality is considered, the continuous system reads

$$\begin{bmatrix} \rho h & 0 & 0 & 0 \\ \mathbf{0} & I_\theta & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{C}_b & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & C_s \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix} = \begin{bmatrix} 0 & 0 & 0 & \text{div} \\ \mathbf{0} & \mathbf{0} & \text{Div} & \mathbf{I}_{2 \times 2} \\ \mathbf{0} & \text{Grad} & \mathbf{0} & \mathbf{0} \\ \text{grad} & -\mathbf{I}_{2 \times 2} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}, \quad (7.97a)$$

$$\mathbf{u}_\partial = \begin{bmatrix} \gamma_0 & 0 & 0 & 0 \\ 0 & \gamma_n & 0 & 0 \\ 0 & \gamma_s & 0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}, \quad \mathbf{u}_\partial \in \mathbb{R}^3, \quad (7.97b)$$

$$\mathbf{y}_\partial = \begin{bmatrix} 0 & 0 & 0 & \gamma_n \\ 0 & 0 & \gamma_{nn} & 0 \\ 0 & 0 & \gamma_{ns} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{E}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}, \quad \mathbf{y}_\partial \in \mathbb{R}^3. \quad (7.97c)$$

1395 Integrating by parts the last two lines of (7.97a) one gets

$$\begin{aligned} \langle v_w, \rho h \partial_t e_w \rangle_{L^2(\Omega)} &= \langle v_w, \text{div } \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)}, \\ \langle \mathbf{v}_\theta, I_\theta \partial_t \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} &= \langle \mathbf{v}_\theta, \text{Div } \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \mathbf{v}_\theta, \mathbf{e}_\gamma \rangle_{L^2(\Omega)}, \\ \langle \mathbf{V}_\kappa, \mathbf{C}_b \partial_t \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} &= -\langle \text{Div } \mathbf{V}_\kappa, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \gamma_n \mathbf{V}_\kappa, \gamma_0 \mathbf{e}_\theta \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}, \\ \langle \mathbf{v}_\gamma, C_s \partial_t \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)} &= -\langle \text{div } \mathbf{v}_\gamma, e_w \rangle_{L^2(\Omega)} - \langle \mathbf{v}_\gamma, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \gamma_0 v_w, u_{\partial,1} \rangle_{L^2(\partial\Omega)}. \end{aligned} \quad (7.98)$$

1396 The term $\langle \gamma_n \mathbf{V}_\kappa, \gamma_0 \mathbf{e}_\theta \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$ can be decomposed in its tangential and normal components

$$\langle \gamma_n \mathbf{V}_\kappa, \gamma_0 \mathbf{e}_\theta \rangle_{L^2(\partial\Omega, \mathbb{R}^2)} = \langle \gamma_{nn} \mathbf{V}_\kappa, u_{\partial,2} \rangle_{L^2(\partial\Omega)} + \langle \gamma_{ns} \mathbf{V}_\kappa, u_{\partial,3} \rangle_{L^2(\partial\Omega)}. \quad (7.99)$$

1397 Plugging approximation (7.92) into this system, one computes

$$\begin{aligned} \text{Diag} \begin{bmatrix} \mathbf{M}_{\rho h} \\ \mathbf{M}_{I_\theta} \\ \mathbf{M}_{\mathbf{C}_b} \\ \mathbf{M}_{C_s} \end{bmatrix} \begin{pmatrix} \dot{e}_w \\ \dot{\mathbf{e}}_\theta \\ \dot{\mathbf{E}}_\kappa \\ \dot{\mathbf{e}}_\gamma \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{D}_{\text{div}} \\ \mathbf{0} & \mathbf{0} & \mathbf{D}_{\text{Div}} & -\mathbf{D}_0^\top \\ \mathbf{0} & -\mathbf{D}_{\text{Div}}^\top & \mathbf{0} & \mathbf{0} \\ -\mathbf{D}_{\text{div}}^\top & \mathbf{D}_0 & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix} + \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{M_{nn}} & \mathbf{B}_{M_{ns}} \\ \mathbf{B}_{q_n} & \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\ \mathbf{M}_{\partial} \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{B}_{q_n}^\top \\ \mathbf{0} & \mathbf{0} & \mathbf{B}_{M_{nn}}^\top & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{B}_{M_{ns}}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}. \end{aligned} \quad (7.100)$$

1398 Matrices \mathbf{D}_{div} , \mathbf{D}_{Div} assume the form ($i, j \in \{1, n_w\}$, $m, n \in \{1, n_\theta\}$, $p, q \in \{1, n_\kappa\}$, $r, s \in$
1399 $\{1, n_\gamma\}$)

$$D_{\text{div}}^{is} = \langle \phi_w^i, \text{div } \phi_\gamma^s \rangle_{L^2(\Omega)}, \quad D_{\text{Div}}^{mq} = \langle \phi_\theta^m, \text{Div } \Phi_\kappa^q \rangle_{L^2(\Omega, \mathbb{R}^2)}. \quad (7.101)$$

Matrix \mathbf{B}_{q_n} , $\mathbf{B}_{M_{nn}}$, $\mathbf{B}_{M_{ns}}$ are computed as ($l \in \{1, n_\partial\}$)

$$B_{q_n}^{rl} = \left\langle \gamma_n \phi_\gamma^r, \phi_{\partial,1}^l \right\rangle_{L^2(\partial\Omega)}, \quad B_{M_{nn}}^{pl} = \left\langle \gamma_{nn} \Phi_\kappa^p, \phi_{\partial,2}^l \right\rangle_{L^2(\partial\Omega)}, \quad B_{M_{ns}}^{pl} = \left\langle \gamma_{ns} \Phi_\kappa^p, \phi_{\partial,3}^l \right\rangle_{L^2(\partial\Omega)}. \quad (7.102)$$

This finite dimensional system represents a purely mixed discretization of the problem and is really close to the plane elasticity system. Conforming finite elements for the plane elasticity system on simplicial meshes have been constructed in [AW02]. The resulting element is rather cumbersome and computationally expensive as the stress tensor has at least 24 degrees of freedom on a triangle. For this reason, many finite element discretization imposes the symmetry of the stress tensor weakly [AFW07]. To actually implement the discretization, in Chap. 8 the Mindlin plate problem is going to be reformulated so that the momenta tensor is only weakly symmetric.

7.2 Mixed boundary conditions

In this section Assumption 3 on uniform boundary condition is modified to account for general non homogeneous boundary conditions. The discretization of Stokes-Dirac structure under mixed causality has been already treated in [KML18]. However, to satisfy the power balance at a discrete level, some additional parameters are introduced. This makes the employment of this methodology not simple and dependent on the considered application. Furthermore, elasticity models do not fall within the required assumptions.

We propose here two methodologies to tackle mixed boundary conditions within the Partitioned Finite Element Method. The first introduces Lagrange multipliers, and therefore algebraic constraints, to enforce the mixed causality. Finite dimensional differential algebraic port-Hamiltonian systems (pHDAE) have been introduced in [BMXZ18] for linear systems and in [MM19] for non linear systems. This enriched description shares all the crucial features of ordinary pHs, but easily takes into account algebraic constraints, time-dependent transformations and explicit dependence on time in the Hamiltonian. The second method employs a domain decomposition technique to interconnect systems with different causalities. For sake of simplicity the illustration is restricted to the linear case.

The open connected set $\Omega \subset \mathbb{R}^d$, $d = \{1, 2, 3\}$, with Lipschitz boundary $\partial\Omega$ represents the spatial domain. The boundary is partitioned into two sets $\partial\Omega = \bar{\Gamma}_1 \cup \bar{\Gamma}_2$, $\Gamma_1 \cap \Gamma_2 = \{\emptyset\}$. The sets Γ_1 , Γ_2 are considered to be connected, cf. Fig. 7.1.

Remark 11 (Connectedness of Γ_1, Γ_2)

Disconnected sets can be handled as well. This requires the introduction of an heavy notation and complicates the illustration. For sake of simplicity, the connectedness hypothesis applies.

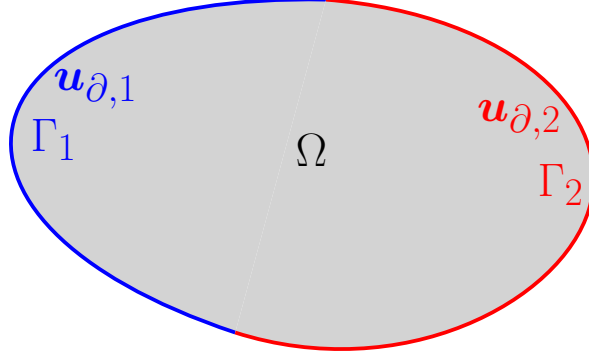


Figure 7.1: Partition of boundary into two connected sets.

1433 For scalars $a_{\partial,*}, b_{\partial,*} \in L^2(\Gamma_*)$ and vectors $\mathbf{a}_{\partial,*}, \mathbf{b}_{\partial,*} \in L^2(\Gamma_*, \mathbb{R}^m)$ defined on the boundary
 1434 partition Γ_* the inner product is defined as

$$\langle a_{\partial,*}, b_{\partial,*} \rangle_{L^2(\Gamma_*)} = \int_{\Gamma_*} a_{\partial,*} b_{\partial,*} \, d\Gamma_*, \quad \langle \mathbf{a}_{\partial,*}, \mathbf{b}_{\partial,*} \rangle_{L^2(\Gamma_*, \mathbb{R}^m)} = \int_{\Gamma_*} \mathbf{a}_{\partial,*} \cdot \mathbf{b}_{\partial,*} \, d\Gamma_*. \quad (7.103)$$

Consider now the following boundary control linear pH system in co-energy form

$$\begin{bmatrix} \mathcal{M}_1 & 0 \\ 0 & \mathcal{M}_2 \end{bmatrix} \partial_t \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} = \begin{bmatrix} 0 & -\mathbf{L}^\top - \mathcal{L}^* \\ \mathbf{L} + \mathcal{L} & 0 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}, \quad \begin{matrix} \mathbf{e}_1 \in H^\mathcal{L}, \\ \mathbf{e}_2 \in H^{-\mathcal{L}*}, \end{matrix} \quad (7.104a)$$

$$\begin{pmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,2} \end{pmatrix} = \begin{bmatrix} \mathcal{N}_{\partial,1}^{\Gamma_1} & 0 \\ 0 & \mathcal{N}_{\partial,2}^{\Gamma_2} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}, \quad \begin{matrix} \mathbf{u}_{\partial,1} \in \mathbb{R}^m, \\ \mathbf{u}_{\partial,2} \in \mathbb{R}^m, \end{matrix} \quad (7.104b)$$

$$\begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,2} \end{pmatrix} = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2}^{\Gamma_1} \\ \mathcal{N}_{\partial,1}^{\Gamma_2} & 0 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}, \quad \begin{matrix} \mathbf{y}_{\partial,1} \in \mathbb{R}^m, \\ \mathbf{y}_{\partial,2} \in \mathbb{R}^m. \end{matrix} \quad (7.104c)$$

1435 The operator $\mathcal{N}_{\partial,*}^{\Gamma_\circ}$ with $*, \circ \in \{1, 2\}$ represents now the restriction of operator $\mathcal{N}_{\partial,*}$,
 1436 defined in Eq. (7.8), over the subset Γ_\circ . The boundary inputs and outputs are now vectors
 1437 \mathbb{R}^{2m} . This does not mean that the boundary conditions have been doubled, but only that the
 1438 components of $\mathbf{u}_\partial, \mathbf{y}_\partial$ are only defined on the subsets Γ_1, Γ_2 of the overall boundary. This
 1439 corresponds to a slight modification of Assumption 3.

1440 Given the additive property of the integral, it is possible to write

$$\begin{aligned} \langle \mathcal{N}_{\partial,1} \mathbf{e}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} &= \langle \mathcal{N}_{\partial,1}^{\Gamma_1} \mathbf{e}_1, \mathcal{N}_{\partial,2}^{\Gamma_1} \mathbf{e}_2 \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,1}^{\Gamma_2} \mathbf{e}_1, \mathcal{N}_{\partial,2}^{\Gamma_2} \mathbf{e}_2 \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}, \\ &= \langle \mathbf{u}_{\partial,1}, \mathbf{y}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathbf{y}_{\partial,2}, \mathbf{u}_{\partial,2} \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}. \end{aligned} \quad (7.105)$$

1441 The continuous power balance is obtained using Eqs. (7.50) and (7.105)

$$\dot{H} = \langle \mathbf{u}_{\partial,1}, \mathbf{y}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathbf{y}_{\partial,2}, \mathbf{u}_{\partial,2} \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}. \quad (7.106)$$

7.2.1 Solution using Lagrange multipliers

This solution introduces a Lagrange multiplier for the boundary control that does not arise explicitly in the weak form. To illustrate the idea, consider again the weak form 7.51 (obtained by integration by parts of the $-\mathcal{L}^*$ partition) of Sys. 7.104

$$\begin{aligned}\langle \mathbf{v}_1, \mathcal{M}_1 \partial_t \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{A})} - \langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}, \\ \langle \mathbf{v}_2, \mathcal{M}_2 \partial_t \mathbf{e}_2 \rangle_{L^2(\Omega, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega, \mathbb{B})}.\end{aligned}\quad (7.107)$$

The term $\langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)}$ can be split into the two boundary contributions, as in Eq. (7.105). The variable $\mathbf{y}_{\partial,1}$ plays here the role of a Lagrange multiplier $\mathbf{y}_{\partial,1} = \boldsymbol{\lambda}_{\partial,1}$

$$\begin{aligned}\langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} &= \langle \mathcal{N}_{\partial,1}^{\Gamma_1} \mathbf{v}_1, \mathcal{N}_{\partial,2}^{\Gamma_1} \mathbf{e}_2 \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,1}^{\Gamma_2} \mathbf{v}_1, \mathcal{N}_{\partial,2}^{\Gamma_2} \mathbf{e}_2 \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}, \\ &= \langle \mathcal{N}_{\partial,1}^{\Gamma_1} \mathbf{v}_1, \mathbf{y}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,1}^{\Gamma_2} \mathbf{v}_1, \mathbf{u}_{\partial,2} \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}, \\ &= \langle \mathcal{N}_{\partial,1}^{\Gamma_1} \mathbf{v}_1, \boldsymbol{\lambda}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,1}^{\Gamma_2} \mathbf{v}_1, \mathbf{u}_{\partial,2} \rangle_{L^2(\Gamma_2, \mathbb{R}^m)},\end{aligned}\quad (7.108)$$

If the test functions $\mathbf{v}_{\partial,1}, \mathbf{v}_{\partial,2} \in \mathbb{R}^m$ are introduced, the input and outputs definitions

$$\mathbf{u}_{\partial,1} = \mathcal{N}_{\partial,1}^{\Gamma_1} \mathbf{e}_1, \quad \mathbf{y}_{\partial,1} = \boldsymbol{\lambda}_{\partial,1}, \quad \mathbf{y}_{\partial,2} = \mathcal{N}_{\partial,1}^{\Gamma_2} \mathbf{e}_1, \quad (7.109)$$

can be put into weak form to obtain

$$\begin{aligned}\langle \mathbf{v}_{\partial,1}, \mathbf{u}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} &= \langle \mathbf{v}_{\partial,1}, \mathcal{N}_{\partial,1}^{\Gamma_1} \mathbf{e}_1 \rangle_{L^2(\Gamma_1, \mathbb{R}^m)}, \\ \langle \mathbf{v}_{\partial,1}, \mathbf{y}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} &= \langle \mathbf{v}_{\partial,1}, \boldsymbol{\lambda}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)}, \\ \langle \mathbf{v}_{\partial,2}, \mathbf{y}_{\partial,2} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} &= \langle \mathbf{v}_{\partial,2}, \mathcal{N}_{\partial,1}^{\Gamma_2} \mathbf{e}_1 \rangle_{L^2(\Gamma_1, \mathbb{R}^m)}.\end{aligned}\quad (7.110)$$

As usual, a Galerkin approximation is introduced

$$\begin{aligned}\mathbf{v}_1 &\approx \sum_{i=1}^{n_1} \phi_1^i(\mathbf{x}) v_1^i, & \mathbf{e}_1 &\approx \sum_{i=1}^{n_1} \phi_1^i(\mathbf{x}) e_1^i(t), & \Delta_{\partial,1} &\approx \sum_{i=1}^{n_{\partial,1}} \phi_{\partial,1}^i(\mathbf{s}_1) \Delta_{\partial,1}^i, & \mathbf{s}_1 &\in \Gamma_1, \\ \mathbf{v}_2 &\approx \sum_{i=1}^{n_2} \phi_2^i(\mathbf{x}) v_2^i, & \mathbf{e}_2 &\approx \sum_{i=1}^{n_2} \phi_2^i(\mathbf{x}) e_2^i(t), & \square_{\partial,2} &\approx \sum_{i=1}^{n_{\partial,2}} \phi_{\partial,2}^i(\mathbf{s}_2) \square_{\partial,2}^i(t), & \mathbf{s}_2 &\in \Gamma_2.\end{aligned}\quad (7.111)$$

where \triangle stays for v, u, y, λ and \square for v, u, y . Replacing the approximation 7.111 into Eqs. 7.107, 7.108, 7.110, the following differential-algebraic system is constructed

$$\begin{aligned} \text{Diag} \begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} \\ \mathbf{M}_{\mathcal{M}_2} \\ \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \\ \dot{\boldsymbol{\lambda}}_{\partial,1} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_{\mathcal{L}}^\top & \mathbf{B}_{1,\Gamma_1} \\ \mathbf{D}_0 + \mathbf{D}_{\mathcal{L}} & \mathbf{0} & \mathbf{0} \\ -\mathbf{B}_{1,\Gamma_1}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,1} \end{pmatrix} + \begin{bmatrix} \mathbf{0} & \mathbf{B}_{1,\Gamma_2} \\ \mathbf{0} & \mathbf{0} \\ \mathbf{M}_{\partial,1} & \mathbf{0} \end{bmatrix} \begin{bmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,2} \end{bmatrix}, \\ \begin{bmatrix} \mathbf{M}_{\partial,1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{M}_{\partial,1} \\ \mathbf{B}_{1,\Gamma_2}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,1} \end{pmatrix}. \end{aligned} \quad (7.112)$$

Apart for matrices $\mathbf{M}_{\partial,1}, \mathbf{M}_{\partial,2}, \mathbf{B}_{1,\Gamma_1}, \mathbf{B}_{1,\Gamma_2}$,

$$\begin{aligned} M_{\partial,1}^{lk} &= \langle \phi_{\partial,1}^l, \phi_{\partial,1}^k \rangle_{L^2(\Gamma_1, \mathbb{R}^m)}, \quad (l, k) \in \{1, n_{\partial,1}\}, \quad B_{1,\Gamma_1}^{ik} = \langle \mathcal{N}_{\partial,1}^{\Gamma_1} \phi_1^i, \phi_{\partial,1}^k \rangle_{L^2(\Gamma_1, \mathbb{R}^m)}, \quad i \in \{1, n_1\}, \\ M_{\partial,2}^{fg} &= \langle \phi_{\partial,2}^f, \phi_{\partial,2}^g \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}, \quad (f, g) \in \{1, n_{\partial,2}\}, \quad B_{1,\Gamma_2}^{ig} = \langle \mathcal{N}_{\partial,1}^{\Gamma_2} \phi_1^i, \phi_{\partial,2}^g \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}, \end{aligned} \quad (7.113)$$

the other matrices keep the same definition as in (7.53). The discrete Hamiltonian, whose expression is [BMXZ18]

$$H_d = \frac{1}{2} \mathbf{e}_1^\top \mathbf{M}_{\mathcal{M}_1} \mathbf{e}_1 + \frac{1}{2} \mathbf{e}_2^\top \mathbf{M}_{\mathcal{M}_2} \mathbf{e}_2. \quad (7.114)$$

gives rise to the discrete power balance

$$\begin{aligned} \dot{H}_d &= \mathbf{e}_1^\top \mathbf{M}_{\mathcal{M}_1} \dot{\mathbf{e}}_1 + \mathbf{e}_2^\top \mathbf{M}_{\mathcal{M}_2} \dot{\mathbf{e}}_2, \\ &= -\mathbf{e}_1^\top (\mathbf{D}_0 + \mathbf{D}_{\mathcal{L}})^\top \mathbf{e}_2 + \mathbf{e}_2^\top (\mathbf{D}_0 + \mathbf{D}_{\mathcal{L}}) \mathbf{e}_1 + \mathbf{e}_1^\top (\mathbf{B}_{1,\Gamma_1} \boldsymbol{\lambda}_{\partial,1} + \mathbf{B}_{1,\Gamma_2} \mathbf{u}_{\partial,2}), \\ &= \mathbf{y}_{\partial,1}^\top \mathbf{M}_{\partial,1} \mathbf{u}_{\partial,1} + \mathbf{y}_{\partial,2}^\top \mathbf{M}_{\partial,2} \mathbf{u}_{\partial,2}, \\ &= \hat{\mathbf{y}}_{\partial,1}^\top \mathbf{u}_{\partial,1} + \hat{\mathbf{y}}_{\partial,2}^\top \mathbf{u}_{\partial,2}, \quad \text{where} \quad \hat{\mathbf{y}}_{\partial,1} := \mathbf{M}_{\partial,1} \mathbf{y}_{\partial,1}, \quad \hat{\mathbf{y}}_{\partial,2} := \mathbf{M}_{\partial,2} \mathbf{y}_{\partial,2}. \end{aligned} \quad (7.115)$$

This result is the finite dimensional equivalent of (7.106).

Equivalently, the weak form Eq. 7.52 may be used as a starting point. The computation follows in a completely analogous manner. The only difference is that $\mathbf{y}_{\partial,2} = \boldsymbol{\lambda}_{\partial,2}$ plays the role of the Lagrange multiplier. The final finite dimensional system is then given by

$$\begin{aligned} \text{Diag} \begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} \\ \mathbf{M}_{\mathcal{M}_2} \\ \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \\ \dot{\boldsymbol{\lambda}}_{\partial,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top + \mathbf{D}_{-\mathcal{L}^*} & \mathbf{0} \\ \mathbf{D}_0 - \mathbf{D}_{-\mathcal{L}^*}^\top & \mathbf{0} & \mathbf{B}_{2,\Gamma_2} \\ \mathbf{0} & -\mathbf{B}_{2,\Gamma_2}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,2} \end{pmatrix} + \begin{bmatrix} \mathbf{0} & \mathbf{0} \\ \mathbf{B}_{2,\Gamma_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{bmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,2} \end{bmatrix}, \\ \begin{bmatrix} \mathbf{M}_{\partial,1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{B}_{2,\Gamma_1}^\top & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,2} \end{pmatrix}. \end{aligned} \quad (7.116)$$

where $\mathbf{B}_{2,\Gamma_1}, \mathbf{B}_{2,\Gamma_2}$ are given by

$$B_{2,\Gamma_1}^{mk} = \langle \mathcal{N}_{\partial,2}^{\Gamma_1} \phi_2^m, \phi_{\partial,1}^k \rangle_{L^2(\Gamma_1, \mathbb{R}^m)}, \quad B_{2,\Gamma_2}^{mg} = \langle \mathcal{N}_{\partial,2}^{\Gamma_2} \phi_2^m, \phi_{\partial,2}^g \rangle_{L^2(\Gamma_2, \mathbb{R}^m)}, \quad (7.117)$$

where $m \in \{1, n_2\}, k \in \{1, n_{\partial,1}\}, g \in \{1, n_{\partial,2}\}$. This solution can be applied to incorporate

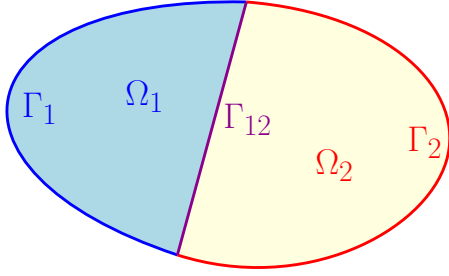
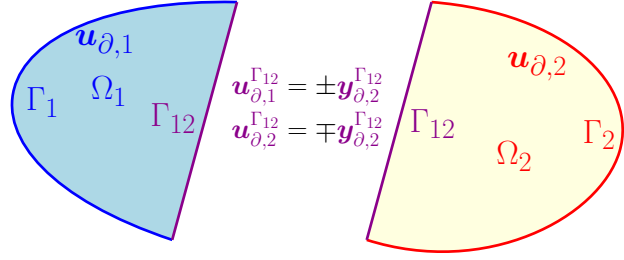


Figure 7.2: Splitting of the domain.

Figure 7.3: Interconnection at the interface Γ_{12} .

all possible mixed boundary conditions in a systematic manner. However the finite element discretization is required to satisfy the inf-sup condition. Simulating the resulting system is harder, since the algebraic constraints pose additional difficulties for the time integration.

7.2.2 Virtual domain decomposition

Since the boundary subsets Γ_1 , Γ_2 are supposed to be connected sets, a single interface is sufficient to decompose the system appropriately. In Fig. 7.2 the splitting of the domain is accomplished by introducing the interface Γ_{12} . This separation line that separates the domain is an additional degree of freedom, as it can be freely drawn. If the finite element method is used for the basis functions, the interface should be drawn so that the meshing of the subdomains does not generate excessively skewed triangles.

The idea is based on the fact that System 7.104 can be split into two systems with uniform causality. The following set of boundary variables is used for Ω_1 subdomain

$$\begin{pmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,1}^{\Gamma_{12}} \end{pmatrix} = \begin{bmatrix} \mathcal{N}_{\partial,1}^{\Gamma_1} & 0 \\ \mathcal{N}_{\partial,1}^{\Gamma_{12}} & 0 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}, \quad \begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,1}^{\Gamma_{12}} \end{pmatrix} = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2}^{\Gamma_1} \\ 0 & \mathcal{N}_{\partial,2}^{\Gamma_{12}} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}. \quad (7.118)$$

Whereas for the Ω_2 subdomain, the boundary variables are

$$\begin{pmatrix} \mathbf{u}_{\partial,2} \\ \mathbf{u}_{\partial,2}^{\Gamma_{12}} \end{pmatrix} = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2}^{\Gamma_2} \\ 0 & \mathcal{N}_{\partial,2}^{\Gamma_{12}} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}, \quad \begin{pmatrix} \mathbf{y}_{\partial,2} \\ \mathbf{y}_{\partial,2}^{\Gamma_{12}} \end{pmatrix} = \begin{bmatrix} \mathcal{N}_{\partial,1}^{\Gamma_1} & 0 \\ \mathcal{N}_{\partial,1}^{\Gamma_{12}} & 0 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}. \quad (7.119)$$

The following relations then hold (cf. Fig. 7.3)

$$\mathbf{u}_{\partial,1}^{\Gamma_{12}} = \pm \mathbf{y}_{\partial,2}^{\Gamma_{12}}, \quad \mathbf{u}_{\partial,2}^{\Gamma_{12}} = \mp \mathbf{y}_{\partial,1}^{\Gamma_{12}}. \quad (7.120)$$

The plus or minus sign is due to the fact that either $\mathcal{N}_{\partial,1}^{\Gamma_{12}}$ or $\mathcal{N}_{\partial,2}^{\Gamma_{12}}$ contains a scalar product with the outgoing normal (or the tangent unit vector) at Γ_{12} (that has opposite direction depending on which subdomain is considered). *These relations are at the core of the methodology, since they state the equivalence between a problem with mixed causalities and the interconnection of two problems with uniform causality.*

To obtain a final system with the desired causality, the weak form has to be carried out separately on each subdomain. In particular, on subdomain Ω_1 the \mathcal{L} operator is integrated by parts, whereas on subdomain Ω_2 the $-\mathcal{L}^*$ operator undergoes the integration by parts. Consequently, on subdomains Ω_1 (Ω_2) the boundary input $\mathbf{u}_{\partial,1}$ ($\mathbf{u}_{\partial,2}$) explicitly appears. Let $L^2(\Omega_*, \mathbb{A})$ be the L^2 space restricted to the subdomain Ω_* , and let $L^2(\Omega_*, \mathbb{B})$ be the restriction of the L^2 space to Ω_* for $* \in \{1, 2\}$. The weak form of the dynamics (7.104a) for the Ω_1 contribution reads

$$\begin{aligned} \langle \mathbf{v}_1, \mathcal{M}_1 \partial_t \mathbf{e}_1 \rangle_{L^2(\Omega_1, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega_1, \mathbb{A})} - \langle \mathbf{v}_1, \mathcal{L}^* \mathbf{e}_2 \rangle_{L^2(\Omega_1, \mathbb{A})} \\ \langle \mathbf{v}_2, \mathcal{M}_2 \partial_t \mathbf{e}_2 \rangle_{L^2(\Omega_1, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega_1, \mathbb{B})} + \langle \mathcal{L}^* \mathbf{v}_2, \mathbf{e}_1 \rangle_{L^2(\Omega_1, \mathbb{A})} + \langle \mathcal{N}_{\partial,2} \mathbf{v}_2, \mathcal{N}_{\partial,1} \mathbf{e}_1 \rangle_{L^2(\partial\Omega_1, \mathbb{R}^m)}. \end{aligned} \quad (7.121)$$

For Ω_2 , we get

$$\begin{aligned} \langle \mathbf{v}_1, \mathcal{M}_1 \partial_t \mathbf{e}_1 \rangle_{L^2(\Omega_2, \mathbb{A})} &= -\langle \mathbf{v}_1, \mathbf{L}^\top \mathbf{e}_2 \rangle_{L^2(\Omega_2, \mathbb{A})} - \langle \mathcal{L} \mathbf{v}_1, \mathbf{e}_2 \rangle_{L^2(\Omega_2, \mathbb{B})} + \langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega_2, \mathbb{R}^m)}, \\ \langle \mathbf{v}_2, \mathcal{M}_2 \partial_t \mathbf{e}_2 \rangle_{L^2(\Omega_2, \mathbb{B})} &= \langle \mathbf{v}_2, \mathbf{L} \mathbf{e}_1 \rangle_{L^2(\Omega_2, \mathbb{B})} + \langle \mathbf{v}_2, \mathcal{L} \mathbf{e}_1 \rangle_{L^2(\Omega_2, \mathbb{B})}. \end{aligned} \quad (7.122)$$

Since $\partial\Omega_1 = \bar{\Gamma}_1 \cup \bar{\Gamma}_{12}$ and $\partial\Omega_2 = \bar{\Gamma}_2 \cup \bar{\Gamma}_{12}$, the boundary terms can be decomposed

$$\begin{aligned} \langle \mathcal{N}_{\partial,2} \mathbf{v}_2, \mathcal{N}_{\partial,1} \mathbf{e}_1 \rangle_{L^2(\partial\Omega_1, \mathbb{R}^m)} &= \langle \mathcal{N}_{\partial,2} \mathbf{v}_2, \mathcal{N}_{\partial,1} \mathbf{e}_1 \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,2} \mathbf{v}_2, \mathcal{N}_{\partial,1} \mathbf{e}_1 \rangle_{L^2(\Gamma_{12}, \mathbb{R}^m)}, \\ &= \langle \mathcal{N}_{\partial,2}^{\Gamma_1} \mathbf{v}_2, \mathcal{N}_{\partial,1}^{\Gamma_1} \mathbf{e}_1 \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,2}^{\Gamma_{12}} \mathbf{v}_2, \mathcal{N}_{\partial,1}^{\Gamma_{12}} \mathbf{e}_1 \rangle_{L^2(\Gamma_{12}, \mathbb{R}^m)}, \\ &= \langle \mathcal{N}_{\partial,2}^{\Gamma_1} \mathbf{v}_2, \mathbf{u}_{\partial,1} \rangle_{L^2(\Gamma_1, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,2}^{\Gamma_{12}} \mathbf{v}_2, \mathbf{u}_{\partial,1}^{\Gamma_{12}} \rangle_{L^2(\Gamma_{12}, \mathbb{R}^m)}. \end{aligned} \quad (7.123)$$

Analogously, for the remaining boundary term we find

$$\langle \mathcal{N}_{\partial,1} \mathbf{v}_1, \mathcal{N}_{\partial,2} \mathbf{e}_2 \rangle_{L^2(\partial\Omega_2, \mathbb{R}^m)} = \langle \mathcal{N}_{\partial,1}^{\Gamma_2} \mathbf{v}_1, \mathbf{u}_{\partial,2} \rangle_{L^2(\Gamma_2, \mathbb{R}^m)} + \langle \mathcal{N}_{\partial,1}^{\Gamma_{12}} \mathbf{v}_1, \mathbf{u}_{\partial,2}^{\Gamma_{12}} \rangle_{L^2(\Gamma_{12}, \mathbb{R}^m)}. \quad (7.124)$$

A Galerkin approximation, analogous to (7.111), is used for each subdomain

$$\begin{aligned} \mathbf{v}_{1,1} &\approx \sum_{i=1}^{n_{1,1}} \phi_{1,1}^i(\mathbf{x}_1) v_{1,1}^i, & \mathbf{x}_1 \in \Omega_1, & \quad \mathbf{v}_{1,2} \approx \sum_{i=1}^{n_{1,2}} \phi_{1,2}^i(\mathbf{x}_2) v_{1,2}^i, & \mathbf{x}_2 \in \Omega_2, \\ \mathbf{v}_{2,1} &\approx \sum_{i=1}^{n_{2,1}} \phi_{2,1}^i(\mathbf{x}_1) v_{2,1}^i, & & \quad \mathbf{v}_{2,2} \approx \sum_{i=1}^{n_{2,2}} \phi_{2,2}^i(\mathbf{x}_2) v_{2,2}^i, & \\ \mathbf{e}_{1,1} &\approx \sum_{i=1}^{n_{1,1}} \phi_{1,1}^i(\mathbf{x}_1) e_{1,1}^i(t), & & \quad \mathbf{e}_{1,2} \approx \sum_{i=1}^{n_{1,2}} \phi_{1,2}^i(\mathbf{x}_2) e_{1,2}^i(t), & \\ \mathbf{e}_{2,1} &\approx \sum_{i=1}^{n_{2,1}} \phi_{2,1}^i(\mathbf{x}_1) e_{2,1}^i(t), & & \quad \mathbf{e}_{2,2} \approx \sum_{i=1}^{n_{2,2}} \phi_{2,2}^i(\mathbf{x}_2) e_{2,2}^i(t). & \end{aligned} \quad (7.125)$$

For the boundary variables, additional terms for the common interface are needed

$$\begin{aligned} \square_{\partial,1} &\approx \sum_{i=1}^{n_{\partial,1}} \phi_{\partial,1}^i(\mathbf{s}_1) \square_{\partial,1}^i(t), \quad \mathbf{s}_1 \in \Gamma_1, & \square_{\partial,1}^{\Gamma_{12}} &\approx \sum_{i=1}^{n_{\partial,12}} \phi_{\partial,12}^i(\mathbf{s}_{12}) \square_{\partial,1}^{i,\Gamma_{12}}(t), \\ & & & \mathbf{s}_{12} \in \Gamma_{12}. \\ \square_{\partial,2} &\approx \sum_{i=1}^{n_{\partial,2}} \phi_{\partial,2}^i(\mathbf{s}_2) \square_{\partial,2}^i(t), \quad \mathbf{s}_2 \in \Gamma_2, & \square_{\partial,2}^{\Gamma_{12}} &\approx \sum_{i=1}^{n_{\partial,12}} \phi_{\partial,12}^i(\mathbf{s}_{12}) \square_{\partial,2}^{i,\Gamma_{12}}(t), \end{aligned} \quad (7.126)$$

where \square stays for v, u, y .

Remark 12 (Choice of the interface basis functions)

Notice that the same basis functions $\phi_{\partial,12}$ are used for both interface variables. This is necessary in order to dispose of the same degrees of freedom for the interconnection.

Replacing approximations 7.111, 7.126 into Eqs. 7.121, 7.123, 7.118, a finite dimensional system for the Ω_1 subdomain is obtained

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\mathcal{M}_1}^{\Omega_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{M}_2}^{\Omega_1} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_{1,1} \\ \dot{\mathbf{e}}_{2,1} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^{\Omega_1 \top} + \mathbf{D}_{-\mathcal{L}^*}^{\Omega_1} \\ \mathbf{D}_0^{\Omega_1} - \mathbf{D}_{-\mathcal{L}^*}^{\Omega_1 \top} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{1,1} \\ \mathbf{e}_{2,1} \end{pmatrix} + \begin{bmatrix} \mathbf{0} & \mathbf{0} \\ \mathbf{B}_{2,\Gamma_1}^{\Omega_1} & \mathbf{B}_{2,\Gamma_{12}}^{\Omega_1} \end{bmatrix} \begin{pmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,1}^{\Gamma_{12}} \end{pmatrix}, \\ \begin{bmatrix} \mathbf{M}_{\partial,1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,12} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,1}^{\Gamma_{12}} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{B}_{2,\Gamma_1}^{\Omega_1 \top} \\ \mathbf{0} & \mathbf{B}_{2,\Gamma_{12}}^{\Omega_1 \top} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{1,1} \\ \mathbf{e}_{2,1} \end{pmatrix}. \end{aligned} \quad (7.127)$$

The mass and interconnection operator matrices are the restrictions to the subdomain of the matrices given in (7.116)

$$\begin{aligned} M_{\mathcal{M}_1}^{\Omega_1,ij} &= \langle \phi_{1,1}^i, \mathcal{M}_1 \phi_{1,1}^j \rangle_{L^2(\Omega_1, \mathbb{A})}, & D_0^{\Omega_1,mj} &= \langle \phi_{2,1}^i, \mathbf{L} \phi_{1,1}^j \rangle_{L^2(\Omega_1, \mathbb{B})}, & i, j &\in \{1, n_{1,1}\}, \\ M_{\mathcal{M}_2}^{\Omega_1,mn} &= \langle \phi_{2,1}^m, \mathcal{M}_2 \phi_{2,1}^n \rangle_{L^2(\Omega_1, \mathbb{B})}, & D_{-\mathcal{L}^*}^{\Omega_1,in} &= \langle \phi_{1,1}^m, -\mathcal{L}^* \phi_{2,1}^n \rangle_{L^2(\Omega_1, \mathbb{A})}, & m, n &\in \{1, n_{2,1}\}. \end{aligned} \quad (7.128)$$

Matrix $\mathbf{M}_{\partial,1}$ is constructed as in Eq. (7.116). Matrix $\mathbf{M}_{\partial,12}$ is similarly built

$$M_{\partial,12}^{lk} = \langle \phi_{\partial,12}^l, \phi_{\partial,12}^k \rangle_{L^2(\Gamma_{12}, \mathbb{R}^m)}, \quad l, k \in \{1, n_{\partial,12}\}. \quad (7.129)$$

The novel matrices $\mathbf{B}_{2,\Gamma_1}^{\Omega_1}, \mathbf{B}_{1,\Gamma_{12}}^{\Omega_1}$ have elements

$$\begin{aligned} B_{2,\Gamma_1}^{\Omega_1,mh} &= \langle \mathcal{N}_{\partial,2}^{\Gamma_1} \phi_{2,1}^m, \phi_{\partial,1}^h \rangle_{L^2(\Gamma_1, \mathbb{R}^m)}, & m &\in \{1, n_{2,1}\}, & h &\in \{1, n_{\partial,1}\}, \\ B_{2,\Gamma_{12}}^{\Omega_1,mk} &= \langle \mathcal{N}_{\partial,2}^{\Gamma_{12}} \phi_{2,1}^m, \phi_{\partial,12}^k \rangle_{L^2(\Gamma_{12}, \mathbb{R}^m)}, & & & k &\in \{1, n_{\partial,12}\}. \end{aligned} \quad (7.130)$$

If instead the approximations are plugged into Eqs. 7.122, 7.124, 7.119, a finite dimensional system for the Ω_2 subdomain is computed

$$\begin{aligned}
\begin{bmatrix} \mathbf{M}_{\mathcal{M}_1}^{\Omega_2} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{M}_2}^{\Omega_2} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_{1,2} \\ \dot{\mathbf{e}}_{2,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^{\Omega_2\top} - \mathbf{D}_{\mathcal{L}}^{\Omega_2\top} \\ \mathbf{D}_0^{\Omega_2} + \mathbf{D}_{\mathcal{L}}^{\Omega_2} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{1,2} \\ \mathbf{e}_{2,2} \end{pmatrix} + \begin{bmatrix} \mathbf{B}_{1,\Gamma_2}^{\Omega_2} & \mathbf{B}_{1,\Gamma_{12}}^{\Omega_2} \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{u}_{\partial,2} \\ \mathbf{u}_{\partial,2}^{\Gamma_{12}} \end{pmatrix}, \\
\begin{bmatrix} \mathbf{M}_{\partial,2} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,12} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,2} \\ \mathbf{y}_{\partial,2}^{\Gamma_{12}} \end{pmatrix} &= \begin{bmatrix} \mathbf{B}_{1,\Gamma_2}^{\Omega_2\top} & \mathbf{0} \\ \mathbf{B}_{1,\Gamma_{12}}^{\Omega_2\top} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{1,2} \\ \mathbf{e}_{2,2} \end{pmatrix}.
\end{aligned} \tag{7.131}$$

1507 The mass and interconnection operator matrices are the restrictions to the subdomain of
 1508 the matrices given in (7.112)

$$\begin{aligned}
M_{\mathcal{M}_1}^{\Omega_2,ij} &= \left\langle \phi_{1,2}^i, \mathcal{M}_1 \phi_{1,2}^j \right\rangle_{L^2(\Omega_2, \mathbb{A})}, \quad D_0^{\Omega_2,mj} = \left\langle \phi_{2,2}^i, \mathbf{L} \phi_{1,2}^j \right\rangle_{L^2(\Omega_2, \mathbb{B})}, \quad i, j \in \{1, n_{1,2}\}, \\
M_{\mathcal{M}_2}^{\Omega_2,mn} &= \left\langle \phi_{2,2}^m, \mathcal{M}_2 \phi_{2,2}^n \right\rangle_{L^2(\Omega_2, \mathbb{B})}, \quad D_{\mathcal{L}}^{\Omega_2,mj} = \left\langle \phi_{2,2}^m, \mathcal{L} \phi_{1,2}^j \right\rangle_{L^2(\Omega_2, \mathbb{B})}, \quad m, n \in \{1, n_{2,2}\}.
\end{aligned} \tag{7.132}$$

1509 Matrix $\mathbf{M}_{\partial,2}$ is constructed as in (7.112). The elements of matrices \mathbf{B}_{1,Γ_2} , $\mathbf{B}_{1,\Gamma_{12}}$ are computed
 1510 as

$$\begin{aligned}
B_{1,\Gamma_2}^{ig} &= \left\langle \mathcal{N}_{\partial,1}^{\Gamma_2} \phi_{1,2}^i, \phi_{\partial,2}^g \right\rangle_{L^2(\Gamma_2)}, \quad i \in \{1, n_{1,2}\}, \quad g \in \{1, n_{\partial,2}\}, \\
B_{1,\Gamma_{12}}^{ik} &= \left\langle \mathcal{N}_{\partial,1}^{\Gamma_{12}} \phi_{1,2}^i, \phi_{\partial,12}^k \right\rangle_{L^2(\Gamma_{12})}, \quad k \in \{1, n_{\partial,12}\}.
\end{aligned} \tag{7.133}$$

1511 Systems (7.127), (7.131) are compactly rewritten as

System (7.127)	System (7.131)
$ \begin{aligned} \mathbf{M}_{\Omega_1} \dot{\mathbf{e}}_{\Omega_1} &= \mathbf{J}_{\Omega_1} \mathbf{e}_{\Omega_1} + \mathbf{B}_{\Gamma_1}^{\Omega_1} \mathbf{u}_{\partial,1} + \mathbf{B}_{\Gamma_{12}}^{\Omega_1} \mathbf{u}_{\partial,1}^{\Gamma_{12}}, \\ \mathbf{M}_{\partial,1} \mathbf{y}_{\partial,1} &= \mathbf{B}_{\Gamma_1}^{\Omega_1\top} \mathbf{e}_{\Omega_1}, \\ \mathbf{M}_{\partial,12} \mathbf{y}_{\partial,1}^{\Gamma_{12}} &= \mathbf{B}_{\Gamma_{12}}^{\Omega_1\top} \mathbf{e}_{\Omega_1}. \end{aligned} \tag{7.134} $ <p>with Hamiltonian $H_{d,1} = \frac{1}{2} \mathbf{e}_{\Omega_1}^\top \mathbf{M}_{\Omega_1} \mathbf{e}_{\Omega_1}$</p>	$ \begin{aligned} \mathbf{M}_{\Omega_2} \dot{\mathbf{e}}_{\Omega_2} &= \mathbf{J}_{\Omega_2} \mathbf{e}_{\Omega_2} + \mathbf{B}_{\Gamma_2}^{\Omega_2} \mathbf{u}_{\partial,2} + \mathbf{B}_{\Gamma_{12}}^{\Omega_2} \mathbf{u}_{\partial,2}^{\Gamma_{12}}, \\ \mathbf{M}_{\partial,2} \mathbf{y}_{\partial,2} &= \mathbf{B}_{\Gamma_2}^{\Omega_2\top} \mathbf{e}_{\Omega_2}, \\ \mathbf{M}_{\partial,12} \mathbf{y}_{\partial,2}^{\Gamma_{12}} &= \mathbf{B}_{\Gamma_{12}}^{\Omega_2\top} \mathbf{e}_{\Omega_2}. \end{aligned} \tag{7.135} $ <p>with Hamiltonian $H_{d,2} = \frac{1}{2} \mathbf{e}_{\Omega_2}^\top \mathbf{M}_{\Omega_2} \mathbf{e}_{\Omega_2}$</p>

1513 To obtain a system with the desired causality, an interconnection is employed to connect
 1514 the two Systems (7.134), (7.135) along the shared boundary Γ_{12} . Given (7.120), the gyrator
 1515 interconnection is computed as

$$\begin{aligned}
\mathbf{u}_{\partial,1}^{\Gamma_{12}} &= \pm \mathbf{y}_{\partial,2}^{\Gamma_{12}} = \pm \mathbf{M}_{\partial,12}^{-1} \mathbf{B}_{\Gamma_{12}}^{\Omega_2\top} \mathbf{e}_{\Omega_2}, \\
\mathbf{u}_{\partial,2}^{\Gamma_{12}} &= \mp \mathbf{y}_{\partial,1}^{\Gamma_{12}} = \mp \mathbf{M}_{\partial,12}^{-1} \mathbf{B}_{\Gamma_{12}}^{\Omega_1\top} \mathbf{e}_{\Omega_1},
\end{aligned} \tag{7.136}$$

1516 The coupling matrix is then defined by

$$\mathbf{C} := \mathbf{B}_{\Gamma_{12}}^{\Omega_1} \mathbf{M}_{\partial,12}^{-1} \mathbf{B}_{\Gamma_{12}}^{\Omega_2\top}. \tag{7.137}$$

1517 Plugging Eq. (7.136) into 7.134, 7.135, the final system with mixed causality is obtained

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\Omega_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\Omega_2} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_{\Omega_1} \\ \dot{\mathbf{e}}_{\Omega_2} \end{pmatrix} &= \begin{bmatrix} \mathbf{J}_{\Omega_1} & \pm \mathbf{C} \\ \mp \mathbf{C}^\top & \mathbf{J}_{\Omega_2} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{\Omega_1} \\ \mathbf{e}_{\Omega_2} \end{pmatrix} + \begin{bmatrix} \mathbf{B}_{\Gamma_1}^{\Omega_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\Gamma_2}^{\Omega_2} \end{bmatrix} \begin{pmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,2} \end{pmatrix}, \\ \begin{bmatrix} \mathbf{M}_{\partial,1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{B}_{\Gamma_1}^{\Omega_1\top} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\Gamma_2}^{\Omega_2\top} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{\Omega_1} \\ \mathbf{e}_{\Omega_2} \end{pmatrix}. \end{aligned} \quad (7.138)$$

1518 The total Hamiltonian is the sum

$$H_d = H_{d,1} + H_{d,2} = \frac{1}{2} \mathbf{e}_{\Omega_1}^\top \mathbf{M}_{\Omega_1} \mathbf{e}_{\Omega_1} + \frac{1}{2} \mathbf{e}_{\Omega_2}^\top \mathbf{M}_{\Omega_2} \mathbf{e}_{\Omega_2}. \quad (7.139)$$

1519 So, the power rate is

$$\begin{aligned} \dot{H}_d &= \mathbf{e}_{\Omega_1}^\top \mathbf{M}_{\Omega_1} \dot{\mathbf{e}}_{\Omega_1} + \mathbf{e}_{\Omega_2}^\top \mathbf{M}_{\Omega_2} \dot{\mathbf{e}}_{\Omega_2}, \\ &= \mathbf{e}_{\Omega_1}^\top \mathbf{J}_{\Omega_1} \mathbf{e}_{\Omega_1} + \mathbf{e}_{\Omega_2}^\top \mathbf{J}_{\Omega_2} \mathbf{e}_{\Omega_2} \pm \mathbf{e}_{\Omega_1}^\top \mathbf{C} \mathbf{e}_{\Omega_2} \mp \mathbf{e}_{\Omega_2}^\top \mathbf{C}^\top \mathbf{e}_{\Omega_1} + \mathbf{e}_{\Omega_1}^\top \mathbf{B}_{\Gamma_1}^{\Omega_1} \mathbf{u}_{\partial,1} + \mathbf{e}_{\Omega_2}^\top \mathbf{B}_{\Gamma_2}^{\Omega_2} \mathbf{u}_{\partial,2}, \\ &= \mathbf{y}_{\partial,1}^\top \mathbf{M}_{\partial,1} \mathbf{u}_{\partial,1} + \mathbf{y}_{\partial,2}^\top \mathbf{M}_{\partial,2} \mathbf{u}_{\partial,2}, \\ &= \hat{\mathbf{y}}_{\partial,1}^\top \mathbf{u}_{\partial,1} + \hat{\mathbf{y}}_{\partial,2}^\top \mathbf{u}_{\partial,2}, \quad \text{where} \quad \hat{\mathbf{y}}_{\partial,1} := \mathbf{M}_{\partial,1} \mathbf{y}_{\partial,1}, \quad \hat{\mathbf{y}}_{\partial,2} := \mathbf{M}_{\partial,2} \mathbf{y}_{\partial,2}. \end{aligned} \quad (7.140)$$

1520 Again this results mimics its corresponding infinite-dimensional (7.106).

1521

1522 This technique allows obtaining a system with the correct causality, but has some draw-
 1523 backs. Suitable finite elements are required for both kinds of discretization detailed in §7.1.1,
 1524 but the two are not always available (see Remark 10). A rigorous numerical convergence anal-
 1525 ysis of this technique appears rather involved. Some cases of mixed conditions, in particular
 1526 conditions on single components of vectors, cannot be handled by this technique. For exam-
 1527 ple, the simply supported condition in beams and plates imposes zero normal component of
 1528 the traction at the boundary. Furthermore two different meshes are required and the intercon-
 1529 nection has to manipulate carefully the degrees of freedom. This makes the implementation
 1530 heavier than the Lagrange multiplier solution §7.2.1.

1531 7.3 Conclusion

1532 In this chapter a universal discretization method for multi-dimensional pHs has been detailed.
 1533 The underlying Assumptions 2, 3 are indeed those that characterize the well-posedness of
 1534 multi-dimensional pHs [Skr19]. For the time being, it has been shown that this technique
 1535 is capable of constructing a finite-dimensional pHs from an infinite-dimensional one. For
 1536 this reason, it is a structure-preserving method. The questions of numerical convergence and
 1537 choice of approximation bases (in this thesis the focus is on the finite element method but
 1538 spectral methods can be employed as well) are addressed in the next chapter, for the linear
 1539 case only.

Numerical convergence study

Aristotle maintained that women have fewer teeth than men; although he was twice married, it never occurred to him to verify this statement by examining his wives' mouths.

The Impact of Science on Society
Bertrand Russell

Contents

8.1	Discretization of the Euler-Bernoulli beam	107
8.1.1	Mixed discretization for the free-free beam	107
8.1.2	Mixed discretization for the clamped-clamped beam	108
8.1.3	Mixed discretization with lower regularity requirement	108
8.2	Plate problems using known mixed finite elements	109
8.2.1	Mindlin plate mixed discretization	109
8.2.2	The Hellan-Herrmann-Johnson scheme for the Kirchhoff plate	112
8.3	Dual mixed discretization of plate problems	113
8.3.1	Dual mixed discretization of the Mindlin plate	113
8.3.2	Dual mixed discretization of the Kirchhoff plate	114
8.4	Numerical experiments	115
8.4.1	Numerical test for the Euler-Bernoulli beam	116
8.4.2	Numerical test for the Mindlin plate	118
8.4.3	Numerical test for the Kirchhoff plate	120
8.5	Conclusion	125



The application of the Partitioned Finite Element leads to finite-dimensional pH systems, that can be discretized using finite elements method. To quantify how well the numerical solution approximates the true one, it is important to estimate the rate of convergence of the finite elements. In this chapter convergence estimates are conjectured for beams and plates systems and numerical experiments are constructed in support to the proposed conjectures.

The first section is consecrated to the Euler-Bernoulli beam. For the discretization of this problem three methodologies are proposed. In this second section of this chapter, pH plate problems are discretized using mixed finite elements. This means that the divergence operator explicitly appears in the weak formulation. In the third part the discretization of plate problem is of dual-mixed type [A.90], meaning that the gradient operator comes out in the weak formulation. The last section gathers all the numerical results.

Remark 13

Homogeneous boundary conditions will be always considered in this chapter. This are enforced weakly or strongly depending on the specific formulation under analysis.

Notations The space of all, symmetric and skew-symmetric 2×2 matrices are denoted by $\mathbb{M}, \mathbb{S}, \mathbb{K}$ respectively. The space of \mathbb{R}^2 vectors is denoted by \mathbb{V} . The symbol $\Omega \subset \mathbb{R}^2$ denotes an open connected set. The standard notation $H^m(\Omega)$ denotes the Sobolev space of square integrable functions with m^{th} derivative in L^2 and norm

$$\|u\|_m^2 = \sum_{|\alpha| \leq m} \|\partial^\alpha u\|_{L^2(\Omega)}^2.$$

The space $H^{\text{Grad}}(\Omega, \mathbb{V})$ is the space of vectors with symmetric gradient in L^2

$$H^{\text{Grad}}(\Omega, \mathbb{V}) = \{\mathbf{u} \in L^2(\Omega, \mathbb{V}) \mid \text{Grad}(\mathbf{u}) \in L^2(\Omega, \mathbb{S})\},$$

and norm

$$\|\mathbf{u}\|_{\text{Grad}}^2 = \|\mathbf{u}\|^2 + \|\text{Grad}(\mathbf{u})\|^2.$$

For $\mathbb{X} \subseteq \mathbb{M}$, let

$$\begin{aligned} H^{\text{div}}(\Omega, \mathbb{V}) &= \{\mathbf{u} \in L^2(\Omega, \mathbb{V}) \mid \text{div}(\mathbf{u}) \in L^2(\Omega)\}, \\ H^{\text{Div}}(\Omega, \mathbb{X}) &= \{\mathbf{U} \in L^2(\Omega, \mathbb{X}) \mid \text{Div}(\mathbf{U}) \in L^2(\Omega; \mathbb{V})\}, \end{aligned}$$

which are Hilbert spaces with the norms

$$\begin{aligned} \|\mathbf{u}\|_{\text{div}}^2 &= \|\mathbf{u}\|_{L^2(\Omega, \mathbb{V})}^2 + \|\text{div}(\mathbf{u})\|_{L^2(\Omega)}^2, \\ \|\mathbf{U}\|_{\text{Div}}^2 &= \|\mathbf{U}\|_{L^2(\Omega, \mathbb{M})}^2 + \|\text{Div}(\mathbf{U})\|_{L^2(\Omega, \mathbb{V})}^2. \end{aligned}$$

Let X be a Hilbert space, and t_f a positive real number. We denote by $L^\infty([0, t_f]; X)$ or $L^\infty(X)$ the space of functions $f : [0, t_f] \rightarrow X$ for which the time-space norm $\|\cdot\|_{L^\infty([0, t_f]; X)}$ satisfies

$$\|f\|_{L^\infty([0, t_f]; X)} = \text{ess sup}_{t \in [0, t_f]} \|f\|_X < \infty.$$

The notation

$$\|u - u_h\| \lesssim h^k$$

means $\|u^{\text{ex}} - u_h\| \leq Ch^k$. The constant $C(u, t_f)$ depends only on the exact solution u and on the final time t_f .

8.1 Discretization of the Euler-Bernoulli beam

In this section the Euler-Bernoulli beam is discretized using conforming finite elements for three different formulations:

- the weak formulation (7.65) corresponding (in absence of inputs) to a free-free beam;
- the weak formulation (7.71) corresponding (for zero inputs) to a clamped-clamped beam;
- a novel weak formulation allowing to use H^1 conforming finite elements (both lines of system (7.64) are integrated by parts once).

8.1.1 Mixed discretization for the free-free beam

The weak formulation (7.65) seeks

$$\{e_w, e_\kappa\} \in H^2(\Omega) \times L^2(\Omega)$$

so that

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= - \langle \partial_{xx} v_w, e_\kappa \rangle_{L^2(\Omega)}, & \forall v_w \in H^2(\Omega), \\ \langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \rangle_{L^2(\Omega)} &= \langle v_\kappa, \partial_{xx} e_w \rangle_{L^2(\Omega)}, & \forall v_\kappa \in L^2(\Omega). \end{aligned} \quad (8.1)$$

Given an interval mesh \mathcal{I}_h with elements E , the following conforming family of finite elements is selected for this problem

$$\begin{aligned} H_{h, \text{HerDG1}}^2(\Omega) &= \{w_h \in H^2(\Omega) \mid \forall E \in \mathcal{I}_h, w_h|_E \in \text{Her}\}, \\ L_{h, \text{HerDG1}}^2(\Omega) &= \{M_h \in L^2(\Omega) \mid \forall E \in \mathcal{I}_h, M_h|_E \in \text{DG}_1\}, \end{aligned} \quad (8.2)$$

where Her denotes the cubic Hermite polynomials and DG is the discontinuous Galerkin finite element [LMW⁺12, Chapter 3]. Since for the discretization of the static problem the use of Hermite polynomial provides optimal convergence of order 2 [Hug12], it seems logical to conjecture the following error estimates:

Conjecture 4 (Convergence of the HerDG1 elements)

Assuming a smooth solution for problem (8.1), the following error estimates hold

$$\|e_w - e_w^h\|_{L^\infty(H^2(\Omega))} \lesssim h^2, \quad \|e_\kappa - e_\kappa^h\|_{L^\infty(L^2(\Omega))} \lesssim h^2. \quad (8.3)$$

8.1.2 Mixed discretization for the clamped-clamped beam

The weak formulation (7.71) seeks

$$\{e_w, e_\kappa\} \in L^2(\Omega) \times H^2(\Omega)$$

so that

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= \langle v_w, -\partial_{xx} e_\kappa \rangle_{L^2(\Omega)}, & \forall v_w \in L^2(\Omega), \\ \langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \rangle_{L^2(\Omega)} &= \langle \partial_{xx} v_\kappa, e_w \rangle_{L^2(\Omega)}, & \forall v_\kappa \in H^2(\Omega). \end{aligned} \quad (8.4)$$

The following family of finite elements, defined on an interval mesh \mathcal{I}_h with elements E , is chosen for this problem

$$\begin{aligned} H_{h,\text{DG1Her}}^2(\Omega) &= \{w_h \in L^2(\Omega) \mid \forall E \in \mathcal{I}_h, w_h|_E \in \text{DG}_1\}, \\ L_{h,\text{DG1Her}}^2(\Omega) &= \{M_h \in H^2(\Omega) \mid \forall E \in \mathcal{I}_h, M_h|_E \in \text{Her}\}, \end{aligned} \quad (8.5)$$

Since the formulation is symmetrical to (8.1), the following error estimates is conjectured:

Conjecture 5 (Convergence of the DG1Her elements)

Assuming a smooth solution for problem (8.4), the following error estimates hold

$$\|e_w - e_w^h\|_{L^\infty(L^2(\Omega))} \lesssim h^2, \quad \|e_\kappa - e_\kappa^h\|_{L^\infty(H^2(\Omega))} \lesssim h^2. \quad (8.6)$$

8.1.3 Mixed discretization with lower regularity requirement

Consider the weak formulation (7.64). If both lines are integrated by parts the following weak form is obtained: find

$$\{e_w, e_\kappa\} \in H^1(\Omega) \times H^1(\Omega)$$

so that

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= \langle \partial_x v_w, \partial_x e_\kappa \rangle_{L^2(\Omega)}, & \forall v_w \in H^1(\Omega), \\ \langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \rangle_{L^2(\Omega)} &= -\langle \partial_x v_\kappa, \partial_x e_w \rangle_{L^2(\Omega)}, & \forall v_\kappa \in H^1(\Omega). \end{aligned} \quad (8.7)$$

The following family of finite elements is employed for this problem

$$\begin{aligned} H_{h,\text{CGCG}}^2(\Omega) &= \{w_h \in H^1(\Omega) \mid \forall E \in \mathcal{I}_h, w_h|_E \in \text{CG}_k\}, \\ L_{h,\text{CGCG}}^2(\Omega) &= \{M_h \in H^1(\Omega) \mid \forall E \in \mathcal{I}_h, M_h|_E \in \text{CG}_k\}, \end{aligned} \quad (8.8)$$

where CG is the continuous Galerkin finite element [LMW⁺12, Chapter 3]. The following error estimates are conjectured:

Conjecture 6 (Convergence of the CGCG elements)

Assuming a smooth solution for problem (8.4), the following error estimates hold

$$\|e_w - e_w^h\|_{L^\infty(H^1(\Omega))} \lesssim h^k, \quad \|e_\kappa - e_\kappa^h\|_{L^\infty(H^1(\Omega))} \lesssim h^k. \quad (8.9)$$

8.2 Plate problems using known mixed finite elements

First we focused on the Mindlin plate. This problem is a combination of plane wave dynamics and plane elastodynamics. A classical mixed formulation requires H^{div} conforming elements both for the wave dynamics [BJT00] and elastodynamics [BJT01, AL14]. To obtain a suitable discretization of the Mindlin problem one has to combine the two. Additional difficulties arising from the symmetry of the stress tensor that can be imposed strongly [BJT01] or weakly [AL14].

We then discuss the mixed discretization of the Kirchhoff plate problem. For this problem the non-conforming Hellan-Herrmann-Johnson scheme [Hel67, Her67, Joh73] (HHJ) is the most successful. However, it has been analyzed under generic boundary conditions in the static case only [BR90].

8.2.1 Mindlin plate mixed discretization

We consider the weak formulation (7.98), reported in Section §7.1.2. We present first a scheme that enforces the symmetry of the momenta tensor strongly and then a scheme in which the symmetry of the momenta tensor is imposed weakly.

8.2.1.1 Mindlin plate with strongly imposed symmetry

The weak formulation with strongly imposed symmetry seeks

$$\{e_w, \mathbf{e}_\theta, \mathbf{E}_\kappa, \mathbf{e}_\gamma\} \in L^2(\Omega) \times L^2(\Omega, \mathbb{V}) \times H^{\text{Div}}(\Omega, \mathbb{S}) \times H^{\text{div}}(\Omega, \mathbb{V})$$

so that

$$\begin{aligned} \langle v_w, \rho b \dot{e}_w \rangle_{L^2(\Omega)} &= \langle v_w, \text{div } \mathbf{e}_\gamma \rangle_{L^2(\Omega)} + (v_w, f), & \forall v_w \in L^2(\Omega), \\ \langle \mathbf{v}_\theta, I_\theta \dot{\mathbf{e}}_\theta \rangle_{L^2(\Omega, \mathbb{V})} &= \langle \mathbf{v}_\theta, \text{Div } \mathbf{E}_\kappa + \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{V})} + \langle \mathbf{v}_\theta, \boldsymbol{\tau} \rangle_{L^2(\Omega, \mathbb{V})}, & \forall \mathbf{v}_\theta \in L^2(\Omega, \mathbb{V}), \\ \langle \mathbf{V}_\kappa, \mathbf{C}_b \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{S})} &= - \langle \text{Div } \mathbf{V}_\kappa, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{S})}, & \forall \mathbf{V}_\kappa \in H^{\text{Div}}(\Omega, \mathbb{S}), \\ \langle \mathbf{v}_\gamma, C_s \dot{\mathbf{e}}_\gamma \rangle_{L^2(\Omega, \mathbb{V})} &= - \langle \text{div } \mathbf{v}_\gamma, e_w \rangle_{L^2(\Omega)} + \langle \mathbf{v}_\gamma, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{V})}, & \forall \mathbf{v}_\gamma \in H^{\text{div}}(\Omega, \mathbb{V}). \end{aligned} \quad (8.10)$$

The plate thickness is indicated by the b symbol, to avoid confusion with the average

mesh size indicated by h . A distributed force f and torque $\boldsymbol{\tau}$ are considered in order to find a manufactured solution for this problem.

Obtaining stable finite elements that embed the symmetry of the stress tensor for the elastodynamics problem has proven to be a difficult task [AW02]. The easiest construction is the one presented in [BJT01]. This finite element solution can be implemented in FIREDRAKE [RHM⁺17] thanks to the extruded mesh functionality [MBM⁺16]. The main disadvantage is that this scheme requires the domain to be given by a union of rectangles, as the mesh elements have to be square. However, this allows constructing a simple element for the momenta tensor. Given a regular mesh \mathcal{R}_h with square elements Q the following spaces are introduced as discretization spaces

$$\begin{aligned} L^2_{h,\text{BJT}}(\Omega) &= \{w_h \in L^2(\Omega) \mid \forall Q \in \mathcal{R}_h, w_h|_Q \in \text{DG}_{k-1}\}, \\ L^2_{h,\text{BJT}}(\Omega, \mathbb{V}) &= \{\boldsymbol{\theta}_h \in L^2(\Omega, \mathbb{V}) \mid \forall Q \in \mathcal{R}_h, \boldsymbol{\theta}_h|_Q \in (\text{DG}_{k-1})^2\}, \\ H^{\text{Div}}_{h,\text{BJT}}(\Omega, \mathbb{S}) &= \{m_{12} \in H^1(\Omega) \mid \forall Q \in \mathcal{R}_h, m_{12}|_Q \in \text{CG}_k\} \\ &\quad \cup \{(m_{11}, m_{22}) \in H^{\text{div}}(\Omega, \mathbb{V}) \mid \forall Q \in \mathcal{R}_h, (m_{11}, m_{22})|_Q \in \text{BDM}_k\}, \\ H^{\text{div}}_{h,\text{BJT}}(\Omega, \mathbb{V}) &= \{\mathbf{q}_h \in H^{\text{div}}(\Omega, \mathbb{V}) \mid \forall Q \in \mathcal{R}_h, \mathbf{q}_h|_Q \in \text{BDM}_k\}, \end{aligned} \tag{8.11}$$

where BDM are the Brezzi-Douglas-Marini elements [BDM85]. BTJ stands for the initials of the authors in [BJT00, BJT01]. Combining the results of both papers, the following error estimates are conjectured.

Conjecture 7 (Convergence rate for the BJT elements)

Assuming a smooth solution to problem (8.10), the following error estimates hold

$$\begin{aligned} \|e_w - e_w^h\|_{L^\infty(L^2(\Omega))} &\lesssim h^k, & \|\mathbf{E}_\kappa - \mathbf{E}_\kappa^h\|_{L^\infty(L^2(\Omega, \mathbb{S}))} &\lesssim h^k, \\ \|e_\theta - e_\theta^h\|_{L^\infty(L^2(\Omega, \mathbb{V}))} &\lesssim h^k, & \|e_\gamma - e_\gamma^h\|_{L^\infty(L^2(\Omega, \mathbb{V}))} &\lesssim h^k. \end{aligned} \tag{8.12}$$

8.2.1.2 Mindlin plate with weakly imposed symmetry

To impose the symmetry of the momenta tensor weakly, we modify the third equation in (8.10). The symmetric gradient can be rewritten as

$$\text{Grad } \boldsymbol{\theta} = \text{grad } \boldsymbol{\theta} - \text{skw}(\text{grad } \boldsymbol{\theta}),$$

where $\text{skw}(\mathbf{A}) = (\mathbf{A} - \mathbf{A}^\top)/2$ is the skew-symmetric part of matrix \mathbf{A} . Consider the weak form of the third equation in (8.10) before applying the integration by parts

$$\langle \mathbf{V}_\kappa, \mathcal{C}_b \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{M})} = \langle \mathbf{V}_\kappa, \text{Grad } \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{M})}.$$

Introducing the new variable $\mathbf{E}_r = \text{skw}(\text{grad } \boldsymbol{\theta})$, then $\{\mathbf{e}_\theta, \mathbf{E}_\kappa, \mathbf{E}_r\} \in L^2(\Omega, \mathbb{V}) \times H^{\text{Div}}(\Omega, \mathbb{M}) \times L^2(\Omega, \mathbb{K})$ satisfy (remind that $\mathbf{e}_\theta = \partial_t \boldsymbol{\theta}$)

$$\begin{aligned} \langle \mathbf{V}_\kappa, \mathbf{C}_b \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{M})} &= \langle \mathbf{V}_\kappa, \text{grad } \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{M})} - \langle \mathbf{V}_\kappa, \dot{\mathbf{E}}_r \rangle_{L^2(\Omega, \mathbb{M})}, \\ &= -\langle \text{Div } \mathbf{V}_\kappa, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{V})} - \langle \mathbf{V}_\kappa, \dot{\mathbf{E}}_r \rangle_{L^2(\Omega, \mathbb{M})}. \end{aligned}$$

The momenta tensor is weakly symmetric if

$$\langle \mathbf{V}_r, \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{M})},$$

or equivalently

$$\langle \mathbf{V}_r, \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{M})}.$$

1657 The weak formulation then consists in finding

$$\{e_w, \mathbf{e}_\theta, \mathbf{E}_\kappa, \mathbf{e}_\gamma, \mathbf{E}_r\} \in L^2(\Omega) \times L^2(\Omega, \mathbb{V}) \times H^{\text{Div}}(\Omega, \mathbb{M}) \times H^{\text{div}}(\Omega, \mathbb{V}) \times L^2(\Omega, \mathbb{K}).$$

1658 so that

$$\begin{aligned} \langle v_w, \rho b \dot{e}_w \rangle_{L^2(\Omega)} &= \langle v_w, \text{div } \mathbf{e}_\gamma \rangle_{L^2(\Omega)} + (v_w, f), & \forall v_w \in L^2(\Omega), \\ \langle \mathbf{v}_\theta, I_\theta \dot{\mathbf{e}}_\theta \rangle_{L^2(\Omega, \mathbb{V})} &= \langle \mathbf{v}_\theta, \text{Div } \mathbf{E}_\kappa + \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{V})} + \langle \mathbf{v}_\theta, \boldsymbol{\tau} \rangle_{L^2(\Omega, \mathbb{V})}, & \forall \mathbf{v}_\theta \in L^2(\Omega, \mathbb{V}), \\ \langle \mathbf{V}_\kappa, \mathbf{C}_b \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{M})} &= -\langle \text{Div } \mathbf{V}_\kappa, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{V})} - \langle \mathbf{V}_\kappa, \dot{\mathbf{E}}_r \rangle_{L^2(\Omega, \mathbb{M})}, & \forall \mathbf{V}_\kappa \in H^{\text{Div}}(\Omega, \mathbb{M}), \\ \langle \mathbf{v}_\gamma, C_s \dot{\mathbf{e}}_\gamma \rangle_{L^2(\Omega, \mathbb{V})} &= -\langle \text{div } \mathbf{v}_\gamma, e_w \rangle_{L^2(\Omega)} + \langle \mathbf{v}_\gamma, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{V})}, & \forall \mathbf{v}_\gamma \in H^{\text{div}}(\Omega, \mathbb{V}), \\ \langle \mathbf{V}_r, \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{M})} &= 0 & \forall \mathbf{V}_r \in L^2(\Omega, \mathbb{K}). \end{aligned} \tag{8.13}$$

1659 Consider a regular triangulation \mathcal{T}_h with elements T . The following spaces are used as
1660 discretization spaces

$$\begin{aligned} L_{h, \text{AFW}}^2(\Omega) &= \{w_h \in L^2(\Omega) \mid \forall T \in \mathcal{T}_h, w_h|_T \in \text{DG}_{k-1}\}, \\ L_{h, \text{AFW}}^2(\Omega, \mathbb{V}) &= \{\boldsymbol{\theta}_h \in L^2(\Omega, \mathbb{V}) \mid \forall T \in \mathcal{T}_h, \boldsymbol{\theta}_h|_T \in (\text{DG}_{k-1})^2\}, \\ H_{h, \text{AFW}}^{\text{Div}}(\Omega, \mathbb{M}) &= \{(m_{11}, m_{12}) \in H^{\text{div}}(\Omega, \mathbb{V}) \mid \forall T \in \mathcal{T}_h, (m_{11}, m_{12})|_T \in \text{BDM}_k\} \\ &\quad \cup \{(m_{21}, m_{22}) \in H^{\text{div}}(\Omega, \mathbb{V}) \mid \forall T \in \mathcal{T}_h, (m_{21}, m_{22})|_T \in \text{BDM}_k\}, \\ H_{h, \text{AFW}}^{\text{div}}(\Omega, \mathbb{V}) &= \{\mathbf{q}_h \in H^{\text{div}}(\Omega, \mathbb{V}) \mid \forall T \in \mathcal{T}_h, \mathbf{q}_h|_T \in \text{RT}_{k-1}\}, \\ L_{h, \text{AFW}}^2(\Omega, \mathbb{K}) &= \{\mathbf{R}_h \in L^2(\Omega, \mathbb{K}) \mid \forall T \in \mathcal{T}_h, \mathbf{R}_h|_T \in \text{DG}_{k-1}\}, \end{aligned} \tag{8.14}$$

1661 where RT stands for the Raviart-Thomas elements [RT77]. The acronym AFW stands for
1662 Arnold-Falk-Winther, that proposed this kind on discretization for static elasticity [AFW07].
1663 A convergence analysis for the general elastodynamics problem with weak symmetry in the
1664 $L^\infty(L^2)$ norm is detailed [AL14]. A convergence study for the wave equation with mixed

finite elements in the $L^\infty(L^2)$ is presented in [Gev88]. Combining the results of the two, the following error estimates are conjectured:

Conjecture 8 (Rate of convergence for the AFW elements)

Assuming a smooth solution to problem (8.13), the following error estimates hold

$$\begin{aligned} \|e_w - e_w^h\|_{L^\infty(L^2(\Omega))} &\lesssim h^k, & \|\mathbf{E}_\kappa - \mathbf{E}_\kappa^h\|_{L^\infty(L^2(\Omega, \mathbb{M}))} &\lesssim h^k, & \|\mathbf{E}_r - \mathbf{E}_r^h\|_{L^\infty(L^2(\Omega, \mathbb{K}))} &\lesssim h^k. \\ \|e_\theta - e_\theta^h\|_{L^\infty(L^2(\Omega, \mathbb{V}))} &\lesssim h^k, & \|\mathbf{e}_\gamma - \mathbf{e}_\gamma^h\|_{L^\infty(L^2(\Omega, \mathbb{V}))} &\lesssim h^k, \end{aligned} \quad (8.15)$$

8.2.2 The Hellan-Herrmann-Johnson scheme for the Kirchhoff plate

For the Kirchhoff plate, the Hellan-Herrmann-Johnson scheme [Hel67, Her67, Joh73] (HHJ) can be used to obtain a structure-preserving discretization. Given the non conforming nature of this scheme, it is necessary to first introduce the discrete functional spaces and state the problem directly in discrete form. The illustration of the method follows closely [AW19]. The vertical displacement is approximated using continuous Lagrange polynomials, while the momenta tensor is discretized using the HHJ element

$$\begin{aligned} W_h &= \{w_h \in H_0^1(\Omega) \mid \forall T \in \mathcal{T}_h, w_h|_T \in P_k\}, \\ S_h &= \{\mathbf{M}_h \in L^2(\Omega, \mathbb{S}) \mid \forall T \in \mathcal{T}_h, \mathbf{M}_h|_T \in (P_{k-1})_{\text{sym}}^{2 \times 2}, \\ &\quad \mathbf{M}_h \text{ is normal-normal continuous across elements}\}. \end{aligned} \quad (8.16)$$

The normal to normal continuity means that if two triangles T_1, T_2 share a common edge E then $\mathbf{n}^\top(\mathbf{M}_h|_{T_1})\mathbf{n} = \mathbf{n}^\top(\mathbf{M}_h|_{T_2})\mathbf{n}$ on E . Taking system (5.35) and multiplying the first equation by $v_w \in W_h$ and integrating over a triangle

$$\begin{aligned} -\langle v_w, \text{div Div } \mathbf{E}_\kappa \rangle_{L^2(T)} &= \langle \nabla v_w, \text{Div } \mathbf{E}_\kappa \rangle_{L^2(T, \mathbb{V})} - \langle v_w, \text{Div } \mathbf{E}_\kappa \cdot \mathbf{n} \rangle_{L^2(\partial T)}, \\ &= -\langle \text{Hess } v_w, \mathbf{E}_\kappa \rangle_{L^2(T, \mathbb{S})} - \langle v_w, \text{Div } \mathbf{E}_\kappa \cdot \mathbf{n} \rangle_{L^2(\partial T)}, \\ &\quad + \langle \partial_s v_w, \mathbf{s}^\top \mathbf{E}_\kappa \mathbf{n} \rangle_{L^2(\partial T)} + \langle \partial_n v_w, \mathbf{n}^\top \mathbf{E}_\kappa \mathbf{n} \rangle_{L^2(\partial T)}. \end{aligned}$$

A double integration by parts is applied to get the final equation. For the last term a summation over all triangles provides

$$\sum_{T \in \mathcal{T}_h} \langle \partial_n v_w, \mathbf{n}^\top \mathbf{E}_\kappa \mathbf{n} \rangle_{L^2(\partial T)} = \sum_{E \in \mathcal{E}_h} \langle \llbracket \partial_n v_w \rrbracket, \mathbf{n}^\top \mathbf{E}_\kappa \mathbf{n} \rangle_{L^2(E)},$$

where \mathcal{E}_h is the set of all edges belonging to the mesh and $\llbracket a \rrbracket = a|_{T_1} + a|_{T_2}$ denotes the jump of a function across shared edges. For a boundary edge it is simply the value of the function. For the other terms, it holds

$$\langle v_w, \text{Div } \mathbf{E}_\kappa \cdot \mathbf{n} \rangle_{L^2(\partial T)} = 0, \quad \langle \partial_s v_w, \mathbf{s}^\top \mathbf{E}_\kappa \mathbf{n} \rangle_{L^2(\partial T)} = 0,$$

1679 since v_w is continuous across the edge boundaries and the normal switches sign. We are now
 1680 in a position to state the final weak form. Given the bilinear form

$$d_h(v_w, \mathbf{E}_\kappa) := - \sum_{T \in \mathcal{T}_h} \langle \text{Hess } v_w, \mathbf{E}_\kappa \rangle_{L^2(T, \mathbb{S})} + \sum_{E \in \mathcal{E}_h} \left\langle \llbracket \partial_n v_w \rrbracket, \mathbf{n}^\top \mathbf{E}_\kappa \mathbf{n} \right\rangle_{L^2(E)},$$

1681 find $(e_w, \mathbf{E}_\kappa) \in W_h \times S_h$ such that

$$\begin{aligned} \langle v_w, \rho b \dot{e}_w \rangle_{L^2(\Omega)} &= +d_h(v_w, \mathbf{E}_\kappa) + \langle v_w, f \rangle_{L^2(\Omega)}, & v_w &\in W_h, \\ \langle \mathbf{V}_\kappa, \mathbf{C}_b \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{S})} &= -d_h(e_w, \mathbf{V}_\kappa), & \mathbf{V}_\kappa &\in S_h. \end{aligned} \quad (8.17)$$

1682 For the associated static problem, under the hypothesis of smooth solutions, optimal
 1683 convergence of order $O(k)$ for $w \in H^1$ and $\mathbf{M} \in L^2$ has been established. So, it is natural to
 1684 conjecture the following result for the dynamic problem:

1685 **Conjecture 9** (Convergence of the HHJ elements)

1686 *Assuming a smooth solution for problem (8.17), the following error estimates hold*

$$\|e_w - e_w^h\|_{L^\infty(H^1(\Omega))} \lesssim h^k, \quad \|\mathbf{E}_\kappa - \mathbf{E}_\kappa^h\|_{L^\infty(L^2(\Omega, \mathbb{S}))} \lesssim h^k. \quad (8.18)$$

1687 8.3 Dual mixed discretization of plate problems

1688 In this section the discretization of the Kirchhoff and Mindlin plates is no-more a classical
 1689 mixed discretization. The application of PFEM to the other partition of the system provides
 1690 a discretization in which the grad and Grad operators appear.

1691 8.3.1 Dual mixed discretization of the Mindlin plate

First of all we construct a family of finite elements capable of discretizing problem (7.90), that seeks

$$\{e_w, \mathbf{e}_\theta, \mathbf{E}_\kappa, \mathbf{e}_\gamma\} \in H^1(\Omega) \times H^{\text{Grad}}(\Omega, \mathbb{V}) \times L^2(\Omega, \mathbb{S}) \times L^2(\Omega, \mathbb{V})$$

1692 so that

$$\begin{aligned} \langle v_w, \rho h \partial_t e_w \rangle_{L^2(\Omega)} &= - \langle \text{grad } v_w, \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)}, & \forall v_w &\in H^1(\Omega), \\ \langle \mathbf{v}_\theta, I_\theta \partial_t \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} &= - \langle \text{Grad } \mathbf{v}_\theta, \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} + \langle \mathbf{v}_\theta, \mathbf{e}_\gamma \rangle_{L^2(\Omega)}, & \forall \mathbf{v}_\theta &\in H^{\text{Grad}}(\Omega, \mathbb{V}), \\ \langle \mathbf{V}_\kappa, \mathbf{C}_b \partial_t \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} &= \langle \mathbf{V}_\kappa, \text{Grad } \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})}, & \forall \mathbf{V}_\kappa &\in L^2(\Omega, \mathbb{S}), \\ \langle \mathbf{v}_\gamma, C_s \partial_t \mathbf{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)} &= \langle \mathbf{v}_\gamma, \text{grad } e_w \rangle_{L^2(\Omega, \mathbb{R}^2)} - \langle \mathbf{v}_\gamma, \mathbf{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)}, & \forall \mathbf{v}_\gamma &\in L^2(\Omega, \mathbb{V}). \end{aligned} \quad (8.19)$$

1693 Consider a regular triangulation \mathcal{T}_h with elements T . The following conforming family of
 1694 finite elements is used to the weak formulation (8.19) (see also [CF05] for a similar construction

for the elastodynamics problem)

$$\begin{aligned}
H_{h,\text{CGDG}}^1(\Omega) &= \{w_h \in H^1(\Omega) \mid \forall T \in \mathcal{T}_h, w_h|_T \in \text{CG}_k\}, \\
H_{h,\text{CGDG}}^{\text{Grad}}(\Omega, \mathbb{R}^2) &= \{\boldsymbol{\theta}_h \in H^{\text{Grad}}(\Omega, \mathbb{R}^2) \mid \forall T \in \mathcal{T}_h, \boldsymbol{\theta}_h|_T \in (\text{CG}_k)^2\}, \\
L_{h,\text{CGDG}}^2(\Omega, \mathbb{S}) &= \{\mathbf{M}_h \in L^2(\Omega, \mathbb{S}) \mid \forall T \in \mathcal{T}_h, \mathbf{M}_h|_T \in (\text{DG}_{k-1})_{\text{sym}}^{2 \times 2}\}, \\
L_{h,\text{CGDG}}^2(\Omega, \mathbb{R}^2) &= \{\mathbf{q}_h \in L^2(\Omega, \mathbb{R}^2) \mid \forall T \in \mathcal{T}_h, \mathbf{q}_h|_T \in (\text{DG}_{k-1})^2\}.
\end{aligned} \tag{8.20}$$

To approximate spaces $H_h^1(\Omega)$, $H_h^{\text{Grad}}(\Omega, \mathbb{R}^2)$ Lagrange polynomials of order k are selected. For spaces $L_h^2(\Omega, \mathbb{S})$, $L_h^2(\Omega, \mathbb{R}^2)$ Discontinuous Galerkin polynomials of order $k-1$ are employed. This selection of finite elements can be seen as a standard discretization of the problem combined with a reduced integration of the stress tensor and shear vector. For this reason, the following conjecture on the error estimates is proposed.

Conjecture 10 (Convergence of the CGDG elements)

Assuming a smooth solution to problem (8.19), the following error estimates hold

$$\begin{aligned}
\|e_w - e_w^h\|_{L^\infty(H^1(\Omega))} &\lesssim h^k, & \|\mathbf{E}_\kappa - \mathbf{E}_\kappa^h\|_{L^\infty(L^2(\Omega))} &\lesssim h^k, \\
\|e_\theta - e_\theta^h\|_{L^\infty(H^{\text{Grad}}(\Omega, \mathbb{R}^2))} &\lesssim h^k, & \|e_\gamma - e_\gamma^h\|_{L^\infty(L^2(\Omega, \mathbb{S}))} &\lesssim h^k.
\end{aligned} \tag{8.21}$$

8.3.2 Dual mixed discretization of the Kirchhoff plate

The Kirchhoff plate weak formulation (7.80) seeks

$$\{e_w, \mathbf{E}_\kappa\} \in H^2(\Omega) \times L^2(\Omega, \mathbb{S})$$

so that

$$\begin{aligned}
\langle v_w, \rho h \partial_t e_w \rangle_{L^2(\Omega)} &= - \langle \text{Hess } v_w, \mathbf{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})}, & \forall v_w \in H^2(\Omega), \\
\langle \mathbf{V}_\kappa, \mathbf{C}_b \partial_t \mathbf{V}_\kappa \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})} &= \langle \mathbf{V}_\kappa, \text{Hess } e_w \rangle_{L^2(\Omega, \mathbb{R}_{\text{sym}}^{2 \times 2})}. & \forall \mathbf{V}_\kappa \in L^2(\Omega, \mathbb{S}).
\end{aligned} \tag{8.22}$$

Given a regular triangulation \mathcal{T}_h with elements T , the following family of finite elements is conforming to the weak formulation (8.22)

$$\begin{aligned}
H_{h,\text{BellDG3}}^2(\Omega) &= \{w_h \in H^2(\Omega) \mid \forall T \in \mathcal{T}_h, w_h|_T \in \text{Bell}\}, \\
L_{h,\text{BellDG3}}^2(\Omega, \mathbb{S}) &= \{\mathbf{M}_h \in L^2(\Omega, \mathbb{S}) \mid \forall T \in \mathcal{T}_h, \mathbf{M}_h|_T \in (\text{DG}_3)_{\text{sym}}^{2 \times 2}\},
\end{aligned} \tag{8.23}$$

where Bell stands for the Bell element [Bel69]. No conjectured error estimates are proposed to this problem. As it will be shown in §8.4.3, the results obtained with this element are of difficult interpretation.

Remark 14

Thanks to a general approach for transforming finite elements [Kir18], H^2 conforming elements have been implemented in the FIREDRAKE library. Therefore, for the discretization of

the H^2 space, the Argyris element [AFS68] is another valuable possibility. Unfortunately, the strong imposition of boundary conditions is not possible in FIREDRAKE at the present time [KM19, Sec. 3.2]. Because of the simpler structure and ordering of its degrees of freedom, the Bell element has been privileged over the Argyris one for the convergence study. In Chap. 9 the Argyris element will be employed imposing weakly the boundary conditions.

8.4 Numerical experiments

In this section numerical test cases are used to verify the conjectured orders of convergence for the two problems. Upon discretization, cf. Section §7.1.2, the weak formulations (8.1), (8.4), (8.7) (Euler Bernoulli beam), (8.10), (8.19) (Mindlin plate), and (8.17) (8.22) (Kirchhoff plate) assume the form

$$\underbrace{\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix}}_{\mathbf{M}} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \end{pmatrix} = \underbrace{\begin{bmatrix} \mathbf{0} & \mathbf{D} \\ -\mathbf{D}^\top & \mathbf{0} \end{bmatrix}}_{\mathbf{J}} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{pmatrix} \mathbf{f} \\ \mathbf{0} \end{pmatrix}.$$

The mass matrix \mathbf{M} is symmetric and positive definite. In case of weak enforcement of the symmetry (8.13) the final system reads

$$\underbrace{\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 & \mathbf{A}_\lambda^\top \\ \mathbf{0} & \mathbf{A}_\lambda & \mathbf{0} \end{bmatrix}}_{\mathbf{M}} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \\ \dot{\lambda} \end{pmatrix} = \underbrace{\begin{bmatrix} \mathbf{0} & \mathbf{D} & \mathbf{0} \\ -\mathbf{D}^\top & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix}}_{\mathbf{J}} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \lambda \end{pmatrix} + \begin{pmatrix} \mathbf{f} \\ \mathbf{0} \\ \mathbf{0} \end{pmatrix}.$$

where \mathbf{A}_λ is the matrix obtained by discretization of $\langle \mathbf{V}_r, \dot{\mathbf{E}}_\kappa \rangle_{L^2(\Omega, \mathbb{M})}$. Because of the presence of the Lagrange multiplier, the mass matrix \mathbf{M} is symmetric and indefinite, giving rise to a saddle point problem. The numerical solution of this kind of problems is notoriously much harder than that of positive definite ones [BGL05]. The FIREDRAKE library [RHM⁺17] is used to generate the matrices. To integrate the equations in time a Crank-Nicholson scheme has been used, for all simulations. The time step is set to $\Delta t = h/10$ to have a lower impact of the time discretization error with respect to the spatial error. The final time is set to one $t_f = 1[\text{s}]$ for all simulations. To compute the $L^\infty(X)$ space-time dependent norm the discrete norm $L_{\Delta t}^\infty(X)$ is used

$$\|\cdot\|_{L^\infty(X)} \approx \|\cdot\|_{L_{\Delta t}^\infty(X)} = \max_{t \in t_i} \|\cdot\|_X,$$

where t_i are the discrete simulation instants.

8.4.1 Numerical test for the Euler-Bernoulli beam

We consider the following exact solution for the Euler-Bernoulli beam under simply supported boundary conditions

$$w^{\text{ex}} = \sin(\pi x/L) \sin(t), \quad \Omega = \{0, L\}. \quad (8.24)$$

The corresponding pH exact solution are then

$$\begin{aligned} e_w^{\text{ex}} &= \sin(\pi x/L) \cos(t), & e_w^{\text{ex}}|_{\partial\Omega} &= 0, \\ e_\kappa^{\text{ex}} &= -EI (\pi/L)^2 \sin(\pi x/L) \sin(t), & e_\kappa^{\text{ex}}|_{\partial\Omega} &= 0. \end{aligned} \quad (8.25)$$

The numerical values used for the simulations are reported in Tab. 8.1.

Beam parameters				
ρ	A	E	I	L
5600 [kg/m ³]	50 [mm ²]	[136 GPa]	4.16 [mm ⁴]	1 m

Table 8.1: Physical parameters for the Euler Bernoulli beam.

Results for the HerDG1 elements 8.2 The results are reported in Fig. 8.1 and Table B.2. The conjectured error estimates (8.3) are fulfilled.

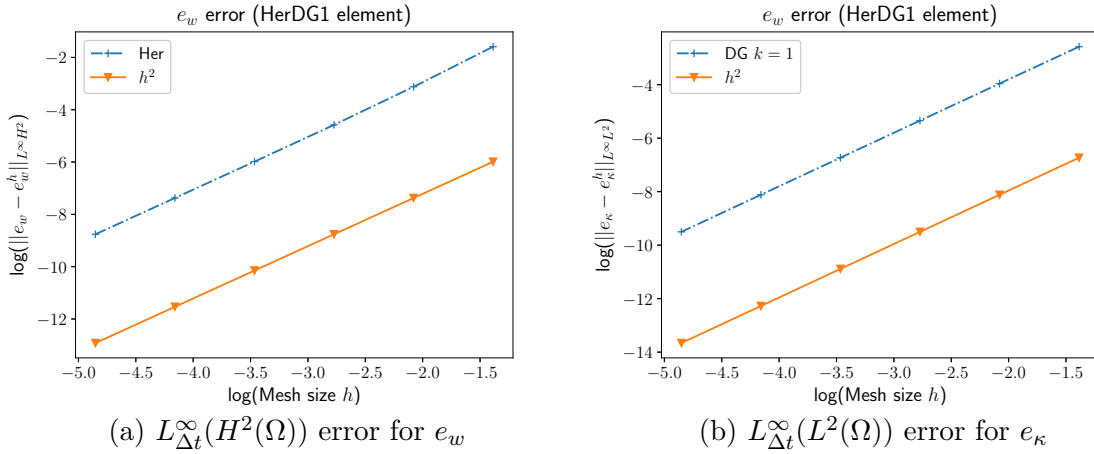


Figure 8.1: Error for the Euler Bernoulli beam (HerDG1 elements).

Results for the DG1Her elements 8.5 The results, reported in Fig. 8.2 and Table B.1, satisfy the predicted error (8.6).

Results for the CGCG elements 8.8 The results, reported in Fig. 8.3 and Tables B.3, B.4, B.5, verify the conjectured error (8.9).

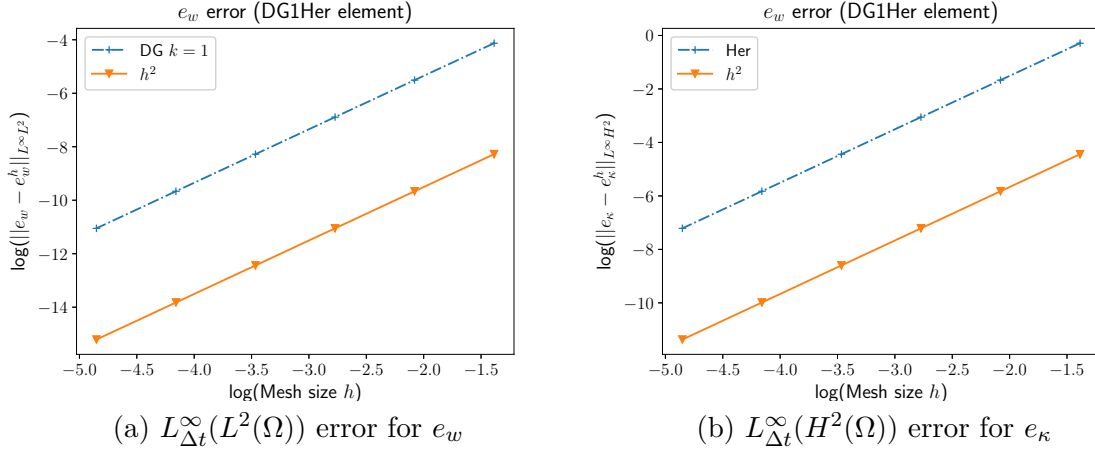


Figure 8.2: Error for the Euler Bernoulli beam (DG1Her elements).

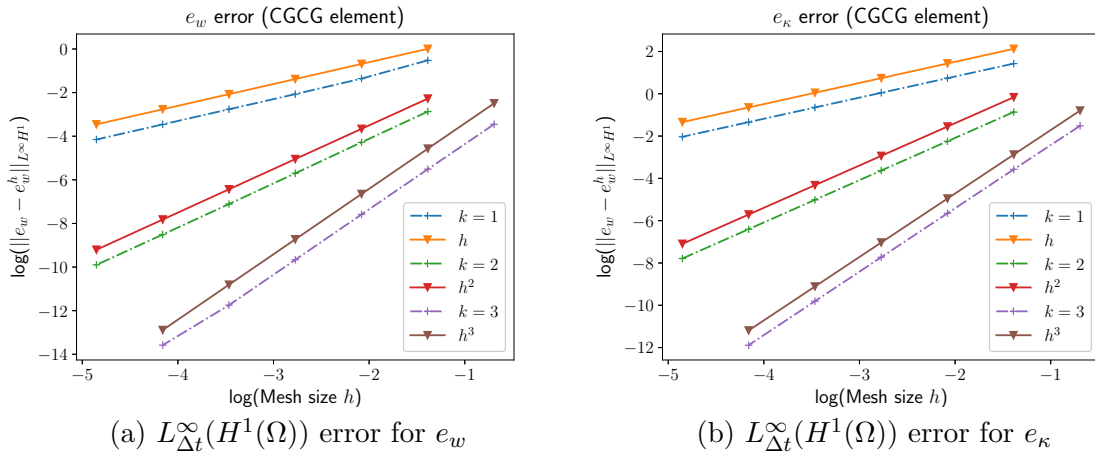


Figure 8.3: Error for the Euler Bernoulli beam (CGCG elements).

8.4.2 Numerical test for the Mindlin plate

To validate the method first we test a finite element combinations on an analytic solution. Constructing an analytical solution for a vibrating Mindlin plate is far from trivial. Therefore, the solution for the static case [BadVMR13] is exploited.

Consider a distributed static force given by

$$f_s(x, y) = \frac{E_Y}{12(1 - \nu^2)} \{12y(y-1)(5x^2 - 5x + 1) \\ \times [2y^2(y-1)2 + x(x-1)(5y^2 - 5y + 1)] + 12x(x-1) \\ \times (5y^2 - 5y + 1)[2x^2(x-1)2 + y(y-1)(5x^2 - 5x + 1)]\}.$$

The static displacement and rotation are given by

$$w_s(x, y) = \frac{1}{3}x^3(x-1)^3y^3(y-1)^3 - \frac{2b^2}{5(1-\nu)}[y^3(y-1)^3x(x-1)(5x^2 - 5x + 1). \\ \theta_s(x, y) = \left(\frac{y^3(y-1)^3}{x^3(x-1)^3} \frac{x^2(x-1)^2(2x-1)}{y^2(y-1)^2(2y-1)} \right)$$

The static solution solves the following problem defined on the square domain $\Omega = (0, 1) \times (0, 1)$ under clamped boundary condition:

$$\begin{aligned} 0 &= \operatorname{div} \mathbf{q}_s + f_s, & \mathcal{D}_b^{-1} \mathbf{M}_s &= \operatorname{Grad} \boldsymbol{\theta}_s, & w_s|_{\partial\Omega} &= 0, \\ 0 &= \operatorname{Div} \mathbf{M}_s + \mathbf{q}_s, & D_s^{-1} \mathbf{q}_s &= \operatorname{grad} w_s - \boldsymbol{\theta}_s, & \boldsymbol{\theta}_s|_{\partial\Omega} &= 0. \end{aligned} \quad (8.26)$$

Given the linear nature of the system a solution for the dynamic problem is found by multiplying the static solution by a time dependent term. For simplicity a sinus function is chosen

$$w_d(x, y, t) = w_s(x, y) \sin(t), \quad \boldsymbol{\theta}_d(x, y, t) = \boldsymbol{\theta}_s(x, y) \sin(t).$$

Appropriate forcing terms have to be introduced to compensate the inertial accelerations. The force and torque in the dynamical case become

$$f_d = f_s \sin(t) + \rho b \partial_{tt} w_d, \quad \boldsymbol{\tau}_d = \frac{\rho b^3}{12} \partial_{tt} \boldsymbol{\theta}_d.$$

For the port-Hamiltonian system the unknowns are the linear and angular velocities, the momenta tensor and the shear force. The exact solution and boundary conditions are thus given by

$$\begin{aligned} e_w^{\text{ex}} &= w_s(x, y) \cos(t), & \mathbf{E}_\kappa^{\text{ex}} &= \mathcal{D}_b \operatorname{Grad} \boldsymbol{\theta}_d, & e_w^{\text{ex}}|_{\partial\Omega} &= 0, \\ e_\theta^{\text{ex}} &= \boldsymbol{\theta}_s(x, y) \cos(t), & e_\gamma^{\text{ex}} &= D_s(\operatorname{grad} w_d - \boldsymbol{\theta}_d), & e_\theta^{\text{ex}}|_{\partial\Omega} &= 0. \end{aligned} \quad (8.27)$$

Variables $(e_w^{\text{ex}}, e_\theta^{\text{ex}}, \mathbf{E}_\kappa^{\text{ex}}, e_\gamma^{\text{ex}})$ under excitations $(f_d, \boldsymbol{\tau}_d)$ solve problem (7.86a). The solution being smooth, the conjectures 7 and 8 should hold. The numerical values of the physical parameters are reported in Table 8.2.

Plate parameters				
E	ρ	ν	K_{sh}	b
1 [Pa]	1 [kg/m ³]	0.3	5/6	0.1 [m]

Table 8.2: Physical parameters for the Mindlin plate.

1756 **Results for the mixed strong symmetry formulation (BTJ elements (8.11))** The
 1757 weak form (8.10) and its corresponding finite elements (8.11) was implemented using FIRE-
 1758 DRAKE extruded mesh functionality [MBM⁺16]. A direct solver based on an LU preconditioner
 1759 is used. In Fig. 8.4 and Tables B.6, B.7, B.8 the errors for $(e_w, e_\theta, E_\kappa, e_\gamma)$ are reported.
 1760 As one can notice, the conjectured error estimates (8.12) are respected for all variables.

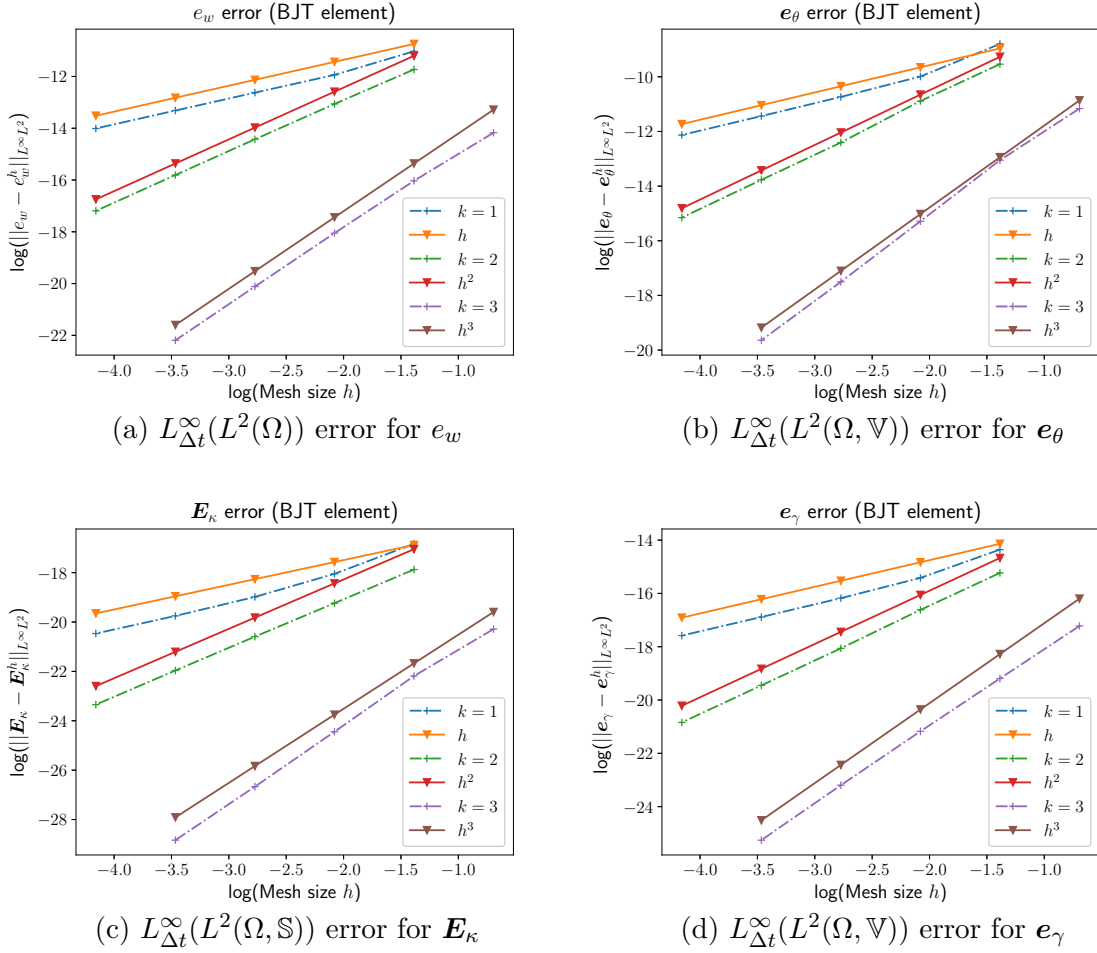


Figure 8.4: Error for the clamped Mindlin plate (BJT elements).

1761 **Results for the mixed weak symmetry formulation (AFW elements (8.14))** For-
 1762 mulation (8.13) and its element (8.14) are considered here. A direct solver fails for high order
 1763 cases (i.e. $k = 3$). For this reason a generalized minimal residual method GMRES [SS86]

is used with restart number of iterations equal to 100. In Fig. 8.5 and Tables B.9, B.10, B.11 the errors for variables $(e_w, e_\theta, \mathbf{E}_\kappa, e_\gamma)$ are reported. The errors for $(e_w, e_\theta, e_\gamma)$ respect the conjectured result (8.15). Variable \mathbf{E}_κ exhibit a superconvergence phenomenon for the case $k = 1$. In [AL14] no numerical study was carried out for the case $k = 1$. The BDM elements might be responsible for such superconvergence. The convergence order of $(\mathbf{E}_\kappa, e_\gamma)$ deteriorates for $k = 3$ for the finest mesh. This must be linked to errors due to the underlying large saddle-point problem. Indeed in [AL14] an hybridization method is used to transform the saddle-point problem into a positive definite one. The results for the Lagrange multiplier is reported in Fig. 8.5e and Table B.12. For this variable an order 2 of convergence is observed for all cases.

Results for dual mixed formulation (CGDG elements (8.20)) For this formulation have to imposed strongly on e_w, e_θ . A direct solver based on an LU preconditioner is used. In Fig. 8.6 and Tables B.13 the errors are reported. Conjecture 10 is verified for this test.

8.4.3 Numerical test for the Kirchhoff plate

The weak form (8.17) and the finite elements (8.16) are considered. The HHJ elements were included in FENICS and FIREDRAKE thanks to the contribution of Lizao Li [Li18]. Two numerical tests are performed to verify these elements. Both tests are solved using a direct solver with an LU preconditioner.

8.4.3.1 Simply supported test

An analytical solution for simply supported Kirchhoff plates is readily available. Consider the following solution of problem (5.20) under simply supported conditions on a square unitary domain $\Omega = (0, 1) \times (0, 1)$

$$w^{\text{ex}}(x, y, t) = \sin(\pi x) \sin(\pi y) \sin(t), \quad (x, y) \in \Omega.$$

The forcing term is given by

$$f = (4D\pi^4 - \rho b) \sin(\pi x) \sin(\pi y) \sin(t), \quad D = \frac{E_Y b^3}{12(1 - \nu^2)}.$$

The corresponding variables in the port-Hamiltonian frame work are

$$e_w^{\text{ex}} = \partial_t w^{\text{ex}}, \quad \mathbf{E}_\kappa^{\text{ex}} = \mathcal{D} \nabla^2 w^{\text{ex}},$$

under simply supported boundary conditions

$$e_w|_{\partial\Omega} = 0, \quad \mathbf{E}_\kappa : (\mathbf{n} \otimes \mathbf{n})|_{\partial\Omega} = 0.$$

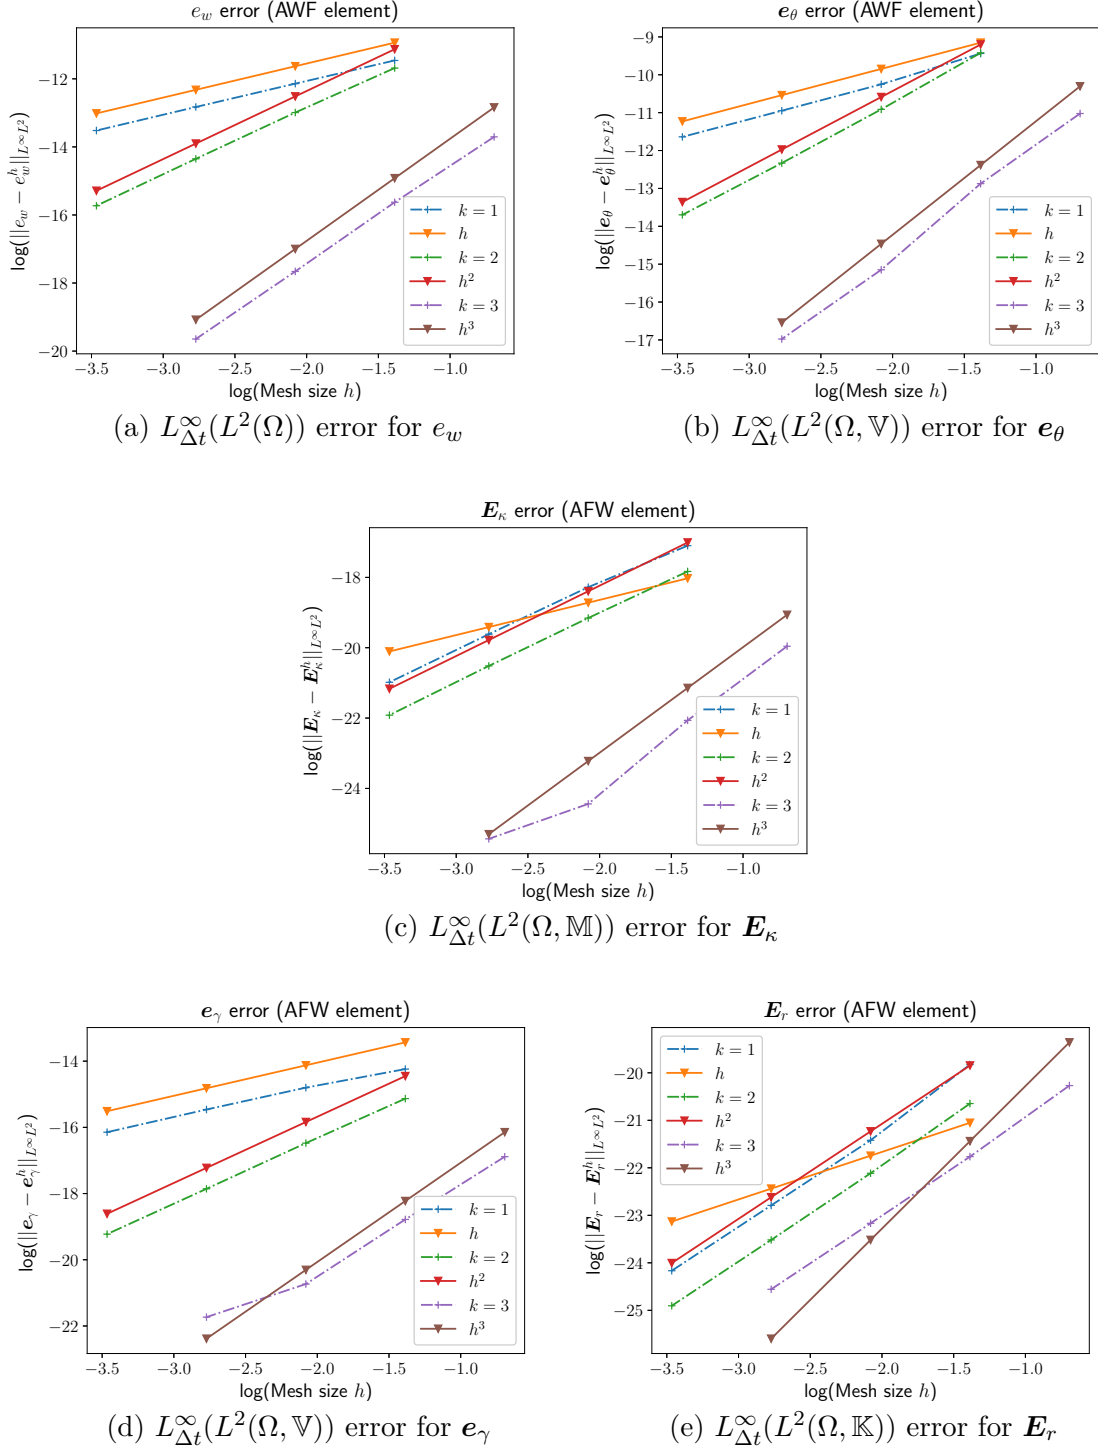


Figure 8.5: Error for the clamped Mindlin plate (AFW elements).

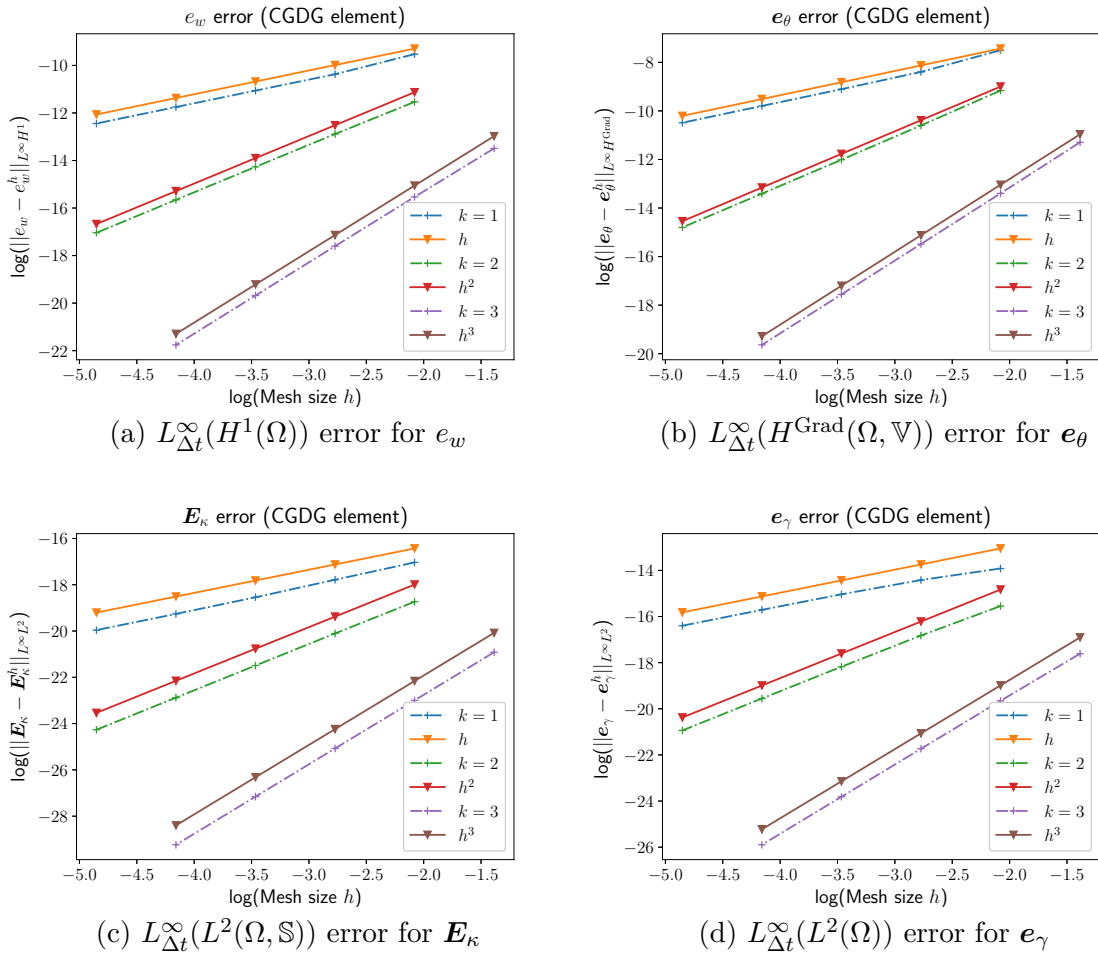


Figure 8.6: Error for the clamped Mindlin plate (CGDG elements).

Variables $(e_w^{\text{ex}}, \mathbf{E}_\kappa^{\text{ex}})$ under excitation f solve problem (5.35). The physical parameters used in simulation are reported in Table 8.3.

Plate parameters			
E	ρ	ν	b
136 [GPa]	5600 [kg/m ³]	0.3	0.001 [m]

Table 8.3: Physical parameters for the Kirchhoff plate.

Results for the HHJ elements (8.16) Results are shown in Fig. 8.7 and Tables B.16, B.17 and B.18. The conjectured error estimates are respected.

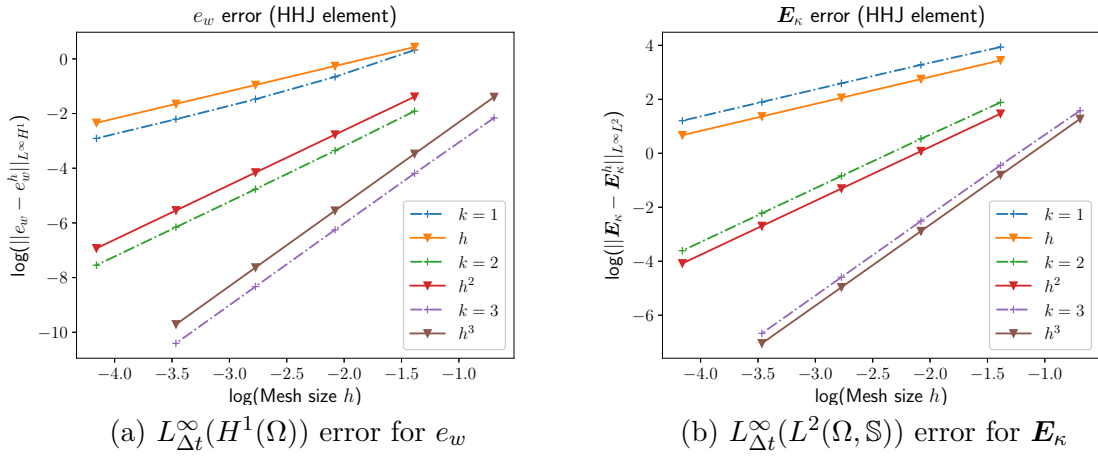


Figure 8.7: Error for the simply supported Kirchhoff plate (HHJ elements).

Results for the dual mixed formulation (BellDG3 elements) The results are reported in Fig. 8.8 and Tab. B.19. The error is computed in the $L^\infty(H^2(\Omega))$ norm for e_w and in the $L^\infty(L^2(\Omega, \mathbb{S}))$ norm for \mathbf{E}_κ . The convergence of the proposed elements is higher than linear, with a rate approaching 1.50 for the finest meshes. It is difficult to interpret this rate of convergence with respect to known convergence results. In particular the convergence rate for the Bell element (measured in the H^2 norm) for the classical biharmonic problem is 3 [Cia88]. The proposed method is not as performing as a standard discretization of the biharmonic problem

8.4.3.2 Mixed boundary conditions (CSFS)

We retrieve the manufactured solution for the static case from [RZ18]. Consider a square plate $\Omega = (-1, 1) \times (-1, 1)$ with simply supported top and bottom boundary, clamped left

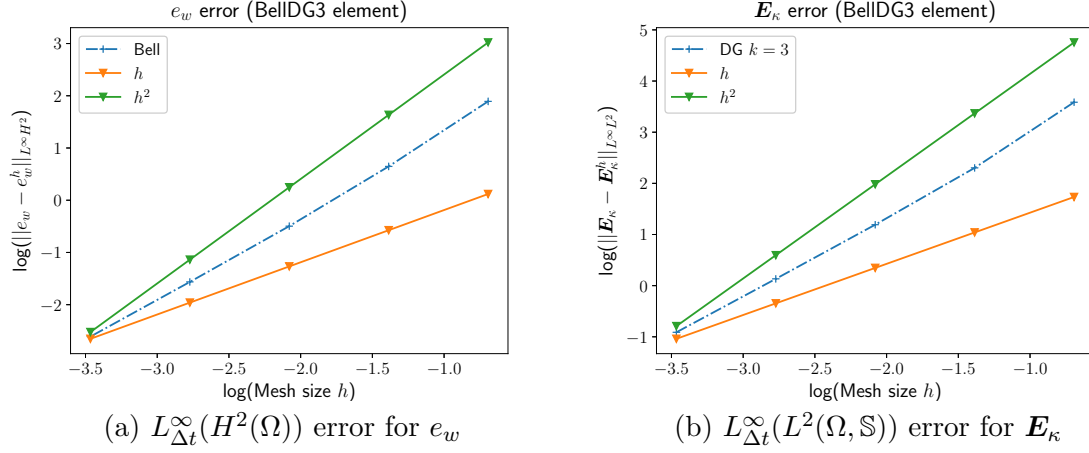


Figure 8.8: Error for the SSSS Kirchhoff plate (BellDG3 elements).

boundary and free right boundary. The stiffness tensor is the identity

$$\mathcal{D}_b = \text{Id}.$$

The density ρ and thickness b are the same as in 8.3. The static load is given by

$$f_s = 4\pi \sin(\pi x) \sin(\pi y).$$

The exact static solution is given by

$$w_s(x, y) = [(c_1 + c_2 x) \cosh(\pi x) + (c_3 + c_4 x) \sinh(\pi x) + \sin(\pi x)] \sin(\pi y).$$

The coefficient are then computed depending on the boundary conditions. For the considered case (CSFS) it is obtained

$$\begin{aligned} c_1 &= -2 \frac{\sinh(\pi) - 3 \sinh(3\pi) + \pi[4\pi \sinh(\pi) + 7 \cosh(\pi) - 3 \cosh(3\pi)]}{5 + 8\pi^2 + 3 \cosh(4\pi)}, \\ c_2 &= -\frac{8\pi[2\pi \sinh(\pi) + \cosh(\pi)]}{5 + 8\pi^2 + 3 \cosh(4\pi)}, \\ c_3 &= \frac{10 \cosh(\pi) + 6 \cosh(\pi) + 16\pi[\sinh(\pi) + \pi \cosh(\pi)]}{5 + 8\pi^2 + 3 \cosh(4\pi)}, \\ c_4 &= \frac{2\pi(5 \sinh(\pi) - 3 \sinh(3\pi) + 4\pi \cosh(\pi))}{5 + 8\pi^2 + 3 \cosh(4\pi)} \end{aligned}$$

The dynamical solution is constructed as in Sec. §8.4.2, meaning that a the static solution is multiplied by a sinusoidal function in time

$$w_d(x, y) = w_s(x, y) \sin(t).$$

The dynamical force is then given by

$$f_d(x, y, t) = f_s(x, y) \sin(t) + \rho b \partial_{tt} w_d$$

For the port-Hamiltonian system the exact solution are thus given by

$$e_w^{\text{ex}} = w_s(x, y) \cos(t), \quad \mathbf{E}_\kappa^{\text{ex}} = \mathcal{D}_b \text{ Grad } \boldsymbol{\theta}_d. \quad (8.28)$$

The boundary conditions read

$$\begin{array}{cccc} C & S & F & S \\ e_w^{\text{ex}}|_{x=-1} = 0, & e_w^{\text{ex}}|_{y=-1} = 0, & \partial_x E_{\kappa,xx} + \partial_y E_{\kappa,xy}|_{x=1} = 0, & e_w^{\text{ex}}|_{y=1} = 0, \\ \partial_x e_w^{\text{ex}}|_{x=-1} = 0, & E_{\kappa,yy}|_{y=-1} = 0, & E_{\kappa,xx}|_{x=1} = 0. & E_{\kappa,yy}|_{y=1} = 0. \end{array} \quad (8.29)$$

Variables $(e_w^{\text{ex}}, \mathbf{E}_\kappa^{\text{ex}})$ under excitations f_d solve problem (7.77a).

Results for the HHJ elements (8.16) The results are reported in Fig. 8.9 and Tables B.20, B.21, B.22. Conjecture 9 is verified for all orders.

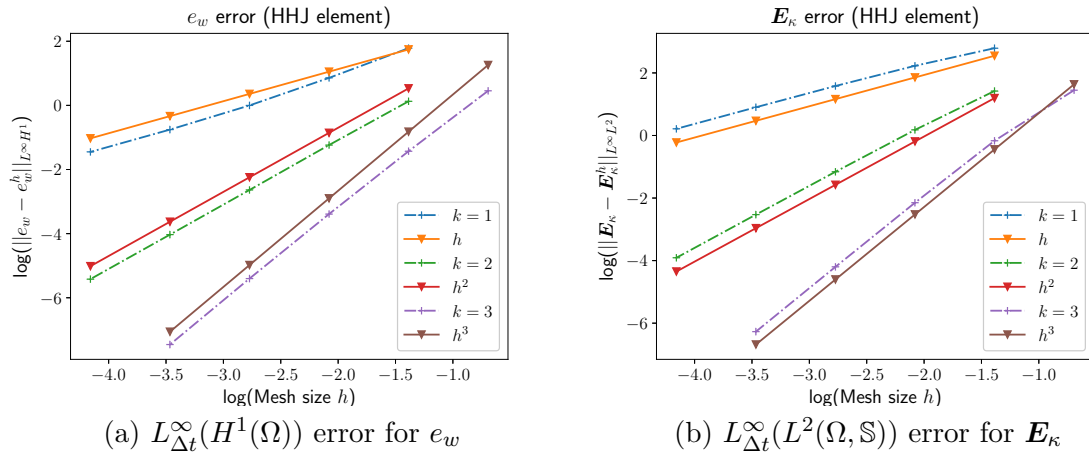


Figure 8.9: Error for the CSFS Kirchhoff plate (HHJ elements)

Results for the dual mixed formulation (BellDG3 elements) The results are reported in Fig. 8.10 and Tab. B.23. The error is computed in the $L^\infty(H^2(\Omega))$ norm for e_w and in the $L^\infty(L^2(\Omega, \mathbb{S}))$ norm for \mathbf{E}_κ . The convergence rate stays around 1.50 (as for the SSSS test).

8.5 Conclusion

In this chapter, the link between mixed finite element method and pH flexible structured has been studied. It was shown that existing and non-standard elements can be used to achieve

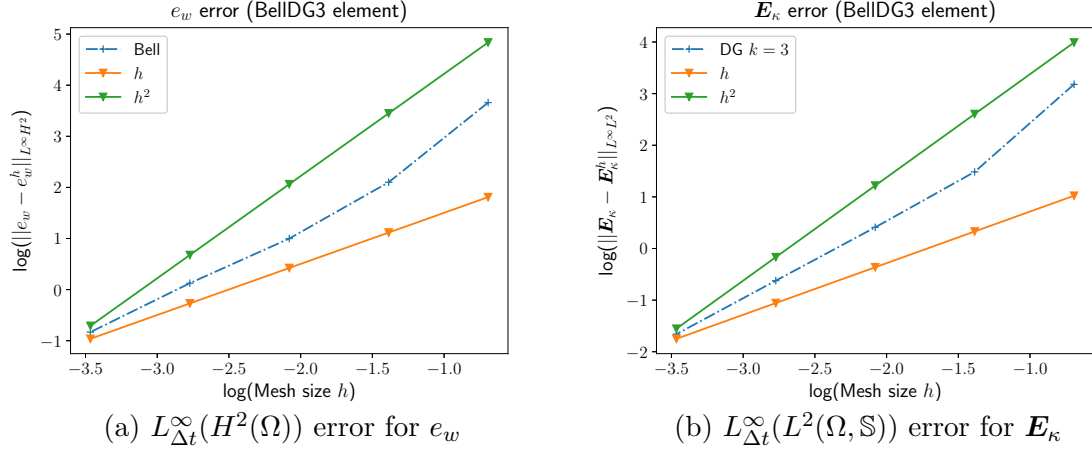


Figure 8.10: Error for the CSFS Kirchhoff plate (BellDG3 elements).

a structure-preserving discretization of the models under consideration. Apart for the dual discretization of the Kirchhoff plate, error estimates conjectures have been formulated. The numerical examples seem to confirm such conjectures. However a rigorous error analysis is still to be done.

Since the pH framework provides a powerful description of boundary control systems, it is important that numerical methods be capable of handling generic boundary conditions. Concerning this problem, the mixed discretization of Kirchhoff plate poses additional difficulties [BR90]. A promising methodology is detailed in [RZ18], but the dynamical case has not been considered yet.

Numerical applications

The most obvious characteristic of science is its application: the fact that, as a consequence of science, one has a power to do things. And the effect this power has had need hardly be mentioned. The whole industrial revolution would almost have been impossible without the development of science.

Richard Feynman
The Meaning of It All: Thoughts of a Citizen-Scientist

Contents

9.1	Boundary stabilization	128
9.1.1	Cantilever Kirchhoff plate	128
9.1.2	Irrotational shallow water equations	130
9.2	Mixed boundary conditions enforcement	135
9.2.1	Motion planning of a thin beam	135
9.2.2	Vibroacoustics under mixed boundary conditions	136
9.3	Thermoelastic wave propagation	143
9.4	Modal analysis of plates	143



The proposed finite element discretization can be employed for different numerical applications. The chapter is organized as follows:

- a boundary stabilization problem for the Kirchhoff plate and for the irrotational shallow water equations is presented in Sec. §9.1;
- Sec. §9.2 presents a comparison of the Lagrange multiplier 7.2.1 and the virtual domain decomposition method 7.2.2 for the enforcement of mixed boundary conditions;
- a thermoelastic problem for which an analytic solution is available is illustrated in Sec. §9.3.

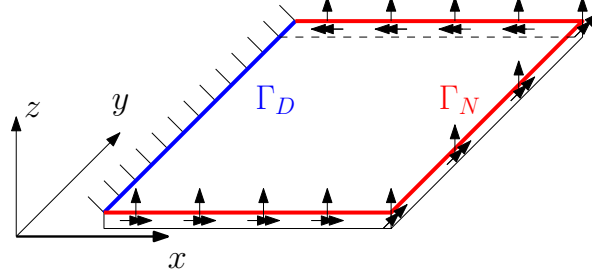


Figure 9.1: Cantilever plate subjected to a control forces on the lateral sides.

9.1 Boundary stabilization

In this section, we consider the boundary stabilization of a cantilever Kirchhoff plate of the irrotational shallow water equations. For pHs a simple proportional gain assures asymptotic system of the system thanks to the LaSalle' invariance principle [DMSB09, chapter 6, proposition 6.2]. This can be used to achieve stabilization of the undeformed configuration of the Kirchhoff plate. For the shallow water equation a reference is also added to stabilizes the system around a certain fluid height.

9.1.1 Cantilever Kirchhoff plate

Consider the problem (illustrated in Fig. 9.1)

$$\begin{bmatrix} \rho h & 0 \\ \mathbf{0} & \mathbf{c}_b \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div} \operatorname{Div} \\ \operatorname{Hess} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \mathbf{E}_\kappa \end{pmatrix} \quad (x, y) \in \Omega = [0, 1] \times [0, 1]$$

subjected to the following Dirichlet homogeneous conditions

$$\begin{aligned} \partial_t e_w|_{\Gamma_D} &= 0, \\ \partial_x e_w|_{\Gamma_D} &= 0, \end{aligned} \quad \Gamma_D = \{x = 0\},$$

and Neumann boundary control

$$\begin{aligned} u_{\partial, q} &= \tilde{q}_n|_{\Gamma_N} = -\mathbf{n} \cdot \operatorname{Div} \mathbf{E}_\kappa - \partial_s(\mathbf{E}_\kappa : (\mathbf{n} \otimes \mathbf{s}))|_{\Gamma_N}, \\ u_{\partial, m} &= m_{nn}|_{\Gamma_N} = \mathbf{E}_\kappa : (\mathbf{n} \otimes \mathbf{n})|_{\Gamma_N}, \end{aligned} \quad \Gamma_N = \{y = 0 \cup x = 1 \cup y = 1\}.$$

The corresponding boundary outputs read

$$\begin{aligned} y_{\partial, q} &= e_w|_{\Gamma_N}, \\ y_{\partial, m} &= \partial_n e_w|_{\Gamma_N}. \end{aligned}$$

The initial conditions (compatible with the constraints) are given by

$$e_w(x, y, 0) = x^2, \quad \mathbf{E}_\kappa(x, y, 0) = \mathbf{0}.$$

The following control law asymptotically stabilizes the system (cf. [Lag89])

$$\begin{aligned} u_q &= -k_q e_w|_{\Gamma_N} = -k_q y_{\partial,q}, & k_q &> 0, \\ u_m &= -k_m \partial_n e_w|_{\Gamma_N} = -k_m y_{\partial,m}, & k_m &> 0. \end{aligned} \quad (9.1)$$

The discretization is performed as in (7.82). A structured mesh with 6 elements for side is used. Variables e_w and \mathbf{E}_κ are discretized using the Argyris element and Discontinuous Galerkin elements of order 3. The Dirichlet conditions are imposed weakly using Lagrange multipliers (cf. (7.112) and Remark 14), that are discretized using Lagrange polynomials of order 2. The resulting system read

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\rho h} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{C}_b} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \\ \dot{\lambda}_{\Gamma_D} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_{\text{Hess}}^\top & \mathbf{B}_{\Gamma_D} \\ \mathbf{D}_{\text{Hess}} & \mathbf{0} & \mathbf{0} \\ -\mathbf{B}_{\Gamma_D}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \\ \lambda_{\Gamma_D} \end{pmatrix} + \begin{bmatrix} \mathbf{B}_{w,\Gamma_N} & \mathbf{B}_{\partial_n w,\Gamma_N} \\ \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{bmatrix} \mathbf{u}_{\partial,q} \\ \mathbf{u}_{\partial,m} \end{bmatrix}, \\ \begin{bmatrix} \mathbf{M}_{\Gamma_N} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\Gamma_N} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,q} \\ \mathbf{y}_{\partial,m} \end{pmatrix} &= \begin{bmatrix} \mathbf{B}_{w,\Gamma_N}^\top & \mathbf{0} & \mathbf{0} \\ \mathbf{B}_{\partial_n w,\Gamma_N}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \\ \lambda_{\Gamma_D} \end{pmatrix}, \end{aligned} \quad (9.2)$$

where $\mathbf{B}_{\Gamma_D} = [\mathbf{B}_{w,\Gamma_D} \ \mathbf{B}_{\partial_n w,\Gamma_D}]$. The discretization of the control law (9.1) provides

$$\begin{aligned} \mathbf{u}_{\partial,q} &= -k_q \mathbf{y}_{\partial,q} = -k_q \mathbf{M}_{\Gamma_N}^{-1} \mathbf{B}_{w,\Gamma_N}^\top \mathbf{e}_w, \\ \mathbf{u}_{\partial,m} &= -k_m \mathbf{y}_{\partial,m} = -k_m \mathbf{M}_{\Gamma_N}^{-1} \mathbf{B}_{\partial_n w,\Gamma_N}^\top \mathbf{e}_w. \end{aligned} \quad (9.3)$$

System (9.2) now reads

$$\begin{bmatrix} \mathbf{M}_{\rho h} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{C}_b} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \\ \dot{\lambda}_{\Gamma_D} \end{pmatrix} = \begin{bmatrix} -\mathbf{R}_w & -\mathbf{D}_{\text{Hess}}^\top & \mathbf{B}_{\Gamma_D} \\ \mathbf{D}_{\text{Hess}} & \mathbf{0} & \mathbf{0} \\ -\mathbf{B}_{\Gamma_D}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \\ \lambda_{\Gamma_D} \end{pmatrix}. \quad (9.4)$$

The matrix

$$\mathbf{R}_w = k_q \mathbf{B}_{w,\Gamma_N} \mathbf{M}_{\Gamma_N}^{-1} \mathbf{B}_{w,\Gamma_N}^\top + k_m \mathbf{B}_{\partial_n w,\Gamma_N} \mathbf{M}_{\Gamma_N}^{-1} \mathbf{B}_{\partial_n w,\Gamma_N}^\top \succ 0$$

is positive definitive because of the collocated input-output feature of pH systems. The energy rate evaluates to ([BMXZ18] theorem 13)

$$\dot{H}_d = -\mathbf{e}_w^\top \mathbf{R}_w \mathbf{e}_w \leq 0.$$

Therefore, the Hamiltonian energy is a Lyapunov function and the asymptotic stability of configuration $\mathbf{e}_w = \mathbf{0}$, $\mathbf{e}_\kappa = \mathbf{0}$ is deduced using LaSalle' invariance principle.

The parameters for the numerical simulation are given in Table 9.1. The controller gains

Plate Parameters		Simulation Settings	
E	70 [GPa]	Integrator	Störmer-Verlet
ρ	2700 [kg · m ³]	Δt	1 [μs]
ν	0.35	N° FE	6
h/L	0.05	FE spaces	Argyris × DG ₃ × CG ₂
$L_x = L_y$	1 [m]	t_{end}	5 [s]

Table 9.1: Settings and parameters for the boundary control of the Kirchhoff plate.

1874 are set to

$$k_q = 10, \quad k_m = 10. \quad (9.5)$$

1875 The system is simulated using a Störmer-Verlet time integrator [HLW03] using a time step
 1876 $\Delta t = 10^{-6}$ for a total simulation time of $t_{\text{end}} = 5$ [s]. The Lagrange multiplier is eliminated
 1877 using a projection method [BH15]. The control law is activated after 1 second. Snapshots of
 1878 the simulation are reported in Fig. 9.3. The discrete Hamiltonian goes almost to zero in 4
 1879 seconds (Fig. 9.2).

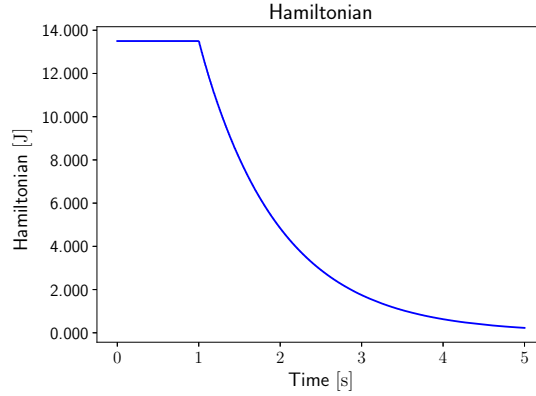


Figure 9.2: Hamiltonian trend for the cantilever Kirchhoff plate.

1880 9.1.2 Irrotational shallow water equations

1881 In this section we consider the boundary stabilization of a circular water tank via proportional
 1882 feedback. We recall the system of equations (3.37)

$$\begin{aligned}
 \frac{\partial}{\partial t} \begin{pmatrix} \alpha_h \\ \alpha_v \end{pmatrix} &= \begin{bmatrix} 0 & -\text{div} \\ -\text{grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_h \\ e_v \end{pmatrix}, \quad (x, y) \in \Omega = \{x^2 + y^2 \leq R\}, \\
 \begin{pmatrix} e_h \\ e_v \end{pmatrix} &= \begin{pmatrix} \delta_{\alpha_h} H \\ \delta_{\alpha_v} H \end{pmatrix}
 \end{aligned} \quad (9.6)$$

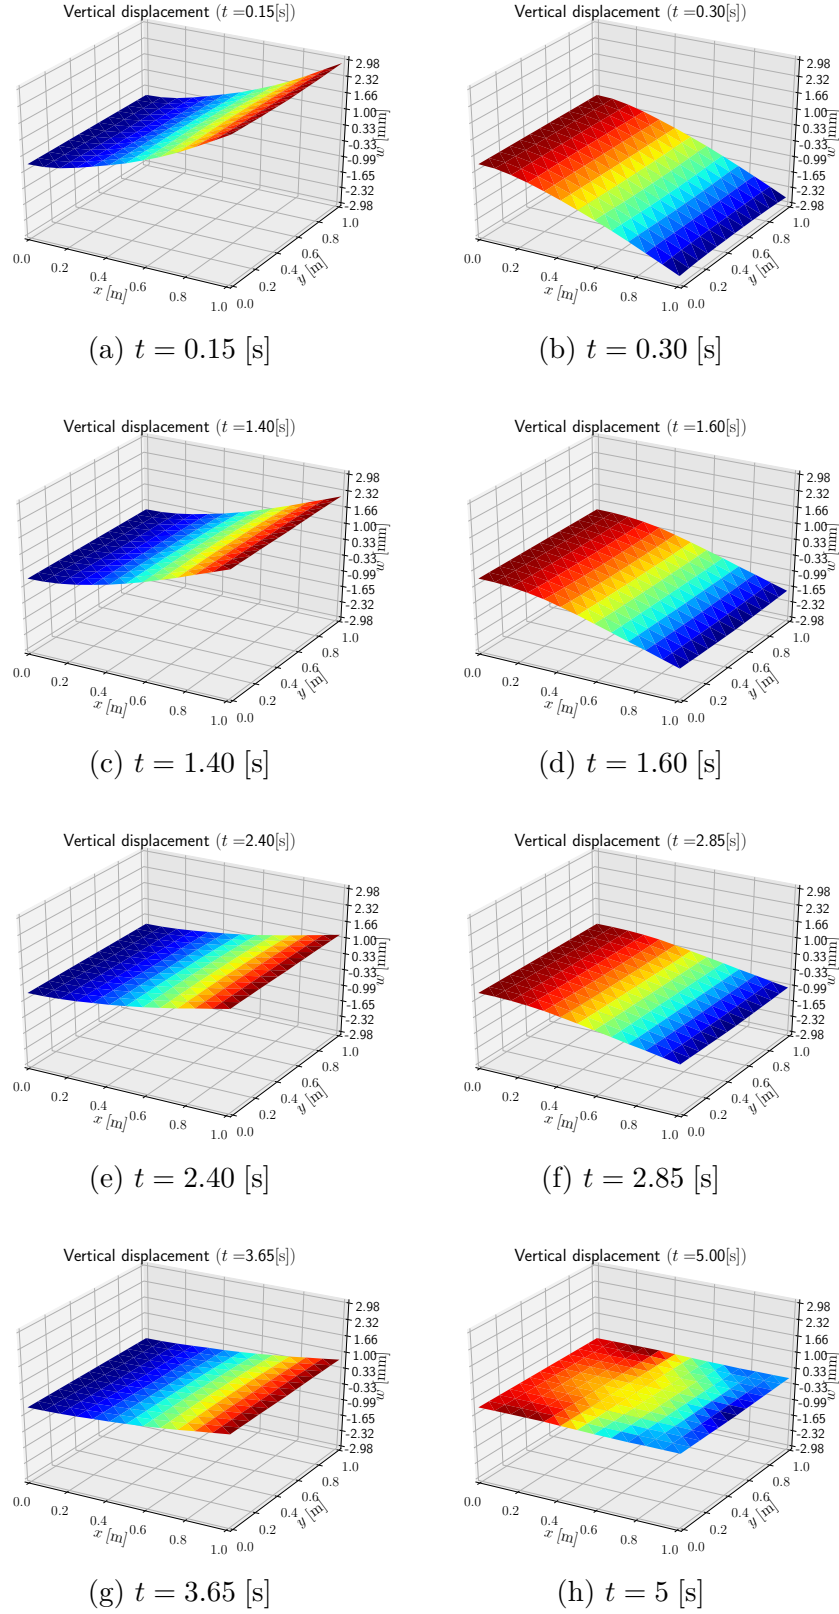


Figure 9.3: Snapshots at different times of the simulation of the boundary controlled cantilever Kirchhoff plate ($t_{\text{end}} = 5$ [s]).

with

$$H(\alpha_h, \boldsymbol{\alpha}_v) = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho} \alpha_h \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h^2 \right\} d\Omega, \quad (9.7)$$

under Neumann boundary control

$$u_{\partial} = -\mathbf{e}_v \cdot \mathbf{n}|_{\partial\Omega} = -\frac{1}{\rho} \alpha_h \boldsymbol{\alpha}_v \cdot \mathbf{n}|_{\partial\Omega}. \quad (9.8)$$

The corresponding output reads

$$y_{\partial} = \mathbf{e}_h|_{\partial\Omega} = (\rho g \alpha_h + \frac{1}{2\rho} \|\boldsymbol{\alpha}_v\|^2)|_{\partial\Omega}. \quad (9.9)$$

The initial conditions are

$$\alpha_h = h_* + 10^{-1} \sin(\pi r/R) \cos(2\theta), \quad r = \sqrt{x^2 + y^2}, \quad \theta = \arctan(y/r), \quad (9.10)$$

where h_* is the desired fluid height. It is known that a proportional controller exponentially stabilizes the system [DSP08]. Here, we use a simple control for stabilizing the system around the desired point h^*

$$u_{\partial} = -k(y_{\partial} - y_{\partial}^*), \quad y_{\partial}^* = \rho g h^*, \quad k > 0. \quad (9.11)$$

This control law ensures that the Lyapunov functional

$$V = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{2} \rho g (\alpha_h - \alpha_h^*)^2 + \frac{1}{2\rho} \alpha_h \|\boldsymbol{\alpha}_v\|^2 \right\} d\Omega \geq 0, \quad (9.12)$$

where $\alpha_h^* = h^*$, has negative semi definite time derivative

$$\dot{V} = -k \int_{\partial\Omega} (y_{\partial} - y_{\partial}^*)^2 d\Gamma \leq 0. \quad (9.13)$$

By the LaSalle' principle [Hen06] the point

$$\alpha_h = h^*, \quad \boldsymbol{\alpha}_v = \mathbf{0}, \quad (9.14)$$

is asymptotically stable.

The discretization is performed as in (7.40). Variable α_h is discretized using Lagrange polynomials of order 1. Discontinuous Galerkin of order 0 defined on the domain and on the boundary are used for $\boldsymbol{\alpha}_v, \mathbf{u}_{\partial}$.

$$\begin{aligned} \begin{pmatrix} \dot{\alpha}_{d,h} \\ \dot{\alpha}_{d,v} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{M}_h^{-1} \mathbf{D}_{\text{grad}}^{\top} \mathbf{M}_v^{-1} \\ -\mathbf{M}_v^{-1} \mathbf{D}_{\text{grad}} \mathbf{M}_h^{-1} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \partial_{\alpha_{d,h}} H_d(\alpha_{d,h}, \alpha_{d,v}) \\ \partial_{\alpha_{d,v}} H_d(\alpha_{d,h}, \alpha_{d,v}) \end{pmatrix} + \begin{bmatrix} \mathbf{B}_h \\ \mathbf{0} \end{bmatrix} \mathbf{u}_{\partial}, \\ \mathbf{M}_{\partial} \mathbf{y}_{\partial} &= \begin{bmatrix} \mathbf{B}_h^{\top} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \partial_{\alpha_{d,h}} H_d(\alpha_{d,h}, \alpha_{d,v}) \\ \partial_{\alpha_{d,v}} H_d(\alpha_{d,h}, \alpha_{d,v}) \end{pmatrix}. \end{aligned} \quad (9.15)$$

The control law (9.11), once discretized, is expressed as

$$\mathbf{u}_\partial = -k(\mathbf{y}_\partial - \mathbf{y}_\partial^*), \quad (9.16)$$

where $\mathbf{y}_\partial^* = \mathbf{M}_\partial^{-1} \int_{\partial\Omega} \rho g h_* \phi_\partial(s) \, d\Gamma$. The closed loop system is then

$$\begin{pmatrix} \dot{\boldsymbol{\alpha}}_{d,h} \\ \dot{\boldsymbol{\alpha}}_{d,v} \end{pmatrix} = \begin{bmatrix} -\mathbf{R}_h & \mathbf{M}_h^{-1} \mathbf{D}_{\text{grad}}^\top \mathbf{M}_v^{-1} \\ -\mathbf{M}_v^{-1} \mathbf{D}_{\text{grad}} \mathbf{M}_h^{-1} & \mathbf{0} \end{bmatrix} \begin{bmatrix} \partial_{\boldsymbol{\alpha}_{d,h}} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v}) \\ \partial_{\boldsymbol{\alpha}_{d,v}} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v}) \end{bmatrix} + \begin{bmatrix} \mathbf{B}_h \\ \mathbf{0} \end{bmatrix} k \mathbf{y}_\partial^*, \quad (9.17)$$

Again the matrix

$$\mathbf{R}_h = k \mathbf{B}_h \mathbf{M}_\partial^{-1} \mathbf{B}_h^\top \succ 0$$

is positive definite and the discretized Lyapunov function rate reads

$$\dot{V}_d = -\partial_{\boldsymbol{\alpha}_{d,h}} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v})^\top \mathbf{R}_h \partial_{\boldsymbol{\alpha}_{d,h}} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v}) \leq 0.$$

Parameters		Simulation Settings	
ρ	1000 [kg · m ³]	Integrator	Runge-Kutta 45
g	10 [m/s ²]	N° FE along R	20
R	1 [m]	FE spaces	CG ₁ × DG ₀ × DG ₀
h^*	1 [m]	t_{end}	3 [s]

Table 9.2: Settings and parameters for the irrotational shallow water equations.

The parameters for the simulation are reported in Table. (9.2). The controller gain is set to $k = 10^{-3}$. The control law is activated after 0.5 seconds. The system is simulated using a Runge-Kutta method. Snapshots are collected in Fig. 9.5. The discretized Hamiltonian and Lyapunov functional trends (Fig. 9.4) clearly show that while the Lyapunov function monotonically decrease, the Hamiltonian does not.

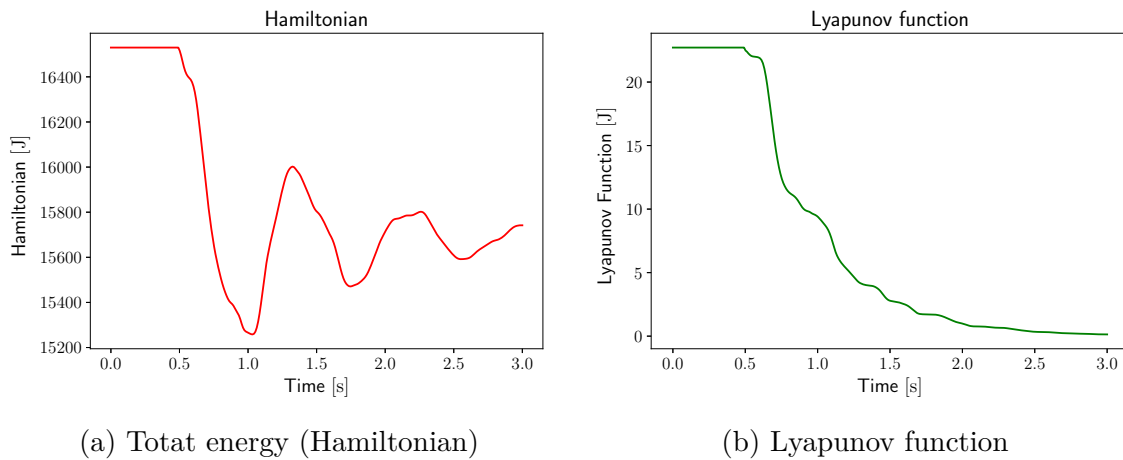


Figure 9.4: Total energy and Lyapunov function for the Shallow water equations.

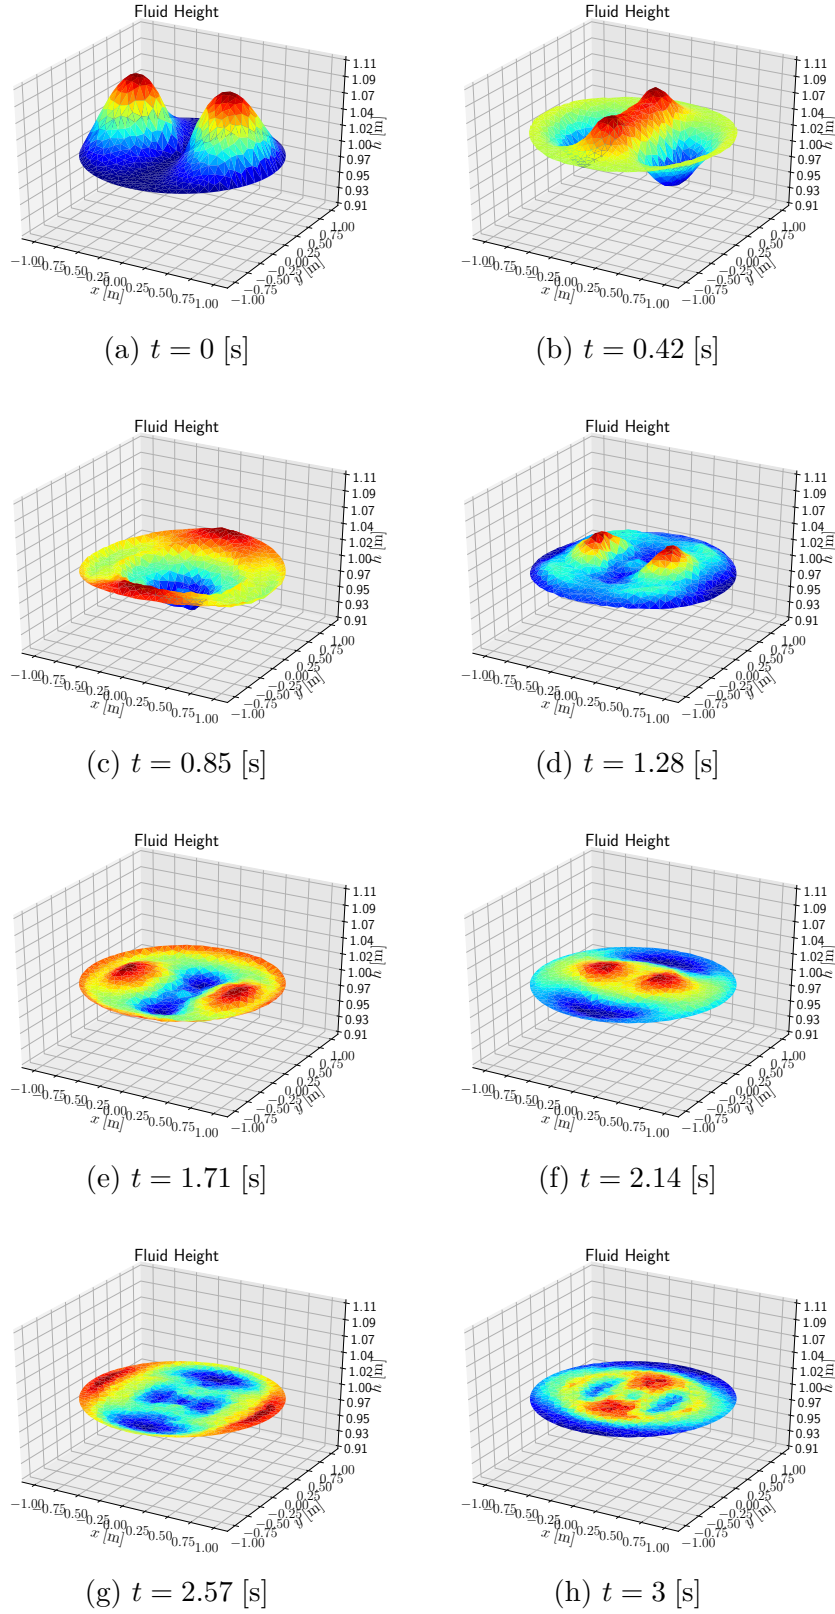


Figure 9.5: Snapshots at different times of the simulation for the boundary controlled irrotational shallow water equations ($t_{\text{end}} = 3$ [s]).




Figure 9.6: Boundary conditions for the motion planning problem.

9.2 Mixed boundary conditions enforcement

In this section the Lagrange multiplier method §7.2.1 and the virtual domain decomposition method §7.2.2 are compared for two problems:

1. a reference tracking problem for the Euler-Bernoulli beam;
2. a vibroacoustic application.

9.2.1 Motion planning of a thin beam

Consider the motion planning problem for the Euler Bernoulli beam [KS08, Chapter 12]

$$\partial_{tt}w + \partial_{xxxx}w = 0, \quad x \in \Omega = \{0, 1\} \quad (9.18)$$

$$\partial_{xx}w(0, t) = 0, \quad \partial_{xxx}w(0, t) = 0, \quad (9.19)$$

$$w^r(0, t) = \sin(\omega t), \quad \partial_x w^r(0, t) = 0. \quad (9.20)$$

The equation (9.18) represents the Euler-Bernoulli beam (3.24) with unitary coefficients. Conditions (9.19) represent an homogeneous free boundary conditions at the left side. To objective is to find controls $u_1 = w^r(1, t)$, $u_2 = \partial_x w^r(1, t)$ to match the reference outputs $w^r(0, t)$, $\partial_x w^r(0, t)$. The reference solution for this problem can be found by postulating the existence of a function of the form

$$w^r(x, t) = \sum_{k=0}^{\infty} a_k(t) \frac{x^k}{k!}.$$

Given the reference output $w^r(1, t) = \sin(\omega t)$, the reference solution assumes the form (cf. [KS08, Chapter 12] for details)

$$w^r(x, t) = \sum_{k=0}^{\infty} \omega^{2k} \frac{x^{4k}}{(4k)!} \sin(\omega t) = \frac{1}{2} [\cosh(\sqrt{\omega}x) + \cos(\omega x)] \sin(\omega t). \quad (9.21)$$

The inputs that assure the tracking of the outputs can be computed

$$\begin{aligned} w^r(1, t) &= \frac{1}{2} [\cosh(\sqrt{\omega}) + \cos(\omega)] \sin(\omega t), \\ \partial_x w^r(1, t) &= \frac{1}{2} [\sinh(\sqrt{\omega}) - \sin(\omega)] \sin(\omega t). \end{aligned} \quad (9.22)$$

Figure 9.7: Boundary conditions for the 3D vibroacoustic problem.

This problem can be equivalently cast as a boundary control pH system with mixed boundary conditions (see Fig. 9.6).

$$\frac{\partial}{\partial t} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} \\ \partial_{xx} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} \quad (9.23a)$$

$$\mathbf{u}_\partial = \begin{pmatrix} e_\kappa(0, t) \\ \partial_x e_\kappa(0, t) \\ e_w(1, t) \\ \partial_x e_w(1, t) \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ \frac{1}{2}[\cosh(\sqrt{\omega}) + \cos(\omega)]\omega \cos(\omega t) \\ \frac{1}{2}[\sinh(\sqrt{\omega}) - \sin(\omega)]\omega \cos(\omega t) \end{pmatrix}, \quad (9.23b)$$

$$\mathbf{y}_\partial = \begin{pmatrix} \partial_x e_w(0, t) \\ e_w(0, t) \\ \partial_x e_\kappa(1, t) \\ e_\kappa(1, t) \end{pmatrix}. \quad (9.23c)$$

This choice of the inputs assures that the outputs $y_\partial^1 = \partial_x e_w(0, t)$, $y_\partial^2 = e_w(0, t)$ verify the desired trajectories

$$y_\partial^1 = \partial_t \partial_x w^r(0, t) = 0, \quad y_\partial^2 = \partial_t w^r(0, t) = \omega \cos(\omega t).$$

9.2.2 Vibroacoustics under mixed boundary conditions

Consider the model for the propagation of sound in air 3.23

$$\begin{bmatrix} \chi_s & 0 \\ \mathbf{0} & \mu_0 \mathbf{I}_{3 \times 3} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix} = - \begin{bmatrix} 0 & \text{div} \\ \text{grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix}, \quad \Omega = \{x \in [0, L], r \in [0, R], \theta = [0, 2\pi)\}, \quad (9.24)$$

where $e_p \in \mathbb{R}$ and $\mathbf{e}_v \in \mathbb{R}^3$ denote the variations of pressure and velocity from a steady state, μ_0 is the steady state mass density, and χ_s represents a constant adiabatic compressibility factor. With x, r, θ we denote the axial, radial and tangential cylindrical coordinates. The domain is cylindrical duct of length L and radius R . The following boundary conditions are imposed (see Fig. 9.7)

$$\begin{aligned}
e_p(x, R, \theta, t) &= -\mathcal{Z}(x, t) e_v^r(x, R, \theta), \\
\mathbf{e}_v \cdot \mathbf{n}(0, r, \theta, t) &= -e_v^x(0, r, \theta) = -f(r), \\
\mathbf{e}_v \cdot \mathbf{n}(L, r, \theta, t) &= +e_v^x(L, r, \theta) = +f(r).
\end{aligned}$$

1921 For the initial boundary conditions, it is assumed

$$\begin{aligned}
e_p^0(x, r, \theta) &= 0, & e_v^{r,0}(x, r, \theta) &= g(r), \\
e_v^{x,0}(x, r, \theta) &= f(r), & e_v^{\theta,0}(x, r, \theta) &= 0.
\end{aligned} \tag{9.25}$$

The impedance and the axial and radial flows expressions are the following

$$\begin{aligned}
\mathcal{Z}(x, t) &= \mathbb{1} \left\{ \frac{1}{3}L \leq x \leq \frac{2}{3}L, t \geq 0.2 t_{\text{fin}} \right\} \mu_0 c_0, \\
f(r) &= \left(1 - \frac{r^2}{R^2} \right) v_0, \\
g(r) &= 16 \frac{r^2}{R^4} (R - r)^2 v_0.
\end{aligned}$$

1922 The impedance operator \mathcal{Z} is non invertible. If it were invertible than the impedance con-
 1923 dition could be treated as a Robin condition. This model describes the behavior of an axis-
 1924 symmetrical flow subjected to an impedance condition on the lateral surface. Because of
 1925 symmetry the model can be reduced to a 2D problem in polar coordinates over the domain
 1926 $\Omega_r = \{x \in [0, L], r \in [0, R]\}$. The reduced system reads

$$\begin{bmatrix} \chi_s & p \\ \mathbf{0} & \mu_0 \mathbf{I}_{2 \times 2} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix} = - \begin{bmatrix} 0 & \text{div}_r \\ \text{grad}_r & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_p \\ \mathbf{e}_v \end{pmatrix}, \quad \text{div}_r = \begin{bmatrix} \partial_x & \partial_r + 1/r \end{bmatrix}, \quad \text{grad}_r = \begin{bmatrix} \partial_x \\ \partial_r \end{bmatrix}. \tag{9.26}$$

The boundary conditions must now account for the symmetry condition at $r = 0$, leading to the set of boundary conditions (see Fig. 9.8)

$$u_D = e_p|_{\Gamma_D} = -\mathcal{Z}(x, t) e_v^r(x, R), \tag{9.27}$$

$$u_N = \mathbf{e}_v \cdot \mathbf{n}|_{\Gamma_N} = \begin{cases} -f(r), & x = 0, \\ +f(r), & x = L, \\ 0, & r = 0, \end{cases} \tag{9.28}$$

1927 where Γ_D, Γ_N denote the boundary partitions. The Hamiltonian is then computed as

$$H = \frac{1}{2} \langle e_p, \chi_s e_p \rangle_{\Omega_r} + \frac{1}{2} \langle \mathbf{e}_v, \mu_0 \mathbf{e}_v \rangle_{\Omega_r}$$

1928 where $\langle \cdot, \cdot \rangle_{\Omega_r}$ is the standard L^2 inner product in polar coordinates, defined for scalar or
 1929 vector fields as

$$\langle \alpha, \beta \rangle_{\Omega_r} = \int_{\Omega_r} \alpha \cdot \beta r \, dr \, dx = \int_{\Omega_r} \alpha \cdot \beta \, d\Omega_r.$$

1930 The power flow is obtained by application of the Stokes theorem

$$\dot{H} = \langle e_p, \mathbf{e}_v \cdot \mathbf{n} \rangle_{\partial\Omega_r} = \int_{\partial\Omega_r} e_p \mathbf{e}_v \cdot \mathbf{n} \, d\Gamma_r = - \int_0^L \mathcal{Z}(x, t) (e_v^r)^2 R \, dx \leq 0$$

1931 where $d\Gamma_r = r \, ds$ is the infinitesimal surface.

1932

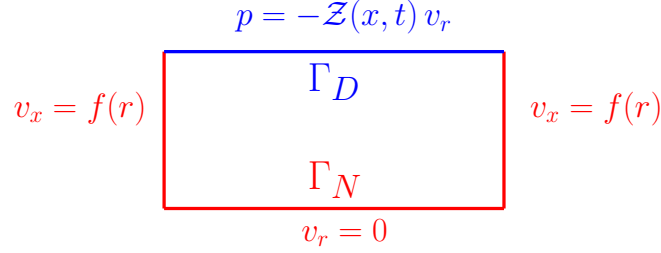


Figure 9.8: Boundary partition for the 2D vibroacoustic problem.

1933 In the next paragraphs we provide a concise description of the discretization procedure
1934 for the two methods.

1935 **Lagrange multipliers** If a Lagrange multiplier is introduced for the Dirichlet boundary
1936 condition, the following weak form is obtained

$$\begin{aligned} \langle v_p, \chi_s \partial_t e_p \rangle_{\Omega_r} &= \langle \text{grad}_r v_p, \mathbf{e}_v \rangle_{\Omega_r} + \langle v_p, \lambda_D \rangle_{\Gamma_D} + \langle v_p, u_N \rangle_{\Gamma_D}, \\ \langle \mathbf{v}_v, \mu_0 \partial_t \mathbf{e}_v \rangle_{\Omega_r} &= \langle \mathbf{v}_v, \text{grad}_r e_p \rangle_{\Omega_r}, \\ 0 &= - \langle v_\lambda, e_p \rangle_{\Gamma_D} + \langle v_D, u_D \rangle_{\Gamma_D}, \\ \langle v_\lambda, y_N \rangle_{\Gamma_N} &= \langle v_N, e_p \rangle_{\Gamma_N}, \\ \langle v_D, y_D \rangle_{\Gamma_D} &= \langle v_D, \lambda_D \rangle_{\Gamma_D}, \end{aligned} \tag{9.29}$$

1937 where v_N, v_D are the test functions associated to the output discretization and $\langle \cdot, \cdot \rangle_{\Gamma_*}$ is the
1938 L^2 inner product on boundary Γ_* . Introducing a Galerkin approximation for the variables,
1939 one obtains the following system

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\chi_s} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mu_0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{e}_p \\ \dot{e}_v \\ \dot{\lambda}_D \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & \mathbf{D}_{\text{grad}}^\top & \mathbf{B}_{p, \Gamma_D} \\ -\mathbf{D}_{\text{grad}} & \mathbf{0} & \mathbf{0} \\ -\mathbf{B}_{p, \Gamma_D}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_p \\ \mathbf{e}_v \\ \lambda_D \end{pmatrix} + \begin{bmatrix} \mathbf{B}_{p, \Gamma_N} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\Gamma_D} \end{bmatrix} \begin{pmatrix} \mathbf{u}_N \\ \mathbf{u}_D \end{pmatrix}, \\ \begin{bmatrix} \mathbf{M}_{\Gamma_N} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\Gamma_D} \end{bmatrix} \begin{pmatrix} \mathbf{y}_N \\ \mathbf{y}_D \end{pmatrix} &= \begin{bmatrix} \mathbf{B}_{p, \Gamma_D}^\top & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{M}_{\Gamma_D} \end{bmatrix} \begin{pmatrix} \mathbf{e}_p \\ \mathbf{e}_v \\ \lambda_D \end{pmatrix}. \end{aligned} \tag{9.30}$$

1940 The matrices are computed as in (7.112). To impose the actual boundary conditions consider
1941 the weak form of (9.27) $u_D = -\mathcal{Z} \lambda_D = -\mathcal{Z} y_D$:

$$\mathbf{M}_{\Gamma_D} \mathbf{u}_D = -\mathbf{M}_{\Gamma_D, \mathcal{Z}} \mathbf{y}_D,$$

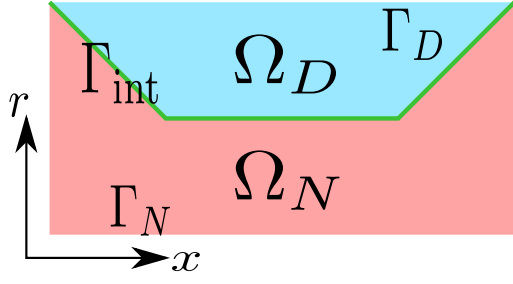
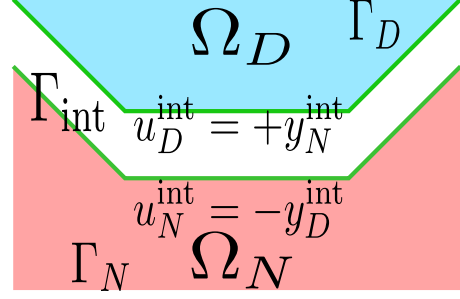


Figure 9.9: Virtual decomposition of the vibroacoustic domain.

Figure 9.10: Interconnection at the interface Γ_{int} .

where $\mathbf{M}_{\Gamma_D, \mathcal{Z}}$ corresponds to the mass matrix associated to the weighted inner product $\langle v_D, \mathcal{Z}y_D \rangle_{\Gamma_D}$. The Neumann boundary condition is imposed by projection on the u_N space. The boundary controlled system becomes

$$\begin{bmatrix} \mathbf{M}_{\chi_s} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mu_0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_p \\ \dot{\mathbf{e}}_v \\ \dot{\boldsymbol{\lambda}}_D \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{D}_{\text{grad}}^\top & \mathbf{B}_{p, \Gamma_D} \\ -\mathbf{D}_{\text{grad}} & \mathbf{0} & \mathbf{0} \\ -\mathbf{B}_{p, \Gamma_D}^\top & \mathbf{0} & -\mathbf{M}_{\Gamma_D, \mathcal{Z}} \end{bmatrix} \begin{pmatrix} \mathbf{e}_p \\ \mathbf{e}_v \\ \boldsymbol{\lambda}_D \end{pmatrix} + \begin{pmatrix} \mathbf{b}_N \\ \mathbf{0} \\ \mathbf{0} \end{pmatrix}, \quad (9.31)$$

Virtual domain decomposition In order to apply this methodology the domain has to be split into two sub-domains. The shared boundary connecting the two sub-domains can be freely chosen. For the given geometry, the separation line that provide the most regular simplicial meshes is the trapezoidal one given in Fig. 9.9.

Applying the PFEM methodology as in 7.2.2 two finite dimensional systems are obtained. For Ω_D the system is analogous to (7.134), while for Ω_N to (7.135).

Subdomain Ω_D

$$\begin{aligned} \mathbf{M}_{\Omega_D} \dot{\mathbf{e}}_{\Omega_D} &= \mathbf{J}_{\Omega_D} \mathbf{e}_{\Omega_D} + \mathbf{B}_{\Gamma_D}^{\Omega_D} \mathbf{u}_D + \mathbf{B}_{\Gamma_{\text{int}}}^{\Omega_D} \mathbf{u}_D^{\text{int}}, \\ \mathbf{M}_{\Gamma_D} \mathbf{y}_D &= \mathbf{B}_{\Gamma_D}^{\Omega_D \top} \mathbf{e}_D, \\ \mathbf{M}_{\Gamma_{\text{int}}} \mathbf{y}_D^{\text{int}} &= \mathbf{B}_{\Gamma_{\text{int}}}^{\Omega_D \top} \mathbf{e}_D. \end{aligned} \quad (9.32)$$

Subdomain Ω_N

$$\begin{aligned} \mathbf{M}_{\Omega_N} \dot{\mathbf{e}}_{\Omega_N} &= \mathbf{J}_{\Omega_N} \mathbf{e}_{\Omega_N} + \mathbf{B}_{\Gamma_N}^{\Omega_N} \mathbf{u}_N + \mathbf{B}_{\Gamma_{\text{int}}}^{\Omega_N} \mathbf{u}_N^{\text{int}}, \\ \mathbf{M}_{\Gamma_N} \mathbf{y}_N &= \mathbf{B}_{\Gamma_N}^{\Omega_N \top} \mathbf{e}_N, \\ \mathbf{M}_{\Gamma_{\text{int}}} \mathbf{y}_N^{\text{int}} &= \mathbf{B}_{\Gamma_{\text{int}}}^{\Omega_N \top} \mathbf{e}_N. \end{aligned} \quad (9.33)$$

In order to get a system with mixed causality, systems (9.32) and (9.33) have to be interconnected using a classical gyrator interconnection. Considering that the pressure field is continuous at Γ_{int} , the outward normal verifies $\mathbf{n}_D|_{\Gamma_{\text{int}}} = -\mathbf{n}_N|_{\Gamma_{\text{int}}}$ and the corresponding degrees of freedom have to be matched, the correct interconnection reads (cf. Fig. 9.10)

$$\mathbf{u}_N^{\text{int}} = -\mathbf{y}_D^{\text{int}}, \quad \mathbf{u}_D^{\text{int}} = \mathbf{y}_N^{\text{int}}. \quad (9.34)$$

This interconnection establishes that the power is exchanged without loss between the two

Physical Parameters		Simulation Settings	
L	2 [m]	ODE Integrator	RK 45
R	1 [m]	DAE Integrator	IDA
μ_0	1.225 [kg/m ³]	t_{end}	0.1[s]
c_0	340 [m/s]	FE spaces	CG ₁ × RT ₁ × CG ₁
χ_s	7.061 [μPa] ⁻¹		
v_0	1 [m/s]		

Table 9.3: Settings and parameters for the vibroacoustic problem.

1957 systems

$$\mathbf{u}_D^{\text{int} \top} \mathbf{M}_{\Gamma_{\text{int}}} \mathbf{y}_D^{\text{int}} + \mathbf{u}_N^{\text{int} \top} \mathbf{M}_{\Gamma_{\text{int}}} \mathbf{y}_N^{\text{int}} = 0. \quad (9.35)$$

1958 The resulting interconnected system is written as

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_{\Omega_D} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\Omega_N} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_{\Omega_D} \\ \dot{\mathbf{e}}_{\Omega_N} \end{pmatrix} &= \begin{bmatrix} \mathbf{J}_{\Omega_D} & \mathbf{C} \\ -\mathbf{C}^\top & \mathbf{J}_{\Omega_N} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{\Omega_D} \\ \mathbf{e}_{\Omega_N} \end{pmatrix} + \begin{bmatrix} \mathbf{B}_{\Gamma_D}^{\Omega_D} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\Gamma_N}^{\Omega_N} \end{bmatrix} \begin{pmatrix} \mathbf{u}_D \\ \mathbf{u}_N \end{pmatrix}, \\ \begin{bmatrix} \mathbf{M}_{\Gamma_D} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\Gamma_N} \end{bmatrix} \begin{pmatrix} \mathbf{y}_D \\ \mathbf{y}_N \end{pmatrix} &= \begin{bmatrix} \mathbf{B}_{\Gamma_D}^{\Omega_N \top} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\Gamma_N}^{\Omega_D \top} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{\Omega_1} \\ \mathbf{e}_{\Omega_2} \end{pmatrix}. \end{aligned} \quad (9.36)$$

1959 where $\mathbf{C} = \mathbf{B}_{\Gamma_{\text{int}}}^{\Omega_D} \mathbf{M}_{\Gamma_{\text{int}}}^{-1} \mathbf{B}_{\Gamma_{\text{int}}}^{\Omega_N \top}$. The actual boundary condition (9.27) can be plugged into the
1960 system leading to

$$\begin{bmatrix} \mathbf{M}_{\Omega_D} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\Omega_N} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_{\Omega_D} \\ \dot{\mathbf{e}}_{\Omega_N} \end{pmatrix} = \begin{bmatrix} \mathbf{J}_{\Omega_D} - \mathbf{R}_{\Omega_D} & \mathbf{C} \\ -\mathbf{C}^\top & \mathbf{J}_{\Omega_N} \end{bmatrix} \begin{pmatrix} \mathbf{e}_{\Omega_D} \\ \mathbf{e}_{\Omega_N} \end{pmatrix} + \begin{pmatrix} \mathbf{0} \\ \mathbf{b}_{\Gamma_N}^{\Omega_N} \end{pmatrix}, \quad (9.37)$$

1961 where $\mathbf{R}_{\Omega_D} = \mathbf{B}_{\Gamma_D}^{\Omega_D} \mathbf{M}_{\Gamma_D}^{-1} \mathbf{B}_{\Gamma_D}^{\Omega_D \top}$ is symmetric and positive definite.

Numerical results and discussion In this section a numerical illustration of the two methodologies is presented. The Hamiltonian and the state variables trends given by the DAE (obtained from the Lagrange's multiplier method) and the ODE (obtained from the virtual domain decomposition method) are compared with respect to a reference solution. The reference is set to the DAE solution on a very fine mesh. The physical parameters are provided in Tab. 9.3. The initial condition are selected according to (9.25):

$$e_p^0(x, r) = 0, \quad e_v^{x,0}(x, r) = f(r), \quad e_v^{r,0}(x, r) = g(r).$$

1962 A radial component of the velocity allows highlighting the effect of the impedance. The
1963 velocity profile satisfies some regularity conditions so that the transition between Neumann
1964 and Dirichlet boundary conditions is smooth. In order to get a finite dimensional discretization
1965 the fields are approximated using the following finite element families for both approaches:

- e_p is interpolated using order 1 Lagrange polynomials;

- \mathbf{e}_v is interpolated using order 1 Raviart-Thomas polynomials;
- Boundary variables are approximated by Lagrange polynomial of order 1 defined on the boundary Γ_D (for λ_D, u_D, y_D) or Γ_N (for u_N, y_N).

Such a choice guarantees the conformity with respect to the differential operators. The FENICS library, that allows interpolating functions on different meshes, is used for the computations. The reference solution, obtained by using the DAE approach on a very fine mesh, is plotted in Fig. 9.11a, where the two contribution to the total energy

$$H_{p,d} \approx \frac{1}{2} \mathbf{e}_p^\top \mathbf{M}_p \mathbf{e}_p, \quad H_{v,d} \approx \frac{1}{2} \mathbf{e}_v^\top \mathbf{M}_v \mathbf{e}_v,$$

are highlighted. The Dirichlet condition induces a continuous transfer from radial kinetic energy into pressure potential. The impedance acts by dissipating the radial component of the velocity so that only the axial flow contribution is left. The total energy at the initial time of the simulation is given only by the kinetic energy

$$H_v^0 = H_{vx}^0 + H_{vr}^0 = \frac{1}{2} \int_0^L \int_0^R \mu_0 \|\mathbf{e}_v\|^2 r dr dx.$$

Given the physical parameters in Tab. 9.3, the numerical values of the energy contribution are readily found

$$H_v^0 = 0.453[J], \quad H_{vx}^0 = 0.204[J], \quad H_{vr}^0 = 0.249[J].$$

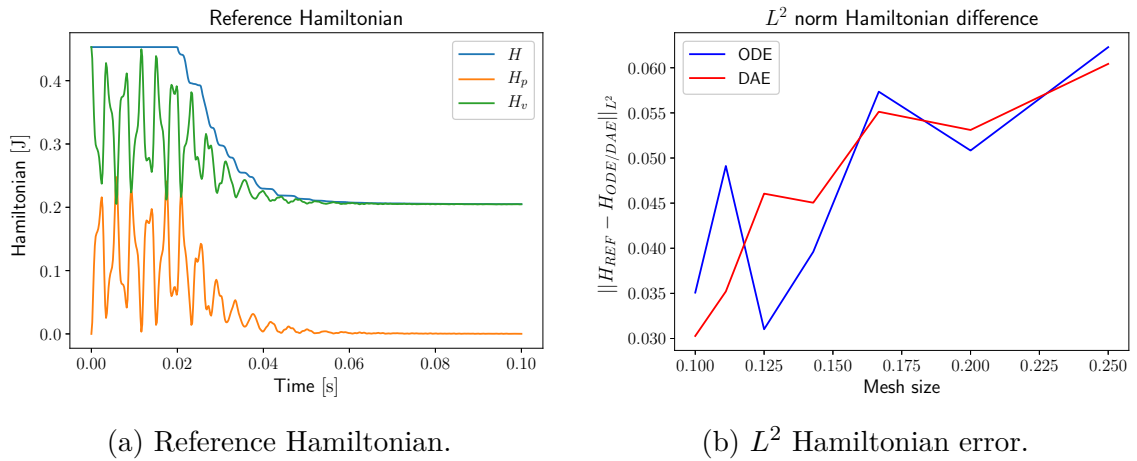


Figure 9.11: Reference Hamiltonian and L^2 error.

In order to demonstrate the consistency of the two proposed approaches the following

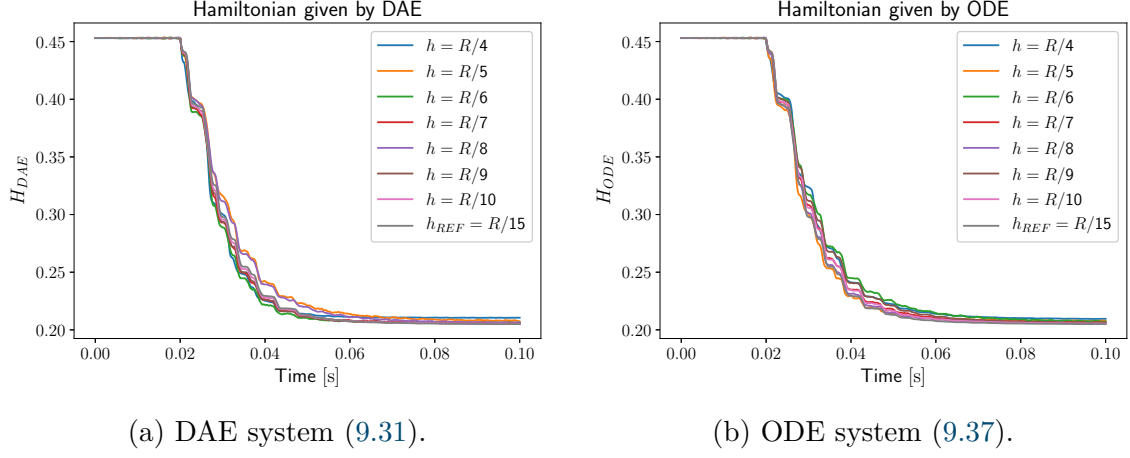


Figure 9.12: Hamiltonian trend for different mesh size.

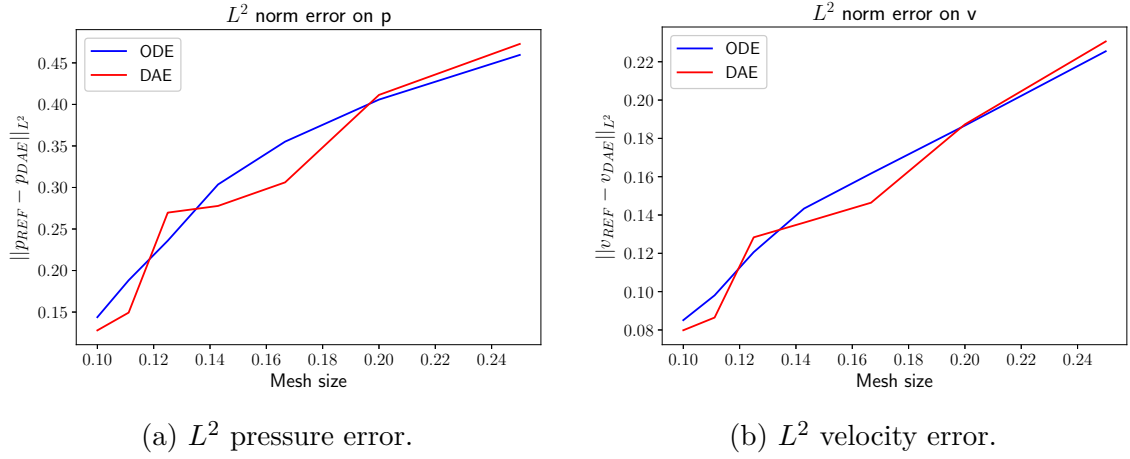


Figure 9.13: Error on the state variables for different mesh size.

measures are adopted

$$\begin{aligned}\varepsilon_{\text{ODE/DAE}}^H &= \frac{\|H_{\text{REF}} - H_{\text{ODE/DAE}}\|_{L^2}}{\|H_{\text{REF}}\|_{L^2}}, \\ \varepsilon_{\text{ODE/DAE}}^p &= \frac{\|p_{\text{REF}} - p_{\text{ODE/DAE}}\|_{L^2}}{\|p_{\text{REF}}\|_{L^2}}, \\ \varepsilon_{\text{ODE/DAE}}^v &= \frac{\|\mathbf{v}_{\text{REF}} - \mathbf{v}_{\text{ODE/DAE}}\|_{L^2}}{\|\mathbf{v}_{\text{REF}}\|_{L^2}}.\end{aligned}$$

1980 The total energy obtained with several meshes is shown in Figs. 9.12a, 9.12b for the DAE
 1981 and ODE approach respectively. It can be noticed that the Hamiltonian tends to the value
 1982 H_{vx}^0 as expected. The overall Hamiltonian trend is well captured and even for coarse meshes
 1983 the relative error does not exceed 6% (see Fig. 9.11b). Both methods converge monotonically

h mesh	$\Delta t_{\text{DAE}}[s]$	$\Delta t_{\text{ODE}}[s]$
$R_{\text{ext}}/4$	98.95	124.43
$R_{\text{ext}}/5$	415.99	255.54
$R_{\text{ext}}/6$	798.24	893.63
$R_{\text{ext}}/7$	1408.76	1120.69
$R_{\text{ext}}/8$	3054.78	2271.28
$R_{\text{ext}}/9$	6929.24	5792.89
$R_{\text{ext}}/10$	12648.15	8835.09

Table 9.4: Elapsed simulation time for the vibroacoustic experiment.

1984 to the reference solution, as illustrated in Figs. 9.13a, 9.13b. The faster convergence of one
 1985 method on the other cannot be established. For what concerns the computational cost, in
 1986 Tab. 9.4 the simulation time required by each solver is shown. The ODE approach is less
 1987 time consuming for mesh size sufficiently small.

1988 9.3 Thermoelastic wave propagation

1989 9.4 Modal analysis of plates

1990

Part IV

1991

Port-Hamiltonian flexible multibody dynamics

1992

Modular multibody systems in port-Hamiltonian form

10.1 Reminder of the rigid case

10.2 Flexible floating body

10.3 Modular construction of multibody systems

2000

CHAPTER 11

2001

Validation

2002

2003 11.1 Beam systems

2004 11.1.1 Modal analysis of a flexible mechanism

2005 11.1.2 Non-linear crank slider

2006 11.1.3 Hinged beam

2007 11.2 Plate systems

2008 11.2.1 Boundary interconnection with a rigid element

2009 11.2.2 Actuated plate

Conclusion

2011

Conclusions and future directions

Je n'ai cherché de rien prouver, mais de bien peindre et d'éclairer bien ma
peinture.

2012

André Gide
Préface de L'Immoraliste

Mathematical tools

A.1 Differential operators

The space of all, symmetric and skew-symmetric $d \times d$ matrices are denoted by \mathbb{M} , \mathbb{S} , \mathbb{K} respectively. The space of \mathbb{R}^d vectors is denoted by \mathbb{V} . $\Omega \subset \mathbb{R}^d$ is an open connected set. For a scalar field $u : \Omega \rightarrow \mathbb{R}$ the gradient is defined as

$$\text{grad}(u) = \nabla u := \left(\partial_{x_1} u \dots \partial_{x_d} u \right)^\top.$$

For a vector field $\mathbf{u} : \Omega \rightarrow \mathbb{V}$, with components u_i , the gradient (Jacobian) is defined as

$$\text{grad}(\mathbf{u})_{ij} := (\nabla \mathbf{u})_{ij} = \partial_{x_i} u_j.$$

The symmetric part of the gradient operator Grad (i. e. the deformation gradient in continuum mechanics) is thus given by

$$\text{Grad}(\mathbf{u}) := \frac{1}{2} \left(\nabla \mathbf{u} + (\nabla \mathbf{u})^\top \right) \in \mathbb{S}.$$

The Hessian operator of u is then computed as follows

$$\text{Hess}(u) = \nabla^2 u = \text{Grad}(\text{grad}(u)).$$

For a tensor field $\mathbf{U} : \Omega \rightarrow \mathbb{M}$, with components u_{ij} , the divergence is a vector, defined column-wise as

$$\text{Div}(\mathbf{U}) = \nabla \cdot \mathbf{U} := \left(\sum_{i=1}^d \partial_{x_i} u_{ij} \right)_{j=1, \dots, d}.$$

The double divergence of a tensor field \mathbf{U} is then a scalar field defined as

$$\text{div}(\text{Div}(\mathbf{U})) := \sum_{i=1}^d \sum_{j=1}^d \partial_{x_i} \partial_{x_j} u_{ij}.$$

Definition 7 (Formal adjoint, Def. 5.80 [RR04])

Consider the differential operator defined on Ω

$$\mathcal{L}(\mathbf{x}, \partial) = \sum_{|\alpha| \leq k} a_\alpha(\mathbf{x}) \partial^\alpha, \tag{A.1}$$

where $\alpha := (\alpha_1, \dots, \alpha_d)$ is a multi-index of order $|\alpha| := \sum_{i=1}^d \alpha_i$, a_α are a set of real scalars and $\partial^\alpha := \partial_{x_1}^{\alpha_1} \dots \partial_{x_d}^{\alpha_d}$ is a differential operator of order $|\alpha|$ resulting from a combination of spatial derivatives. The formal adjoint of \mathcal{L} is the operator defined by

$$\mathcal{L}^*(\mathbf{x}, \partial)u = \sum_{|\alpha| \leq k} (-1)^\alpha \partial^\alpha (a_\alpha(\mathbf{x})u(\mathbf{x})). \quad (\text{A.2})$$

The importance of this definition lies in the fact that

$$\langle \phi, \mathcal{L}(\mathbf{x}, \partial)\psi \rangle_\Omega = \langle \mathcal{L}^*(\mathbf{x}, \partial)\phi, \psi \rangle_\Omega \quad (\text{A.3})$$

for every $\phi, \psi \in C_0^\infty(\Omega)$. If the assumption of compact support is removed, then (A.3) no longer holds; instead the integration by parts yields additional terms involving integrals over the boundary $\partial\Omega$. However, these boundary terms vanish if ϕ and ψ satisfy certain restrictions on the boundary.

A.2 Integration by parts

Theorem 4 (Integration by parts for tensors)

Consider a smooth tensor-valued function $\mathbf{A} \in \mathbb{R}^{d \times d}$ and vector-valued function $\mathbf{b} \in \mathbb{V} = \mathbb{R}^d$. The following integration by parts formula holds

$$\int_\Omega \{\text{Div}(\mathbf{A}) \cdot \mathbf{b} + \mathbf{A} : \text{grad}(\mathbf{b})\} \, d\Omega = \int_\Omega \text{div}(\mathbf{A}\mathbf{b}) \, d\Omega = \int_{\partial\Omega} (\mathbf{A}^\top \mathbf{n}) \cdot \mathbf{b} \, dS, \quad (\text{A.4})$$

where \mathbf{n} is the outward normal at the boundary and dS the infinitesimal surface.

Proof. Consider the components expression of Eq. (A.4)

$$\begin{aligned} \int_\Omega \{\text{Div}(\mathbf{A}) \cdot \mathbf{b} + \mathbf{A} : \text{grad}(\mathbf{b})\} \, d\Omega &= \int_\Omega \sum_{i=1}^d \sum_{j=1}^d \{(\partial_{x_i} A_{ij})b_j + A_{ij}(\partial_{x_i} b_j)\} \, d\Omega, \\ &= \int_\Omega \sum_{i=1}^d \sum_{j=1}^d \partial_{x_i} (A_{ij}b_j) \, d\Omega = \int_\Omega \text{div}(\mathbf{A}\mathbf{b}) \, d\Omega, \\ &= \int_{\partial\Omega} \sum_{i=1}^d \sum_{j=1}^d (n_i A_{ij})b_j \, dS = \int_{\partial\Omega} (\mathbf{A}^\top \mathbf{n}) \cdot \mathbf{b} \, dS. \end{aligned} \quad (\text{A.5})$$

□

The previous result can be specialized for symmetric tensor field [BBF⁺13, Chapter 1].

Theorem 5 (Integration by parts for symmetric tensors)

Consider a smooth tensor-valued function $\mathbf{M} \in \mathbb{S} = \mathbb{R}_{sym}^{d \times d}$ and vector-valued function $\mathbf{b} \in \mathbb{V} =$

2037 \mathbb{R}^d . Then, it holds

$$\int_{\Omega} \{\text{Div}(\mathbf{M}) \cdot \mathbf{b} + \mathbf{M} : \text{Grad}(\mathbf{b})\} \, d\Omega = \int_{\Omega} \text{div}(\mathbf{M}\mathbf{b}) \, d\Omega = \int_{\partial\Omega} (\mathbf{M}\mathbf{n}) \cdot \mathbf{b} \, dS. \quad (\text{A.6})$$

2038 *Proof.* Consider the components expression of Eq. (A.6)

$$\int_{\Omega} \{\text{Div}(\mathbf{M}) \cdot \mathbf{b} + \mathbf{M} : \text{Grad}(\mathbf{b})\} \, d\Omega = \int_{\Omega} \sum_{i=1}^d \sum_{j=1}^d \left\{ (\partial_{x_i} M_{ij}) b_j + M_{ij} \frac{1}{2} (\partial_{x_i} b_j + \partial_{x_j} b_i) \right\} \, d\Omega, \quad (\text{A.7})$$

2039 The term $M_{ij} \frac{1}{2} (\partial_{x_i} b_j + \partial_{x_j} b_i)$ can be manipulated exploiting the symmetry of the tensor \mathbf{M}

$$\begin{aligned} \sum_{i=1}^d \sum_{j=1}^d \frac{1}{2} (M_{ij} \partial_{x_i} b_j + M_{ij} \partial_{x_j} b_i) &= \sum_{i=1}^d \sum_{j=1}^d \frac{1}{2} (M_{ij} \partial_{x_i} b_j + M_{ji} \partial_{x_i} b_j), \\ &= \sum_{i=1}^d \sum_{j=1}^d \frac{1}{2} (M_{ij} + M_{ji}) \partial_{x_i} b_j \quad \text{Since } \mathbf{M} \text{ is symmetric,} \\ &= \sum_{i=1}^d \sum_{j=1}^d M_{ij} \partial_{x_i} b_j = \mathbf{M} : \text{grad}(\mathbf{b}) \end{aligned} \quad (\text{A.8})$$

2040 Then it holds

$$\int_{\Omega} \{\text{Div}(\mathbf{M}) \cdot \mathbf{b} + \mathbf{M} : \text{Grad}(\mathbf{b})\} \, d\Omega = \int_{\Omega} \{\text{Div}(\mathbf{M}) \cdot \mathbf{b} + \mathbf{M} : \text{grad}(\mathbf{b})\} \, d\Omega \quad (\text{A.9})$$

2041 Using Eq (A.4) then

$$\begin{aligned} \int_{\Omega} \{\text{Div}(\mathbf{M}) \cdot \mathbf{b} + \mathbf{M} : \text{Grad}(\mathbf{b})\} \, d\Omega &= \int_{\Omega} \{\text{Div}(\mathbf{M}) \cdot \mathbf{b} + \mathbf{M} : \text{grad}(\mathbf{b})\} \, d\Omega, \\ &= \int_{\partial\Omega} (\mathbf{M}^{\top} \mathbf{n}) \cdot \mathbf{b} \, dS, \quad \text{Since } \mathbf{M} \text{ is symmetric,} \\ &= \int_{\partial\Omega} (\mathbf{M} \mathbf{n}) \cdot \mathbf{b} \, dS. \end{aligned} \quad (\text{A.10})$$

2042 This concludes the proof. \square

2043 A.3 Bilinear forms

Definition 8 (Skew-symmetric bilinear form)

A bilinear form on the Hilbert space H

$$\begin{aligned} b : H \times H &\longrightarrow \mathbb{R}, \\ (\mathbf{v}, \mathbf{u}) &\longrightarrow b(\mathbf{v}, \mathbf{u}), \end{aligned}$$

is skew-symmetric iff

$$b(\boldsymbol{v}, \boldsymbol{u}) = -b(\boldsymbol{u}, \boldsymbol{v}).$$

Supplementary material: tabulated results of Chapter 8

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	2.03e-01	—	7.58e-02	—
8	4.39e-02	2.21	1.90e-02	1.99
16	1.02e-02	2.09	4.77e-03	1.99
32	2.52e-03	2.02	1.19e-03	1.99
64	6.27e-04	2.00	2.98e-04	1.99
128	1.56e-04	2.00	7.47e-05	1.99

Table B.1: Euler Bernoulli convergence result for the HerDG1 scheme.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	1.61e-02	—	7.48e-01	—
8	4.05e-03	1.99	1.88e-01	1.99
16	1.01e-03	1.99	4.71e-02	1.99
32	2.53e-04	1.99	1.17e-02	1.99
64	6.34e-05	1.99	2.94e-03	1.99
128	1.58e-05	1.99	7.37e-04	1.99

Table B.2: Euler Bernoulli convergence result for the DG1Her scheme.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	5.93e-01	—	4.16e-00	—
8	2.57e-01	1.20	2.08e-00	0.99
16	1.26e-01	1.02	1.04e-00	0.99
32	6.29e-02	1.00	5.22e-01	0.99
64	3.14e-02	1.00	2.61e-01	0.99
128	1.57e-02	1.00	1.30e-01	0.99

Table B.3: Euler Bernoulli convergence result for the CGCG scheme $k = 1$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	5.66e-02	—	4.20e-01	—
8	1.38e-02	2.03	1.05e-01	1.99
16	3.34e-03	2.05	2.65e-02	1.99
32	8.16e-04	2.03	6.62e-03	1.99
64	2.01e-04	2.01	1.65e-03	1.99
128	5.01e-05	2.00	4.14e-04	2.00

Table B.4: Euler Bernoulli convergence result for the CGCG scheme $k = 2$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
2	3.16e-02	—	2.19e-01	—
4	4.04e-03	2.97	2.80e-02	2.96
8	5.06e-04	2.99	3.51e-03	2.99
16	6.33e-05	3.00	4.39e-04	2.99
32	7.91e-06	3.00	5.50e-05	2.99
64	1.26e-06	2.64	6.88e-06	2.99

Table B.5: Euler Bernoulli convergence result for the CGCG scheme $k = 3$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
4	1.62e-05	—	1.51e-04	—	4.89e-08	—	5.83e-07	—
8	6.52e-06	1.31	4.59e-05	1.71	1.45e-08	1.75	2.01e-07	1.53
16	3.28e-06	0.98	2.17e-05	1.07	5.69e-09	1.34	9.41e-08	1.09
32	1.64e-06	0.99	1.07e-05	1.01	2.63e-09	1.10	4.64e-08	1.02
64	8.24e-07	0.99	5.39e-06	1.00	1.29e-09	1.02	2.31e-08	1.00

Table B.6: Mindlin plate convergence result for the BJT scheme $k = 1$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
4	8.05e-06	—	7.22e-05	—	1.72e-08	—	2.42e-07	—
8	2.12e-06	1.92	1.87e-05	1.94	4.42e-09	1.96	6.06e-08	2.00
16	5.42e-07	1.96	4.09e-06	2.19	1.14e-09	1.95	1.43e-08	2.07
32	1.36e-07	1.99	1.04e-06	1.97	2.89e-10	1.97	3.56e-09	2.00
64	3.41e-08	1.99	2.62e-07	1.99	7.26e-11	1.99	8.88e-10	2.00

Table B.7: Mindlin plate convergence result for the BJT scheme $k = 2$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
2	6.98e-07	—	1.42e-05	—	1.54e-09	—	3.31e-08	—
4	1.09e-07	2.67	2.14e-06	2.72	2.31e-10	2.73	4.61e-09	2.84
8	1.44e-08	2.91	2.29e-07	3.22	2.42e-11	3.25	6.36e-10	2.85
16	1.83e-09	2.97	2.05e-08	3.19	2.62e-12	3.20	8.44e-11	2.91
32	2.30e-10	2.99	2.94e-09	3.08	3.00e-13	3.12	1.07e-11	2.97

Table B.8: Mindlin plate convergence result for the BJT scheme $k = 3$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
4	1.05e-05	—	7.96e-05	—	3.75e-08	—	6.54e-07	—
8	5.33e-06	0.98	3.53e-05	1.17	1.15e-08	1.70	3.73e-07	0.80
16	2.68e-06	0.99	1.75e-05	1.00	3.02e-09	1.92	1.92e-07	0.95
32	1.34e-06	0.99	8.80e-06	0.99	7.71e-10	1.97	9.72e-08	0.98

Table B.9: Mindlin plate convergence result for the AFW scheme $k = 1$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
4	8.43e-06	—	8.10e-05	—	1.80e-08	—	2.68e-07	—
8	2.28e-06	1.88	1.82e-05	2.15	4.79e-09	1.90	6.99e-08	1.93
16	5.85e-07	1.96	4.41e-06	2.04	1.22e-09	1.96	1.75e-08	1.99
32	1.47e-07	1.98	1.12e-06	1.97	3.03e-10	2.01	4.47e-09	1.97

Table B.10: Mindlin plate convergence result for the AFW scheme $k = 2$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
2	1.11e-06	—	1.63e-05	—	2.14e-09	—	4.63e-08	—
4	1.63e-07	2.77	2.56e-06	2.67	2.61e-10	3.04	6.96e-09	2.73
8	2.13e-08	2.93	2.63e-07	3.28	2.42e-11	3.42	9.90e-10	2.81
16	2.93e-09	2.86	4.24e-08	2.63	8.99e-12	1.43	3.64e-10	1.44

Table B.11: Mindlin plate convergence result for the AFW scheme $k = 3$.

$\ \mathbf{E}_r - \mathbf{E}_r^h\ _{L^\infty(L^2)}$							
$\frac{1}{h}$	$k = 1$		$k = 2$		$k = 3$		
	Error	Order	Error	Order	Error	Order	
4	2.45e-09	—	1.07e-09	—	1.57e-09	—	
8	4.98e-10	2.29	2.48e-10	2.11	3.52e-10	2.15	
16	1.26e-10	1.97	6.11e-11	2.02	8.67e-11	2.02	
32	3.19e-11	1.98	1.52e-11	1.99	2.16e-11	2.00	

Table B.12: Mindlin plate convergence result for the Lagrange multiplier \mathbf{E}_r .

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(H^1)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(H^{\text{Grad}})}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
8	7.30e-05	—	5.52e-04	—	3.99e-08	—	9.02e-07	—
16	3.13e-05	1.22	2.26e-04	1.28	1.88e-08	1.08	5.47e-07	0.72
32	1.57e-05	0.99	1.11e-04	1.02	8.84e-09	1.09	2.94e-07	0.89
64	7.87e-06	0.99	5.57e-05	0.99	4.31e-09	1.03	1.50e-07	0.97
128	3.94e-06	0.99	2.78e-05	0.99	2.14e-09	1.01	7.55e-08	0.99

Table B.13: Mindlin plate convergence result for the CGDG scheme $k = 1$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(H^1)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(H^{\text{Grad}})}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
8	9.78e-06	—	1.04e-04	—	7.30e-09	—	1.77e-07	—
16	2.53e-06	1.95	2.49e-05	2.07	1.85e-09	1.97	4.93e-08	1.84
32	6.35e-07	1.99	6.06e-06	2.04	4.63e-10	1.99	1.27e-08	1.95
64	1.58e-07	1.99	1.50e-06	2.01	1.15e-10	2.00	3.21e-09	1.98
128	3.97e-08	2.00	3.74e-07	2.00	2.89e-11	2.00	8.06e-10	1.99

Table B.14: Mindlin plate convergence result for the CGDG scheme $k = 2$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(H^1)}$		$\ e_\theta - e_\theta^h\ _{L^\infty(H^{\text{Grad}})}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$		$\ e_\gamma - e_\gamma^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order	Error	Order	Error	Order
4	1.38e-06	—	1.24e-05	—	8.24e-10	—	2.24e-08	—
8	1.79e-07	2.94	1.51e-06	3.03	1.03e-10	2.99	2.90e-09	2.94
16	2.26e-08	2.98	1.88e-07	3.00	1.28e-11	3.00	3.64e-10	2.99
32	2.83e-09	2.99	2.36e-08	2.99	1.60e-12	3.00	4.54e-11	3.00
64	3.54e-10	2.99	2.95e-09	2.99	2.00e-13	3.00	5.67e-12	3.00

Table B.15: Mindlin plate convergence result for the CGDG scheme $k = 3$.

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	1.38e-00	—	5.11e+01	—
8	5.17e-01	1.41	2.64e+01	0.95
16	2.28e-01	1.18	1.33e+01	0.98
32	1.09e-01	1.05	6.68e-00	0.99
64	5.45e-02	1.01	3.34e-00	0.99

Table B.16: Kirchoff plate convergence result for the HHJ scheme $k = 1$ (SSSS test).

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	1.47e-01	—	6.58e-00	—
8	3.48e-02	2.08	1.70e-00	1.94
16	8.51e-03	2.03	4.31e-01	1.98
32	2.11e-03	2.00	1.08e-01	1.99
64	5.28e-04	2.00	2.70e-02	1.99

Table B.17: Kirchhoff plate convergence result for the HHJ scheme $k = 2$ (SSSS test).

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
2	1.15e-01	—	4.85e-00	—
4	1.51e-02	2.92	6.42e-01	2.91
8	1.92e-03	2.97	8.10e-02	2.98
16	2.41e-04	2.99	1.01e-02	2.99
32	3.02e-05	2.99	1.26e-03	3.00

Table B.18: Kirchhoff plate convergence result for the HHJ scheme $k = 3$ (SSSS test).

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
2	6.63e-00	—	3.60e+01	—
4	1.91e-00	1.79	9.99e-00	1.85
8	6.08e-01	1.64	3.29e-00	1.60
16	2.09e-01	1.54	1.14e-00	1.52
32	7.34e-02	1.50	4.01e-01	1.50

Table B.19: Kirchhoff plate convergence result for the BellDG3 scheme (SSSS test).

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	5.94e-00	—	1.62e+01	—
8	2.35e-00	1.33	9.27e-00	0.81
16	9.98e-01	1.23	4.86e-00	0.93
32	4.69e-01	1.08	2.46e-00	0.98
64	2.34e-01	1.00	1.23e-00	0.99

Table B.20: Kirchhoff plate convergence result for the HHJ scheme $k = 1$ (CSFS test).

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
4	1.13e-00	—	4.14e-00	—
8	2.90e-01	1.96	1.19e-00	1.79
16	7.14e-02	2.02	3.13e-01	1.93
32	1.77e-02	2.00	7.96e-02	1.97
64	4.43e-03	2.00	2.00e-02	1.98

Table B.21: Kirchoff plate convergence result for the HHJ scheme $k = 2$ (CSFS test).

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
2	1.57e-00	—	4.25e-00	—
4	2.39e-01	2.71	8.44e-01	2.33
8	3.37e-02	2.82	1.16e-01	2.85
16	4.50e-03	2.90	1.49e-02	2.95
32	5.76e-04	2.96	1.89e-03	2.98

Table B.22: Kirchoff plate convergence result for the HHJ scheme $k = 3$ (CSFS test).

$\frac{1}{h}$	$\ e_w - e_w^h\ _{L^\infty(L^2)}$		$\ \mathbf{E}_\kappa - \mathbf{E}_\kappa^h\ _{L^\infty(L^2)}$	
	Error	Order	Error	Order
2	3.88e+01	—	2.40e+01	—
4	8.17e-00	2.24	4.41e-00	2.44
8	2.71e-00	1.58	1.50e-00	1.54
16	1.13e-00	1.25	5.36e-01	1.49
32	4.35e-01	1.38	1.90e-01	1.49

Table B.23: Kirchoff plate convergence result for the BellDG3 scheme (CSFS test).

2048

APPENDIX C

2049

Implementation using FEniCS and Firedrake

2050

2051

Bibliography

2052

- 2053 [A.90] Douglas N. A. Mixed finite element methods for elliptic problems. *Computer*
2054 *Methods in Applied Mechanics and Engineering*, 82(1):281 – 300, 1990. Pro-
2055 ceedings of the Workshop on Reliability in Computational Mechanics.
- 2056 [AB85] D. Arnold and F. Brezzi. Mixed and nonconforming finite element meth-
2057 ods: implementation, postprocessing and error estimates. *ESAIM: Mathemat-*
2058 *ical Modelling and Numerical Analysis-Modélisation Mathématique et Analyse*
2059 *Numérique*, 19(1):7–32, 1985.
- 2060 [Abe12] R. Abeyaratne. *Lecture Notes on the Mechanics of Elastic Solids. Volume II:*
2061 *Continuum Mechanics*. Cambridge, MA and Singapore, 1st edition, 2012.
- 2062 [AFS68] J.H. Argyris, I. Fried, and D. W. Scharpf. The tuba family of plate ele-
2063 ments for the matrix displacement method. *The Aeronautical Journal (1968)*,
2064 72(692):701–709, 1968.
- 2065 [AFW07] D. Arnold, R. Falk, and R. Winther. Mixed finite element methods for lin-
2066 ear elasticity with weakly imposed symmetry. *Mathematics of Computation*,
2067 76(260):1699–1723, 2007.
- 2068 [AL00] G. Avalos and I. Lasiecka. Boundary controllability of thermoelastic plates via
2069 the free boundary conditions. *SIAM Journal on Control and Optimization*,
2070 38(2):337–383, 2000.
- 2071 [AL14] D. Arnold and J. Lee. Mixed methods for elastodynamics with weak symmetry.
2072 *SIAM Journal on Numerical Analysis*, 52(6):2743–2769, 2014.
- 2073 [AW02] D. Arnold and R. Winther. Mixed finite elements for elasticity. *Numerische*
2074 *Mathematik*, 92(3):401–419, 2002.
- 2075 [AW19] D. Arnold and S. W. Walker. The Hellan-Herrmann-Johnson method with
2076 curved elements, 2019. arXiv preprint arXiv:1909.09687.
- 2077 [BadVMR13] L. Beirão da Veiga, D. Mora, and R. Rodríguez. Numerical analysis of a locking-
2078 free mixed finite element method for a bending moment formulation of Reissner-
2079 Mindlin plate model. *Numerical Methods for Partial Differential Equations*,
2080 29(1):40–63, 2013.
- 2081 [BBF⁺13] D. Boffi, F. Brezzi, M. Fortin, et al. *Mixed finite element methods and applica-*
2082 *tions*, volume 44. Springer, 2013.
- 2083 [BDM85] F. Brezzi, J. Jr. Douglas, and L.D. Marini. Two families of mixed finite elements
2084 for second order elliptic problems. *Numerische Mathematik*, 47:217–236, 1985.

-
- 2085 [Bel69] K. Bell. A refined triangular plate bending finite element. *International Journal*
2086 *for Numerical Methods in Engineering*, 1(1):101–122, 1969.
- 2087 [BGL05] M. Benzi, G. H. Golub, and J. Liesen. Numerical solution of saddle point
2088 problems. *Acta Numerica*, 14:1–137, 2005.
- 2089 [BH15] P. Benner and J. Heiland. Time-dependent Dirichlet conditions in finite element
2090 discretizations. *ScienceOpen Research*, 2015.
- 2091 [Bio56] M.A. Biot. Thermoelasticity and irreversible thermodynamics. *Journal of Ap-*
2092 *plied Physics*, 27(3):240–253, 1956.
- 2093 [BJT00] E. Bécache, P. Joly, and C. Tsogka. An analysis of new mixed finite elements for
2094 the approximation of wave propagation problems. *SIAM Journal on Numerical*
2095 *Analysis*, 37(4):1053–1084, 2000.
- 2096 [BJT01] E. Bécache, P. Joly, and C. Tsogka. A new family of mixed finite elements
2097 for the linear elastodynamic problem. *SIAM Journal on Numerical Analysis*,
2098 39:2109–2132, 06 2001.
- 2099 [BMXZ18] C. Beattie, V. Mehrmann, H. Xu, and H. Zwart. Linear port-Hamiltonian
2100 descriptor systems. *Mathematics of Control, Signals, and Systems*, 30(4):17,
2101 2018.
- 2102 [BR90] H. Blum and R. Rannacher. On mixed finite element methods in plate bending
2103 analysis. *Computational Mechanics*, 6(3):221–236, May 1990.
- 2104 [Bre08] F. Brezzi. *Mixed finite elements, compatibility conditions, and applications*.
2105 Springer, 2008.
- 2106 [Car73] D. E. Carlson. Linear thermoelasticity. In C. Truesdell, editor, *Linear Theories*
2107 *of Elasticity and Thermoelasticity: Linear and Nonlinear Theories of Rods,*
2108 *Plates, and Shells*, pages 297–345. Springer, Berlin, Heidelberg, 1973.
- 2109 [CF05] G. Cohen and S. Fauqueux. Mixed spectral finite elements for the linear elas-
2110 ticity system in unbounded domains. *SIAM Journal on Scientific Computing*,
2111 26(3):864–884, 2005.
- 2112 [Cha62] P. Chadwick. On the propagation of thermoelastic disturbances in thin plates
2113 and rods. *Journal of the Mechanics and Physics of Solids*, 10(2):99–109, 1962.
- 2114 [Cia88] P. G. Ciarlet. *Mathematical Elasticity: Three-Dimensional Elasticity*. Studies
2115 in mathematics and its applications. North-Holland, 1988.
- 2116 [CMKO11] S.H. Christiansen, H.Z. Munthe-Kaas, and B. Owren. Topics in structure-
2117 preserving discretization. *Acta Numerica*, 20:1–119, 2011.
- 2118 [Cou90] T.J. Courant. Dirac manifolds. *Transactions of the American Mathematical*
2119 *Society*, 319(2):631–661, 1990.
-

-
- 2120 [CR16] F.L. Cardoso Ribeiro. *Port-Hamiltonian modeling and control of fluid-structure*
2121 *system*. PhD thesis, Université de Toulouse, Dec. 2016.
- 2122 [CRML18] F.L. Cardoso-Ribeiro, D. Matignon, and L. Lefèvre. A structure-preserving par-
2123 titioned finite element method for the 2d wave equation. *IFAC-PapersOnLine*,
2124 51(3):119 – 124, 2018. 6th IFAC Workshop on Lagrangian and Hamiltonian
2125 Methods for Nonlinear Control LHMNC 2018.
- 2126 [CRML19] F.L. Cardoso-Ribeiro, D. Matignon, and L. Lefèvre. A partitioned finite element
2127 method for power-preserving discretization of open systems of conservation
2128 laws, 2019. arXiv preprint arXiv:1906.05965.
- 2129 [CRMPB17] F.L. Cardoso-Ribeiro, D. Matignon, and V. Pommier-Budinger. A port-
2130 Hamiltonian model of liquid sloshing in moving containers and application to a
2131 fluid-structure system. *Journal of Fluids and Structures*, 69:402–427, February
2132 2017.
- 2133 [DHNLS99] R. Durán, L. Hervella-Nieto, E. Liberman, and J. Solomin. Approximation of
2134 the vibration modes of a plate by Reissner-Mindlin equations. *Mathematics of*
2135 *Computation of the American Mathematical Society*, 68(228):1447–1463, 1999.
- 2136 [DMSB09] V. Duindam, A. Macchelli, S. Stramigioli, and H. Bruyninckx. *Modeling and*
2137 *Control of Complex Physical Systems*. Springer Verlag, 2009.
- 2138 [DSP08] V. Dos Santos and C. Prieur. Boundary control of open channels with nu-
2139 merical and experimental validations. *IEEE transactions on Control systems*
2140 *technology*, 16(6):1252–1264, 2008.
- 2141 [Gev88] T. Geveci. On the application of mixed finite element methods to the wave
2142 equations. *ESAIM: M2AN*, 22(2):243–250, 1988.
- 2143 [Gri15] M. Grinfeld. *Mathematical Tools for Physicists*. John Wiley & Sons Inc, 2nd
2144 edition, jan 2015.
- 2145 [GSV18] T. Gustafsson, R. Stenberg, and J. Videman. A posteriori estimates for con-
2146 forming kirchhoff plate elements. *SIAM Journal on Scientific Computing*,
2147 40(3):A1386–A1407, 2018.
- 2148 [GV64] I.M. Gel’fand and N.Ya. Vilenkin. *Generalized functions: Applications of har-*
2149 *monic analysis*, volume 4. Academic press, 1964.
- 2150 [HE09] R.B. Hetnarski and M.R. Eslami. *Thermal stresses: advanced theory and ap-*
2151 *plications*, volume 158. Springer, 2009.
- 2152 [Hel67] K. Hellan. Analysis of elastic plates in flexure by a simplified finite element
2153 method. *Acta Polytechnica Scandinavica*, 1967.
- 2154 [Hen06] D. Henry. *Geometric theory of semilinear parabolic equations*, volume 840.
2155 Springer, 2006.
-

-
- 2156 [Her67] L.R. Herrmann. Finite-element bending analysis for plates. *Journal of the*
2157 *Engineering Mechanics Division*, 93(5):13–26, 1967.
- 2158 [HLW03] E. Hairer, C. Lubich, and G. Wanner. Geometric numerical integration illus-
2159 trated by the Störmer–Verlet method. *Acta numerica*, 12:399–450, 2003.
- 2160 [HM78] T. J.R. Hughes and J.E. Marsden. Classical elastodynamics as a linear sym-
2161 metric hyperbolic system. *Journal of Elasticity*, 8(1):97–110, 1978.
- 2162 [Hug12] T. J.R. Hughes. *The finite element method: linear static and dynamic finite*
2163 *element analysis*. Courier Corporation, 2012.
- 2164 [HZ97] S.W. Hansen and B.Y. Zhang. Boundary control of a linear thermoelastic beam.
2165 *Journal of Mathematical Analysis and Applications*, 210(1):182–205, 1997.
- 2166 [Joh73] C. Johnson. On the convergence of a mixed finite-element method for plate
2167 bending problems. *Numerische Mathematik*, 21(1):43–62, 1973.
- 2168 [JZ12] B. Jacob and H. Zwart. *Linear Port-Hamiltonian Systems on Infinite-*
2169 *dimensional Spaces*. Number 223 in Operator Theory: Advances and Ap-
2170 plications. Springer Verlag, Germany, 2012. [https://doi.org/10.1007/](https://doi.org/10.1007/978-3-0348-0399-1)
2171 [978-3-0348-0399-1](https://doi.org/10.1007/978-3-0348-0399-1).
- 2172 [Kir18] R.C. Kirby. A general approach to transforming finite elements. *The SMAI*
2173 *journal of computational mathematics*, 4:197–224, 2018.
- 2174 [KK15] R.C. Kirby and T. T. Kieu. Symplectic-mixed finite element approximation of
2175 linear acoustic wave equations. *Numerische Mathematik*, 130(2):257–291, Jun
2176 2015.
- 2177 [KM19] R.C. Kirby and L. Mitchell. Code generation for generally mapped finite ele-
2178 ments. *ACM Trans. Math. Softw.*, 45(4), December 2019.
- 2179 [KML18] P. Kotyczka, B. Maschke, and L. Lefèvre. Weak form of Stokes-Dirac struc-
2180 tures and geometric discretization of port-Hamiltonian systems. *Journal of*
2181 *Computational Physics*, 361:442 – 476, 2018.
- 2182 [Kot19] P. Kotyczka. *Numerical Methods for Distributed Parameter Port-Hamiltonian*
2183 *Systems*. TUM University Press, 2019.
- 2184 [KS08] M. Krstic and A. Smyshlyaev. *Boundary control of PDEs: A course on back-*
2185 *stepping designs*, volume 16. Society for Industrial and Applied Mathematics,
2186 2008.
- 2187 [KZ15] M. Kurula and H. Zwart. Linear wave systems on n-d spatial domains. *Interna-*
2188 *tional Journal of Control*, 88(5):1063–1077, 2015. [https://www.tandfonline.](https://www.tandfonline.com/doi/abs/10.1080/00207179.2014.993337)
2189 [com/doi/abs/10.1080/00207179.2014.993337](https://www.tandfonline.com/doi/abs/10.1080/00207179.2014.993337).
-

-
- [KZvdSB10] M. Kurula, H. Zwart, A. J. van der Schaft, and J. Behrndt. Dirac structures and their composition on Hilbert spaces. *Journal of mathematical analysis and applications*, 372(2):402–422, 2010. <https://doi.org/10.1016/j.jmaa.2010.07.004>.
- [Lag89] J.E. Lagnese. *Boundary Stabilization of Thin Plates*. Society for Industrial and Applied Mathematics, 1989.
- [Lee12] J. Lee. *Mixed methods with weak symmetry for time dependent problems of elasticity and viscoelasticity*. PhD thesis, University of Minnesota, 2012.
- [LGZM05] Y. Le Gorrec, H. Zwart, and B. Maschke. Dirac structures and Boundary Control Systems associated with Skew-Symmetric Differential Operators. *SIAM Journal on Control and Optimization*, 44(5):1864–1892, 2005. <https://doi.org/10.1137/040611677>.
- [Li18] L. Li. *Regge finite elements with applications in solid mechanics and relativity*. PhD thesis, University of Minnesota, 2018.
- [LMW⁺12] A. Logg, K.A. Mardal, G.N. Wells, et al. *Automated Solution of Differential Equations by the Finite Element Method*. Springer, 2012.
- [LPKL12] L.D. Landau, L.P. Pitaevskii, A.M. Kosevich, and E.M. Lifshitz. *Theory of Elasticity*. Butterworth Heinemann, third edition, Dec 2012.
- [LR00] R. Lifshitz and M. L. Roukes. Thermoelastic damping in micro-and nanomechanical systems. *Physical review B*, 61(8):5600, 2000.
- [MBM⁺16] A. T. T. McRae, G.-T. Bercea, L. Mitchell, D. A. Ham, and C. J. Cotter. Automated generation and symbolic manipulation of tensor product finite elements. *SIAM Journal on Scientific Computing*, 38(5):S25–S47, 2016.
- [Min51] R.D. Mindlin. Influence of rotatory inertia and shear on flexural motions of isotropic elastic Plates. *Journal of Applied Mechanics*, 18:31–38, March 1951.
- [MM19] V. Mehrmann and R. Morandin. Structure-preserving discretization for port-hamiltonian descriptor systems. In *2019 IEEE 58th Conference on Decision and Control (CDC)*, pages 6863–6868, 2019.
- [MMB05] A. Macchelli, C. Melchiorri, and L. Bassi. Port-based modelling and control of the Mindlin plate. In *Proceedings of the 44th IEEE Conference on Decision and Control*, pages 5989–5994, Dec. 2005. <https://doi.org/10.1109/CDC.2005.1583120>.
- [Nor06] A.N. Norris. Dynamics of thermoelastic thin plates: A comparison of four theories. *Journal of Thermal Stresses*, 29(2):169–195, 2006.
- [NY04] G. Nishida and M. Yamakita. A higher order Stokes-Dirac structure for distributed-parameter port-Hamiltonian systems. In *Proceedings of the 2004 American Control Conference*, volume 6, pages 5004–5009 vol.6, 2004.
-

-
- 2227 [Olv93] P. J. Olver. *Applications of Lie groups to differential equations*, volume 107 of
2228 *Graduate texts in mathematics*. Springer-Verlag New York, 2nd edition, 1993.
- 2229 [Pir89] O.A. Pironneau. *Finite element methods for fluids*. John Wiley and Sons, 1989.
- 2230 [PZ18] D. Pauly and W. Zulehner. The divdiv-complex and applications to biharmonic
2231 equations. *Applicable Analysis*, pages 1–52, 2018.
- 2232 [PZ20] D. Pauly and W. Zulehner. The elasticity complex, 2020. arXiv preprint
2233 arXiv:2001.11007.
- 2234 [Red03] J.N. Reddy. *Mechanics of laminated composite plates and shells: theory and
2235 analysis*. CRC press, 2003.
- 2236 [Red06] J.N. Reddy. *Theory and analysis of elastic plates and shells*. CRC press, 2006.
- 2237 [Rei47] E. Reissner. On bending of elastic plates. *Quarterly of Applied Mathematics*,
2238 5(1):55–68, 1947.
- 2239 [RHM⁺17] F. Rathgeber, D.A. Ham, L. Mitchell, M. Lange, F. Luporini, A.T.T. McRae,
2240 G.T. Bercea, G.R. Markall, and P.H.J. Kelly. Firedrake: automating the finite
2241 element method by composing abstractions. *ACM Transactions on Mathematical
2242 Software (TOMS)*, 43(3):24, 2017.
- 2243 [RR04] M. Renardy and R.C. Rogers. *An Introduction to Partial Differential Equations*.
2244 Number 13 in Texts in Applied Mathematics. Springer-Verlag New York, 2nd
2245 edition, 2004.
- 2246 [RT77] P.A. Raviart and J.M. Thomas. A mixed finite element method for 2-nd order
2247 elliptic problems. In Ilio Galligani and Enrico Magenes, editors, *Mathematical
2248 Aspects of Finite Element Methods*, pages 292–315, Berlin, Heidelberg, 1977.
2249 Springer Berlin Heidelberg.
- 2250 [RZ18] K. Rafetseder and W. Zulehner. A decomposition result for Kirchhoff plate
2251 bending problems and a new discretization approach. *SIAM Journal on Nu-
2252 merical Analysis*, 56(3):1961–1986, 2018.
- 2253 [SHM19a] A. Serhani, G. Haine, and D. Matignon. Anisotropic heterogeneous n-D
2254 heat equation with boundary control and observation: I. Modeling as port-
2255 Hamiltonian system. *IFAC-PapersOnLine*, 52(7):51 – 56, 2019. 3rd IFAC
2256 Workshop on Thermodynamic Foundations for a Mathematical Systems The-
2257 ory TFMST 2019.
- 2258 [SHM19b] A. Serhani, G. Haine, and D. Matignon. Anisotropic heterogeneous n-D heat
2259 equation with boundary control and observation: II. Structure-preserving dis-
2260 cretization. *IFAC-PapersOnLine*, 52(7):57 – 62, 2019. 3rd IFAC Workshop
2261 on Thermodynamic Foundations for a Mathematical Systems Theory TFMST
2262 2019.
-

-
- 2263 [Sim99] J.G. Simmonds. Major simplifications in a current linear model for the motion
2264 of a thermoelastic plate. *Quarterly of Applied Mathematics*, 57(4):673–679,
2265 1999.
- 2266 [Skr19] N. Skrepek. Well-posedness of linear first order port-Hamiltonian systems on
2267 multidimensional spatial domains, 2019. arXiv preprint arXiv:1910.09847.
- 2268 [SS86] Y. Saad and M.H. Schultz. Gmres: A generalized minimal residual algorithm
2269 for solving nonsymmetric linear systems. *SIAM Journal on Scientific and Sta-*
2270 *tistical Computing*, 7(3):856–869, 1986.
- 2271 [SS17] M. Schöberl and K. Schlacher. Variational Principles for Different Represen-
2272 tations of Lagrangian and Hamiltonian Systems. In Hans Irschik, Alexander
2273 Belyaev, and Michael Krommer, editors, *Dynamics and Control of Advanced*
2274 *Structures and Machines*, pages 65–73. Springer International Publishing, 2017.
- 2275 [TRLGK18] V. Trenchant, H. Ramírez, Y. Le Gorrec, and P. Kotyczka. Finite differences
2276 on staggered grids preserving the port-Hamiltonian structure with application
2277 to an acoustic duct. *Journal of Computational Physics*, 373, 06 2018.
- 2278 [TW09] M. Tucsnak and G. Weiss. *Observation and control for operator semigroups*.
2279 Springer Science & Business Media, 2009.
- 2280 [TWK59] S. Timoshenko and S. Woinowsky-Krieger. *Theory of plates and shells*. Engi-
2281 neering societies monographs. McGraw-Hill, 1959.
- 2282 [vdSM02] A.J. van der Schaft and B. Maschke. Hamiltonian formulation of distributed-
2283 parameter systems with boundary energy flow. *Journal of Geometry and*
2284 *Physics*, 42(1):166 – 194, 2002.
- 2285 [Vil07] J.A. Villegas. *A Port-Hamiltonian Approach to Distributed Parameter Systems*.
2286 PhD thesis, University of Twente, May 2007.
- 2287 [Yao11] P.F. Yao. *Modeling and Control in Vibrational and Structural Dynamics: A*
2288 *Differential Geometric Approach*. Chapman & Hall/CRC Applied Mathematics
2289 & Nonlinear Science. Taylor & Francis, 2011.
-

Résumé — Malgré l’abondante littérature sur le formalisme pH, les problèmes d’élasticité en deux ou trois dimensions géométriques n’ont presque jamais été considérés. Cette thèse vise à étendre l’approche port-Hamiltonienne (pH) à la mécanique des milieux continus. L’originalité apportée réside dans trois contributions majeures. Tout d’abord, la nouvelle formulation pH des modèles de plaques et des phénomènes thermoélastiques couplés est présentée. L’utilisation du calcul tensoriel est obligatoire pour modéliser les milieux continus et l’introduction de variables tensorielles est nécessaire pour obtenir une description pH équivalente qui soit intrinsèque, c’est-à-dire indépendante des coordonnées choisies. Deuxièmement, une technique de discrétisation basée sur les éléments finis et capable de préserver la structure du problème de la dimension infinie au niveau discret est développée et validée. La discrétisation des problèmes d’élasticité nécessite l’utilisation d’éléments finis non standard. Néanmoins, l’implémentation numérique est réalisée grâce à des bibliothèques open source bien établies, fournissant aux utilisateurs externes un outil facile à utiliser pour simuler des systèmes flexibles sous forme pH. Troisièmement, une nouvelle formulation pH de la dynamique multicorps flexible est dérivée. Cette reformulation, valable sous de petites hypothèses de déformations, inclut toutes sortes de modèles élastiques linéaires et exploite la modularité intrinsèque des systèmes pH.

Mots clés : Systèmes port-Hamiltonien, mécanique des solides, discretisation symplectique, méthode des éléments finis, dynamique multicorps

Abstract — Despite the large literature on pH formalism, elasticity problems in higher geometrical dimensions have almost never been considered. This work establishes the connection between port-Hamiltonian distributed systems and elasticity problems. The originality resides in three major contributions. First, the novel pH formulation of plate models and coupled thermoelastic phenomena is presented. The use of tensor calculus is mandatory for continuum mechanical models and the inclusion of tensor variables is necessary to obtain an equivalent and intrinsic, i.e. coordinate free, pH description. Second, a finite element based discretization technique, capable of preserving the structure of the infinite-dimensional problem at a discrete level, is developed and validated. The discretization of elasticity problems requires the use of non-standard finite elements. Nevertheless, the numerical implementation is performed thanks to well-established open-source libraries, providing external users with an easy to use tool for simulating flexible systems in pH form. Third, flexible multibody systems are recast in pH form by making use of a floating frame description valid under small deformations assumptions. This reformulation include all kinds of linear elastic models and exploits the intrinsic modularity of pH systems.

Keywords: Port-Hamiltonian systems, continuum mechanics, structure preserving discretization, finite element method, multibody dynamics.