Université Fédérale

Toulouse Midi-Pyrénées

THÈSE

En vue de l'obtention du

DOCTORAT DE L'UNIVERSITÉ DE TOULOUSE

Délivré par : *l'Institut Supérieur de l'Aéronautique et de l'Espace (ISAE)*

Présentée et soutenue le *30 Octobre 2020* par :
Andrea BRUGNOLI

A port-Hamiltonian formulation of flexible structures
Modelling and symplectic finite element discretization

JURY

Daniel ALAZARD	ISAE-Supaéro, Toulouse	Directeur
Valérie P. BUDINGER	ISAE-Supaéro, Toulouse	Co-directeur
Yann LE GORREC	Institut FEMTO-ST	Rapporteur
Alessandro MACCHELLI	Universitá di Bologna	Rapporteur
Thomas Hélie	Directeur de Recherches CNRS	Examinateur
?????	??????	Président

École doctorale et spécialité :
   EDSYS : Automatique
Unité de Recherche :
   CSDV - Commande des Systèmes et Dynamique du Vol - ONERA - ISAE
Directeur de Thèse :
   Daniel ALAZARD et *Valérie POMMIER-BUDINGER*
Rapporteurs :
   Yann LE GORREC et *Alessandro MACCHELLI*

Abstract

This thesis aims at extending the port-Hamiltonian (pH) approach to continuum mechanics in higher geometrical dimensions (particularly in 2D). The pH formalism has a strong multiphysics character and represents a unified framework to model, analyze and control both finite- and infinite-dimensional systems. Despite the large literature on this topic, elasticity problems in higher geometrical dimensions have almost never been considered. This work establishes the connection between port-Hamiltonian distributed systems and elasticity problems. The originality resides in three major contributions. First, the novel pH formulation of plate models and coupled thermoelastic phenomena is presented. The use of tensor calculus is mandatory for continuum mechanical models and the inclusion of tensor variables is necessary to obtain an intrinsic, i.e. coordinate free, and equivalent pH description. Second, a finite element based discretization technique, capable of preserving the structure of the infinite-dimensional problem at a discrete level, is developed and validated. The discretization of elasticity problems in port-Hamiltonian form requires the use of non-standard finite elements. Nevertheless, the numerical implementation is performed thanks to well-established open-source libraries, providing external users with an easy to use tool for simulating flexible systems in pH form. Third, flexible multibody systems are recast in pH form by making use of a floating frame description valid under small deformations assumptions. This reformulation include all kinds of linear elastic models and exploits the intrinsic modularity of pH systems.

Résumé

Cette thèse vise à étendre l'approche port-hamiltonienne (pH) à la mécanique des milieux continus dans des dimensions géométriques plus élevées (en particulier on se focalise sur la dimension deux). Le formalisme pH, avec son fort caractère multiphysique, représente un cadre unifié pour modéliser, analyser et contrôler les systèmes de dimension finie et infinie. Malgré l'abondante littérature sur ce sujet, les problèmes d'élasticité en deux ou trois dimensions géométriques n'ont presque jamais été considérés. Dans ce travail de thèse la connexion entre problèmes d'élasticité et systèmes distribués port-Hamiltoniens est établie. L'originalité apportée réside dans trois contributions majeures. Tout d'abord, une nouvelle formulation pH des modèles de plaques et des phénomènes thermoélastiques couplés est présentée. L'utilisation du calcul tensoriel est obligatoire pour modéliser les milieux continus et l'introduction de variables tensorielles est nécessaire pour obtenir une description pH équivalente qui soit intrinsèque, c'est-à-dire indépendante des coordonnées choisies. Deuxièmement, une technique de discrétisation basée sur les éléments finis et capable de préserver la structure du problème de la dimension infinie au niveau discret est développée et validée. La discrétisation des problèmes d'élasticité écrits en forme port-Hamiltonienne nécessite l'utilisation d'éléments finis non standards. Néanmoins, l'implémentation numérique est réalisée grâce à des bibliothèques open source bien établies, fournissant aux utilisateurs externes un outil facile à utiliser pour simuler des systèmes flexibles sous forme pH. Troisièmement, une nouvelle formulation pH de la dynamique multicorps flexible est dérivée. Cette reformulation, valable sous de petites hypothèses de déformations, inclut toutes sortes de modèles élastiques linéaires et exploite la modularité intrinsèque des systèmes pH.

Acknowledgments

Remerciements

Ringraziamenti

Alla mia famiglia

Contents

xiii

List of Figures

List of Tables

List of Acronyms

DAE	*Differential-Algebraic Equation*
dpHs	*distributed port-Hamiltonian systems*
FEM	*Finite Element Method*
IDA-PBC	*Interconnection and Damping Assignment Passivity Based Control*
PDE	*Partial Differential Equation*
PFEM	*Partitioned Finite Element Method*
pH	*port-Hamiltonian*
pHs	*port-Hamiltonian systems*
pHDAE	*port-Hamiltonian Descriptor System*

Part I

Introduction and state of the art

Introduction

I was born not knowing and have had only a little time to change that here and there.

Richard Feynman
Letter to Armando Garcia J.

Contents

1.1 Motivation and context

1.2 Overview of chapters

1.3 Contributions

Literature review

> Books serve to show a man that those original thoughts of his aren't very new after all.
>
> *Abraham Lincoln*

2.1 Port-Hamiltonian distributed systems

For 1D linear PH systems with a generalized skew-adjoint system operator, [LGZM05] gives conditions on the assignment of boundary inputs and outputs for the system operator to generate a contraction semigroup. The latter is instrumental to show well-posedness of a linear PH system, see [JZ12]. Essentially, at most half the number of boundary port variables can be imposed as control inputs for a well-posed PH system in 1D.

2.2 Structure-preserving discretization

2.3 Mixed finite element for elasticity

2.4 Multibody dynamics

Reminder on port-Hamiltonian systems

Contents

THe main mathematical aspects behind the pH formalism are recalled in this chapter. First, the concept of Stokes-Dirac structure is presented. This notion was first introduced in the literature by making use of a differential geometry approach [vdSM02]. Despite being really insightful in terms of geometrical structure, this approach does not encompass the case of higher-order differential operators. An extension in this sense is still an open question. Since bending problems in elasticity introduce higher-order differential operators, the language of PDE will be privileged over the one of differential forms. To have the most suitable definition of Stokes-Dirac structure for flexible systems, the approach adopted in [MvdSM04] is here recovered.

Second, distributed port-Hamiltonian systems are introduced, in connection with the underlying Stokes-Dirac structure. PHs as boundary control systems have been analyzed deeply in one geometrical dimension [JZ12, LGZM05]. The complete characterization of pH in arbitrary dimension is still an open research field. Two notable exceptions [KZ15, Skr19] provide partial answers to this problem. The first demonstrate the well-posedness of the linear wave equation in arbitrary geometrical dimensions. The second generalizes this result to treat the case of generic first order linear pHs in arbitrary geometrical dimensions.

7

3.1   The Stokes-Dirac structure

In the section the concept of Stokes-Dirac structure for distributed, i.e. infinite-dimensional, pHs is introduced. First, the finite-dimensional case is considered. Then, to introduce the infinite-dimensional extension of Dirac structure, namely the Stokes-Dirac structure, the differential operators that come into play are characterized.

3.1.1   Dirac Structures

Consider a finite dimensional space F over the field $\mathbb{R}$ and $E \equiv F'$ its dual, i.e. the space of linear operator $\mathbf{e} : F \to \mathbb{R}$. The elements of F are called flows, while the elements of E are called efforts. Those are port variables and their combination gives the power flowing inside the system. The space $B = F \times E$ is called the bond space of power variables. Therefore the power is defined as $\langle \mathbf{e}, \mathbf{f} \rangle = e(\mathbf{f})$, where $\langle \mathbf{e}, \mathbf{f} \rangle$ is the dual product between $\mathbf{f}$ and $\mathbf{e}$.

Definition 1 ([Cou90], Def. 1.1.1)
Given the finite-dimensional space F and its dual E with respect to the inner product $\langle \cdot, \cdot \rangle :$
$F \times E \to \mathbb{R}$, consider the symmetric bilinear form:

$$\langle\langle\, (\mathbf{f}_1, \mathbf{e}_1), (\mathbf{f}_2, \mathbf{e}_2)\, \rangle\rangle := \langle \mathbf{e}_1, \mathbf{f}_2 \rangle + \langle \mathbf{e}_2, \mathbf{f}_1 \rangle, \qquad where \qquad \mathbf{f}_i, \mathbf{e}_i \in B,\ i = 1, 2 \tag{3.1}$$

A Dirac structure on $B := F \times E$ is a subspace $D \subset B$, which is maximally isotropic under $\langle\langle \cdot, \cdot \rangle\rangle$. Equivalently, a Dirac structure on $B := F \times E$ is a subspace $D \subset B$ which equals its orthogonal complement with respect to $\langle\langle \cdot, \cdot \rangle\rangle : D = D^\perp$.

This definition can be extended to consider distributed forces and dissipation [Vil07].

Proposition 1
Consider the space of power variables $F \times E$ and let X denote an n-dimensional space, the space of energy variables. Suppose that $F := F_s \times F_e$ and that $E := E_s \times E_e$, with $dim\, F_s = dim\, E_s = n$ and $dim\, F_e = dim\, E_e = m$. Moreover, let $\mathbf{J}(\mathbf{x})$ denote a skew-symmetric matrix of dimension n and $\mathbf{B}(\mathbf{x})$ a matrix of dimension $n \times m$. Then, the set

$$D := \left\{ (\mathbf{f}_s, \mathbf{f}_e, \mathbf{e}_s, \mathbf{e}_e) \in F \times E \mid\ \ \mathbf{f}_s = -\mathbf{J}(\mathbf{x})\mathbf{e}_s - \mathbf{B}(\mathbf{x})\mathbf{f}_e,\ \mathbf{e}_e = \mathbf{B}(\mathbf{x})^\top \mathbf{e}_s \right\} \tag{3.2}$$

is a Dirac structure.

3.1.2 Finite-dimensional port-Hamiltonian systems

259 Consider the time-invariant dynamical system:

$$\begin{cases} \dot{\mathbf{x}} &= \mathbf{J}(\mathbf{x})\nabla H(\mathbf{x}) + \mathbf{B}(\mathbf{x})\mathbf{u}, \\ \mathbf{y} &= \mathbf{B}(\mathbf{x})^\top \nabla H(\mathbf{x}), \end{cases} \tag{3.3}$$

260 where $H(\mathbf{x}) : X \to \mathbb{R}$, the Hamiltonian, is a real-valued function bounded from below. Such
261 a system is called port-Hamiltonian, as it arises from the Hamiltonian modelling of a physical
262 system and it interacts with the environment through the input $\mathbf{u}$, included in the formulation.
263 The connection with the concept of Dirac structure is achieved by considering the following
264 port behavior:

$$\begin{aligned} \mathbf{f}_s &= -\dot{\mathbf{x}}, & \mathbf{e}_s &= \nabla H(\mathbf{x}), \\ \mathbf{f}_e &= \mathbf{u}, & \mathbf{e}_e &= \mathbf{y}. \end{aligned} \tag{3.4}$$

265 With this choice of the port variables, system (3.3) defines, by Proposition 1, a Dirac structure.
266 Dissipation and distributed forces can be included and the corresponding system defines an
267 extended Dirac structure, once the proper port variables have been introduced.

268 ### 3.1.3 Constant matrix differential operators

269 Let Ω denote a compact subset of $\mathbb{R}^d$ representing the spatial domain of the distributed
270 parameter system. Then, let $U = C^\infty(\Omega, \mathbb{R}^{q_u})$ and $V = C^\infty(\Omega, \mathbb{R}^{q_v})$ denote the sets of
271 smooth functions from Ω to $\mathbb{R}^{q_u}$ and $\mathbb{R}^{q_v}$ respectively.

272 **Definition 2**
273 *A constant matrix differential operator of order n is a map $\mathcal{L} : U \to V$ such that, given*
274 *$\boldsymbol{u} = (u_1, \ldots, u_{q_u}) \in U$ and $\boldsymbol{v} = (v_1, ..., v_{q_v}) \in V$:*

$$\boldsymbol{v} = \mathcal{L}\boldsymbol{u} \iff \boldsymbol{v} := \sum_{|\alpha|=0}^{n} \boldsymbol{P}_\alpha \partial^\alpha \boldsymbol{u}, \tag{3.5}$$

275 *where $\alpha := (\alpha_1, \ldots, \alpha_d)$ is a multi-index of order $|\alpha| := \sum_{i=1}^{d} \alpha_i$, $\boldsymbol{P}_\alpha$ is a set of constant real*
276 *$q_v \times q_u$ matrices and $\partial^\alpha := \partial_{x_1}^{\alpha_1} \ldots \partial_{x_d}^{\alpha_d}$ is a differential operator of order $|\alpha|$ resulting from a*
277 *combination of spatial derivatives.*

278 The following definition, instrumental for the case of dpHs, is a simplified version of (6).

279 **Definition 3**
280 *Consider the constant matrix differential operator (3.5). Its formal adjoint is the map $\mathcal{L}^*$*
281 *from V to U such that:*

$$\boldsymbol{u} = \mathcal{L}^*\boldsymbol{v} \iff \boldsymbol{u} := \sum_{|\alpha|=0}^{n} (-1)^{|\alpha|} \boldsymbol{P}_\alpha^\top \partial^\alpha \boldsymbol{v}. \tag{3.6}$$

Remark 1 (Differences between adjoint and formal adjoint)
The definition of formal adjoint is such that the integration by parts formula is respected

$$\int_\Omega \boldsymbol{a} \cdot (\mathcal{L}\boldsymbol{b}) \, \mathrm{d}\Omega = \int_\Omega (\mathcal{L}^*\boldsymbol{a}) \cdot \boldsymbol{b} \, \mathrm{d}\Omega,$$

where $\boldsymbol{a} \in C_0^\infty(\Omega, \mathbb{R}^{q_u})$, $\boldsymbol{b} \in C_0^\infty(\Omega, \mathbb{R}^{q_v})$ are smooth functions with compact support. This corresponds to the adjoint definition for a bounded operator between L^2 spaces of square integrable functions

$$\langle \boldsymbol{a}, \mathcal{L}\boldsymbol{b} \rangle_{L^2(\Omega, \mathbb{R}^{q_v})} = \langle \mathcal{L}^*\boldsymbol{a}, \boldsymbol{b} \rangle_{L^2(\Omega, \mathbb{R}^{q_u})}.$$

That means that, contrarily to the adjoint of an operator, the formal adjoint definition does not regard the actual domain of the operator nor the boundary conditions. For example, the differential operators div, grad *are unbounded in the L^2 topology. Whenever unbounded operators are considered, it is important to define their domain. To avoid the need of specifying domains, the notion of formal adjoint is used. The formal adjoint respects the integration by parts formula and is defined only for sufficiently smooth functions with compact support. In this sense the formal adjoint of* div *is* $-$ grad, *since for smooth functions with compact support, it holds*

$$\langle \boldsymbol{y}, \mathrm{grad}\, x \rangle_{L^2(\Omega, \mathbb{R}^3)} \underbrace{=}_{I.B.P.} -\langle \mathrm{div}(\boldsymbol{y}), x \rangle_{L^2(\Omega, \mathbb{R})},$$

for $\boldsymbol{y} \in C_0^\infty(\Omega, \mathbb{R}^n)$, $x \in C_0^\infty(\Omega)$ (I.B.P. stands for integration by parts). The definition of the domain of the operators, that requires the knowledge of the boundary conditions, has not been specified.

When $q_u = q_v = q \implies U \equiv V = W$, formal skew-adjoint operators can be defined:

Definition 4
Let $W = C^\infty(\Omega, \mathbb{R}^q)$ be the space of vector-valued smooth functions and $\mathcal{J} : W \to W$ a constant matrix differential operator. Then, $\mathcal{J}$ is formally skew-adjoint (or skew-symmetric) if and only if $\mathcal{J} = -\mathcal{J}^*$. This corresponds to the algebraic condition on $q \times q$ square matrices

$$\boldsymbol{P}_\alpha = (-1)^{|\alpha|+1}\boldsymbol{P}_\alpha^\top, \quad \forall \alpha. \tag{3.7}$$

An important relation between a differential operator and its adjoint is expressed by the following theorem, valid for operators between spaces of different dimensions.

Theorem 1 ([RR04], Chapter 9, theorem 9.37)
Consider a matrix differential operator $\mathcal{L} : U \to V$ and let $\mathcal{L}^*$ denote its formal adjoint. Then, for each function $\boldsymbol{u} \in U$ and $\boldsymbol{v} \in V$:

$$\int_\Omega \left(\boldsymbol{v}^\top \mathcal{L}\boldsymbol{u} - \boldsymbol{u}^\top \mathcal{L}^*\boldsymbol{v}\right) \, \mathrm{d}\Omega = \int_{\partial\Omega} \widetilde{\mathcal{A}}_\mathcal{L}(\boldsymbol{u}, \boldsymbol{v}) \, \mathrm{d}S, \tag{3.8}$$

295 *where $\widetilde{\mathcal{A}}_{\mathcal{L}}$ is a differential operator induced on the boundary $\partial\Omega$ by $\mathcal{L}$, or equivalently:*

$$\boldsymbol{v}^{\top}\mathcal{L}\boldsymbol{u} - \boldsymbol{u}^{\top}\mathcal{L}^{*}\boldsymbol{v} = \operatorname{div}\widetilde{\mathcal{A}}_{\mathcal{L}}(\boldsymbol{u}, \boldsymbol{v}). \tag{3.9}$$

296 It is important to note that $\widetilde{\mathcal{A}}_{\mathcal{L}}$ is a constant differential operator. The quantity $\widetilde{\mathcal{A}}_{\mathcal{L}}(\boldsymbol{u}, \boldsymbol{v})$
297 is a constant linear combination of the functions $\boldsymbol{u}$ and $\boldsymbol{v}$ together with their spatial derivatives
298 up to a certain order and depending on $\mathcal{L}$.

299 **Corollary 1**
300 *Consider a skew-symmetric differential operator $\mathcal{J}$. For each function $\boldsymbol{u}$, $\boldsymbol{v} \in W = C^{\infty}(\Omega, \mathbb{R}^{q})$*
301 *it holds:*

$$\int_{\Omega}\left(\boldsymbol{v}^{\top}\mathcal{J}\boldsymbol{u} + \boldsymbol{u}^{\top}\mathcal{J}\boldsymbol{v}\right)\,\mathrm{d}\Omega = \int_{\partial\Omega}\widetilde{\mathcal{A}}_{\mathcal{J}}(\boldsymbol{u}, \boldsymbol{v})\,\mathrm{d}S, \tag{3.10}$$

302 *where $\widetilde{\mathcal{A}}_{\mathcal{J}}$ is a symmetric differential operator on $\partial\Omega$ depending on the differential operator $\mathcal{J}$.*

303 ### 3.1.4 Constant Stokes-Dirac structures

304 Following [MvdSM04], let F denote the space of flows, i.e. the space of smooth functions
305 from the compact set $\Omega \subset \mathbb{R}^{d}$ to $\mathbb{R}^{q}$. For simplicity assume that the space of efforts is $E \equiv F$
306 (generally speaking these spaces are Hilbert spaces linked by duality, as in [Vil07]). Given
307 $\boldsymbol{f} = (f_{1}, \ldots, f_{q}) \in F$ and $\boldsymbol{e} = (e_{1}, \ldots, e_{q}) \in E$. Let $\boldsymbol{z} = \mathcal{A}_{\partial}(\boldsymbol{e})$ denote the boundary terms,
308 where $\mathcal{A}_{\partial}$ provides the restriction on $\partial\Omega$ of the effort variables $\boldsymbol{e}$ and of their spatial derivatives
309 of proper order. The associated boundary space is $Z := \{\boldsymbol{z}|\,\boldsymbol{z} = \mathcal{A}_{\partial}(\boldsymbol{e})\}$. Then, it holds

$$\int_{\partial\Omega}\widetilde{\mathcal{A}}_{\mathcal{J}}(\boldsymbol{e}_{1}, \boldsymbol{e}_{2})\,\mathrm{d}S = \int_{\partial\Omega}\mathcal{A}_{\mathcal{J}}(\boldsymbol{z}_{1}, \boldsymbol{z}_{2})\,\mathrm{d}S, \quad \text{with} \quad \widetilde{\mathcal{A}}_{\mathcal{J}}(\cdot, \cdot) = \mathcal{A}_{\mathcal{J}}(\mathcal{A}_{\partial}(\cdot), \mathcal{A}_{\partial}(\cdot)). \tag{3.11}$$

310 The following theorem characterizes Stokes-Dirac structures for pHs of arbitrary geometrical
311 dimension and differential order.

312 **Proposition 2** (Proposition 3.3 [MvdSM04])
313 *Consider the space of power variables $B = F \times E \times Z$. The linear subspace $D \subset B$*

$$D_{\mathcal{J}} = \left\{(\boldsymbol{f}, \boldsymbol{e}, \boldsymbol{z}) \in F \times E \times Z \mid \boldsymbol{f} = -\mathcal{J}\boldsymbol{e},\ \boldsymbol{z} = \mathcal{A}_{\partial}(\boldsymbol{e})\right\}, \tag{3.12}$$

314 *is a Stokes–Dirac structure on B with respect to the pairing*

$$\left\langle\!\left\langle (\boldsymbol{f}^{1}, \boldsymbol{e}^{1}, \boldsymbol{z}^{1}), (\boldsymbol{f}^{2}, \boldsymbol{e}^{2}, \boldsymbol{z}^{2})\right\rangle\!\right\rangle := \int_{\Omega}\left(\boldsymbol{e}^{1\top}\boldsymbol{f}^{2} + \boldsymbol{e}^{2\top}\boldsymbol{f}^{1}\right)\,\mathrm{d}\Omega + \int_{\partial\Omega}\mathcal{A}_{\mathcal{J}}(\boldsymbol{z}^{1}, \boldsymbol{z}^{2})\,\mathrm{d}S. \tag{3.13}$$

315 From this proposition, if $(\boldsymbol{f}, \boldsymbol{e}, \boldsymbol{z}) \in D_{\mathcal{J}}$, then $\left\langle\!\left\langle (\boldsymbol{f}, \boldsymbol{e}, \boldsymbol{z}), (\boldsymbol{f}, \boldsymbol{e}, \boldsymbol{z})\right\rangle\!\right\rangle = 0$, that is

$$\int_{\Omega}\boldsymbol{e}^{\top}\boldsymbol{f}\,\mathrm{d}\Omega + \frac{1}{2}\int_{\partial\Omega}\mathcal{A}_{\mathcal{J}}(\boldsymbol{z}, \boldsymbol{z})\,\mathrm{d}S = 0. \tag{3.14}$$

This relation expresses the power conservation property of the Stokes–Dirac structure. It states the relation between the variation of internal energy (the integral on the domain Ω) with the power flowing through the boundary (the integral over $\partial\Omega$). Thanks to the power conservation property dpHs always dispose of an associated Stokes-Dirac structure. This concept can be extended to consider dissipation or distributed forces. To this aim, it is necessary to include additional ports to account for the power exchange due to these effects (see Theorem 3.4 [MvdSM04]).

Remark 2

The constant Stokes-Dirac structure has been defined in case of smooth vector-valued functions for simplicity. The definition is indeed more general and encompasses the case of more complex functional spaces, in particular the L^2 space of square integrable functions. Linear elasticity for example is defined on a mixed function space of vector- and tensor-valued functions, cf. Sec §4.2.

3.2   Distributed port-Hamiltonian systems

A distributed lossless port-Hamiltonian system is defined by a set of variables that describes the unknowns, by a formally skew-adjoint differential operator, an energy functional and a set of boundary inputs and corresponding conjugated outputs. Such a system is described by the following set of equations

$$
\begin{aligned}
\frac{\partial \boldsymbol{\alpha}}{\partial t} &= \mathcal{J}\boldsymbol{e}, \\
\boldsymbol{e} &:= \frac{\delta H}{\delta \boldsymbol{\alpha}}, \\
\boldsymbol{u}_\partial &= \mathcal{B}_\partial \boldsymbol{e}, \\
\boldsymbol{y}_\partial &= \mathcal{C}_\partial \boldsymbol{e},
\end{aligned}
\tag{3.15}
$$

The unknowns $\boldsymbol{\alpha}$ are called energy variables in the port-Hamiltonian framework, the formally skew-adjoint operator $\mathcal{J}$ is named interconnection operator (see Def. 4 for a precise definition of formal skew adjointness). $\mathcal{B}_\partial, \mathcal{C}_\partial$ are boundary operators, that provide the boundary input $\boldsymbol{u}_\partial$ and output $\boldsymbol{y}_\partial$ [TW09, Chapter 4]. The variational derivative of the Hamiltonian defines the co-energy variables $\boldsymbol{e}$.

Remark 3

It will become clear in this section that the effort variables of the Stokes-Dirac structure are indeed equivalent to the co-energy variables of the pH system. This justifies using the same notation for both.

Definition 5 (Variational derivative, Def. 4.1 in [Olv93])
Consider a functional $H(\boldsymbol{\alpha})$

$$
H(\boldsymbol{\alpha}) = \int_\Omega \mathcal{H}(\boldsymbol{\alpha})\,\mathrm{d}\Omega.
$$

Given a variation $\boldsymbol{\alpha} = \bar{\boldsymbol{\alpha}} + \eta\boldsymbol{\delta\alpha}$ the variational derivative $\frac{\delta H}{\delta\boldsymbol{\alpha}}$ is defined as

$$H(\bar{\boldsymbol{\alpha}} + \eta\boldsymbol{\delta\alpha}) = H(\bar{\boldsymbol{\alpha}}) + \eta \int_\Omega \frac{\delta H}{\delta\boldsymbol{\alpha}} \cdot \boldsymbol{\delta\alpha} \, \mathrm{d}\Omega + O(\eta^2).$$

Remark 4

If the integrand does not contain derivative of the argument $\boldsymbol{\alpha}$ then the variational derivative is equal to the partial derivative of the Hamiltonian density $\mathcal{H}$

$$\frac{\delta H}{\delta\boldsymbol{\alpha}} = \frac{\partial\mathcal{H}}{\partial\boldsymbol{\alpha}}.$$

Lossless port-Hamiltonian systems possess a peculiar property: the energy rate is given by the power due to the boundary ports $\boldsymbol{u}_\partial, \boldsymbol{y}_\partial$

$$\dot{H} = \int_\Omega \frac{\delta H}{\delta\boldsymbol{\alpha}} \cdot \frac{\partial\boldsymbol{\alpha}}{\partial t} \, \mathrm{d}\Omega \overset{\text{Stokes theorem}}{=} \int_{\partial\Omega} \boldsymbol{u}_\partial \cdot \boldsymbol{y}_\partial \, \mathrm{d}S \tag{3.16}$$

From the energy rate, the structural power balance is obtained

$$-\int_\Omega \frac{\delta H}{\delta\boldsymbol{\alpha}} \cdot \frac{\partial\boldsymbol{\alpha}}{\partial t} \, \mathrm{d}\Omega + \int_{\partial\Omega} \boldsymbol{u}_\partial \cdot \boldsymbol{y}_\partial \, \mathrm{d}S = 0 \tag{3.17}$$

From (3.14), it is clear by identification that $\mathcal{A}_{\mathcal{J}}(\boldsymbol{z}, \boldsymbol{z}) = 2\,\boldsymbol{u}_\partial \cdot \boldsymbol{y}_\partial$. This means that the boundary space can be split into boundary input and output

$$Z := \{\boldsymbol{z}|\, \boldsymbol{z} = \mathcal{A}_\partial(\boldsymbol{e}) = (\boldsymbol{u}_\partial,\, \boldsymbol{y}_\partial)\}$$

If the flow, effort and boundary variables are chosen to be

$$\boldsymbol{f} := -\partial_t\boldsymbol{\alpha}, \quad \boldsymbol{e} := \delta_{\boldsymbol{\alpha}}H, \quad \boldsymbol{z} := (\boldsymbol{u}_\partial,\, \boldsymbol{y}_\partial), \tag{3.18}$$

then system (3.15) defines a Stokes-Dirac structure by Proposition 2. In this rather informal treatment of dpHs, no rigorous characterization whatsoever has been introduced for operators $\mathcal{J}$, $\mathcal{B}_\partial$, $\mathcal{C}_\partial$ in system (3.15). A formal characterization of these operators has been given in [LGZM05] for pH of generic order only in one geometrical dimensional. In Chapter 7 the operator $\mathcal{J}$ will be better characterize using an appropriate partition. By applying a general integration by parts formula, the operators $\mathcal{B}_\partial$, $\mathcal{C}_\partial$ associated to $\mathcal{J}$ can be defined as well. The following examples clarifies this assertion for some known pHs.

3.2.1   Euler Bernoulli beam

The Euler-Bernoulli beam model consists of one PDE, describing the vertical displacement along the beam length:

$$\rho A(x)\frac{\partial^2 w}{\partial t^2}(x,t) + \frac{\partial^2}{\partial x^2}\left(EI(x)\frac{\partial^2 w}{\partial x^2}\right) = 0, \quad x \in \Omega = \{0, L\}, \tag{3.19}$$

where $w(x,t)$ is the transverse displacement of the beam. The coefficients $\rho(x), A(x)E(x)$ and $I(x)$ are the mass density, cross section, Young's modulus of elasticity and the moment of inertia of a cross section. The energy variables are then chosen as follows:

$$\alpha_w = \rho A(x)\frac{\partial w}{\partial t}(x,t), \quad \text{Linear Momentum}, \quad \alpha_\kappa = \frac{\partial^2 w}{\partial x^2}(x,t), \quad \text{Curvature}. \tag{3.20}$$

Those variables are collected in the vector $\boldsymbol{\alpha} = (\alpha_w, \alpha_\kappa)^T$, so that the Hamiltonian can be written as a quadratic functional in the energy variables:

$$H = \frac{1}{2}\int_\Omega \left\{\frac{1}{\rho A}\alpha_w^2 + EI\alpha_\kappa^2\right\} \, \mathrm{d}\Omega \tag{3.21}$$

The co-energy variables are found by computing the variational derivative of the Hamiltonian:

$$\begin{aligned}
e_w &:= \frac{\delta H}{\delta \alpha_w} = \frac{\partial w}{\partial t}(x,t), & \text{Vertical velocity,} \\
e_\kappa &:= \frac{\delta H}{\delta \alpha_\kappa} = EI(x)\frac{\partial^2 w}{\partial x^2}(x,t), & \text{Flexural momentum.}
\end{aligned} \tag{3.22}$$

The underlying interconnection structure is then found to be:

$$\frac{\partial}{\partial t}\begin{pmatrix}\alpha_w \\ \alpha_\kappa\end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} \\ \partial_{xx} & 0 \end{bmatrix}\begin{pmatrix}e_w \\ e_\kappa\end{pmatrix}. \tag{3.23}$$

The power flow gives access to the boundary variables:

$$\begin{aligned}
\dot{H} &= \int_\Omega \{e_w \partial_t \alpha_w + e_\kappa \partial_t \alpha_\kappa\} \, \mathrm{d}\Omega, \\
&= \int_\Omega \{-e_w \partial_{xx} e_\kappa + e_\kappa \partial_{xx} e_w\} \, \mathrm{d}\Omega, & \text{Integration by parts,} \\
&= \int_{\partial\Omega} \{-e_w \partial_x e_\kappa + e_\kappa \partial_x e_w\} \, \mathrm{d}s = \langle -e_w, \partial_x e_\kappa\rangle_{\partial\Omega} + \langle e_\kappa, \partial_x e_w\rangle_{\partial\Omega}
\end{aligned} \tag{3.24}$$

Since the system is of differential order two, two pairing appears, giving rise to four combination of uniform boundary causality

- First case $u_{\partial,1} = e_w, \quad u_{\partial,2} = \partial_x e_w, \quad y_{\partial,1} = -\partial_x e_\kappa, \quad y_{\partial,2} = e_\kappa.$
  This imposes the vertical $e_w := \partial_t w$ and angular velocity $\partial_x e_w := \partial_{xt} w$ as boundary

370   inputs. If the inputs are null a clamped boundary condition is obtained.

371   • Second case $u_{\partial,1} = e_w$, $u_{\partial,2} = e_\kappa$, $y_{\partial,1} = -\partial_x e_\kappa$, $y_{\partial,2} = \partial_x e_w$.

372   This imposes the vertical velocity and flexural momentum $e_\kappa := EI\partial_{xx}w$ as boundary

373   inputs. Zero inputs lead to a simply supported condition is found.

374   • Third case $u_{\partial,1} = -\partial_x e_\kappa$, $u_{\partial,2} = e_\kappa$, $y_{\partial,1} = e_w$, $y_{\partial,2} = \partial_x e_w$.

375   This imposes the shear force $\partial_x e_\kappa := \partial_x(EI\partial_{xx}w)$ and flexural momentum as boundary

376   inputs. Null inputs correspond to a free condition.

377   • Forth case $u_{\partial,1} = -\partial_x e_\kappa$, $u_{\partial,2} = \partial_x e_w$, $y_{\partial,1} = e_w$, $y_{\partial,2} = e_\kappa$.

378   This imposes the shear force and angular velocity as boundary inputs.

379 ### 3.2.2   Wave equation

380 Given an open bounded connected set $\Omega \subset \mathbb{R}^2$ with Lipschitz continuous boundary $\partial\Omega$, the
381 propagation of sound in air can be described by the following model [TRLGK18]

$$
\begin{aligned}
\chi_s \partial_t p(\boldsymbol{x}, t) &= -\operatorname{div} \boldsymbol{v}, \\
\mu_0 \partial_t \boldsymbol{v}(\boldsymbol{x}, t) &= -\operatorname{grad} p,
\end{aligned}
\tag{3.25}
$$

where the scalar fields χ_s, μ_0 are the constant adiabatic compressibility factor and the steady
state mass density respectively. The scalar field and vector field $p \in \mathbb{R}$, $\boldsymbol{v} \in \mathbb{R}^2$ represents
the variation of pressure and velocity from the steady state. The Hamiltonian (total energy)
reads

$$
H = \frac{1}{2}\int_\Omega \left\{ \chi_s p^2 + \mu_0 \left\| \boldsymbol{v} \right\|^2 \right\} \, \mathrm{d}\Omega.
$$

To recast (3.25) in pH form the energy variables has to be introduced $\boldsymbol{\alpha} = [\alpha_p, \, \boldsymbol{\alpha}_v]^\top$

$$
\alpha_p := \chi_s p, \qquad \boldsymbol{\alpha}_v := \mu_0 \boldsymbol{v}.
$$

The Hamiltonian is rewritten as

$$
H = \frac{1}{2}\int_\Omega \left\{ \frac{1}{\chi_s}\alpha_p^2 + \frac{1}{\mu_0} \left\| \boldsymbol{\alpha}_v \right\|^2 \right\} \, \mathrm{d}\Omega.
$$

By definition, the co-energy are

$$
e_p = \frac{\delta H}{\delta \alpha_p} = \frac{1}{\chi_s}\alpha_p = p, \qquad \boldsymbol{e}_v = \frac{\delta H}{\delta \boldsymbol{\alpha}_v} = \frac{1}{\mu_0}\boldsymbol{\alpha}_v = \boldsymbol{v}.
$$

Equation (3.25) can be recast in port-Hamiltonian form

$$
\frac{\partial}{\partial t}\begin{pmatrix} \alpha_p \\ \boldsymbol{\alpha}_v \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div} \\ -\operatorname{grad} & \mathbf{0} \end{bmatrix}\begin{pmatrix} e_p \\ \boldsymbol{e}_v \end{pmatrix}.
$$

From the energy rate it is possible to identify the boundary variables.

$$\dot{H} = + \int_{\Omega} \{e_p \, \partial_t \alpha_p + \boldsymbol{e}_v \cdot \partial_t \boldsymbol{\alpha}_v\} \, \mathrm{d}\Omega,$$

$$= - \int_{\Omega} \{e_p \, \mathrm{div} \, \boldsymbol{e}_v + \boldsymbol{e}_v \cdot \mathrm{grad} \, e_p\} \, \mathrm{d}\Omega, \qquad \text{Chain rule,}$$

$$= - \int_{\Omega} \mathrm{div}(e_p \, \boldsymbol{e}_v) \, \mathrm{d}\Omega, \qquad \text{Stokes theorem,}$$

$$= - \int_{\partial\Omega} e_p \, \boldsymbol{e}_v \cdot \boldsymbol{n} \, \mathrm{d}S = - \langle e_p, \, \boldsymbol{e}_v \cdot \boldsymbol{n} \rangle_{\partial\Omega} \, .$$

The boundary term $\langle e_p, \, \boldsymbol{e}_v \rangle_{\partial\Omega}$ pairs two power variables. One is taken as control input, the other plays the role of power-conjugated output. The assignment of these roles to the boundary power variables is referred to as causality of the boundary port [KML18],[Kot19, Chapter 2]. Under uniform causality assumption, either e_p or $\boldsymbol{e}_v$ can assume the role of (distributed) boundary input, but not both. This leads to two possible selections:

- First case $u_\partial = e_p, \quad y_\partial = \boldsymbol{e}_v \cdot \boldsymbol{n}$.
  This imposes the variable $e_p := p$ as boundary input and corresponds to a classical Dirichlet condition.

- Second case $u_\partial = \boldsymbol{e}_v \cdot \boldsymbol{n}, \quad y_\partial = e_p$.
  This imposes the variable $\boldsymbol{e}_v \cdot \boldsymbol{n} := \boldsymbol{v} \cdot \boldsymbol{n}$ as boundary input and corresponds to a Neumann condition.

3.2.3   2D shallow water equations

This formulation may be found in [CR16, Section 6.2.]. This model describes a thin fluid layer of constant density in hydrostatic balance, like the propagation of a tsunami wave far from shore. Consider an open bounded connected set $\Omega \subset \mathbb{R}^2$ and a constant bed profile. The mass conservation implies

$$\frac{\partial h}{\partial t} + \mathrm{div}(h\boldsymbol{v}) = 0,$$

where $h(x, y, t) \in \mathbb{R}$ is a scalar field representing the fluid height, $\boldsymbol{v}(x, y, t) \in \mathbb{R}^2$ is the fluid velocity field. The conservation of linear momentum reads

$$\frac{\partial \rho \boldsymbol{v}}{\partial t} + \rho(\boldsymbol{v} \cdot \nabla)\boldsymbol{v} + \nabla(\rho g h) = 0,$$

where ρ is the mass density and g the gravitational acceleration constant. Using the identity

$$(\boldsymbol{v} \cdot \nabla)\boldsymbol{v} = \frac{1}{2}\nabla(\|\boldsymbol{v}\|^2) + (\nabla \times \boldsymbol{v}) \times \boldsymbol{v},$$

where $\nabla \times$ is the rotational of $\boldsymbol{v}$ (also denoted $\mathrm{curl} \, \boldsymbol{v}$), the momentum is rearranged as follows

$$\frac{\partial \rho \boldsymbol{v}}{\partial t} = -\nabla \left(\frac{1}{2}\rho \|\boldsymbol{v}\|^2 + \rho g h\right) - \rho(\nabla \times \boldsymbol{v}) \times \boldsymbol{v}.$$

The last term on the right-hand side can be rewritten

$$\rho(\nabla \times \boldsymbol{v}) \times \boldsymbol{v} = \begin{bmatrix} 0 & -\rho\omega \\ \rho\omega & 0 \end{bmatrix} \boldsymbol{v},$$

with $\omega = \partial_x v_y - \partial_y v_x$ the local vorticity term. To derive a suitable pH formulation, the total energy, made up of kinetic and potential contribution, has to be invoked

$$H = \frac{1}{2} \int_\Omega \left\{ \rho h \|\boldsymbol{v}\|^2 + \rho g h^2 \right\} \, \mathrm{d}\Omega.$$

As energy variable the fluid height and the linear momentum are chosen

$$\alpha_h = h, \qquad \boldsymbol{\alpha}_v = \rho \boldsymbol{v}. \tag{3.26}$$

The Hamiltonian is a non separable functional of the energy variables

$$H(\alpha_h, \boldsymbol{\alpha}_v) = \frac{1}{2} \int_\Omega \left\{ \frac{1}{\rho} \alpha_h \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h^2 \right\} \, \mathrm{d}\Omega. \tag{3.27}$$

The co-energy variables are given by

$$e_h := \frac{\delta H}{\delta \alpha_h} = \frac{1}{2\rho} \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h, \qquad \boldsymbol{e}_v := \frac{\delta H}{\delta \boldsymbol{\alpha}_v} = \frac{1}{\rho} \alpha_h \boldsymbol{\alpha}_v. \tag{3.28}$$

The mass and momentum conservation are then rewritten as follows

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_h \\ \boldsymbol{\alpha}_v \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div} \\ -\operatorname{grad} & \boldsymbol{\mathcal{G}} \end{bmatrix} \begin{pmatrix} e_h \\ \boldsymbol{e}_v \end{pmatrix}, \tag{3.29}$$

The gyroscopic skew-symmetric term $\boldsymbol{\mathcal{G}}$ introduces a non-linearity as it depends on the energy variables

$$\boldsymbol{\mathcal{G}}(\alpha_h, \boldsymbol{\alpha}_v) = \frac{\omega}{\alpha_h} \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}, \qquad \omega = \partial_x \alpha_{v,y} - \partial_y \alpha_{v,x}.$$

Despite the non-standard formulation, the energy rate provides anyway the boundary variables

$$
\begin{aligned}
\dot{H} &= + \int_\Omega \left\{ e_h \, \partial_t \alpha_h + \boldsymbol{e}_v \cdot \partial_t \boldsymbol{\alpha}_v \right\} \, \mathrm{d}\Omega, \\
&= - \int_\Omega \left\{ e_h \operatorname{div} \boldsymbol{e}_v + \boldsymbol{e}_v \cdot (\operatorname{grad} e_h - \mathcal{G}\boldsymbol{e}_v) \right\} \, \mathrm{d}\Omega, \qquad \text{skew-symmetry of } \mathcal{G}, \\
&= - \int_\Omega \left\{ e_h \operatorname{div} \boldsymbol{e}_v + \boldsymbol{e}_v \cdot \operatorname{grad} e_h \right\} \, \mathrm{d}\Omega, \qquad\qquad\qquad \text{Chain rule}, \qquad (3.30) \\
&= - \int_\Omega \operatorname{div}(e_h \, \boldsymbol{e}_v) \, \mathrm{d}\Omega, \qquad\qquad\qquad\qquad\qquad \text{Stokes theorem}, \\
&= - \int_{\partial\Omega} e_h \, \boldsymbol{e}_v \cdot \boldsymbol{n} \, \mathrm{d}S = - \langle e_h, \, \boldsymbol{e}_v \cdot \boldsymbol{n} \rangle_{\partial\Omega}.
\end{aligned}
$$

Again two possible cases of uniform boundary causality arise:

- First case $u_\partial = e_h, \quad y_\partial = \boldsymbol{e}_v \cdot \boldsymbol{n}$.
  This imposes the variable $e_h := h$ as boundary input and corresponds to a given water level for a fluid boundary.

- Second case $u_\partial = \boldsymbol{e}_v \cdot \boldsymbol{n}, \quad y_\partial = e_p$.
  This imposes the variable $\boldsymbol{e}_v \cdot \boldsymbol{n} := h\boldsymbol{v} \cdot \boldsymbol{n}$ as boundary input and corresponds to a given volumetric flow rate.

3.3   Conclusion

In this chapter, the main mathematical tools needed to understand infinite-dimensional pHs were recalled. A general characterization of the underlying operators behind a boundary control pH system is still an open topic. We have recalled some results available in the literature. Unfortunately, these do not provide a perfectly coherent treatment of pH systems of generic order on multi-dimensional domains. In Chapter 7, these operators are characterized, in connection to the discretization method developed.

Part II

Port-Hamiltonian elasticity and thermoelasticity

Elasticity in port-Hamiltonian form

I try not to break the rules but merely to test their elasticity.

Bill Veeck

Contents

ontinuum mechanics is the mathematical description of how materials behave kinematically under external excitations. In this framework, the microscopic structure of a material body is neglected and a macroscopic viewpoint, that describes the body as a continuum, is adopted. This leads to a PDE based model. In this chapter, the general linear elastodynamics problem is recalled. A suitable port-Hamiltonian formulation is then derived.

4.1 Continuum mechanics

In this section, the main concepts behind a deformable continuum are briefly recalled following [Lee12]. For a detailed discussion on this topic, the reader may consult [Abe12, LPKL12].

4.1.1 Non linear formulation of elasticity

The bounded region of $\mathbb{R}^d$ ($d = 2, 3$) occupied by a solid is called configuration. The reference configuration Ω is the domain that a bodies occupies at the initial state. To describe how the

21

body deforms in time the deformation map $\mathbf{\Phi} : \Omega \times [0, T_f] \to \Omega' \subset \mathbb{R}^d$ is introduced. This map is differentiable and orientation preserving, and the image of Ω under $\mathbf{\Phi}(\cdot, t)$ $\forall t \in [0, T_f]$ is called the deformed configuration Ω_t. Given a specific point in the reference frame its image is denoted by $\boldsymbol{y} = \mathbf{\Phi}(\boldsymbol{x}, t)$. The gradient of the deformation map is called the deformation gradient $\boldsymbol{F} := \nabla_x \mathbf{\Phi} = \frac{\partial \boldsymbol{y}}{\partial \boldsymbol{x}}$. A rigid deformation maps a point $\boldsymbol{x} \in \Omega \to \boldsymbol{A}(t)\boldsymbol{x} + \boldsymbol{b}(t)$, where $\boldsymbol{A}(t)$ is an orthogonal matrix and $\boldsymbol{b}(t) \in \mathbb{R}^d$ a vector. A differentiable deformation map $\mathbf{\Phi}$ is a rigid deformation iff $\boldsymbol{F}^\top \boldsymbol{F} - \boldsymbol{I} = 0$, where $\boldsymbol{I}$ is the identity in $\mathbb{R}^{d \times d}$ (for the proof see [Cia88], page 44). For this reason, a suitable measure of the deformation is the Green-St.Venant strain tensor $\frac{1}{2}(\boldsymbol{F}^\top \boldsymbol{F} - \boldsymbol{I})$.

A quantity of interest is the displacement $\boldsymbol{u} : \Omega \times [0, T_f] \to \mathbb{R}^d$ with respect to the reference configuration. It is defined as $\boldsymbol{u}(\boldsymbol{x}, t) = \mathbf{\Phi}(\boldsymbol{x}, t) - \boldsymbol{x}$. The gradient of the displacement verifies $\nabla_x \boldsymbol{u} = \boldsymbol{F} - \boldsymbol{I}$. The strain tensor can now be written in terms of the displacement

$$\frac{1}{2}(\boldsymbol{F}^\top \boldsymbol{F} - \boldsymbol{I}) = \frac{1}{2}\left[(\nabla_x \boldsymbol{u} + \boldsymbol{I})^\top (\nabla_x \boldsymbol{u} + \boldsymbol{I}) - \boldsymbol{I}\right]$$
$$= \frac{1}{2}\left[\nabla_x \boldsymbol{u} + (\nabla_x \boldsymbol{u})^\top + (\nabla_x \boldsymbol{u})^\top (\nabla_x \boldsymbol{u})\right],$$

or in components

$$\frac{1}{2}(F_{ik}^\top F_{kj} - I_{ij}) = \frac{1}{2}\left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} + \frac{\partial u_i}{\partial x_j}\frac{\partial u_j}{\partial x_i}\right).$$

To state the balance laws the actual deformed configuration is considered. The linear and angular momenta in a subdomain $\omega_t \subset \Omega_t$ are computed as

$$\int_{\omega_t} \rho \, \boldsymbol{v} \, \mathrm{d}\omega_t, \quad \text{and} \quad \int_{\omega_t} \rho \, \boldsymbol{y} \times \boldsymbol{v} \, \mathrm{d}\omega_t,$$

where ρ is the mass density and the velocity $\boldsymbol{v} = \frac{D\boldsymbol{u}}{Dt}(\boldsymbol{y}, t) = \frac{\partial \boldsymbol{u}}{\partial t}(\boldsymbol{x}, t)$ is the material time derivative of the displacement (see [Abe12, Chapter 1]). Let $\omega_{t,1}, \omega_{t,2}$ be two subregions in a deformed continuum Ω_t with contacting surface S_{12}. There is a force acting on this surface for a continuum that is called stress vector or traction. If $\boldsymbol{n}$ is the outward normal at $\boldsymbol{y}$ on S_{12} with respect to $\omega_{t,1}$, then the surface force that $\omega_{t,1}$ exerts on $\omega_{t,2}$ is denoted by $\boldsymbol{t}(\boldsymbol{y}, \boldsymbol{n}) \in \mathbb{R}^d$. By the Newton third law, the surface force that $\omega_{t,2}$ applies on $\omega_{t,1}$ is given by $\boldsymbol{t}(\boldsymbol{y}, -\boldsymbol{n}) = -\boldsymbol{t}(\boldsymbol{y}, \boldsymbol{n})$. It is assumed that the linear and angular momentum balance hold for any subregion $\omega_t \in \Omega_t$

$$\frac{d}{dt}\int_{\omega_t} \rho \boldsymbol{v} \, \mathrm{d}\omega_t = \int_{\partial\omega_t} \boldsymbol{t}(\boldsymbol{y}, \boldsymbol{n}) \, \mathrm{d}S + \int_{\omega_t} \boldsymbol{f} \, \mathrm{d}\omega_t,$$
$$\frac{d}{dt}\int_{\omega_t} \rho \boldsymbol{y} \times \boldsymbol{v} \, \mathrm{d}\omega_t = \int_{\partial\omega_t} \boldsymbol{y} \times \boldsymbol{t}(\boldsymbol{y}, \boldsymbol{n}) \, \mathrm{d}S + \int_{\omega_t} \boldsymbol{y} \times \boldsymbol{f} \, \mathrm{d}\omega_t,$$

where $\partial\omega_t$ stands for the boundary surface of the subdomain ω_t, $\boldsymbol{n}$ is the outward normal to the surface $\partial\omega_t$ and $\boldsymbol{f}$ represents an exterior body force. The following theorem characterizes the stress vector (see [Cia88, Chapter 2]):

446 **Theorem 2** (Cauchy's theorem)

447 *If the linear and angular momenta balance hold, then there exists a matrix-valued function $\mathbf{\Sigma}$*

448 *from Ω_t to $\mathbb{S}$ such that $\boldsymbol{t}(\boldsymbol{y}, \boldsymbol{n}) = \mathbf{\Sigma}(\boldsymbol{y})\boldsymbol{n}, \; \forall \boldsymbol{y} \in \Omega_t$ where the right-hand side is the matrix-*

449 *vector multiplication.*

The set $\mathbb{S} = \mathbb{R}_{\mathrm{sym}}^{d \times d}$ denotes the field of symmetric matrices in $\mathbb{R}^{d \times d}$. The symmetry of the stress tensor $\mathbf{\Sigma}$ is due to the balance of angular momentum. The divergence theorem can then be applied

$$\int_{\partial \omega_t} \mathbf{\Sigma}\, \boldsymbol{n}\, \mathrm{d}S = \int_{\omega_t} \nabla_y \cdot \mathbf{\Sigma}\, \mathrm{d}\omega_t,$$

where $\nabla_y \cdot$ is the tensor divergence with respect to the deformed configuration, $\nabla_y \cdot \mathbf{\Sigma} = \sum_{i=1}^d \frac{\partial \Sigma_{ij}}{\partial y_i}$. Because the considered subregion ω_t is arbitrary, using the linear balance momentum and the conservation of mass, the following PDE is found

$$\rho \frac{D\boldsymbol{v}}{Dt} - \nabla_y \cdot \mathbf{\Sigma} = \boldsymbol{f}, \qquad \boldsymbol{y} \in \Omega_t.$$

450 This equation is written with respect to the deformed configuration Ω_t. For a detailed deriva-

451 tion of this equation the reader may consult [Abe12, Chapter 4]. To obtain a closed formu-

452 lation, the constitutive law, namely the link between $\mathbf{\Sigma}$ and the strain tensor $\frac{1}{2}(\boldsymbol{F}^\top \boldsymbol{F} - \boldsymbol{I})$,

453 has to be introduced. In the next section such relation will be discussed for the case of linear

454 elasticity.

455 ## 4.1.2 The linear elastodynamics problem

Whenever deformations are small, $\|\nabla_x \boldsymbol{u}\| \ll 1$, then the reference and deformed configurations are almost indistinguishable $\boldsymbol{y} = \boldsymbol{x} + \boldsymbol{u} = \boldsymbol{x} + O(\nabla_x \boldsymbol{u}) \approx \boldsymbol{x}$. This allows writing the linear momentum balance in the reference configuration

$$\rho \frac{\partial \boldsymbol{v}}{\partial t}(\boldsymbol{x}, \boldsymbol{t}) - \mathrm{Div}\, \mathbf{\Sigma}(\boldsymbol{x}, t) = \boldsymbol{f}, \qquad \boldsymbol{x} \in \Omega.$$

The material derivative simplifies to a partial one. The operator Div is the divergence of a tensor field with respect to the reference configuration (see Appendix A for a description of the differential operators)

$$\mathrm{Div}\, \mathbf{\Sigma}(\boldsymbol{x}, t) = \nabla_x \cdot \mathbf{\Sigma}(\boldsymbol{x}, t) = \left(\sum_{i=1}^d \frac{\partial \Sigma_{ij}}{\partial x_i} \right)_{1 \le j \le d}.$$

Furthermore, the non-linear terms in the Green-St. Venant strain tensor can be dropped

$$\frac{1}{2}(\boldsymbol{F}^\top \boldsymbol{F} - \boldsymbol{I}) = \frac{1}{2}\left[\nabla_x \boldsymbol{u} + (\nabla_x \boldsymbol{u})^\top + (\nabla_x \boldsymbol{u})^\top (\nabla_x \boldsymbol{u}) \right] \approx \frac{1}{2}\left[\nabla_x \boldsymbol{u} + (\nabla_x \boldsymbol{u})^\top \right].$$

456 The linearized strain tensor (also called infinitesimal strain tensor) is the symmetric gradient
457 of the displacement

$$\boldsymbol{\varepsilon} := \operatorname{Grad} \boldsymbol{u}, \qquad \text{where} \qquad \operatorname{Grad} \boldsymbol{u} = \frac{1}{2}\left[\nabla_x \boldsymbol{u} + (\nabla_x \boldsymbol{u})^\top\right]. \tag{4.1}$$

To obtain a closed system of equations, it is now necessary to characterize the relation
between stress and strain. This relation is normally called *constitutive law*. In the following,
the particular case of elastic materials is considered. These are able to resist distorting
excitations and return to its original size and shape when these excitations are removed. For
this class of materials, the stress tensor is solely determined by the deformed configuration
at a given time (Hooke's law)

$$\boldsymbol{\Sigma}(\boldsymbol{x}) = \boldsymbol{\mathcal{D}}(\boldsymbol{x})\,\boldsymbol{\varepsilon}(\boldsymbol{u}(\boldsymbol{x})).$$

The *stiffness tensor* or *elasticity tensor* $\boldsymbol{\mathcal{D}} : \mathbb{S} \to \mathbb{S}$ is a rank 4 tensor that is symmetric positive
definite and uniformly bounded above and below. Because of symmetry, its components
satisfy

$$\mathcal{D}_{ijkl} = \mathcal{D}_{jikl} = \mathcal{D}_{klij}.$$

458 From the uniform boundedness of $\boldsymbol{\mathcal{D}}$, the map $\boldsymbol{\mathcal{D}} : L^2(\Omega; \mathbb{S}) \to L^2(\Omega; \mathbb{S})$ is a symmetric positive
459 definite bounded linear operator ($L^2(\Omega; \mathbb{S})$ is the space of square integrable symmetric tensor-
460 valued functions). The compliance tensor $\boldsymbol{\mathcal{C}}$ is defined by $\boldsymbol{\mathcal{C}} = \boldsymbol{\mathcal{D}}^{-1}$. Thus $\boldsymbol{\mathcal{C}} : \mathbb{S} \to \mathbb{S}$ is as
461 well symmetric positive definite and uniformly bounded above and below. An isotropic elastic
462 medium has the same kinematic properties in any direction and at each point. If an elastic
463 medium is isotropic, then the stiffness and compliance tensors assume the form

$$\boldsymbol{\mathcal{D}}(\cdot) = 2\mu(\cdot) + \lambda \operatorname{Tr}(\cdot)\boldsymbol{I}, \qquad \boldsymbol{\mathcal{C}}(\cdot) = \frac{1}{2\mu}\left[(\cdot) - \frac{\lambda}{2\mu + d\lambda}\operatorname{Tr}(\cdot)\boldsymbol{I}\right], \qquad d = \{2,3\}, \tag{4.2}$$

464 where Tr is the trace operator and the positive scalar functions μ, λ, defined on Ω, are called
465 the Lamé coefficients. In engineering applications it is easier to compute experimentally two
466 other parameters: the Young modulus E and Poisson's ratio ν. Those are expressed in terms
467 of the Lamé coefficients as

$$\nu = \frac{\lambda}{2(\lambda + \mu)}, \qquad E = \frac{\mu(3\lambda + 2\mu)}{\lambda + \mu}, \tag{4.3}$$

468 and conversely

$$\lambda = \frac{E\nu}{(1+\nu)(1-2\nu)}, \qquad \mu = \frac{E}{2(1+\nu)}. \tag{4.4}$$

The stiffness and compliant tensor are expressed as

$$\boldsymbol{\mathcal{D}}(\cdot) = \frac{E}{1+\nu}\left[(\cdot) + \frac{\nu}{1-2\nu}\operatorname{Tr}(\cdot)\boldsymbol{I}\right], \tag{4.5}$$

$$\boldsymbol{\mathcal{C}}(\cdot) = \frac{1+\nu}{E}\left[(\cdot) - \frac{\nu}{1+\nu(d-2)}\operatorname{Tr}(\cdot)\boldsymbol{I}\right]. \tag{4.6}$$

The linear elastodynamics problem is formulated through a vector-valued PDE

$$\rho \frac{\partial^2 \boldsymbol{u}}{\partial t^2} - \text{Div}(\boldsymbol{\mathcal{D}} \, \text{Grad} \, \boldsymbol{u}) = \boldsymbol{f}. \tag{4.7}$$

The classical elastodynamics problem is expressed considering the displacement $\boldsymbol{u}$ as the unknown. This PDE goes together with appropriate boundary conditions that will be specified in 4.2.

4.2 Port-Hamiltonian formulation of linear elasticity

In this section a port-Hamiltonian formulation for elasticity is deduced from the classical elastodynamics problem. It must be highlighted that already in the seventies a purely hyperbolic formulation for elasticity was detailed [HM78]. The missing point is the clear connection with the theory of Hamiltonian PDEs. An Hamiltonian formulation can be found in [Gri15, Chapter 16], but without any connection to the concept of Stokes-Dirac structure induced by the underlying geometry.

4.2.1 Energy and co-energy variables

Consider an open connected set $\Omega \subset \mathbb{R}^d$, $d = (2, 3)$. The displacement within a deformable continuum is given by Eq. (4.7).

$$\rho \frac{\partial^2 \boldsymbol{u}}{\partial t^2} - \text{Div}(\boldsymbol{\mathcal{D}} \, \text{Grad} \, \boldsymbol{u}) = 0, \qquad \boldsymbol{x} \in \Omega. \tag{4.8}$$

The contribution of the body force $\boldsymbol{f}$ has been removed for ease of presentation. To derive a pH formulation, the total energy, that includes the kinetic and deformation energy, is needed

$$H = \frac{1}{2} \int_{\Omega} \left\{ \rho \, \|\partial_t \boldsymbol{u}\|^2 + \boldsymbol{\Sigma} : \boldsymbol{\varepsilon} \right\} \, \mathrm{d}\Omega. \tag{4.9}$$

The notation $\boldsymbol{A} : \boldsymbol{B} = \text{Tr}(\boldsymbol{A}^\top \boldsymbol{B}) = \sum_{i,j} A_{ij} B_{ij}$ denotes the tensor contraction. Recall that $\boldsymbol{\varepsilon} = \text{Grad} \, \boldsymbol{u}$ and $\boldsymbol{\Sigma} = \boldsymbol{\mathcal{D}}\boldsymbol{\varepsilon}$. The energy variables are then the linear momentum and the deformation field

$$\boldsymbol{\alpha}_v = \rho \boldsymbol{v}, \qquad \boldsymbol{A}_\varepsilon = \boldsymbol{\varepsilon},$$

where $\boldsymbol{v} := \partial_t \boldsymbol{u}$. The Hamiltonian can be rewritten as a quadratic functional in the energy variables

$$H = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho} \boldsymbol{\alpha}_v^2 + (\boldsymbol{\mathcal{D}} \boldsymbol{A}_\varepsilon) : \boldsymbol{A}_\varepsilon \right\} \, \mathrm{d}\Omega. \tag{4.10}$$

The co-energy variables are given by

$$\boldsymbol{e}_v := \frac{\delta H}{\delta \boldsymbol{\alpha}_v} = \boldsymbol{v}, \qquad \boldsymbol{E}_\varepsilon := \frac{\delta H}{\delta \boldsymbol{A}_\varepsilon} = \boldsymbol{\Sigma}. \tag{4.11}$$

489   The tensor-valued co-energy $\boldsymbol{E}_\varepsilon$ is obtained by taking the variational derivative with
490 respect to a tensor.

491 **Proposition 3**
492 *The variational derivative of the Hamiltonian with respect to the strain tensor is the stress*
493 *tensor $\delta_{\boldsymbol{A}_\varepsilon} H = \boldsymbol{\Sigma}$.*

494 *Proof.* Let $\mathbb{S} : \mathbb{R}^{d \times d}_{\mathrm{sym}}$ be the space of symmetric tensor and $L^2(\Omega, \mathbb{S})$ the space of the square
495 integrable symmetric tensors endowed with the tensor contraction as inner product

$$\langle \boldsymbol{A}, \boldsymbol{B} \rangle_{L^2(\Omega, \mathbb{S})} = \int_\Omega \boldsymbol{A} : \boldsymbol{B} \, \mathrm{d}\Omega. \tag{4.12}$$

The contribution due to the deformation part in Hamiltonian is given by:

$$H_{\mathrm{def}}(\boldsymbol{A}_\varepsilon) = \frac{1}{2} \int_\Omega (\boldsymbol{\mathcal{D}} \boldsymbol{A}_\varepsilon) : \boldsymbol{A}_\varepsilon \ \mathrm{d}\Omega.$$

A variation $\boldsymbol{\Delta A}_\varepsilon$ of the strain tensor with respect to a given value $\bar{\boldsymbol{A}}_\varepsilon$ leads to:

$$\begin{aligned} H_{\mathrm{def}}(\bar{\boldsymbol{A}}_\varepsilon + \eta \boldsymbol{\Delta A}_\varepsilon) = {} & + \frac{1}{2} \int_\Omega (\boldsymbol{\mathcal{D}} \bar{\boldsymbol{A}}_\varepsilon) : \bar{\boldsymbol{A}}_\varepsilon \ \mathrm{d}\Omega \\ & + \eta \frac{1}{2} \int_\Omega \left\{ (\boldsymbol{\mathcal{D}} \bar{\boldsymbol{A}}_\varepsilon) : \boldsymbol{\Delta A}_\varepsilon + (\boldsymbol{\mathcal{D}} \boldsymbol{\Delta A}_\varepsilon) : \bar{\boldsymbol{A}}_\varepsilon \right\} \ \mathrm{d}\Omega + O(\eta^2). \end{aligned}$$

    The term $(\boldsymbol{\mathcal{D}} \boldsymbol{\Delta A}_\varepsilon) : \bar{\boldsymbol{A}}_\varepsilon$ can be further rearranged using the symmetry of $\boldsymbol{\mathcal{D}}$ and the commutativity of the tensor contraction

$$(\boldsymbol{\mathcal{D}} \boldsymbol{\Delta A}_\varepsilon) : \bar{\boldsymbol{A}}_\varepsilon = (\boldsymbol{\mathcal{D}} \bar{\boldsymbol{A}}_\varepsilon) : \boldsymbol{\Delta A}_\varepsilon,$$

so that

$$H_{\mathrm{def}}(\bar{\boldsymbol{A}}_\varepsilon + \eta \boldsymbol{\Delta A}_\varepsilon) = \frac{1}{2} \int_\Omega (\boldsymbol{\mathcal{D}} \bar{\boldsymbol{A}}_\varepsilon) : \bar{\boldsymbol{A}}_\varepsilon \ \mathrm{d}\Omega + \eta \int_\Omega (\boldsymbol{\mathcal{D}} \bar{\boldsymbol{A}}_\varepsilon) : \boldsymbol{\Delta A}_\varepsilon \ \mathrm{d}\Omega + O(\eta^2).$$

By definition of variational derivative it can be written:

$$H_{\mathrm{def}}(\bar{\boldsymbol{A}}_\varepsilon + \eta \boldsymbol{\Delta A}_\varepsilon) = H_{\mathrm{def}}(\bar{\boldsymbol{A}}_\varepsilon) + \eta \left\langle \frac{\delta H}{\delta \boldsymbol{A}_\varepsilon}, \boldsymbol{\Delta A}_\varepsilon \right\rangle_{L^2(\Omega, \mathbb{S})} + O(\eta^2),$$

    Then, by identification

$$\frac{\delta H_{\mathrm{def}}}{\delta \boldsymbol{A}_\varepsilon} = \boldsymbol{\mathcal{D}} \bar{\boldsymbol{A}}_\varepsilon = \boldsymbol{\Sigma}.$$

496 Since the Hamiltonian is separable then $\delta_{\boldsymbol{A}_\varepsilon} H_{\mathrm{def}} = \delta_{\boldsymbol{A}_\varepsilon} H$, leading to the final result. $\square$

4.2.2 Final system and associated Stokes-Dirac structure

498 It is now possible to state the final pH form

$$\frac{\partial}{\partial t}\begin{pmatrix} \boldsymbol{\alpha}_v \\ \boldsymbol{A}_\varepsilon \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathrm{Div} \\ \mathrm{Grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon \end{pmatrix}. \tag{4.13}$$

499 The first equation of the system is the conservation of linear momentum. The second repre-
500 sents a compatibility condition

$$\begin{aligned} \partial_t \boldsymbol{A}_\varepsilon &= \mathrm{Grad}(\boldsymbol{e}_v), \\ \partial_t \boldsymbol{\varepsilon} &= \mathrm{Grad}(\boldsymbol{v}), \\ \partial_t \, \mathrm{Grad}\, \boldsymbol{u} &= \mathrm{Grad}(\partial_t \boldsymbol{u}). \end{aligned} \tag{4.14}$$

501 Assuming that $\boldsymbol{u} \in C^2$, higher order derivatives commute (Schwarz theorem). Hence,
502 the equation is verified. The following theorem ensures the differential operator is formally
503 skew-adjoint (one can also find this result in the recent article [PZ20, Lemma 3.3], available
504 as arXiv preprint).

505 **Theorem 3**
506 *The formal adjoint of the tensor divergence* Div *is* $-$Grad, *the opposite of the symmetric*
507 *gradient.*

Proof. We denote by $\mathbb{V} = \mathbb{R}^d$ the space of vector field in $\mathbb{R}^d$ and by $\mathbb{S} = \mathbb{R}^{d\times d}$ hte space of symmetric tensor field in $\mathbb{R}^{d\times d}$. Let us consider the Hilbert space of the square integrable symmetric tensors $L^2(\Omega, \mathbb{S})$ with scalar product is defined in (4.12). Moreover consider the Hilbert space of the square integrable vector function $L^2(\Omega, \mathbb{V})$, endowed with the usual scalar product:

$$\langle \boldsymbol{a}, \boldsymbol{b} \rangle_{L^2(\Omega,\mathbb{V})} = \int_\Omega \boldsymbol{a} \cdot \boldsymbol{b} \,\, \mathrm{d}\Omega = \int_\Omega \boldsymbol{a}^\top \boldsymbol{b} \,\, \mathrm{d}\Omega, \quad \forall \boldsymbol{a}, \boldsymbol{b} \in L^2(\Omega, \mathbb{V}).$$

Let us consider the tensor divergence operator defined as:

$$\mathrm{Div}: \, L^2(\Omega, \mathbb{S}) \to L^2(\Omega, \mathbb{V}), \qquad \text{with } \psi_j = \mathrm{div}(\Psi_{ij}) = \sum_{i=1}^d \frac{\partial \Psi_{ij}}{\partial x_i}.$$
$$\boldsymbol{\Psi} \to \mathrm{Div}\, \boldsymbol{\Psi} = \boldsymbol{\psi},$$

We try to identify Div^*

$$\mathrm{Div}^*: \, L^2(\Omega, \mathbb{V}) \to L^2(\Omega, \mathbb{S}),$$
$$\boldsymbol{\phi} \to \mathrm{Div}^*\boldsymbol{\phi} = \boldsymbol{\Phi},$$

such that

$$\langle \mathrm{Div}\, \boldsymbol{\Psi}, \, \boldsymbol{\phi} \rangle_{L^2(\Omega,\mathbb{V})} = \langle \boldsymbol{\Psi}, \, \mathrm{Div}^*\boldsymbol{\phi} \rangle_{L^2(\Omega,\mathbb{S})}, \qquad \begin{aligned} &\forall \boldsymbol{\Psi} \in \mathrm{Dom}(\mathrm{Div}) \subset L^2(\Omega, \mathbb{S}) \\ &\forall \boldsymbol{\phi} \in \mathrm{Dom}(\mathrm{Div}^*) \subset L^2(\Omega, \mathbb{V}) \end{aligned}$$

Now let us take $\boldsymbol{\Psi} \in C_0^1(\Omega, \mathbb{S}) \subset \mathrm{Domain}(\mathrm{Div})$ the space of differentiable symmetric tensors

with compact support in Ω. Additionally $\boldsymbol{\phi}$ will belong to $C_0^1(\Omega, \mathbb{V}) \subset \mathrm{Dom}(\mathrm{Div}^*)$, the space of differentiable vector functions with compact support in Ω. Then

$$\langle \mathrm{Div}\,\boldsymbol{\Psi}, \boldsymbol{\phi} \rangle_{L^2(\Omega, \mathbb{V})} = \int_\Omega \boldsymbol{\psi} \cdot \boldsymbol{\phi} \ \mathrm{d}\Omega,$$

$$= \int_\Omega \sum_{i=1}^d \sum_{j=1}^d \frac{\partial \Psi_{ij}}{\partial x_i} \phi_j \ \mathrm{d}\Omega,$$

$$= -\int_\Omega \sum_{i=1}^d \sum_{j=1}^d \Psi_{ij} \frac{\partial \phi_j}{\partial x_i} \ \mathrm{d}\Omega, \qquad \text{since the functions vanish at the boundary,}$$

$$= -\int_\Omega \sum_{i=1}^d \sum_{j=1}^d \Psi_{ij} F_{ij} \ \mathrm{d}\Omega, \qquad\qquad \text{where} \qquad F_{ij} = \frac{\partial \phi_j}{\partial x_i},$$

$$= -\langle \boldsymbol{\Psi}, \boldsymbol{F} \rangle_{L^2(\Omega, \mathbb{S})}, \qquad\qquad\qquad \boldsymbol{F} = (\mathrm{grad}\,\boldsymbol{\phi}).$$

But in this latter case, it could not be stated that $\boldsymbol{F} \in L^2(\Omega, \mathbb{S})$. Now, since $\boldsymbol{\Psi} \in L^2(\Omega, \mathbb{S})$, $\Psi_{ji} = \Psi_{ij}$, thus we are allowed to further decompose the last equality as

$$\sum_{i,j} \Psi_{ij} \frac{\partial \phi_j}{\partial x_i} = \sum_{i,j} \Psi_{ij} \frac{1}{2}\left(\frac{\partial \phi_i}{\partial x_j} + \frac{\partial \phi_j}{\partial x_i}\right) = \sum_{i,j} \Psi_{ij} \Phi_{ij}, \qquad \text{with } \Phi_{ij} := \frac{1}{2}\left(\frac{\partial \phi_i}{\partial x_j} + \frac{\partial \phi_j}{\partial x_i}\right).$$

Thus $\boldsymbol{\Phi} = \mathrm{Grad}\,\boldsymbol{\phi} \in L^2(\Omega, \mathbb{S})$ and it can be stated that:

$$\langle \mathrm{Div}\,\boldsymbol{\Psi}, \boldsymbol{\phi} \rangle_{L^2(\Omega, \mathbb{V})} = -\int_\Omega \sum_{i,j} \Psi_{ij} \frac{1}{2}\left(\frac{\partial \phi_i}{\partial x_j} + \frac{\partial \phi_j}{\partial x_i}\right) \ \mathrm{d}\Omega$$

$$= -\int_\Omega \sum_{i,j} \Psi_{ij} \Phi_{ij} \ \mathrm{d}\Omega = \langle \boldsymbol{\Psi}, -\mathrm{Grad}\,\boldsymbol{\phi} \rangle_{L^2(\Omega, \mathbb{S})}.$$

It can be concluded that the formal adjoint of Div is $\mathrm{Div}^* = -\mathrm{Grad}$. $\qquad\qquad\square$

The boundary values are then found by evaluating the energy rate

$$\dot{H} = \int_\Omega \{ \boldsymbol{e}_v \cdot \partial_t \boldsymbol{\alpha}_v + \boldsymbol{E}_\varepsilon : \partial_t \boldsymbol{A}_\varepsilon \} \ \mathrm{d}\Omega,$$

$$= \int_\Omega \{ \boldsymbol{e}_v \cdot \mathrm{Div}\,\boldsymbol{E}_\varepsilon + \boldsymbol{E}_\varepsilon : \mathrm{Grad}\,\boldsymbol{e}_v \} \ \mathrm{d}\Omega,$$

$$= \int_\Omega \mathrm{div}(\boldsymbol{E}_\varepsilon\,\boldsymbol{e}_v) \ \mathrm{d}\Omega, \qquad\qquad \text{Stokes theorem (see Appendix A Eq. (A.6)),}$$

$$= \int_{\partial\Omega} \boldsymbol{e}_v \cdot (\boldsymbol{E}_\varepsilon \boldsymbol{n}) \ \mathrm{d}S = \langle \boldsymbol{e}_v, \boldsymbol{E}_\varepsilon\,\boldsymbol{n} \rangle_{\partial\Omega}.$$

$$(4.15)$$

The imposition of the velocity field along the boundary $\boldsymbol{e}_v = \partial_t \boldsymbol{u}$ corresponds to a Dirichlet condition. Setting $\boldsymbol{E}_\varepsilon\,\boldsymbol{n} = \boldsymbol{\Sigma}\,\boldsymbol{n}$ (the traction) corresponds to a Neumann condition. Consider
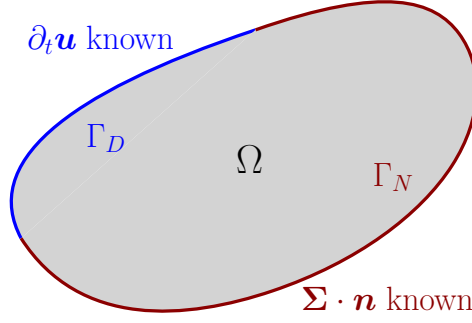
Figure 4.1: A 2D continuum with Neumann and Dirichlet boundary conditions

a partition of the boundary $\partial\Omega = \overline{\Gamma}_N \cup \overline{\Gamma}_D$ and $\Gamma_N \cap \Gamma_D = \{\emptyset\}$, where a Dirichlet and a Neumann condition applies on the open subset Γ_D and Γ_N respectively (see Fig. 4.1). Then the final pH formulation reads

$$\frac{\partial}{\partial t}\begin{pmatrix}\boldsymbol{\alpha}_v \\ \boldsymbol{A}_\varepsilon\end{pmatrix} = \underbrace{\begin{bmatrix}\boldsymbol{0} & \mathrm{Div} \\ \mathrm{Grad} & \boldsymbol{0}\end{bmatrix}}_{\mathcal{J}}\begin{pmatrix}\boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon\end{pmatrix},$$

$$\boldsymbol{u}_\partial = \underbrace{\begin{bmatrix}\boldsymbol{\gamma}_0^{\Gamma_D} & \boldsymbol{0} \\ \boldsymbol{0} & \boldsymbol{\gamma}_n^{\Gamma_N}\end{bmatrix}}_{\mathcal{B}_\partial}\begin{pmatrix}\boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon\end{pmatrix},$$

$$\boldsymbol{y}_\partial = \underbrace{\begin{bmatrix}\boldsymbol{0} & \boldsymbol{\gamma}_n^{\Gamma_D} \\ \boldsymbol{\gamma}_0^{\Gamma_N} & \boldsymbol{0}\end{bmatrix}}_{\mathcal{C}_\partial}\begin{pmatrix}\boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon\end{pmatrix},$$

(4.16)

where $\boldsymbol{\gamma}_0^{\Gamma_*}$ denotes the trace over the set Γ_*, namely $\boldsymbol{\gamma}_0^{\Gamma_*}\boldsymbol{e}_v = \boldsymbol{e}_v|_{\Gamma_*}$. Furthermore, $\boldsymbol{\gamma}_n^{\Gamma_*}$ denotes the normal trace over the set Γ_*, namely $\boldsymbol{\gamma}_n^{\Gamma_*}\boldsymbol{E}_\varepsilon = \boldsymbol{E}_\varepsilon\boldsymbol{n}|_{\Gamma_*}$.

Conjecture 1 (Stokes-Dirac structure for elastodynamics)
Let $H^{\mathrm{Grad}}(\Omega, \mathbb{V})$ the space of vectors with symmetric gradient in $L^2(\Omega, \mathbb{S})$ and $H^{\mathrm{Div}}(\Omega, \mathbb{S})$ denote the space of symmetric tensors with divergence in $L^2(\Omega, \mathbb{V})$. Consider the following definitions

$$H := H^{\mathrm{Grad}}(\Omega, \mathbb{V}) \times H^{\mathrm{Div}}(\Omega, \mathbb{S}),$$
$$F := L^2(\Omega, \mathbb{V}) \times L^2(\Omega, \mathbb{S}),$$
$$F_\partial := L^2(\Gamma_D, \mathbb{V}) \times L^2(\Gamma_N, \mathbb{V}).$$

The set

$$D_{\mathcal{J}} = \left\{\begin{pmatrix}\boldsymbol{f} \\ \boldsymbol{f}_\partial \\ \boldsymbol{e} \\ \boldsymbol{e}_\partial\end{pmatrix} \,\middle|\, \boldsymbol{e} \in H,\ \boldsymbol{f} = -\mathcal{J}\boldsymbol{e},\ \boldsymbol{f}_\partial = \mathcal{B}_\partial \boldsymbol{e},\ \boldsymbol{e}_\partial = \mathcal{C}_\partial \boldsymbol{e}\right\},$$

(4.17)

where $\boldsymbol{e} = (\boldsymbol{e}_v, \boldsymbol{E}_\varepsilon)$ and $\mathcal{J}, \mathcal{B}_\partial, \mathcal{C}_\partial$ are defined in (4.16), is a Stokes–Dirac structure with respect to the pairing

$$\left\langle\!\left\langle (\boldsymbol{f}^1, \boldsymbol{f}_\partial^1, \boldsymbol{e}^1, \boldsymbol{e}_\partial^1), (\boldsymbol{f}^2, \boldsymbol{f}_\partial^2, \boldsymbol{e}^2, \boldsymbol{e}_\partial^2)\right\rangle\!\right\rangle := \left\langle \boldsymbol{e}^1, \boldsymbol{f}^2\right\rangle_F + \left\langle \boldsymbol{e}^2, \boldsymbol{f}^1\right\rangle_F + \left\langle \boldsymbol{e}_\partial^1, \boldsymbol{f}_\partial^2\right\rangle_{F_\partial} + \left\langle \boldsymbol{e}_\partial^2, \boldsymbol{f}_\partial^1\right\rangle_{F_\partial},$$
(4.18)

where

$$\langle(\boldsymbol{a}, \boldsymbol{b}), (\boldsymbol{c}, \boldsymbol{d})\rangle_{F_\partial} = \int_{\Gamma_D} \boldsymbol{a} \cdot \boldsymbol{c}\, \mathrm{d}S + \int_{\Gamma_N} \boldsymbol{b} \cdot \boldsymbol{d}\, \mathrm{d}S, \quad \boldsymbol{a},\ \boldsymbol{b},\ \boldsymbol{c},\ \boldsymbol{d} \in \mathbb{V}.$$

Crucial points to obtain a rigorous proof   *The crucial point that needs to be elucidated is where the boundary variables live. These variables belong to the fractional Sobolev spaces $H^{\frac{1}{2}}(\partial\Omega, \mathbb{V})$, $H^{-\frac{1}{2}}(\partial\Omega, \mathbb{V})$ linked by duality with respect to the pivot space $L^2(\partial\Omega, \mathbb{V})$. This is why a L^2 inner product has been assumed as boundary inner product.*
Furthermore, the partition of the boundary due to the non uniform boundary control complicates the proof, since one has to properly connect the two partitions at their interconnection.

Elements to support the conjecture   *A Stokes-Dirac is characterized by the fact that $D_\mathcal{J} = D_\mathcal{J}^\perp$. Then one has to show that $D_\mathcal{J} \subset D_\mathcal{J}^\perp$ and $D_\mathcal{J}^\perp \subset D_\mathcal{J}$. The main steps of Theorem 3.6 in [LGZM05] are followed here to support the substantiation of the conjecture. The integration by parts formula is applied as in (4.15).*

Step 1. To show that $D_\mathcal{J} \subset D_\mathcal{J}^\perp$, take $(\boldsymbol{f}, \boldsymbol{f}_\partial, \boldsymbol{e}, \boldsymbol{e}_\partial) \in D_\mathcal{J}$. Then

$$\begin{aligned}
\langle\!\langle (\boldsymbol{f}, \boldsymbol{f}_\partial, \boldsymbol{e}, \boldsymbol{e}_\partial), (\boldsymbol{f}, \boldsymbol{f}_\partial, \boldsymbol{e}, \boldsymbol{e}_\partial)\rangle\!\rangle =\ & 2\langle \boldsymbol{e}, \boldsymbol{f}\rangle_F + 2\langle \boldsymbol{e}_\partial, \boldsymbol{f}_\partial\rangle_{F_\partial}, \\
=\ & 2\langle \boldsymbol{e}, -\mathcal{J}\boldsymbol{e}\rangle_F + 2\langle \boldsymbol{e}_\partial, \boldsymbol{f}_\partial\rangle_{F_\partial}, \\
=\ & -2\int_\Omega \{\boldsymbol{e}_v \cdot \mathrm{Div}\, \boldsymbol{E}_\varepsilon + \boldsymbol{E}_\varepsilon : \mathrm{Grad}\, \boldsymbol{e}_v\}\ \mathrm{d}\Omega \\
& + 2\int_{\Gamma_D} \boldsymbol{e}_v \cdot (\boldsymbol{E}_\varepsilon\, \boldsymbol{n})\, \mathrm{d}S + 2\int_{\Gamma_N} \boldsymbol{e}_v \cdot (\boldsymbol{E}_\varepsilon\, \boldsymbol{n})\, \mathrm{d}S, \\
=\ & -2\int_\Omega \{\boldsymbol{e}_v \cdot \mathrm{Div}\, \boldsymbol{E}_\varepsilon + \boldsymbol{E}_\varepsilon : \mathrm{Grad}\, \boldsymbol{e}_v\}\ \mathrm{d}\Omega \\
& + 2\int_{\partial\Omega} \boldsymbol{e}_v \cdot (\boldsymbol{E}_\varepsilon\, \boldsymbol{n})\, \mathrm{d}S, = 0, \quad from\ (4.15).
\end{aligned}$$

This implies $D_\mathcal{J} \subset D_\mathcal{J}^\perp$.

Step 2. Take $(\boldsymbol{\phi}, \boldsymbol{\phi}_\partial, \boldsymbol{\epsilon}, \boldsymbol{\epsilon}_\partial) \in D_\mathcal{J}^\perp$ and $\boldsymbol{e}_0 \in H$ with compact support on Ω. This implies $\mathcal{B}_\partial \boldsymbol{e}_0 = (\boldsymbol{0}, \boldsymbol{0})$ and $\mathcal{C}_\partial \boldsymbol{e}_0 = (\boldsymbol{0}, \boldsymbol{0})$. Taking $(-\mathcal{J}\boldsymbol{e}_0, \boldsymbol{0}, \boldsymbol{e}_0, \boldsymbol{0}) \in D_\mathcal{J}$ then

$$\langle\!\langle (\boldsymbol{\phi}, \boldsymbol{\phi}_\partial, \boldsymbol{\epsilon}, \boldsymbol{\epsilon}_\partial), (\mathcal{J}\boldsymbol{e}_0, \boldsymbol{0}, \boldsymbol{e}_0, \boldsymbol{0})\rangle\!\rangle = \langle \boldsymbol{\epsilon}, -\mathcal{J}\boldsymbol{e}_0\rangle_F + \langle \boldsymbol{e}_0, \boldsymbol{\phi}\rangle_F = 0, \quad \forall \boldsymbol{e}_0 \in H.$$

It follows that $\boldsymbol{\epsilon} \in H$ and $\boldsymbol{\phi} = -\mathcal{J}\boldsymbol{\epsilon}$.

536 *Step 3. Take $(\boldsymbol{\phi}, \boldsymbol{\phi}_\partial, \boldsymbol{\epsilon}, \boldsymbol{\epsilon}_\partial) \in D_{\mathcal{J}}^\perp$ and $(\boldsymbol{f}, \boldsymbol{f}_\partial, \boldsymbol{e}, \boldsymbol{e}_\partial) \in D_{\mathcal{J}}$. Variables $\boldsymbol{e}, \boldsymbol{\epsilon}$ are indeed*
537 *tuples containing a vector and a tensor, namely $\boldsymbol{e} = (\boldsymbol{e}_v, \boldsymbol{E}_\varepsilon)$, $\boldsymbol{\epsilon} = (\boldsymbol{\epsilon}_v, \boldsymbol{\mathcal{E}}_\varepsilon)$. From step 2 and*
538 *(4.18)*

$$0 = -\langle \boldsymbol{e}, \mathcal{J}\boldsymbol{\epsilon} \rangle_F - \langle \mathcal{J}\boldsymbol{e}, \boldsymbol{\epsilon} \rangle_F + \langle \boldsymbol{e}_\partial, \boldsymbol{\phi}_\partial \rangle_{F_\partial} + \langle \boldsymbol{\epsilon}_\partial, \boldsymbol{f}_\partial \rangle_{F_\partial},$$

$$= -\int_{\partial\Omega} \{\boldsymbol{e}_v \cdot (\boldsymbol{\mathcal{E}}_\varepsilon\, \boldsymbol{n}) + \boldsymbol{\epsilon}_v \cdot (\boldsymbol{E}_\varepsilon\, \boldsymbol{n})\}\ \mathrm{d}S + \langle \boldsymbol{e}_\partial, \boldsymbol{\phi}_\partial \rangle_{F_\partial} + \langle \boldsymbol{\epsilon}_\partial, \boldsymbol{f}_\partial \rangle_{F_\partial}$$

Consider the splitting of the boundary $\partial\Omega = \overline{\Gamma}_N \cup \overline{\Gamma}_D$

$$\int_{\partial\Omega} \{\boldsymbol{e}_v \cdot (\boldsymbol{\mathcal{E}}_\varepsilon \cdot \boldsymbol{n}) + \boldsymbol{\epsilon}_v \cdot (\boldsymbol{E}_\varepsilon \cdot \boldsymbol{n})\}\ \mathrm{d}S = +\int_{\Gamma_N} \{\boldsymbol{e}_{\partial,2} \cdot (\boldsymbol{\mathcal{E}}_\varepsilon \cdot \boldsymbol{n}) + \boldsymbol{\epsilon}_v \cdot \boldsymbol{f}_{\partial,2}\}\ \mathrm{d}S,$$

$$+\int_{\Gamma_D} \{\boldsymbol{f}_{\partial,1} \cdot (\boldsymbol{\mathcal{E}}_\varepsilon \cdot \boldsymbol{n}) + \boldsymbol{\epsilon}_v \cdot \boldsymbol{e}_{\partial,1}\}\ \mathrm{d}S,$$

where the elements of the vectors $\boldsymbol{f}_\partial = (\boldsymbol{f}_{\partial,1}, \boldsymbol{f}_{\partial,2})$, $\boldsymbol{e}_\partial = (\boldsymbol{e}_{\partial,1}, \boldsymbol{e}_{\partial,2})$ have been considered. By expanding of the terms $\langle \boldsymbol{e}_\partial, \boldsymbol{\phi}_\partial \rangle_{F_\partial} + \langle \boldsymbol{\epsilon}_\partial, \boldsymbol{f}_\partial \rangle_{F_\partial}$ and given the fact that $\boldsymbol{e}_\partial, \boldsymbol{f}_\partial$ have arbitrary values then

$$\boldsymbol{\phi}_\partial = \begin{bmatrix} \gamma_0^{\Gamma_D} & \boldsymbol{0} \\ \boldsymbol{0} & \gamma_n^{\Gamma_N} \end{bmatrix} \begin{pmatrix} \boldsymbol{\epsilon}_v \\ \boldsymbol{\mathcal{E}}_\varepsilon \end{pmatrix}, \qquad \boldsymbol{\epsilon}_\partial = \begin{bmatrix} \boldsymbol{0} & \gamma_n^{\Gamma_D} \\ \gamma_0^{\Gamma_N} & \boldsymbol{0} \end{bmatrix} \begin{pmatrix} \boldsymbol{\epsilon}_v \\ \boldsymbol{\mathcal{E}}_\varepsilon \end{pmatrix},$$

539 *meaning that $D_{\mathcal{J}}^\perp \subset D_{\mathcal{J}}$.*

540   Linear elasticity falls within the assumption of [Skr19]. Therefore, it is a well posed
541 boundary control pH system. A question that naturally arises is how to reformulate this
542 system using the language of differential geometry. This is possible through the usage of
543 vector-valued differential forms. The interested reader may consult [Bre08].

544 ## 4.3 Conclusion

545 In this chapter, the pH formulation of elasticity have been obtained. This model represents
546 a generalization of the wave equation to higher dimensional variables. This leads to the
547 introduction of symmetric tensorial quantities describing the state of stress and deformation
548 within the body.
549 For a plane continuum with moderate thickness, it is possible to reduce the general three-
550 dimensional mode to two uncoupled systems: one representing the in plane behavior ruled by
551 2D elasticity and one representing the out-of-plane deflection. This will be the object of the
552 next chapter dedicated to the study of a pH formulation of plate bending. It is important to
553 remember that plate models are just particular cases of three-dimensional elasticity.

Port-Hamiltonian plate theory

> You get tragedy where the tree, instead of bending, breaks.
>
> *Culture and Value*
> *Ludwig Wittgenstein*

Contents

Lates are plane structural elements with a small thickness compared to the planar dimension. Thanks to this feature, it is not necessary to model plate structures using three-dimensional elasticity. Dimensional reduction strategies are employed to describe plate structures as two-dimensional problems. These strategies rely on an educated guess of the displacement field. For beams and plates this field is expressed in terms of unknown functions $\phi_i^j(x, y, t)$ that solely depends on the midplane coordinates (x, y)

$$u_i(x, y, z, t) = \sum_{j=0}^{m} (z)^j \phi_i^j(x, y, t).$$

where u_i, $i = \{x, y, z\}$ are the components of the displacement field. A first-order approximation is commonly used, meaning that a linear dependence on z is considered. Two main models arise from such a framework:

- the Mindlin-Reissner model for thick plates;

577   • the Kirchhoff-Love model for thin plates.

578   In this chapter it its shown how to formulate first-order plate models as pHs.

5.1   First order plate theory

As previously stated, first order theories assume a linear dependence on the vertical coordinate
(cf. [Red06])

$$u_i(x, y, z, t) = \phi_i^0(x, y, t) + z\phi_i^1(x, y, t).$$

580   This hypothesis implies that the fibers, i.e. segments perpendicular to the mid-plane before
581   deformation, remain straight after deformation. Additionally, for plate with moderate thick-
582   ness the fibers are considered inextensible, meaning that $\phi_z^1 = 0$. These assumptions lead to
583   the following displacement field

$$
\begin{aligned}
u_x(x, y, z, t) &= u_x^0(x, y, t) - z\theta_x(x, y, t), \\
u_y(x, y, z, t) &= u_y^0(x, y, t) - z\theta_y(x, y, t), \\
u_z(x, y, z, t) &= u_z^0(x, y, t),
\end{aligned}
\tag{5.1}
$$

where $u_i(x, y, t) = \phi_i^0(x, y, t)$, $\theta_i(x, y, t) = -\phi_i^1(x, y, t)$. Assuming a linear elastic behavior,
the 3D strain tensor for such a displacement field takes the form

$$\varepsilon_{\alpha\beta} = \frac{1}{2}\left(\partial_\beta u_\alpha + \partial_\alpha u_\beta\right) - z\frac{1}{2}\left(\partial_\beta \theta_\alpha + \partial_\alpha \theta_\beta\right) = \varepsilon_{\alpha\beta}^0 - z\kappa_{\alpha\beta}, \tag{5.2}$$

$$\varepsilon_{\alpha z} = \frac{1}{2}\left(\partial_a u_z - \theta_\alpha\right) = \frac{1}{2}\gamma_\alpha, \tag{5.3}$$

where $\alpha = \{x, y\}$, $\beta = \{x, y\}$. The tensors $\boldsymbol{\varepsilon}^0$, $\boldsymbol{\kappa}$, $\boldsymbol{\gamma}$ are called membrane, bending (or
curvature) and shear strain tensor

$$\boldsymbol{\varepsilon}^0 = \operatorname{Grad} \boldsymbol{u}^0, \tag{5.4}$$

$$\boldsymbol{\kappa} = \operatorname{Grad} \boldsymbol{\theta}, \tag{5.5}$$

$$\boldsymbol{\gamma} = \operatorname{grad} u_z - \boldsymbol{\theta}. \tag{5.6}$$

where $\boldsymbol{u}^0 = (u_x, u_y)^\top$, $\boldsymbol{\theta} = (\theta_x, \theta_y)^\top$. For now, it is assumed that the material is isotropic,
linear elastic (in Section §5.3 this hypothesis is removed). Recall the Hooke's law for 3D
continua (see Eq. (4.5))

$$\boldsymbol{\Sigma} = \frac{E}{1 + \nu}\left[\boldsymbol{\varepsilon} + \frac{\nu}{1 - 2\nu}\operatorname{Tr}(\boldsymbol{\varepsilon})\boldsymbol{I}_{3\times 3}\right].$$

where E, ν are the Young modulus and Poisson ratio. The hypothesis of inextensible fibers
implies $\varepsilon_{zz} = 0$. However, imposing a plane strain condition provides a model that is too
stiff. Rather than a plain strain assumption, a plain stress hypothesis is used to derive the
constitutive law for plates. The displacement field (5.1) is left unchanged, but, instead of ε_{zz},

Σ_{zz} is set to zero. If $\Sigma_{zz} = 0$, one gets

$$\varepsilon_{zz} = -\frac{\nu}{1-\nu}(\varepsilon_{xx} + \varepsilon_{yy}).$$

Consequently, it is computed

$$\text{Tr}(\boldsymbol{\varepsilon}) = \frac{1-2\nu}{1-\nu}(\varepsilon_{xx} + \varepsilon_{yy}).$$

The constitutive law for the in-plane stress takes the form

$$\boldsymbol{\Sigma}_{2D} = \boldsymbol{\mathcal{D}}_{2D}\,\boldsymbol{\varepsilon}_{2D},$$

where $\boldsymbol{\Sigma}_{2D} = \Sigma_{\alpha\beta}$, $\boldsymbol{\varepsilon}_{2D} = \varepsilon_{\alpha\beta}$ and

$$\boldsymbol{\mathcal{D}}_{2D} = \frac{E}{1-\nu^2}\left[(1-\nu)(\cdot) + \nu\,\text{Tr}(\cdot)\boldsymbol{I}_{2\times2}\right]. \tag{5.7}$$

Concerning the shear deformation, the constitutive law reduces to

$$\boldsymbol{\sigma}_s = G\boldsymbol{\gamma}, \tag{5.8}$$

where $\boldsymbol{\sigma}_s := \boldsymbol{\Sigma}_{\alpha,3}$ and $G = \frac{E}{2(1+\nu)}$ is the shear modulus. In the following sections, the most common plate models will be presented.

5.1.1 Mindlin-Reissner model

The Mindlin-Reissner model [Rei47, Min51] represents a first-order shear deformation theory for describing the bending of plate. The in-plane midplane displacement are zero $\boldsymbol{u}^0(x,y) = \boldsymbol{0}$ for an isotropic plate that experiences only bending. Hence, the displacement field reduces to

$$\begin{aligned}
u_x(x,y,z) &= -z\partial_x\theta_x, \\
u_y(x,y,z) &= -z\partial_y\theta_y, \\
u_z(x,y,z) &= u_z^0(x,y).
\end{aligned} \tag{5.9}$$

In pure bending, the strain tensor is given by

$$\boldsymbol{\varepsilon}_b := \boldsymbol{\varepsilon}_{2D}(\boldsymbol{u}^0 = \boldsymbol{0}) = -z\boldsymbol{\kappa},$$

with $\boldsymbol{\kappa}$ given by (5.5). Consequently, the stress tensor reads

$$\boldsymbol{\Sigma}_b := \boldsymbol{\Sigma}_{2D}(\boldsymbol{u}^0 = \boldsymbol{0}) = -z\boldsymbol{\mathcal{D}}_{2D}\boldsymbol{\kappa},$$

where $\boldsymbol{\mathcal{D}}_{2D}$ is defined in Eq. (5.7).

The undeformed middle plane of the plate is denoted by Ω. The total domain of the

plate is the product $\Omega \times (-h/2, h/2)$, where h is the constant thickness. To effectively reduce the problem from three- to two-dimensional, the stresses have to be integrated along the fibers. Since the stress varies linearly across the thickness, the stress has to be multiplied by z before the integration to get a non null contribution. The resulting quantity is called bending momenta tensor and is given by

$$\boldsymbol{M} := -\int_{-h/2}^{h/2} z\boldsymbol{\Sigma}_b \, \mathrm{d}z = \boldsymbol{\mathcal{D}}_b \, \boldsymbol{\kappa}, \tag{5.10}$$

where

$$\boldsymbol{\mathcal{D}}_b = D_b \left[(1-\nu)(\cdot) + \nu \operatorname{Tr}(\cdot) \boldsymbol{I}_{2\times 2} \right], \qquad \text{where} \qquad D_b = \frac{Eh^3}{12(1-\nu^2)}. \tag{5.11}$$

The shear stress has to be integrated along the fibers as well. Given the excessive rigidity of the shear contribution, a correction factor $k = 5/6$ [Red06, Chapter 10] is introduced

$$\boldsymbol{q} = \int_{-h/2}^{h/2} k\boldsymbol{\sigma}_s = kGh\boldsymbol{\gamma}, \tag{5.12}$$

where $\boldsymbol{\gamma}$ is defined in Eq. (5.6). The equations of motion can be obtained using Hamilton's principle. It consists in minimizing the total Lagrangian, given by $L = E_{\text{def}} - E_{\text{kin}}$, where $E_{\text{def}}, E_{\text{kin}}$ are the deformation and kinetic energy

$$E_{\text{def}} = \frac{1}{2} \int_{\Omega} \int_{-h/2}^{h/2} \boldsymbol{\Sigma} : \boldsymbol{\varepsilon} \, \mathrm{d}\Omega \mathrm{d}z = \frac{1}{2} \int_{\Omega} \left\{ \boldsymbol{M} : \boldsymbol{\kappa} + \boldsymbol{q} \cdot \boldsymbol{\gamma} \right\} \, \mathrm{d}\Omega, \tag{5.13}$$

$$E_{\text{kin}} = \frac{1}{2} \int_{\Omega} \int_{-h/2}^{h/2} \rho \, \|\partial_t \boldsymbol{u}\|^2 \, \mathrm{d}\Omega \mathrm{d}z = \frac{1}{2} \int_{\Omega} \left\{ \frac{\rho h^3}{12} \|\partial_t \boldsymbol{\theta}\|^2 + \rho h (\partial_t u_z)^2 \right\} \, \mathrm{d}\Omega, \tag{5.14}$$

where ρ is the mass density. The Hamilton principle states that

$$\int_0^T \delta L \, \mathrm{d}t = \int_0^T \left\{ \delta E_{\text{def}} - \delta E_{\text{kin}} \right\} \, \mathrm{d}t = 0.$$

The final result is the following system of PDEs (for the detailed computations see [Red06, Chapter 10])

$$\begin{aligned} \rho h \frac{\partial^2 u_z}{\partial t^2} &= \operatorname{div} \boldsymbol{q}, \qquad (x, y) \in \Omega, \\ \frac{\rho h^3}{12} \frac{\partial^2 \boldsymbol{\theta}}{\partial t^2} &= \operatorname{Div} \boldsymbol{M} + \boldsymbol{q}, \end{aligned} \tag{5.15}$$

with $\boldsymbol{M} = \boldsymbol{\mathcal{D}}_b \operatorname{Grad} \boldsymbol{\theta}$ and $\boldsymbol{q} = kGh \left(\operatorname{grad} u_z - \boldsymbol{\theta} \right)$. This PDE goes together with specified boundary conditions. Those will be detailed in 5.2.1.

5.1.2   Kirchhoff-Love model

The Kirchhoff model was formulated around 1850 and it is referred to as classical plate theory. The hypotheses on the displacement field consist of the following three points (see Fig. 5.1):
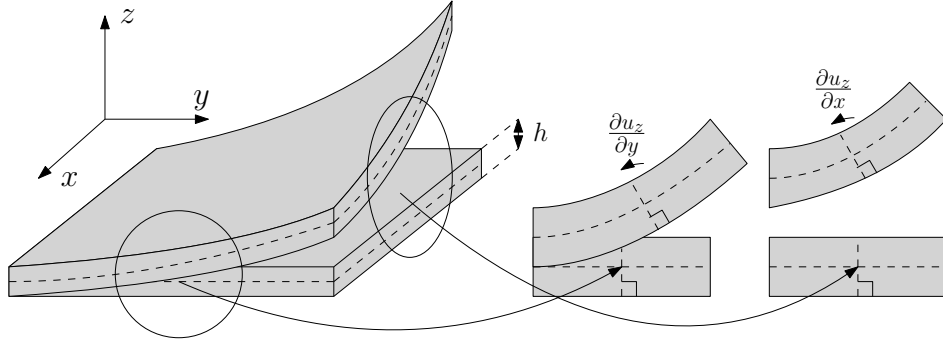
Figure 5.1: Kinematic assumption for the Kirchhoff plate

610 611   1. The fibers, segments perpendicular to the mid-plane before deformation, remain straight after deformation.

612   2. The fibers are inextensible.

613   3. While rotating, fibers remain perpendicular to the middle surface after deformation.

While the first two points are valid also for the Mindlin plate, the third assumption is specific to the Kirchhoff-Love model. Such an approximation is valid for plates having span-to-thickness ratio of the order of $L/h \approx 100-1000$ and implies zero transverse shear deformation

$$\boldsymbol{\gamma} = 0 \implies \varepsilon_{xz} = -\theta_x + \frac{\partial u_z}{\partial x} = 0, \qquad \varepsilon_{yz} = -\theta_y + \frac{\partial u_z}{\partial y} = 0.$$

614 615 The rotation vector is then related to the vertical displacement $\boldsymbol{\theta} = \operatorname{grad} u_z$. Plugging this into (5.5), it is found

$$\boldsymbol{\kappa} = \operatorname{Grad} \operatorname{grad} u_z = \operatorname{Hess} u_z. \tag{5.16}$$

616 617 Since the focus is on bending behavior, the in-plane displacement of the mid-plane are assumed to be zero $\boldsymbol{u}^0(x, y) = \boldsymbol{0}$. Hence, the displacement field assumes the form

$$\begin{aligned} u_x(x, y, z) &= -z\partial_x u_z, \\ u_y(x, y, z) &= -z\partial_y u_z, \\ u_z(x, y, z) &= u_z^0(x, y). \end{aligned} \tag{5.17}$$

For the Kirchhoff plate, the same link between the momenta and bending tensor holds

$$\boldsymbol{M} = \boldsymbol{\mathcal{D}}_b \boldsymbol{\kappa},$$

where $\boldsymbol{\mathcal{D}}_b$ and $\boldsymbol{\kappa}$ are given in (5.11), (5.16) respectively. The equations of motion can be obtained using Hamilton's principle [Red06, Chapter 2]. The deformation energy, kinetic

energy and external work read

$$E_{\text{def}} = \frac{1}{2} \int_\Omega \int_{-h/2}^{h/2} \boldsymbol{\Sigma} : \boldsymbol{\varepsilon} \, \mathrm{d}\Omega \, \mathrm{d}z = \frac{1}{2} \int_\Omega \{\boldsymbol{M} : \boldsymbol{\kappa}\} \, \mathrm{d}\Omega, \tag{5.18}$$

$$E_{\text{kin}} = \frac{1}{2} \int_\Omega \int_{-h/2}^{h/2} \rho \, \|\partial_t \boldsymbol{u}\|^2 \, \mathrm{d}\Omega \, \mathrm{d}z \approx \frac{1}{2} \int_\Omega \rho h (\partial_t u_z)^2 \, \mathrm{d}\Omega. \tag{5.19}$$

Remark 5 (Rotational energy)
For the kinetic energy the rotational contribution

$$E_{rot} = \frac{1}{2} \int_\Omega \int_{-h/2}^{h/2} \left\{ \rho \, (\partial_t u_x)^2 + (\partial_t u_y)^2 \right\} \, \mathrm{d}\Omega \, \mathrm{d}z = \frac{h^3}{24} \int_\Omega \rho \left\{ (\partial_{tx} u_z)^2 + (\partial_{ty} u_z)^2 \right\} \, \mathrm{d}\Omega = O(h^3),$$

is neglected given the small thickness assumption.

The final result from the Hamilton's principle is the following PDE (for the detailed computations the reader may consult [Red06, Chapter 3])

$$\rho h \frac{\partial^2 u_z}{\partial t^2} = -\operatorname{div} \operatorname{Div}(\boldsymbol{\mathcal{D}}_b \operatorname{Grad} \operatorname{grad} u_z), \qquad (x, y) \in \Omega. \tag{5.20}$$

Developing the calculations, one obtains

$$\rho h \frac{\partial^2 u_z}{\partial t^2} = -D_b \Delta^2 u_z, \qquad (x, y) \in \Omega,$$

where $\Delta^2 = \frac{\partial^4}{\partial x^4} + 2 \frac{\partial^2}{\partial x^2} \frac{\partial^2}{\partial y^2} + \frac{\partial^4}{\partial y^4}$ is the bi-Laplacian. Appropriate boundary conditions for this problem will be detailed in 5.2.2.

5.2   Port-Hamiltonian formulation of isotropic plates

In this section the pH formulation of the isotropic Mindlin and Kirchhoff plate models is detailed. In [MMB05], the Mindlin plate model was put in pH form by appropriate selection of the energy variables. However, the final system does not consider the nature of the different variables that come into play, leading to a non intrinsic final formulation. Additionally, this model was presented using the jet bundle formalism in [SS17]. The Kirchhoff model was never explored in the pH framework and represents an original contribution of this thesis. The interested reader can find in [RZ18] a rigorous mathematical treatment of the biharmonic problem and its decomposition in 2D geometries, but only for the static case (the 3D case, that does not relate to plate bending, is treated in [DZ18]).

5.2.1 Port-Hamiltonian Mindlin plate

Let $w := u_z$ denote the vertical displacement of the plate. Consider a bounded, connected domain $\Omega \subset \mathbb{R}^2$ and the Hamiltonian (total energy)

$$H = \frac{1}{2} \int_\Omega \left\{ \rho h \left(\frac{\partial w}{\partial t} \right)^2 + \frac{\rho h^3}{12} \left\| \frac{\partial \boldsymbol{\theta}}{\partial t} \right\|^2 + \boldsymbol{M} : \boldsymbol{\kappa} + \boldsymbol{q} \cdot \boldsymbol{\gamma} \right\} \, \mathrm{d}\Omega, \tag{5.21}$$

where $\boldsymbol{M}$, $\boldsymbol{\kappa}$, $\boldsymbol{q}$, $\boldsymbol{\gamma}$ are defined in Eqs. (5.10), (5.5), (5.12), (5.6) respectively. The choice of the energy variables is the same as in [MMB05] but here scalar-, vector- and tensor-valued variables are gathered together:

$$
\begin{aligned}
\alpha_w &= \rho h \frac{\partial w}{\partial t}, &&\text{Linear momentum,} & \boldsymbol{\alpha}_\theta &= \frac{\rho h^3}{12} \frac{\partial \boldsymbol{\theta}}{\partial t}, &&\text{Angular momentum,} \\
\boldsymbol{A}_\kappa &= \boldsymbol{\kappa}, &&\text{Curvature tensor,} & \boldsymbol{\alpha}_\gamma &= \boldsymbol{\gamma}. &&\text{Shear deformation.}
\end{aligned}
\tag{5.22}
$$

The energy is now a quadratic function of the energy variables

$$H = \frac{1}{2} \int_\Omega \left\{ \frac{1}{\rho h} \alpha_w^2 + \frac{12}{\rho h^3} \|\boldsymbol{\alpha}_\theta\|^2 + (\boldsymbol{\mathcal{D}}_b \boldsymbol{A}_\kappa) : \boldsymbol{A}_\kappa + (\boldsymbol{\mathcal{D}}_s \boldsymbol{\alpha}_\gamma) \cdot \boldsymbol{\alpha}_\gamma \right\} \, \mathrm{d}\Omega, \tag{5.23}$$

where $\boldsymbol{\mathcal{D}}_s := Ghk\boldsymbol{I}_{2\times2}$ and G is the shear modulus k the correction factor. The co-energy variables are found by computing the variational derivative of the Hamiltonian:

$$
\begin{aligned}
e_w &:= \frac{\delta H}{\delta \alpha_w} = \frac{\partial w}{\partial t}, &&\text{Linear velocity,} & \boldsymbol{e}_\theta &:= \frac{\delta H}{\delta \boldsymbol{\alpha}_\theta} = \frac{\partial \boldsymbol{\theta}}{\partial t}, &&\text{Angular velocity,} \\
\boldsymbol{E}_\kappa &:= \frac{\delta H}{\delta \boldsymbol{A}_\kappa} = \boldsymbol{M}, &&\text{Momenta tensor,} & \boldsymbol{e}_\gamma &:= \frac{\delta H}{\delta \boldsymbol{\alpha}_\gamma} = \boldsymbol{q} &&\text{Shear stress.}
\end{aligned}
\tag{5.24}
$$

Proposition 4

The variational derivative of the Hamiltonian with respect to the curvature tensor is the momenta tensor $\frac{\delta H}{\delta \boldsymbol{A}_\kappa} = \boldsymbol{M}$.

Proof. The proof is analogous to the one already detailed in Prop. 3 □

Once the variables are concatenated together, the pH system is expressed as follows

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \boldsymbol{\alpha}_\theta \\ \boldsymbol{A}_\kappa \\ \boldsymbol{\alpha}_\gamma \end{pmatrix} = \begin{bmatrix} 0 & 0 & 0 & \mathrm{div} \\ \boldsymbol{0} & \boldsymbol{0} & \mathrm{Div} & \boldsymbol{I}_{2\times2} \\ \boldsymbol{0} & \mathrm{Grad} & \boldsymbol{0} & \boldsymbol{0} \\ \mathrm{grad} & -\boldsymbol{I}_{2\times2} & \boldsymbol{0} & \boldsymbol{0} \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix}. \tag{5.25}$$

The first two equations are equivalent to (5.15). The last two equations, like (4.14) for 3D elasticity, represent the fact the higher order derivatives commute. We shall now establish the total energy balance in terms of boundary variables as they will be part of the underlying
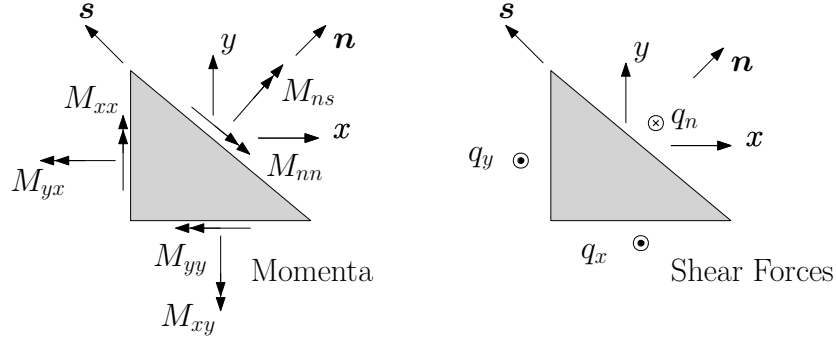
Figure 5.2: Cauchy law for momenta and forces at the boundary.
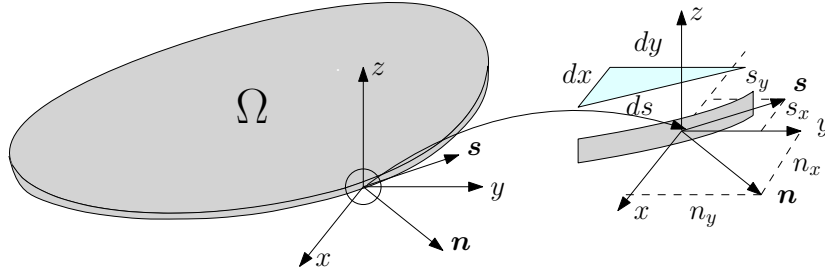
Figure 5.3: Reference frames and notations.

Stokes-Dirac structure of this model. The energy rate reads

$$
\begin{aligned}
\dot{H} &= \int_{\Omega} \left\{ \frac{\partial \alpha_w}{\partial t} e_w + \frac{\partial \boldsymbol{\alpha}_\theta}{\partial t} \cdot \boldsymbol{e}_\theta + \frac{\partial \boldsymbol{A}_\kappa}{\partial t} : \boldsymbol{E}_\kappa + \frac{\partial \boldsymbol{\alpha}_\gamma}{\partial t} \cdot \boldsymbol{e}_\gamma \right\} \, \mathrm{d}\Omega \\
&= \int_{\Omega} \left\{ \mathrm{div}(\boldsymbol{e}_\gamma) e_w + \mathrm{Div}(\boldsymbol{E}_\kappa) \cdot \boldsymbol{e}_\theta + \mathrm{Grad}(\boldsymbol{e}_\theta) : \boldsymbol{E}_\kappa + \mathrm{grad}(e_w) \cdot \boldsymbol{e}_\gamma \right\} \, \mathrm{d}\Omega \qquad \text{Stokes theorem,} \\
&= \int_{\partial\Omega} \left\{ w_t \, q_n + \omega_n \, M_{nn} + \omega_s \, M_{ns} \right\} \, \mathrm{d}s,
\end{aligned}
$$

$$(5.26)$$

where s is the curvilinear abscissa. The last integral is obtained by applying the Stokes theorem. The boundary variables appearing in the last line of (5.26) and illustrated in Fig. 5.2 are defined as follows:

$$
\begin{aligned}
\text{Shear force} \qquad & q_n := \boldsymbol{q} \cdot \boldsymbol{n} = \boldsymbol{e}_\gamma \cdot \boldsymbol{n}, \\
\text{Flexural momentum} \qquad & M_{nn} := \boldsymbol{M} : (\boldsymbol{n} \otimes \boldsymbol{n}) = \boldsymbol{E}_\kappa : (\boldsymbol{n} \otimes \boldsymbol{n}), \\
\text{Torsional momentum} \qquad & M_{ns} := \boldsymbol{M} : (\boldsymbol{s} \otimes \boldsymbol{n}) = \boldsymbol{E}_\kappa : (\boldsymbol{s} \otimes \boldsymbol{n}),
\end{aligned}
\qquad (5.27)
$$

Vectors $\boldsymbol{n}$ and $\boldsymbol{s}$ designate the normal and tangential unit vectors to the boundary, as shown in Fig. 5.3. Given two vectors $\boldsymbol{a} \in \mathbb{R}^n$, $\boldsymbol{a} \in \mathbb{R}^m$, the notation $\boldsymbol{a} \otimes \boldsymbol{b} = \boldsymbol{a}\boldsymbol{b}^\top \in \mathbb{R}^{n \times m}$ denotes the
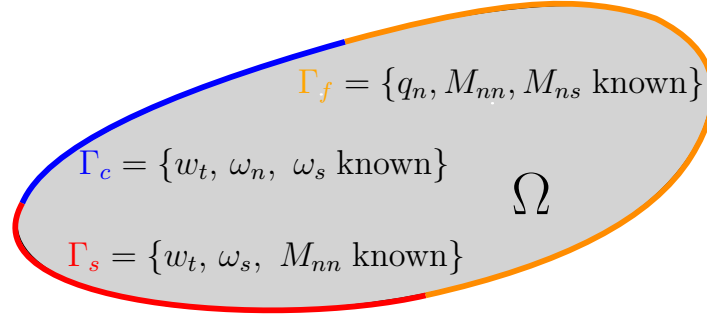
Figure 5.4: Boundary conditions for the Mindlin plate.

outer (or dyadic) product of two vectors. The corresponding power conjugated variables are

$$
\begin{aligned}
\text{Vertical velocity} \quad w_t &:= \frac{\partial w}{\partial t} = e_w, \\
\text{Flexural rotation} \quad \omega_n &:= \frac{\partial \boldsymbol{\theta}}{\partial t} \cdot \boldsymbol{n} = \boldsymbol{e}_\theta \cdot \boldsymbol{n}, \\
\text{Torsional rotation} \quad \omega_s &:= \frac{\partial \boldsymbol{\theta}}{\partial t} \cdot \boldsymbol{s} = \boldsymbol{e}_\theta \cdot \boldsymbol{s}.
\end{aligned}
\tag{5.28}
$$

Consider a partition of the boundary $\partial\Omega = \overline{\Gamma}_C \cup \overline{\Gamma}_S \cup \overline{\Gamma}_F$, $\Gamma_C \cap \Gamma_S \cap \Gamma_F = \{\emptyset\}$. The open subset Γ_C, Γ_S, Γ_F could be empty. Given definitions (5.27), (5.28), the boundary conditions for the Mindlin plate [DHNLS99] (see Fig. 5.4) that are considered are:

- Clamped (C) on $\Gamma_C \subseteq \partial\Omega$: w_t, ω_n, ω_s known;

- Simply supported hard (S) on $\Gamma_S \subseteq \partial\Omega$: w_t, ω_s, M_{nn} known;

- Free (F) on $\Gamma_F \subseteq \partial\Omega$: M_{nn}, M_{ns}, q_n known.

Then the final pH formulation reads

$$\frac{\partial}{\partial t}\begin{pmatrix} \alpha_w \\ \boldsymbol{\alpha}_\theta \\ \boldsymbol{A}_\kappa \\ \boldsymbol{\alpha}_\gamma \end{pmatrix} = \underbrace{\begin{bmatrix} 0 & 0 & 0 & \mathrm{div} \\ \boldsymbol{0} & \boldsymbol{0} & \mathrm{Div} & \boldsymbol{I}_{2\times 2} \\ \boldsymbol{0} & \mathrm{Grad} & \boldsymbol{0} & \boldsymbol{0} \\ \mathrm{grad} & -\boldsymbol{I}_{2\times 2} & \boldsymbol{0} & \boldsymbol{0} \end{bmatrix}}_{\mathcal{J}}\begin{pmatrix} e_w \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix},$$

$$\boldsymbol{u}_\partial = \underbrace{\begin{bmatrix} \gamma_0^{\Gamma_C} & 0 & 0 & 0 \\ 0 & \gamma_n^{\Gamma_C} & 0 & 0 \\ 0 & \gamma_s^{\Gamma_C} & 0 & 0 \\ \gamma_0^{\Gamma_S} & 0 & 0 & 0 \\ 0 & \gamma_s^{\Gamma_S} & 0 & 0 \\ 0 & 0 & \gamma_{nn}^{\Gamma_S} & 0 \\ 0 & 0 & \gamma_{nn}^{\Gamma_F} & 0 \\ 0 & 0 & \gamma_{ns}^{\Gamma_F} & 0 \\ 0 & 0 & 0 & \gamma_n^{\Gamma_F} \end{bmatrix}}_{\mathcal{B}_\partial}\begin{pmatrix} e_w \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix},$$

(5.29)

$$\boldsymbol{y}_\partial = \underbrace{\begin{bmatrix} 0 & 0 & 0 & \gamma_n^{\Gamma_C} \\ 0 & 0 & \gamma_{nn}^{\Gamma_C} & 0 \\ 0 & 0 & \gamma_{ns}^{\Gamma_C} & 0 \\ 0 & 0 & 0 & \gamma_n^{\Gamma_S} \\ 0 & 0 & \gamma_{ns}^{\Gamma_S} & 0 \\ 0 & \gamma_n^{\Gamma_S} & 0 & 0 \\ 0 & \gamma_n^{\Gamma_F} & 0 & 0 \\ 0 & \gamma_s^{\Gamma_F} & 0 & 0 \\ \gamma_0^{\Gamma_F} & 0 & 0 & 0 \end{bmatrix}}_{\mathcal{C}_\partial}\begin{pmatrix} e_w \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix},$$

where $\gamma_0^{\Gamma_*}a = a|_{\Gamma_*}$ denotes the trace over the set Γ_*. Furthermore, notations $\gamma_n^{\Gamma_*}\boldsymbol{a} = \boldsymbol{a} \cdot \boldsymbol{n}|_{\Gamma_*}$, $\gamma_s^{\Gamma_*}\boldsymbol{a} = \boldsymbol{a} \cdot \boldsymbol{s}|_{\Gamma_*}$ indicate the normal and tangential trace over the set Γ_* respectively. Symbols $\gamma_{nn}^{\Gamma_*}, \gamma_{ns}^{\Gamma_*}$ denote the normal-normal trace and the normal-tangential trace of tensor-valued functions, $\gamma_{nn}^{\Gamma_*}\boldsymbol{A} = \boldsymbol{A} : (\boldsymbol{n} \otimes \boldsymbol{n})|_{\Gamma_*}$, $\gamma_{ns}^{\Gamma_*}\boldsymbol{A} = \boldsymbol{A} : (\boldsymbol{n} \otimes \boldsymbol{s})|_{\Gamma_*}$.

Remark 6

It can be observed that the interconnection structure given by $\mathcal{J}$ in (5.29) mimics that of the Timoshenko beam [JZ12, Chapter 7].

Conjecture 2 (Stokes-Dirac structure for the Mindlin plate)

Consider $\mathbb{V} = \mathbb{R}^2$, $\mathbb{S} = \mathbb{R}^{2\times 2}_{sym}$ and let $H^1(\Omega)$ be the space of functions with gradient in $L^2(\Omega, \mathbb{V})$ and $H^{\mathrm{div}}(\Omega, \mathbb{V})$ the space of vector-valued functions with divergence in $L^2(\Omega)$. Furthermore, $H^1(\Omega, \mathbb{V})$ is the space of vectors with symmetric gradient in $L^2(\Omega, \mathbb{S})$ and $H^{\mathrm{Div}}(\Omega, \mathbb{S})$ denote

the space of symmetric tensors with divergence in $L^2(\Omega, \mathbb{V})$. Consider the definitions

$$
\begin{aligned}
H &:= H^1(\Omega) \times H^{\mathrm{Grad}}(\Omega, \mathbb{V}) \times H^{\mathrm{Div}}(\Omega, \mathbb{S}) \times H^{\mathrm{div}}(\Omega, \mathbb{V}), \\
F &:= L^2(\Omega) \times L^2(\Omega, \mathbb{V}) \times L^2(\Omega, \mathbb{S}) \times L^2(\Omega, \mathbb{V}), \\
F_\partial &:= L^2(\Gamma_C, \mathbb{R}^3) \times L^2(\Gamma_S, \mathbb{R}^3) \times L^2(\Gamma_F, \mathbb{R}^3).
\end{aligned}
$$

671   *The set*

$$
D_{\mathcal{J}} = \left\{ \begin{pmatrix} \boldsymbol{f} \\ \boldsymbol{f}_\partial \\ \boldsymbol{e} \\ \boldsymbol{e}_\partial \end{pmatrix} \mid \boldsymbol{e} \in H, \ \boldsymbol{f} = -\mathcal{J}\boldsymbol{e}, \ \boldsymbol{f}_\partial = \mathcal{B}_\partial \boldsymbol{e}, \ \boldsymbol{e}_\partial = \mathcal{C}_\partial \boldsymbol{e} \right\}, \tag{5.30}
$$

672   *where $\boldsymbol{e} = (e_w, \boldsymbol{e}_\theta, \boldsymbol{E}_\kappa, \boldsymbol{e}_\gamma)$ and $\mathcal{J}, \mathcal{B}_\partial, \mathcal{C}_\partial$ are defined in (5.29), is a Stokes–Dirac structure*
673   *with respect to the pairing*

$$
\left\langle\!\!\left\langle (\boldsymbol{f}^1, \boldsymbol{f}_\partial^1, \boldsymbol{e}^1, \boldsymbol{e}_\partial^1), (\boldsymbol{f}^2, \boldsymbol{f}_\partial^2, \boldsymbol{e}^2, \boldsymbol{e}_\partial^2) \right\rangle\!\!\right\rangle := \left\langle \boldsymbol{e}^1, \boldsymbol{f}^2 \right\rangle_F + \left\langle \boldsymbol{e}^2, \boldsymbol{f}^1 \right\rangle_F + \left\langle \boldsymbol{e}_\partial^1, \boldsymbol{f}_\partial^2 \right\rangle_{F_\partial} + \left\langle \boldsymbol{e}_\partial^2, \boldsymbol{f}_\partial^1 \right\rangle_{F_\partial},
$$
$$\tag{5.31}$$

where $\boldsymbol{e}_\partial^i = (e_{\partial,1}^i, \ e_{\partial,2}^i, \ e_{\partial,3}^i)$, $\boldsymbol{f}_\partial^i = (f_{\partial,1}^i, \ f_{\partial,2}^i, \ f_{\partial,3}^i)$ and

$$
\langle (\boldsymbol{a}, \boldsymbol{b}, \boldsymbol{c}), (\boldsymbol{d}, \boldsymbol{e}, \boldsymbol{f}) \rangle_{F_\partial} = \int_{\Gamma_C} \boldsymbol{a} \cdot \boldsymbol{d} \, \mathrm{d}S + \int_{\Gamma_S} \boldsymbol{b} \cdot \boldsymbol{e} \, \mathrm{d}S + \int_{\Gamma_F} \boldsymbol{c} \cdot \boldsymbol{f} \, \mathrm{d}S, \quad \boldsymbol{a}, \ \boldsymbol{b}, \ \boldsymbol{c}, \ \boldsymbol{d}, \ \boldsymbol{e}, \ \boldsymbol{f} \in \mathbb{R}^3.
$$

674   **Crucial points and elements in favor of the conjecture**   *Analogously to what was*
675   *stated in Conjecture 1, the boundary spaces have to properly defined. If the integration by*
676   *parts is carried out as in Eq. (5.26), one can follow the same lines of Conjecture 1 to support*
677   *the present Conjecture.*

678   The Mindlin plate falls within the assumption of [Skr19], hence it is a well posed boundary
679   control pH systems.

680   ## 5.2.2 Port-Hamiltonian Kirchhoff plate

681   Again the starting point is the Hamiltonian (total energy)

$$
H = \frac{1}{2} \int_\Omega \left\{ \rho h \left(\frac{\partial w}{\partial t} \right)^2 + \boldsymbol{M} : \boldsymbol{\kappa} \right\} \mathrm{d}\Omega, \tag{5.32}
$$

682   where $\boldsymbol{M}$, $\boldsymbol{\kappa}$ are defined in Eqs. (5.10), (5.16). For what concerns the choice of the energy
683   variables, a scalar and a tensor variable are considered:

$$
\alpha_w = \rho h \frac{\partial w}{\partial t}, \quad \text{Linear momentum}, \qquad \boldsymbol{A}_\kappa = \boldsymbol{\kappa}, \quad \text{Curvature tensor}. \tag{5.33}
$$

684   The co-energy variables are found by computing the variational derivative of the Hamiltonian:

$$e_w := \frac{\delta H}{\delta \alpha_w} = \frac{\partial w}{\partial t}, \quad \text{Linear velocity,} \qquad \boldsymbol{E}_\kappa := \frac{\delta H}{\delta \boldsymbol{A}_\kappa} = \boldsymbol{M}, \quad \text{Curvature tensor.} \qquad (5.34)$$

685   The port-Hamiltonian system is then written as

$$\frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \boldsymbol{A}_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div} \circ \operatorname{Div} \\ \operatorname{Grad} \circ \operatorname{grad} & \boldsymbol{0} \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix}. \qquad (5.35)$$

The first equation is equivalent to (5.20). The last equation represent the fact the higher order derivatives commute

$$\partial_t \boldsymbol{A}_\kappa = \operatorname{Grad} \operatorname{grad} e_w,$$
$$\partial_t \boldsymbol{\kappa} = \operatorname{Grad} \operatorname{grad} \partial_t w,$$
$$\partial_t \operatorname{Grad} \operatorname{grad} w = \operatorname{Grad} \operatorname{grad} \partial_t w,$$

686   The last equation holds for $w \in C^3(\Omega)$.

687   **Theorem 4**
688   *The operator* $\operatorname{Grad} \circ \operatorname{grad}$, *corresponding to the Hessian operator, is the adjoint of the double*
689   *divergence* $\operatorname{div} \circ \operatorname{Div}$.

Proof. Let $\mathbb{S} = \mathbb{R}^{d \times d}_{\text{sym}}$ and consider the Hilbert space of the square integrable symmetric square tensors $L^2(\Omega, \mathbb{S})$ over an open connected set Ω (its inner product is defined in (4.12)). Consider the Hilbert space $L^2(\Omega)$ of scalar square integrable functions, endowed with the standard inner product. Consider the double divergence operator defined as:

$$\operatorname{div} \operatorname{Div} : \ L^2(\Omega, \mathbb{S}) \to L^2(\Omega), \qquad \text{with } \psi = \operatorname{div} \operatorname{Div} \boldsymbol{\Psi} = \sum_{i=1}^{d} \sum_{j=1}^{d} \frac{\partial^2 \boldsymbol{\Psi}_{ij}}{\partial x_i \, \partial x_j}.$$
$$\boldsymbol{\Psi} \to \operatorname{div} \operatorname{Div} \boldsymbol{\Psi} = \psi,$$

We shall identify $\operatorname{div} \operatorname{Div}^*$

$$\operatorname{div} \operatorname{Div}^* : \ L^2(\Omega) \to L^2(\Omega, \mathbb{S}),$$
$$f \to \operatorname{div} \operatorname{Div}^* f = \boldsymbol{F},$$

such that

$$\langle \operatorname{div} \operatorname{Div} \boldsymbol{\Psi}, f \rangle_{L^2(\Omega)} = \langle \boldsymbol{\Psi}, \operatorname{div} \operatorname{Div}^* f \rangle_{L^2(\Omega, \mathbb{S})}, \qquad \begin{aligned} &\forall \, \boldsymbol{\Psi} \in \operatorname{Dom}(\operatorname{div} \operatorname{Div}) \subset L^2(\Omega, \mathbb{S}) \\ &\forall \, f \in \operatorname{Dom}(\operatorname{div} \operatorname{Div}^*) \subset L^2(\Omega) \end{aligned}$$

The function have to belong to the operator domain, so for instance $f \in C_0^2(\Omega) \in \operatorname{Dom}(\operatorname{div} \operatorname{Div}^*)$ the space of twice differentiable scalar functions with compact support and $\boldsymbol{\Psi}$ can be chosen in the set $C_0^2(\Omega, \mathbb{S}) \in \operatorname{Dom}(\operatorname{div} \operatorname{Div})$, the space of twice differentiable symmetric

tensors with compact support on Ω. A classical result is the fact that the adjoint of the vector divergence is $\mathrm{div}^* = -\mathrm{grad}$ as stated in [KZ15]. By theorem 3, it holds $\mathrm{Div}^* = -\mathrm{Grad}$. Considering that $\mathrm{div}\,\mathrm{Div} = \mathrm{div} \circ \mathrm{Div}$ is the composition of two different operators and that the adjoint of a composed operator is the adjoint of each operator in reverse order, i.e. $(B \circ C)^* = C^* \circ B^*$, then it can be stated

$$(\mathrm{div} \circ \mathrm{Div})^* = \mathrm{Div}^* \circ \mathrm{div}^* = \mathrm{Grad} \circ \mathrm{grad}\,.$$

690 Since only formal adjoints are being looked for, this concludes the proof. $\square$

691   The energy rate provides the boundary port variables

$$
\begin{aligned}
\dot{H} &= \int_\Omega \left\{ \partial_t \alpha_w \, e_w + \partial_t \boldsymbol{A}_\kappa : \boldsymbol{E}_\kappa \right\}\ \mathrm{d}\Omega \\
&= \int_\Omega \left\{ -\mathrm{div}\,\mathrm{Div}\,\boldsymbol{E}_\kappa \, e_w + \mathrm{Grad}\,\mathrm{grad}\,e_w : \boldsymbol{E}_\kappa \right\}\ \mathrm{d}\Omega, && \text{Stokes theorem} \\
&= \int_{\partial\Omega} \left\{ -\boldsymbol{n} \cdot \mathrm{Div}\,\boldsymbol{E}_\kappa \, e_w + (\boldsymbol{n} \otimes \mathrm{grad}\,e_w) : \boldsymbol{E}_\kappa \right\}\ \mathrm{d}s, \\
&= \int_{\partial\Omega} \left\{ -\boldsymbol{n} \cdot \mathrm{Div}\,\boldsymbol{E}_\kappa \, e_w + \partial_{\boldsymbol{n}} e_w \, (\boldsymbol{n} \otimes \boldsymbol{n}) : \boldsymbol{E}_\kappa + \partial_{\boldsymbol{s}} e_w \, (\boldsymbol{n} \otimes \boldsymbol{s}) : \boldsymbol{E}_\kappa \right\}\ \mathrm{d}s, && \text{Dyadic properties} \\
&= \int_{\partial\Omega} \left\{ \widehat{q}_n \, w_t + \partial_{\boldsymbol{n}} w_t \, M_{nn} + \partial_{\boldsymbol{s}} w_t \, M_{ns} \right\}\ \mathrm{d}s.
\end{aligned}
$$
$$(5.36)$$

692 where s is the curvilinear abscissa, $w_t := \partial_t w$ and $\partial_{\boldsymbol{s}} w_t$ denotes the directional derivative
693 along the tangential versor at the boundary. Additionally, the following definitions have been
694 introduced

$$\widehat{q}_n := -\boldsymbol{n} \cdot \mathrm{Div}(\boldsymbol{E}_\kappa), \quad M_{nn} := (\boldsymbol{n} \otimes \boldsymbol{n}) : \boldsymbol{E}_\kappa, \quad M_{ns} := (\boldsymbol{n} \otimes \boldsymbol{s}) : \boldsymbol{E}_\kappa. \tag{5.37}$$

695 Variables w_t and $\partial_{\boldsymbol{s}} w_t$ are not independent as they are differentially related with respect to
696 derivation along $\boldsymbol{s}$ (see for instance [TWK59, Chapter 4]). The tangential derivative has to be
697 moved on the torsional momentum M_{ns}. For sake of simplicity, $\partial\Omega$ is supposed to be regular.
698 Then the integration by parts provides

$$\int_{\partial\Omega} \partial_{\boldsymbol{s}} w_t \, M_{ns}\ \mathrm{d}s = -\int_{\partial\Omega} \partial_{\boldsymbol{s}} M_{ns} \, w_t\ \mathrm{d}s. \tag{5.38}$$

699 The final energy balance reads

$$\dot{H} = \int_{\partial\Omega} \left\{ w_t \, \widetilde{q}_n + \partial_{\boldsymbol{n}} w_t \, M_{nn} \right\}\ \mathrm{d}s, \tag{5.39}$$

700 where the boundary variables are

$$
\begin{aligned}
\text{Effective shear force} \quad & \widetilde{q}_n := \widehat{q}_n - \partial_{\boldsymbol{s}} M_{ns}, \\
\text{Flexural momentum} \quad & M_{nn} := \boldsymbol{M} : (\boldsymbol{n} \otimes \boldsymbol{n}) = \boldsymbol{E}_\kappa : (\boldsymbol{n} \otimes \boldsymbol{n}),
\end{aligned}
\tag{5.40}
$$
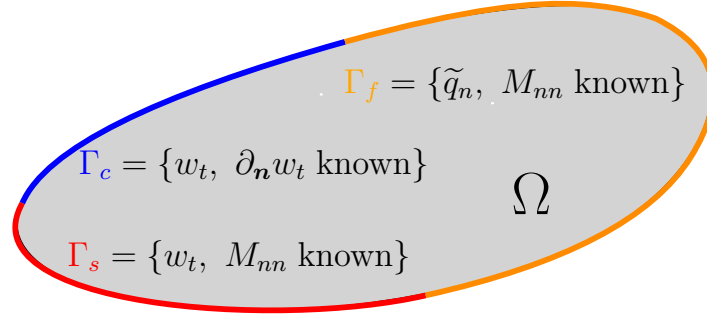
Figure 5.5: Boundary conditions for the Kirchhoff plate.

and $\widehat{q}_n$ is defined in (5.37). The corresponding power conjugated variables are:

$$
\begin{aligned}
\text{Vertical velocity} \quad & w_t := \frac{\partial w}{\partial t} = e_w, \\
\text{Flexural rotation} \quad & \partial_{\boldsymbol{n}} w_t := \nabla e_w \cdot \boldsymbol{n}.
\end{aligned}
\tag{5.41}
$$

Consider a partition of the boundary $\partial\Omega = \overline{\Gamma}_C \cup \overline{\Gamma}_S \cup \overline{\Gamma}_F$, $\Gamma_C \cap \Gamma_S \cap \Gamma_F = \{\emptyset\}$, where $\Gamma_C, \Gamma_S, \Gamma_F$ are open subset of $\partial\Omega$. Given definitions (5.40), (5.41), the boundary conditions for the Kirchhoff plate [GSV18] are the following (see Fig. 5.5):

- Clamped (C) on $\Gamma_C \subseteq \partial\Omega$: $w_t, \ \partial_{\boldsymbol{n}} w_t$ known;

- Simply supported (S) on $\Gamma_S \subseteq \partial\Omega$: $w_t, \ M_{nn}$ known;

- Free (F) on $\Gamma_F \subseteq \partial\Omega$: $\widetilde{q}_n, \ M_{nn}$ known.

Then the final pH formulation reads

$$\frac{\partial}{\partial t}\begin{pmatrix} \alpha_w \\ \boldsymbol{A}_\kappa \end{pmatrix} = \underbrace{\begin{bmatrix} 0 & -\operatorname{div}\circ\operatorname{Div} \\ \operatorname{Grad}\circ\operatorname{grad} & \boldsymbol{0} \end{bmatrix}}_{\mathcal{J}} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix},$$

$$\boldsymbol{u}_\partial = \underbrace{\begin{bmatrix} \gamma_0^{\Gamma_C} & 0 \\ \gamma_1^{\Gamma_C} & 0 \\ \gamma_0^{\Gamma_S} & 0 \\ 0 & \gamma_{nn}^{\Gamma_S} \\ 0 & \gamma_{nn,1}^{\Gamma_F} \\ 0 & \gamma_{nn}^{\Gamma_F} \end{bmatrix}}_{\mathcal{B}_\partial} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix},$$

$$\boldsymbol{y}_\partial = \underbrace{\begin{bmatrix} 0 & \gamma_{nn,1}^{\Gamma_C} \\ 0 & \gamma_{nn}^{\Gamma_C} \\ 0 & \gamma_{nn,1}^{\Gamma_S} \\ \gamma_1^{\Gamma_S} & 0 \\ \gamma_0^{\Gamma_F} & 0 \\ \gamma_1^{\Gamma_F} & 0 \end{bmatrix}}_{\mathcal{C}_\partial} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix},$$

(5.42)

where $\gamma_0^{\Gamma_*}a = a|_{\Gamma_*}$ and $\gamma_1^{\Gamma_*}a = \partial_n a|_{\Gamma_*}$ denote the standard and the normal derivative trace over the set Γ_* respectively. The symbol $\gamma_{nn,1}^{\Gamma_*}$ denotes the map $\gamma_{nn,1}^{\Gamma_*}\boldsymbol{A} = -\boldsymbol{n}\cdot\operatorname{Div}\boldsymbol{A} - \partial_s(\boldsymbol{A}\colon (\boldsymbol{n}\otimes\boldsymbol{s}))|_{\Gamma_*}$,, while $\gamma_{nn}^{\Gamma_*}\boldsymbol{A} = \boldsymbol{A}\colon(\boldsymbol{n}\otimes\boldsymbol{n})|_{\Gamma_*}$ indicates the normal-normal trace of a tensor-valued function.

Remark 7

The interconnection structure $\mathcal{J}$ in (5.42) mimics that of the Bernoulli beam [CRMPB17].
The double divergence and the Hessian coincide, in dimension one, with the second derivative.

Conjecture 3 (Stokes-Dirac structure for the Kirchhoff plate)
Consider $\mathbb{S} = \mathbb{R}^{2\times2}_{sym}$ and let $H^2(\Omega)$ be the space of functions with Hessian in $L^2(\Omega,\mathbb{S})$ and $H^{\operatorname{div}\operatorname{Div}}(\Omega,\mathbb{S})$ the space of vector-valued functions with double divergence in $L^2(\Omega)$. Consider the definitions

$$\begin{aligned} H &:= H^2(\Omega) \times H^{\operatorname{div}\operatorname{Div}}(\Omega,\mathbb{S}), \\ F &:= L^2(\Omega) \times L^2(\Omega,\mathbb{S}), \\ F_\partial &:= L^2(\Gamma_C,\mathbb{R}^2) \times L^2(\Gamma_S,\mathbb{R}^2) \times L^2(\Gamma_F,\mathbb{R}^2). \end{aligned}$$

The set

$$D_{\mathcal{J}} = \left\{ \begin{pmatrix} \boldsymbol{f} \\ \boldsymbol{f}_\partial \\ \boldsymbol{e} \\ \boldsymbol{e}_\partial \end{pmatrix} \mid \boldsymbol{e} \in H,\ \boldsymbol{f} = -\mathcal{J}\boldsymbol{e},\ \boldsymbol{f}_\partial = \mathcal{B}_\partial\boldsymbol{e},\ \boldsymbol{e}_\partial = \mathcal{C}_\partial\boldsymbol{e} \right\}, \tag{5.43}$$

where $\boldsymbol{e} = (e_w, \boldsymbol{E}_\kappa)$ and $\mathcal{J},\mathcal{B}_\partial,\mathcal{C}_\partial$ are defined in (5.42), is a Stokes–Dirac structure with
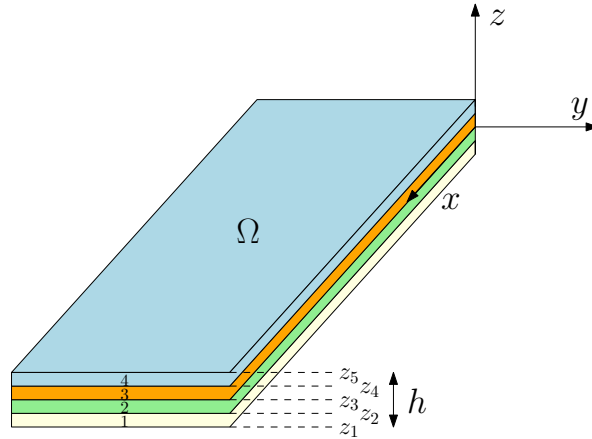
Figure 5.6: Laminated plate with 4 layers.

respect to the pairing

$$\left\langle\!\left\langle (\boldsymbol{f}^1, \boldsymbol{f}^1_\partial, \boldsymbol{e}^1, \boldsymbol{e}^1_\partial), (\boldsymbol{f}^2, \boldsymbol{f}^2_\partial, \boldsymbol{e}^2, \boldsymbol{e}^2_\partial) \right\rangle\!\right\rangle := \left\langle \boldsymbol{e}^1, \boldsymbol{f}^2 \right\rangle_F + \left\langle \boldsymbol{e}^2, \boldsymbol{f}^1 \right\rangle_F + \left\langle \boldsymbol{e}^1_\partial, \boldsymbol{f}^2_\partial \right\rangle_{F_\partial} + \left\langle \boldsymbol{e}^2_\partial, \boldsymbol{f}^1_\partial \right\rangle_{F_\partial},$$

$$(5.44)$$

where $\boldsymbol{e}^i_\partial = (\boldsymbol{e}^i_{\partial,1}, \ \boldsymbol{e}^i_{\partial,2})$, $\boldsymbol{f}^i_\partial = (\boldsymbol{f}^i_{\partial,1}, \ \boldsymbol{f}^i_{\partial,2})$ *and*

$$\langle (\boldsymbol{a}, \boldsymbol{b}, \boldsymbol{c}), (\boldsymbol{d}, \boldsymbol{e}, \boldsymbol{f}) \rangle_{F_\partial} = \int_{\Gamma_C} \boldsymbol{a} \cdot \boldsymbol{d} \, \mathrm{d}S + \int_{\Gamma_S} \boldsymbol{b} \cdot \boldsymbol{e} \, \mathrm{d}S + \int_{\Gamma_F} \boldsymbol{c} \cdot \boldsymbol{f} \, \mathrm{d}S, \quad \boldsymbol{a}, \boldsymbol{b}, \boldsymbol{c}, \boldsymbol{d}, \boldsymbol{e}, \boldsymbol{f} \in \mathbb{R}^2.$$

Validity of the conjecture   *The integration by parts has to be carried as in Eq.* (5.36) *to retrieve a similar discussion to the one in Conjecture 1.*

5.3   Laminated anisotropic plates

Until now homogeneous isotropic materials have been considered. For this class of materials, the membrane and bending problems are decoupled. In aeronautical applications, structure are made up of laminae of different materials to enhance the mechanical properties of the resulting structure. In some cases, a certain coupling is desired, to increase the aerodynamical performance of the wing as it deforms.

Consider again the deformation field given by (5.1)

$$\boldsymbol{u}(x, y, z, t) = \boldsymbol{u}^0(x, y, t) - z\boldsymbol{\theta}(x, y, t),$$
$$u_z(x, y, z, t) = u_z^0(x, y, t),$$

where $\boldsymbol{u} = (u_x, u_y)$. The link between in-plane deformation (5.2) and the membrane and

bending contribution (5.4), (5.5).

$$\varepsilon_{2D} = \varepsilon^0 - z\kappa \qquad \text{where} \qquad \varepsilon^0 = \text{Grad}\, \boldsymbol{u}^0, \quad \kappa = \text{Grad}\, \boldsymbol{\theta}. \tag{5.45}$$

Assume that each layer is an anisotropic material under plane stress condition. Then, it holds (see [Red03, Chapter 1] for details)

$$\boldsymbol{\Sigma}_{2D}^i = \boldsymbol{\mathcal{D}}_{2D}^i \varepsilon_{2D}^i,$$

where i indicates the layer under consideration. The matrix $\boldsymbol{\mathcal{D}}_{2D}^i$ depends on the properties of each material. To reduce the problem to bi-dimensional, the stresses have to be integrated along the thickness. Differently from isotropic plate, for laminated anisotropic plates the membrane and bending behavior are coupled. To see this consider the membrane and bending resultant of the stress

$$\boldsymbol{N} := \int_{-h/2}^{h/2} \boldsymbol{\Sigma}_{2D}\, \mathrm{d}z, \qquad \boldsymbol{M} := \int_{-h/2}^{h/2} -z\boldsymbol{\Sigma}_{2D}\, \mathrm{d}z. \tag{5.46}$$

Since the stress are discontinuous due to the change of constitutive law along the thickness, the integration has to be performed lamina-wise. Once the computations are carried out, it is found

$$\begin{pmatrix} \boldsymbol{N} \\ \boldsymbol{M} \end{pmatrix} = \begin{bmatrix} \boldsymbol{\mathcal{D}}_m & \boldsymbol{\mathcal{D}}_c \\ \boldsymbol{\mathcal{D}}_c & \boldsymbol{\mathcal{D}}_b \end{bmatrix} \begin{pmatrix} \varepsilon^0 \\ \kappa \end{pmatrix}, \tag{5.47}$$

where

$$\boldsymbol{\mathcal{D}}_m = \sum_{i=1}^{n_{\text{layer}}} \boldsymbol{\mathcal{D}}_{2D}^i(z_{i+1} - z_i), \quad \boldsymbol{\mathcal{D}}_c = -\frac{1}{2}\sum_{i=1}^{n_{\text{layer}}} \boldsymbol{\mathcal{D}}_{2D}^i(z_{i+1}^2 - z_i^2), \quad \boldsymbol{\mathcal{D}}_b = \frac{1}{3}\sum_{i=1}^{n_{\text{layer}}} \boldsymbol{\mathcal{D}}_{2D}^i(z_{i+1}^3 - z_i^3), \tag{5.48}$$

and n_{layer} is the number of layers and z_i represents the height of the i^{th} layer (see Fig. 5.6). The coupling term $\boldsymbol{\mathcal{D}}_c$ disappears if a symmetric configuration is considered. For the shear contribution it is obtained

$$\boldsymbol{q} := \int_{-h/2}^{h/2} \boldsymbol{\sigma}_s\, \mathrm{d}z = \boldsymbol{\mathcal{D}}_s\boldsymbol{\gamma}, \qquad \text{where} \qquad \boldsymbol{\gamma} = \text{grad}\, u_z - \boldsymbol{\theta}. \tag{5.49}$$

The tensor $\boldsymbol{\mathcal{D}}_s$ is not diagonal as in the isotropic case, cf. §5.2.1.

In the following section it is shown how anisotropic laminated plates can be formulated as pHs.

5.3.1   Port-Hamiltonian laminated Mindlin plate

For a shear deformable laminated plate the kinetic and deformation energy read

$$E_{\mathrm{kin}} = \frac{1}{2} \int_{\Omega} \left\{ \rho h \left\| \frac{\partial \boldsymbol{u}^0}{\partial t} \right\|^2 + \rho h \left(\frac{\partial u_z}{\partial t} \right)^2 + \frac{\rho h^3}{12} \left\| \frac{\partial \boldsymbol{\theta}}{\partial t} \right\|^2 \right\} \mathrm{d}\Omega,$$

$$E_{\mathrm{def}} = \frac{1}{2} \int_{\Omega} \left\{ \boldsymbol{N} : \boldsymbol{\varepsilon}^0 + \boldsymbol{M} : \boldsymbol{\kappa} + \boldsymbol{q} \cdot \boldsymbol{\gamma} \right\} \mathrm{d}\Omega.$$

By using Hamilton's principle the equations of motion are retrieved (see [Red03, Chapter 3] for an exhaustive explanation)

$$\rho h \frac{\partial^2 \boldsymbol{u}^0}{\partial t^2} = \mathrm{Div}\, \boldsymbol{N},$$

$$\rho h \frac{\partial^2 u_z}{\partial t^2} = \mathrm{div}\, \boldsymbol{q}, \tag{5.50}$$

$$\frac{\rho h^3}{12} \frac{\partial^2 \boldsymbol{\theta}}{\partial t^2} = \mathrm{Div}\, \boldsymbol{M} + \boldsymbol{q},$$

where $\boldsymbol{N}$, $\boldsymbol{M}$, $\boldsymbol{q}$ are defined in Eqs. (5.47), (5.49). To get a port-Hamiltonian formulation, the following energy variable are chosen

$$\boldsymbol{\alpha}_u = \rho h \frac{\partial \boldsymbol{u}^0}{\partial t}, \qquad \alpha_w = \rho h \frac{\partial u_z}{\partial t}, \qquad \boldsymbol{\alpha}_\theta = \frac{\rho h^3}{12} \frac{\partial \boldsymbol{\theta}}{\partial t},$$

$$\boldsymbol{A}_{\varepsilon^0} = \boldsymbol{\varepsilon}^0, \qquad \boldsymbol{A}_\kappa = \boldsymbol{\kappa}, \qquad \boldsymbol{\alpha}_\gamma = \boldsymbol{\gamma}. \tag{5.51}$$

This choice highlights the nature of the problem in which the membrane part (equivalent to a 2D elasticity problem) and the bending part interact. The total energy $H = E_{\mathrm{kin}} + E_{\mathrm{def}}$ is now a quadratic function of the energy variables

$$E_{\mathrm{kin}} = \frac{1}{2} \int_{\Omega} \left\{ \frac{1}{\rho h} \left\| \frac{\partial \boldsymbol{\alpha}_u}{\partial t} \right\|^2 + \frac{1}{\rho h} \left(\frac{\partial \alpha_w}{\partial t} \right)^2 + \frac{12}{\rho h^3} \left\| \frac{\partial \boldsymbol{\alpha}_\theta}{\partial t} \right\|^2 \right\} \mathrm{d}\Omega,$$

$$E_{\mathrm{def}} = \frac{1}{2} \int_{\Omega} \left\{ (\boldsymbol{\mathcal{D}}_m \boldsymbol{A}_{\varepsilon^0} + \boldsymbol{\mathcal{D}}_c \boldsymbol{A}_\kappa) : \boldsymbol{A}_{\varepsilon^0} + (\boldsymbol{\mathcal{D}}_c \boldsymbol{A}_{\varepsilon^0} + \boldsymbol{\mathcal{D}}_b \boldsymbol{A}_\kappa) : \boldsymbol{A}_\kappa + (\boldsymbol{\mathcal{D}}_s \boldsymbol{\alpha}_\gamma) \cdot \boldsymbol{\alpha}_\gamma \right\} \mathrm{d}\Omega,$$

The co-energies are equal to

$$e_w := \frac{\delta H}{\delta \boldsymbol{\alpha}_u} = \frac{\partial \boldsymbol{u}^0}{\partial t}, \qquad e_w := \frac{\delta H}{\delta \alpha_w} = \frac{\partial u_z}{\partial t}, \qquad \boldsymbol{e}_\theta := \frac{\delta H}{\delta \boldsymbol{\alpha}_\theta} = \frac{\partial \boldsymbol{\theta}}{\partial t},$$

$$\boldsymbol{E}_\kappa := \frac{\delta H}{\delta \boldsymbol{A}_{\varepsilon^0}} = \boldsymbol{N}, \qquad \boldsymbol{E}_\kappa := \frac{\delta H}{\delta \boldsymbol{A}_\kappa} = \boldsymbol{M}, \qquad e_\gamma := \frac{\delta H}{\delta \boldsymbol{\alpha}_\gamma} = \boldsymbol{q} \tag{5.52}$$

The final pH formulation is found as usual considering the dynamics (5.50) and fact that higher derivatives commute

$$
\frac{\partial}{\partial t}
\begin{pmatrix}
\boldsymbol{\alpha}_u \\
\alpha_w \\
\boldsymbol{\alpha}_\theta \\
\boldsymbol{A}_{\varepsilon^0} \\
\boldsymbol{A}_\kappa \\
\boldsymbol{\alpha}_\gamma
\end{pmatrix}
=
\begin{bmatrix}
\mathbf{0} & \mathbf{0} & \mathbf{0} & \mathrm{Div} & \mathbf{0} & \mathbf{0} \\
0 & 0 & 0 & 0 & 0 & \mathrm{div} \\
\mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathrm{Div} & \boldsymbol{I}_{2\times 2} \\
\mathrm{Grad} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\
\mathbf{0} & \mathbf{0} & \mathrm{Grad} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\
\mathbf{0} & \mathrm{grad} & -\boldsymbol{I}_{2\times 2} & \mathbf{0} & \mathbf{0} & \mathbf{0}
\end{bmatrix}
\begin{pmatrix}
\boldsymbol{e}_u \\
e_w \\
\boldsymbol{e}_\theta \\
\boldsymbol{E}_{\varepsilon^0} \\
\boldsymbol{E}_\kappa \\
\boldsymbol{e}_\gamma
\end{pmatrix}.
\tag{5.53}
$$

The coupling between the membrane and bending part is clear when considering the link between energy and co-energy variables

$$
\begin{pmatrix}
\boldsymbol{e}_u \\
e_w \\
\boldsymbol{e}_\theta \\
\boldsymbol{E}_{\varepsilon^0} \\
\boldsymbol{E}_\kappa \\
\boldsymbol{e}_\gamma
\end{pmatrix}
=
\begin{bmatrix}
\frac{1}{\rho h}\boldsymbol{I}_{2\times 2} & 0 & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\
0 & \frac{1}{\rho h} & 0 & 0 & 0 & 0 \\
\mathbf{0} & 0 & \frac{12}{\rho h^3}\boldsymbol{I}_{2\times 2} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\
\mathbf{0} & 0 & \mathbf{0} & \boldsymbol{\mathcal{D}}_m & \boldsymbol{\mathcal{D}}_c & \mathbf{0} \\
\mathbf{0} & 0 & \mathbf{0} & \boldsymbol{\mathcal{D}}_c & \boldsymbol{\mathcal{D}}_b & \mathbf{0} \\
\mathbf{0} & 0 & \mathbf{0} & \mathbf{0} & \mathbf{0} & \boldsymbol{\mathcal{D}}_s
\end{bmatrix}
\begin{pmatrix}
\boldsymbol{\alpha}_u \\
\alpha_w \\
\boldsymbol{\alpha}_\theta \\
\boldsymbol{A}_{\varepsilon^0} \\
\boldsymbol{A}_\kappa \\
\boldsymbol{\alpha}_\gamma
\end{pmatrix}.
\tag{5.54}
$$

Again appropriate boundary variables and a suitable Stokes-Dirac structure can be found for this model. The final formulation is just a superposition of systems (4.16) and (5.29).

5.3.2 Port-Hamiltonian laminated Kirchhoff plate

According to the Kirchhoff hypotheses the kinetic and deformation energies reduce to

$$
E_{\mathrm{kin}} = \frac{1}{2}\int_\Omega \left\{ \rho h \left\| \frac{\partial \boldsymbol{u}^0}{\partial t} \right\|^2 + \rho h \left(\frac{\partial u_z}{\partial t} \right)^2 \right\}\, \mathrm{d}\Omega,
$$

$$
E_{\mathrm{def}} = \frac{1}{2}\int_\Omega \left\{ \boldsymbol{N} : \varepsilon^0 + \boldsymbol{M} : \boldsymbol{\kappa} \right\}\, \mathrm{d}\Omega,
$$

where $\boldsymbol{\kappa}$ is defined in Eq. (5.5). Furthermore, as stated in Remark 5, the rotational contribution in the kinetic energy has been neglected. The equations of motion are (see [Red03, Chapter 3] for an exhaustive explanation)

$$
\begin{aligned}
\rho h \frac{\partial^2 \boldsymbol{u}^0}{\partial t^2} &= \mathrm{Div}\, \boldsymbol{N}, \\
\rho h \frac{\partial^2 u_z}{\partial t^2} &= -\,\mathrm{div}\,\mathrm{Div}\, \boldsymbol{M},
\end{aligned}
\tag{5.55}
$$

764   where $\boldsymbol{N}$, $\boldsymbol{M}$ are defined in Eqs. (5.47). To get a port-Hamiltonian formulation, the following
765   energy variable are chosen

$$
\boldsymbol{\alpha}_u = \rho h \frac{\partial \boldsymbol{u}^0}{\partial t}, \qquad \alpha_w = \rho h \frac{\partial u_z}{\partial t},
$$
$$
\boldsymbol{A}_{\varepsilon^0} = \boldsymbol{\varepsilon}^0, \qquad \boldsymbol{A}_\kappa = \boldsymbol{\kappa}.
\tag{5.56}
$$

The total energy $H = E_{\text{kin}} + E_{\text{def}}$ is now a quadratic function of the energy variables

$$
E_{\text{kin}} = \frac{1}{2} \int_\Omega \left\{ \frac{1}{\rho h} \left\| \frac{\partial \boldsymbol{\alpha}_u}{\partial t} \right\|^2 + \frac{1}{\rho h} \left(\frac{\partial \alpha_w}{\partial t} \right)^2 \right\} \, \mathrm{d}\Omega,
$$
$$
E_{\text{def}} = \frac{1}{2} \int_\Omega \left\{ (\boldsymbol{\mathcal{D}}_m \boldsymbol{A}_{\varepsilon^0} + \boldsymbol{\mathcal{D}}_c \boldsymbol{A}_\kappa) : \boldsymbol{A}_{\varepsilon^0} + (\boldsymbol{\mathcal{D}}_c \boldsymbol{A}_{\varepsilon^0} + \boldsymbol{\mathcal{D}}_b \boldsymbol{A}_\kappa) : \boldsymbol{A}_\kappa \right\} \, \mathrm{d}\Omega,
$$

766   The co-energies are equal to

$$
e_w := \frac{\delta H}{\delta \boldsymbol{\alpha}_u} = \frac{\partial \boldsymbol{u}^0}{\partial t}, \qquad e_w := \frac{\delta H}{\delta \alpha_w} = \frac{\partial u_z}{\partial t},
$$
$$
\boldsymbol{E}_\kappa := \frac{\delta H}{\delta \boldsymbol{A}_{\varepsilon^0}} = \boldsymbol{N}, \qquad \boldsymbol{E}_\kappa := \frac{\delta H}{\delta \boldsymbol{A}_\kappa} = \boldsymbol{M},
\tag{5.57}
$$

767   The final pH formulation is found as usual considering the dynamics (5.55) and fact that
768   higher derivatives commute

$$
\frac{\partial}{\partial t} \begin{pmatrix} \boldsymbol{\alpha}_u \\ \alpha_w \\ \boldsymbol{A}_{\varepsilon^0} \\ \boldsymbol{A}_\kappa \end{pmatrix} = \begin{bmatrix} \boldsymbol{0} & \boldsymbol{0} & \mathrm{Div} & \boldsymbol{0} \\ 0 & 0 & 0 & -\mathrm{div} \circ \mathrm{Div} \\ \mathrm{Grad} & \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{0} \\ \boldsymbol{0} & \mathrm{Grad} \circ \mathrm{grad} & \boldsymbol{0} & \boldsymbol{0} \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_u \\ e_w \\ \boldsymbol{E}_{\varepsilon^0} \\ \boldsymbol{E}_\kappa \end{pmatrix}.
\tag{5.58}
$$

769   Again, the coupling appears when considering the link between energy and co-energy variables

$$
\begin{pmatrix} \boldsymbol{e}_u \\ e_w \\ \boldsymbol{E}_{\varepsilon^0} \\ \boldsymbol{E}_\kappa \end{pmatrix} = \begin{bmatrix} \frac{1}{\rho h} \boldsymbol{I}_{2\times2} & \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{0} \\ 0 & \frac{1}{\rho h} & 0 & 0 \\ \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{\mathcal{D}}_m & \boldsymbol{\mathcal{D}}_c \\ \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{\mathcal{D}}_c & \boldsymbol{\mathcal{D}}_b \end{bmatrix} \begin{pmatrix} \boldsymbol{\alpha}_u \\ \alpha_w \\ \boldsymbol{A}_{\varepsilon^0} \\ \boldsymbol{A}_\kappa \end{pmatrix}.
\tag{5.59}
$$

770   The energy rate provides the appropriate boundary conditions from which one can construct
771   the Stokes-Dirac structure. The necessary computations are not performed here as the final
772   result is just a juxtaposition of systems (4.16), (5.42).

773   5.4   Conclusion

774   In this chapter, a pH formulation for the most commonly used plate models has been detailed.
775   Many open questions remain. In particular, how to generalize the results to shell problems,
776   for which the domain is a surface embedded in the three dimensional space (a manifold).
777   Computations get more involved in this case since the usage of differential geometry concepts

is unavoidable. These models are important since they are widely used in the aerospace industry and ubiquitous in nature.

The reformulation of plate models using the language of differential geometry is another open research topic. Indeed, while for the Mindlin plate it should be possible to use vector-valued forms to obtain an equivalent system, for the Kirchhoff plate the task appears more involved. An interesting reference that can provide some ideas in this direction is [Yao11].

Thermoelasticity in port-Hamiltonian form

Eh bien, mon ami, la terre sera un jour ce cadavre refroidi. Elle deviendra inhabitable et sera inhabitée comme la lune, qui depuis longtemps a perdu sa chaleur vitale.

Vingt mille lieues sous les mers
Jules Verne

Contents

Thermoelasticity is the study of deformable bodies undergoing thermal excitations. It is a clear example of a multiphysics phenomenon since the heat transfer and elastic vibrations within the body mutually interact. In this chapter, a linear model of thermoelasticity is obtained under the pH formalism. Each physics is described separately and the final system is obtained considering a power-preserving interconnection of two pHs.

6.1 Port-Hamiltonian linear coupled thermoelasticity

In this section, a pH formulation of heat transfer is first introduced. The classical model of thermoelasticity is then recalled. The same model is found by interconnecting the heat equation and the linear elastodynamics problem seen as pHs. It is shown that the interconnection

813   preserves a quadratic functional that plays the role of a fictitious energy. The resulting sys-
814   tem is dissipative with respect to this functional. The construction makes use of the intrinsic
815   modularity of pHs [KZvdSB10].

816   ### 6.1.1   The heat equation as a pH descriptor system

817   Consider the heat equation in a bounded connected set $\Omega \subset \mathbb{R}^d$, $d = \{1, 2, 3\}$, describing the
818   evolution of the temperature field $T(\boldsymbol{x}, t)$

$$\rho c_\epsilon \frac{\partial T}{\partial t} = k \Delta T + r_Q, \qquad \boldsymbol{x} \in \Omega, \qquad (6.1)$$

where ρ, c_ϵ, k, r_Q are the mass density, the specific heat density at constant strain, the thermal
diffusivity and an heat source. Symbol Δ denotes the Laplacian in $\mathbb{R}^d$. The Dirichlet and
Neumann condition of this problem are

$$T \text{ known on } \Gamma_D^T, \qquad \text{Dirichlet condition,}$$
$$-k \operatorname{grad} T \cdot \boldsymbol{n} \text{ known on } \Gamma_N^T, \qquad \text{Neumann condition,}$$

819   where a partition of the boundary $\partial \Omega = \Gamma_D^T \cup \Gamma_N^T$ has been considered. This model can be
820   put in pH form by means of a canonical interconnection structure. An algebraic relationship
821   that describes the Fourier law has to be incorporated in the model (cf. [Kot19, Chapter 2]).
822   Here, a differential-algebraic formulation is exploited to obtain the same system.
823

     Let T_0 be a constant reference temperature (the introduction of this variables is instru-
mental for coupled thermoelasticity). The functional

$$H_T = \frac{1}{2} \int_\Omega \rho c_\epsilon T_0 \left(\frac{T - T_0}{T_0} \right)^2 \, \mathrm{d}\Omega$$

has the physical dimension of an energy and represents a Lyapunov functional of this system.
Even though it does not represent the internal energy, it has some important properties.
Select as energy variable

$$\alpha_T := \rho c_\epsilon (T - T_0),$$

whose corresponding co-energy is

$$e_T := \frac{\delta H_T}{\delta \alpha_T} = \frac{\alpha_T}{\rho c_\epsilon T_0} = \frac{T - T_0}{T_0} =: \theta.$$

824   Introducing the heat flux $\boldsymbol{j}_Q := -k \operatorname{grad} T$ as additional variable, the heat equation (6.1) is

equivalently reformulated as

$$\begin{bmatrix} 1 & 0 \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_T \\ \boldsymbol{j}_Q \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div} \\ -\operatorname{grad} & -(T_0 k)^{-1} \end{bmatrix} \begin{pmatrix} e_T \\ \boldsymbol{j}_Q \end{pmatrix} + \begin{bmatrix} 1 \\ \mathbf{0} \end{bmatrix} u_T,$$

$$y_T = \begin{bmatrix} 1 & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_T \\ \boldsymbol{j}_Q \end{pmatrix}. \tag{6.2}$$

with $u_T := r_Q$ and y_T represents the corresponding power-conjugated variable. In matrix notation, it is obtained

$$\mathcal{E}_T \partial_t \boldsymbol{\alpha}_T = (\mathcal{J}_T - \mathcal{R}_T) \, \boldsymbol{e}_T + \mathcal{B}_T \, u_T,$$

$$y_d = \mathcal{B}_T^* \, \boldsymbol{e}_T \tag{6.3}$$

where $\boldsymbol{\alpha}_T = (\alpha_T, \, \boldsymbol{j}_Q)$, $\boldsymbol{e}_T = (e_T, \, \boldsymbol{j}_Q)$ and

$$\mathcal{E}_T = \begin{bmatrix} 1 & 0 \\ \mathbf{0} & \mathbf{0} \end{bmatrix}, \quad \mathcal{J}_T = \begin{bmatrix} 0 & -\operatorname{div} \\ -\operatorname{grad} & \mathbf{0} \end{bmatrix}, \quad \mathcal{R}_T = \begin{bmatrix} 0 & 0 \\ \mathbf{0} & (T_0 k)^{-1} \end{bmatrix}, \quad \mathcal{B}_T = \begin{bmatrix} 1 \\ \mathbf{0} \end{bmatrix}.$$

The system is an example of pH descriptor system (cf. [BMXZ18] for the finite dimensional case). The Hamiltonian reads

$$H_T = \frac{1}{2} \int_\Omega \boldsymbol{e}_T \cdot \mathcal{E}_T \boldsymbol{\alpha}_T \, \mathrm{d}\Omega. \tag{6.4}$$

The power rate is then deduced

$$\begin{aligned} \dot{H}_T &= \int_\Omega \boldsymbol{e}_T \cdot \mathcal{E}_T \, \partial_t \boldsymbol{\alpha}_T \, \mathrm{d}\Omega, \\ &= \int_\Omega \boldsymbol{e}_T \cdot \{ (\mathcal{J}_T - \mathcal{R}_T) \boldsymbol{e} + \mathcal{B}_T u_T \} \, \mathrm{d}\Omega, \\ &= \int_\Omega u_T \, y_T \, \mathrm{d}\Omega - \int_\Omega \left(e_T \operatorname{div} \boldsymbol{j}_Q + \boldsymbol{j}_Q \operatorname{grad} e_T + \frac{\|\boldsymbol{j}_Q\|^2}{k T_0} \right) \, \mathrm{d}\Omega, \\ &\leq \int_\Omega u_T \, y_T \, \mathrm{d}\Omega - \int_{\partial\Omega} e_T \, \boldsymbol{j}_Q \cdot \boldsymbol{n} \, \mathrm{d}S. \end{aligned} \tag{6.5}$$

This choice of Hamiltonian allows retrieving the classical boundary conditions and leads to a dissipative system. Other formulations, based on an entropy or internal energy functionals, are possible for the heat equation [DMSB09, SHM19a]. These provide an accrescent or a lossless system. Unfortunately these formulations are non linear and their discretization is a difficult task [SHM19b].

6.1.2 Classical thermoelasticity

The derivation of the classical theory of thermoelasticity is not carried out here. The reader may consult in [HE09, Chapter 1] or [Abe12, Chapter 8] for a detailed discussion on this topic.
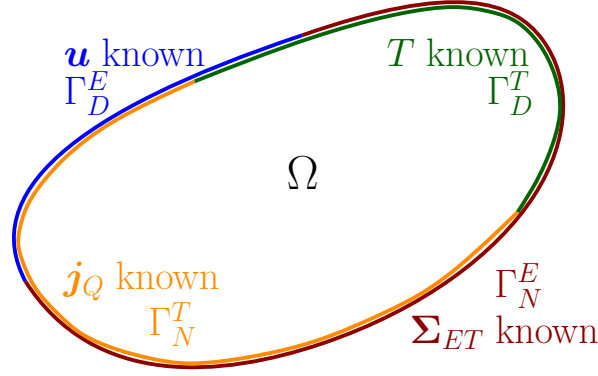
Figure 6.1: Boundary conditions for the thermoelastic problem.

Consider a bounded connected set $\Omega \subset \mathbb{R}^d$, $d = \{1, 2, 3\}$. The classical equations for linear fully-coupled thermoelasticity for an isotropic thermoelastic material are [Bio56, Car73]

$$
\begin{aligned}
\rho \frac{\partial^2 \boldsymbol{u}}{\partial t^2} &= \mathrm{Div}(\boldsymbol{\Sigma}_{ET}), \\
\rho c_\epsilon \frac{\partial T}{\partial t} &= -\mathrm{div}(\boldsymbol{j}_Q) - \mathcal{C}_\beta : \frac{\partial \boldsymbol{\varepsilon}}{\partial t}, \\
\boldsymbol{\Sigma}_{ET} &= \boldsymbol{\Sigma}_E + \boldsymbol{\Sigma}_T, \\
\boldsymbol{\Sigma}_E &= 2\mu \boldsymbol{\varepsilon} + \lambda \, \mathrm{Tr}(\boldsymbol{\varepsilon}) \boldsymbol{I}_{d \times d}, \\
\boldsymbol{\Sigma}_T &= -\mathcal{C}_\beta \theta, \\
\boldsymbol{\varepsilon} &= \mathrm{Grad}(\boldsymbol{u}), \\
\boldsymbol{j}_Q &= -k \, \mathrm{grad}\, T.
\end{aligned}
\tag{6.6}
$$

For simplicity the coupling term

$$
\mathcal{C}_\beta := T_0 \beta (2\mu + d\lambda) \boldsymbol{I}_{d \times d}
$$

has been introduced. Field $\boldsymbol{u}$ is the displacement, $\boldsymbol{\varepsilon}$ is the infinitesimal strain tensor, $\boldsymbol{\Sigma}_E, \boldsymbol{\Sigma}_T$ are the stress tensor contribution due to mechanical deformation and a thermal field. Coefficients λ, μ are the Lamé parameters, and β the thermal expansion coefficient. Given a partition of the boundary $\partial\Omega = \Gamma_D^E \cup \Gamma_N^E = \Gamma_D^T \cup \Gamma_N^T$ for the elastic and thermal domain. The general boundary conditions read (see Fig. 6.1)

$$
\begin{aligned}
\boldsymbol{u} \text{ known on } \Gamma_D^E \times (0, +\infty), \qquad & T \text{ known on } \Gamma_D^T \times (0, +\infty), \\
\boldsymbol{\Sigma}_{ET} \cdot \boldsymbol{n} \text{ known on } \Gamma_N^E \times (0, +\infty), \qquad & \boldsymbol{j}_Q \cdot \boldsymbol{n} \text{ known on } \Gamma_N^T \times (0, +\infty).
\end{aligned}
\tag{6.7}
$$

In the following section an equivalent system is constructed by interconnecting the heat equation and the elastodynamics system in a structured manner.

6.1.3 Thermoelasticity as two coupled pHs

Consider again the equation of elasticity on $\Omega \subset \mathbb{R}^d$, $d = \{1, 2, 3\}$ (cf. Eq. (4.16)), together with a distributed input $\boldsymbol{u}_E$ that plays the role of a distributed force

$$
\frac{\partial}{\partial t} \begin{pmatrix} \boldsymbol{\alpha}_v \\ \boldsymbol{A}_\varepsilon \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathrm{Div} \\ \mathrm{Grad} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon \end{pmatrix} + \begin{bmatrix} \boldsymbol{I}_{d \times d} \\ \mathbf{0} \end{bmatrix} \boldsymbol{u}_E,
$$
$$
\boldsymbol{y}_E = \begin{bmatrix} \boldsymbol{I}_{d \times d} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon \end{pmatrix},
$$

(6.8)

with Hamiltonian

$$
H_E = \frac{1}{2} \int_\Omega \left\{ \boldsymbol{\alpha}_v \cdot \boldsymbol{e}_v + \boldsymbol{A}_\varepsilon : \boldsymbol{E}_\varepsilon \right\} \, \mathrm{d}\Omega.
$$

Recall the pH formulation of the heat equation (6.2)

$$
\begin{bmatrix} 1 & 0 \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_T \\ \boldsymbol{j}_Q \end{pmatrix} = \begin{bmatrix} 0 & -\mathrm{div} \\ -\mathrm{grad} & -(T_0 k)^{-1} \end{bmatrix} \begin{pmatrix} e_T \\ \boldsymbol{j}_Q \end{pmatrix} + \begin{bmatrix} 1 \\ \mathbf{0} \end{bmatrix} u_T,
$$
$$
y_T = \begin{bmatrix} 1 & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_T \\ \boldsymbol{j}_Q \end{pmatrix},
$$

(6.9)

with Hamiltonian H_T defined in (6.4). The linear thermoelastic problem can be expressed as a coupled port-Hamiltonian system. Consider the following interconnection

$$
\boldsymbol{u}_E = -\mathrm{Div}(\mathcal{C}_\beta \, y_T), \qquad u_T = -\mathcal{C}_\beta : \mathrm{Grad}(\boldsymbol{y}_E).
$$

(6.10)

The interconnection is power preserving as it can be compactly written as

$$
\boldsymbol{u}_E = \mathcal{A}_\beta(y_T), \qquad u_T = -\mathcal{A}_\beta^*(\boldsymbol{y}_E).
$$

where $\mathcal{A}_\beta^*$ denotes the formal adjoint. The assertion is justified by the following proposition.

Proposition 5

Let $C_0^\infty(\Omega)$, $C_0^\infty(\Omega, \mathbb{R}^d)$ be the space of smooth functions and vector-valued functions respectively. Given $y_T \in C_0^\infty(\Omega)$, $\boldsymbol{y}_E \in C_0^\infty(\Omega, \mathbb{R}^d)$, the coupling operator

$$
\mathcal{A}_\beta : C_0^\infty(\Omega) \to C_0^\infty(\Omega, \mathbb{R}^d),
$$
$$
y_T \to -\mathrm{Div}(\mathcal{C}_\beta y_T)
$$

(6.11)

has formal adjoint

$$
\mathcal{A}_\beta^* : C_0^\infty(\Omega, \mathbb{R}^d) \to C_0^\infty(\Omega)
$$
$$
\boldsymbol{y}_E \to -\mathcal{C}_\beta : \mathrm{Grad}(\boldsymbol{y}_E)
$$

(6.12)

Proof. It is necessary to show

$$
\langle \boldsymbol{y}_E, \mathcal{A}_\beta y_T \rangle_{L^2(\Omega, \mathbb{R}^d)} = \left\langle \mathcal{A}_\beta^* \boldsymbol{y}_E, y_T \right\rangle_{L^2(\Omega)},
$$

(6.13)

where for $\boldsymbol{u}_E, \boldsymbol{y}_E \in C_0^\infty(\Omega)$, $u_T, y_T \in C_0^\infty(\Omega)$

$$\langle \boldsymbol{u}_E, \, \boldsymbol{y}_E \rangle_{L^2(\Omega, \mathbb{R}^d)} = \int_{\Omega_E} \boldsymbol{u}_E \cdot \boldsymbol{y}_E \, \mathrm{d}\Omega, \qquad \langle u_T, \, y_T \rangle_{L^2(\Omega)} = \int_{\Omega_T} u_T y_T \, \mathrm{d}\Omega. \tag{6.14}$$

The proof is a simple application of Th. 6

$$
\begin{aligned}
\langle \boldsymbol{y}_E, \, \mathcal{A}_\beta y_T \rangle_{L^2(\Omega, \mathbb{R}^d)} &= - \int_\Omega \boldsymbol{y}_E \cdot \mathrm{Div}(\mathcal{C}_\beta y_T) \, \mathrm{d}\Omega, \\
&= - \int_\Omega \mathrm{Grad}(\boldsymbol{y}_E) : \mathcal{C}_\beta y_T \, \mathrm{d}\Omega, \\
&= \int_\Omega \mathcal{A}_\beta^*(\boldsymbol{y}_E) y_T \, \mathrm{d}\Omega, \\
&= \left\langle \mathcal{A}_\beta^* \boldsymbol{y}_E, \, y_T \right\rangle_{L^2(\Omega)}.
\end{aligned}
\tag{6.15}
$$

This concludes the proof. $\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad$ $\square$

If the compact support assumption is removed, it is obtained

$$
\begin{aligned}
\langle u_T, y_T \rangle_{L^2(\Omega)} + \langle \boldsymbol{u}_E, \boldsymbol{y}_E \rangle_{L^2(\Omega, \mathbb{R}^3)} &= - \int_\Omega \{ (\mathcal{C}_\beta : \mathrm{Grad}\, \boldsymbol{e}_v) e_T + \mathrm{Div}(\mathcal{C}_\beta e_T) \cdot \boldsymbol{e}_v \} \, \mathrm{d}\Omega, \\
&= - \int_\Omega \mathrm{div}(e_T \mathcal{C}_\beta \cdot \boldsymbol{e}_v) \, \mathrm{d}\Omega, \\
&= - \int_{\partial\Omega} (e_T \mathcal{C}_\beta \cdot \boldsymbol{n}) \cdot \boldsymbol{e}_v \, \mathrm{d}S.
\end{aligned}
\tag{6.16}
$$

Using the expression of $y_T, \boldsymbol{y}_E$, considering that T_0 is constant and applying Schwarz theorem for smooth function, the inputs are equal to

$$\boldsymbol{u}_E = \mathrm{Div}(\boldsymbol{\Sigma}_T), \qquad u_T = -\mathcal{C}_\beta : \mathrm{Grad}(\boldsymbol{v}) = -\mathcal{C}_\beta : \frac{\partial \boldsymbol{\varepsilon}}{\partial t}.$$

The coupled thermoelastic problem can now be written as

$$
\begin{bmatrix} \mathbf{1} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{1} & \mathbf{0} & \mathbf{0} \\ 0 & 0 & 1 & 0 \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \boldsymbol{\alpha}_v \\ \boldsymbol{A}_\varepsilon \\ \alpha_T \\ \boldsymbol{j}_Q \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathrm{Div} & \mathcal{A}_\beta & \mathbf{0} \\ \mathrm{Grad} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ -\mathcal{A}_\beta^* & 0 & 0 & -\mathrm{div} \\ \mathbf{0} & \mathbf{0} & -\mathrm{grad} & -(T_0 k)^{-1} \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon \\ e_T \\ \boldsymbol{j}_Q \end{pmatrix},
\tag{6.17}
$$

with total energy given by $H = H_E + H_T$. The power balance for each subsystem is given by

$$\dot{H}_E = \int_\Omega \boldsymbol{u}_E \cdot \boldsymbol{y}_E \, \mathrm{d}\Omega + \int_{\partial\Omega} \boldsymbol{e}_v \cdot (\boldsymbol{E}_\varepsilon \cdot \boldsymbol{n}) \, \mathrm{d}S, \tag{6.18}$$

$$\dot{H}_T \leq \int_\Omega u_T \, y_T \, \mathrm{d}\Omega - \int_{\partial\Omega} \theta \, \boldsymbol{j}_Q \cdot \boldsymbol{n} \, \mathrm{d}S, \tag{6.19}$$

The overall power balance is easily computed considering Eqs. (6.18) (6.19) and (6.16)

$$\dot{H} = \dot{H}_E + \dot{H}_T \leq \int_{\partial\Omega} \{[\boldsymbol{E}_\varepsilon - e_T \mathcal{C}_\beta] \cdot \boldsymbol{n}\} \cdot \boldsymbol{e}_v \, \mathrm{d}S - \int_{\partial\Omega} \theta \, \boldsymbol{j}_Q \cdot \boldsymbol{n} \, \mathrm{d}S. \tag{6.20}$$

From the power balance the classical boundary conditions are retrieved. This allows defining appropriate boundary operators for the thermoelastic problem

$$\boldsymbol{u}_\partial = \underbrace{\begin{bmatrix} \boldsymbol{\gamma}_0^{\Gamma_D^E} & \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{0} \\ \boldsymbol{0} & \boldsymbol{\gamma}_n^{\Gamma_N^E} & -\boldsymbol{\gamma}_n^{\Gamma_N^E}(\mathcal{C}_\beta \cdot) & \boldsymbol{0} \\ 0 & 0 & \boldsymbol{\gamma}_0^{\Gamma_D^T} & 0 \\ \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{\gamma}_n^{\Gamma_N^T} \end{bmatrix}}_{\mathcal{B}_\partial} \begin{pmatrix} \boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon \\ e_T \\ \boldsymbol{j}_Q \end{pmatrix}, \quad \boldsymbol{y}_\partial = \underbrace{\begin{bmatrix} \boldsymbol{0} & \boldsymbol{\gamma}_n^{\Gamma_D^E} & -\boldsymbol{\gamma}_n^{\Gamma_D^E}(\mathcal{C}_\beta \cdot) & \boldsymbol{0} \\ \boldsymbol{\gamma}_0^{\Gamma_N^E} & \boldsymbol{0} & \boldsymbol{0} & \boldsymbol{0} \\ 0 & 0 & 0 & \boldsymbol{\gamma}_n^{\Gamma_D^T} \\ 0 & 0 & \boldsymbol{\gamma}_0^{\Gamma_N^T} & 0 \end{bmatrix}}_{\mathcal{C}_\partial} \begin{pmatrix} \boldsymbol{e}_v \\ \boldsymbol{E}_\varepsilon \\ e_T \\ \boldsymbol{j}_Q \end{pmatrix}.$$

$$\tag{6.21}$$

System (6.17) together with (6.21) is a pH system with boundary control and observation. Indeed, the classical thermoelastic problem can be modeled as two coupled systems, demonstrating the modularity of the pH paradigm.

6.2 Thermoelastic port-Hamiltonian bending

In this section, the thermoelastic bending of thin beam and plate structures is described as coupled interconnection pf pHs. Starting from classical thermoelastic models and introducing a linear approximation of the temperature field along the thickness coordinate, a suitable pH formulation can be obtained.

6.2.1 Thermoelastic port-Hamiltonian Euler-Bernoulli beam

The model for the linear thermoelastic vibrations of an isotropic thin rod is detailed in [Cha62, LR00]. The domain of the beam is uni-dimensional $\Omega_E = \{0, L\}$, while the thermal domain is three-dimensional $\Omega_T = \{0, L\} \times S$, where S is the set representing the beam cross section. The set S is assumed to constant along the axis for simplicity. The ruling equations are

$$\rho A \frac{\partial^2 w}{\partial t^2} = -EI \frac{\partial^4 w}{\partial x^4} - \beta E T_0 \frac{\partial^2}{\partial x^2} \int_S z\theta \, \mathrm{d}x \, \mathrm{d}y, \qquad x \in \{0, L\} = \Omega_E,$$

$$\rho c_{\epsilon,B} T_0 \frac{\partial \theta}{\partial t} = k T_0 \Delta \theta + \beta T_0 E z \frac{\partial^3 w}{\partial x^2 \partial t}, \qquad (x, y, z) \in \Omega_E \times S = \Omega_T, \tag{6.22}$$

where $w(x, t)$ is the vertical displacement of the beam $I = \int_S z^2 \, \mathrm{d}x \, \mathrm{d}y$ the second moment of area, E the Young modulus and A the cross section. The constant $c_{\epsilon,B}$ is due to the thermoelastic coupling (cf. [Cha62, LR00] for a detailed explanation). The other terms have meaning than in Section §6.1. Since the normalized temperature $\theta(x, y, z, t)$ depends on all spatial coordinates, the symbol $\Delta = \partial_{xx} + \partial_{yy} + \partial_{zz}$ is the Laplacian in three dimensions.

The physical constants are assumed to be constant for simplicity.

The coupling operator is defined as

$$\mathcal{A}_{\beta,B}(y_T) := -\beta E T_0 \partial_{xx} \left(\int_S z y_T \, \mathrm{d}x \, \mathrm{d}y \right). \tag{6.23}$$

To unveil an interconnection that is power with respect to a certain function, the formal adjoint of the coupling operator is needed.

Proposition 6

Let $C_0^\infty(\Omega_T)$, $C_0^\infty(\Omega_E)$ be the space of smooth functions with compact support defined on Ω_T and Ω_E respectively. Given $y_T \in C_0^\infty(\Omega_T)$, $y_E \in C_0^\infty(\Omega_E)$ the formal adjoint of the coupling operator is

$$\mathcal{A}_{\beta,B}^*(y_E) = -\beta E T_0 z \, \partial_{xx} y_E. \tag{6.24}$$

Proof. The formal adjoint is defined by the relation

$$\langle y_E, \mathcal{A}_{\beta,B} y_T \rangle_{L^2(\Omega_E)} = \left\langle \mathcal{A}_{\beta,B}^* y_E, \, y_T \right\rangle_{L^2(\Omega_T)}, \tag{6.25}$$

where for $u_E, y_E \in C_0^\infty(\Omega_E)$, $u_T, y_T \in C_0^\infty(\Omega_T)$

$$\langle u_E, y_E \rangle_{L^2(\Omega_E)} = \int_{\Omega_E} u_E y_E \, \mathrm{d}x, \qquad \langle u_T, y_T \rangle_{L^2(\Omega_T)} = \int_{\Omega_T} y_T y_T \, \mathrm{d}x \, \mathrm{d}y \, \mathrm{d}z. \tag{6.26}$$

Using Def. (6.23) and the integration by parts, one finds

$$\begin{aligned}
\langle y_E, \mathcal{A}_{\beta,B} y_T \rangle_{L^2(\Omega_E)} &= \int_{\Omega_E} y_E \mathcal{A}_{\beta,B} y_T \, \mathrm{d}x, \\
&= -\int_{\Omega_E} y_E \beta E T_0 \partial_{xx} \left(\int_S z y_T \, \mathrm{d}x \, \mathrm{d}y \right) \, \mathrm{d}x, \\
&= -\int_{\Omega_E} (\partial_{xx} y_E) \beta E T_0 \left(\int_S z y_T \, \mathrm{d}x \, \mathrm{d}y \right) \, \mathrm{d}x,
\end{aligned} \tag{6.27}$$

Since $\Omega_T = \Omega_E \times S$ and from the properties of multiple integrals, it is found

$$\begin{aligned}
-\int_{\Omega_E} \partial_{xx}(y_E) \beta E T_0 \left(\int_S z \, y_T \, \mathrm{d}x \, \mathrm{d}y \right) \, \mathrm{d}x &= -\int_{\Omega_E} \int_S (\partial_{xx} y_E) \beta E T_0 z \, y_T \, \mathrm{d}x \, \mathrm{d}x \, \mathrm{d}y, \\
&= -\int_{\Omega_T} (\partial_{xx} y_E) \beta E T_0 z \, y_T \, \mathrm{d}x \, \mathrm{d}x \, \mathrm{d}y, \\
&= \left\langle \mathcal{A}_{\beta,B}^* y_E, \, y_T \right\rangle_{L^2(\Omega_T)}.
\end{aligned} \tag{6.28}$$

This concludes the proof. $\qquad \square$

Using Eqs. (6.23) and (6.24), System (6.22), is rewritten as

$$
\begin{aligned}
\rho A \frac{\partial^2 w}{\partial t^2} &= -EI \frac{\partial^4 w}{\partial x^4} + \mathcal{A}_{\beta,B}\theta, \\
\rho c_{\epsilon,B} T_0 \frac{\partial \theta}{\partial t} &= k T_0 \Delta \theta - \mathcal{A}_{\beta,B}^* \frac{\partial w}{\partial t}.
\end{aligned}
\tag{6.29}
$$

Consider the Hamiltonian functional

$$
H = H_E + H_T = \frac{1}{2} \int_{\Omega_E} \left\{ \rho A \left(\frac{\partial w}{\partial t} \right)^2 + EI \left(\frac{\partial^2 w}{\partial x^2} \right)^2 \right\} \, \mathrm{d}x + \frac{1}{2} \int_{\Omega_T} \rho c_{\epsilon,B} T_0 \theta^2 \, \mathrm{d}x \, \mathrm{d}y \, \mathrm{d}z. \tag{6.30}
$$

The energy variables are chosen to make the Hamiltonian functional quadratic

$$
\alpha_w = \rho A \partial_t w, \qquad \alpha_\kappa = \partial_{xx} w, \qquad \alpha_T = \rho c_{\epsilon,B} T_0 \theta. \tag{6.31}
$$

The corresponding co-energy variables evaluate to

$$
e_w := \frac{\delta H}{\delta \alpha_w} = \partial_t w, \qquad e_\kappa := \frac{\delta H}{\delta \alpha_\kappa} = EI \partial_{xx} w, \qquad e_T := \frac{\delta H}{\delta \alpha_T} = \theta. \tag{6.32}
$$

System (6.29) can now be rewritten as

$$
\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \alpha_\kappa \\ \alpha_T \\ \boldsymbol{j}_Q \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} & \mathcal{A}_{\beta,B} & 0 \\ \partial_{xx} & 0 & 0 & 0 \\ -\mathcal{A}_{\beta,B}^* & 0 & 0 & -\operatorname{div} \\ \mathbf{0} & \mathbf{0} & -\operatorname{grad} & -(kT_0)^{-1} \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \\ e_T \\ \boldsymbol{j}_Q \end{pmatrix}, \tag{6.33}
$$

This system is the equivalent of (6.17) for bending of beams. Hence, following the same reasoning, it can be obtained starting from each subsystem in pH form by means of an appropriate interconnection.

6.2.2 Thermoelastic port-Hamiltonian Kirchhoff plate

For the bending of thin plate, several different models have been proposed [Cha62, Lag89, Sim99, Nor06]. Here, the Chadwick model [Cha62] is considered. The thin plate occupies the open connected set $\Omega_E \times \left\{ -\frac{h}{2}, \frac{h}{2} \right\}$, where h is the plate thickness. The system of equations describe the midplane vertical displacement and the evolution of the temperature in the 3D domain

$$
\begin{aligned}
\rho h \frac{\partial^2 w}{\partial t^2} &= -D_b \Delta_{2D}^2 w - \frac{\beta T_0 E}{1-\nu} \Delta_{2D} \left(\int_{-h/2}^{h/2} z\theta \, \mathrm{d}z \right), & (x,y) \in \Omega_E, \\
\rho c_{\epsilon,P} T_0 \frac{\partial \theta}{\partial t} &= -k T_0 \Delta_{3D} + \frac{\beta T_0 E z}{1-\nu} \Delta_{2D} \left(\frac{\partial w}{\partial t} \right), & (x,y,z) \in \Omega_E \times \left\{ -\frac{h}{2}, \frac{h}{2} \right\} = \Omega_T,
\end{aligned}
\tag{6.34}
$$

where $w(x,y,t)$ is the vertical deflection, $D_b = \frac{Eh^3}{12(1-\nu^2)}$ the bending rigidity (cf. Eq. (5.11)), ν the Poisson modulus and $c_{\epsilon,P}$ a constant (depending on the heat capacity at constant strain

and other coupling parameters, cf. [Cha62]). Symbols $\Delta_{2D} = \partial_{xx} + \partial_{yy}$, $\Delta_{3D} = \partial_{xx} + \partial_{yy} + \partial_{zz}$ are the two- and three-dimensional Laplacian.

The coupling operator is here defined as

$$\mathcal{A}_{\beta,P}(y_T) := -\frac{\beta T_0 E}{1 - \nu} \Delta_{2D} \left(\int_{-h/2}^{h/2} z y_T \, \mathrm{d}z \right). \tag{6.35}$$

Analouglsy with respect to the Euler-Bernoulli beam its formal adjoint is sought for.

Proposition 7

Let $C_0^\infty(\Omega_T)$, $C_0^\infty(\Omega_E)$ be the space of smooth functions with compact support defined on Ω_T and Ω_E respectively. Given $y_T \in C_0^\infty(\Omega_T)$, $y_E \in C_0^\infty(\Omega_E)$ the formal adjoint of the coupling operator is

$$\mathcal{A}_{\beta,B}^*(y_E) = -\frac{\beta T_0 E z}{1 - \nu} \Delta_{2D} y_E. \tag{6.36}$$

Proof. The proof is completely identical to Prop. 6. $\square$

System 6.34 is rewritten as

$$\rho h \frac{\partial^2 w}{\partial t^2} = -D_b \Delta_{2D}^2 w + \mathcal{A}_{\beta,P}\theta,$$
$$\rho c_{\epsilon,P} T_0 \frac{\partial \theta}{\partial t} = -k T_0 \Delta_{3D}\theta - \mathcal{A}_{\beta,P}^*(\frac{\partial w}{\partial t}), \tag{6.37}$$

The Hamiltonian functional equals

$$H = H_E + H_T = \frac{1}{2} \int_{\Omega_E} \left\{ \rho h \left(\frac{\partial w}{\partial t} \right)^2 + (\boldsymbol{\mathcal{D}}_b \mathrm{Hess}_{2D} w) : \mathrm{Hess}_{2D} w \right\} \, \mathrm{d}x \, \mathrm{d}y$$
$$+ \frac{1}{2} \int_{\Omega_T} \rho c_{\epsilon,P} T_0 \theta^2 \, \mathrm{d}x \, \mathrm{d}y \, \mathrm{d}z, \tag{6.38}$$

where Hess_{2D} is the Hessian in two dimensions and $\boldsymbol{\mathcal{D}}_b$ was defined in (5.11) (cf. Sec. §5.1.1). The energy and co-energy variables are

$$\alpha_w = \rho h \partial_t w, \qquad \boldsymbol{A}_\kappa = \mathrm{Hess}_{2D} w, \qquad \alpha_T = \rho c_{\epsilon,P} T_0 \theta, \tag{6.39}$$
$$e_w = \partial_t w, \qquad \boldsymbol{E}_\kappa = \boldsymbol{\mathcal{D}}_b \mathrm{Hess}_{2D} w, \qquad e_T = \theta.$$

System (6.37) is rewritten as

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ \mathbf{0} & \mathbf{1} & \mathbf{0} & \mathbf{0} \\ 0 & 0 & 1 & 0 \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} \alpha_w \\ \boldsymbol{A}_\kappa \\ \alpha_T \\ \boldsymbol{j}_Q \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div}\operatorname{Div}_{2D} & \mathcal{A}_{\beta,P} & 0 \\ \mathrm{Hess}_{2D} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ -\mathcal{A}_{\beta,P}^* & 0 & 0 & -\operatorname{div}_{3D} \\ \mathbf{0} & \mathbf{0} & -\operatorname{grad}_{3D} & -(kT_0)^{-1} \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \\ e_T \\ \boldsymbol{j}_Q \end{pmatrix}, \tag{6.40}$$

The subscript $2D$, $3D$ refers to two- and three-dimensional operators respectively. The final system reproduces the same structured coupling already observed for (6.17), (6.33).

Remark 8

The thermoelastic bending of plates [AL00] and beams can be reduced to two problems defined on the same domain by introducing the following approximation of the temperature field

$$\theta(x, y, z) = \theta_0 + z\theta_1. \tag{6.41}$$

This is a reduction technique analogous to the one used to derive plate models.

6.3 Conclusion

In this chapter, it was shown how to derive linear thermoelastic problem as coupled pHs. This is especially interesting for the simulation of thermoelastic phenomena: each subsystem can be discretized separately and then coupled to the other using the discretized coupling operator.

To achieve a suitable formulation for the bending of plates and beams a linear approximation was introduced. However, if higher order theories are used for the bending behavior, the approximation of temperature field modifies accordingly, allowing for a better representation of temperature trend along the thickness.

Part III

Finite element structure preserving discretization

Partitioned finite element method

Every truth is simple... is that not doubly a lie?

Twilight of the Idols
Friedrich Nietzsche

Contents

Iscretization is the process of transferring continuous models into discrete counterparts. The discrete model should be faithful to the continuous one. To this aim, it is usually essential that the main properties of the continuous system are preserved at the discrete level. An algorithm that is capable of conserving properties at the discrete level is called structure-preserving [CMKO11]. In this chapter, a finite element method to spatially discretize infinite-dimensional pHs into finite-dimensional ones in a structure preserving manner is illustrated.

7.1 Discretization under uniform boundary condition

A discrete version of a infinite-dimensional pH system is meant to preserve the underlying properties related to power continuity. To achieve this purpose, the discretization procedure consists of two steps [KML18]:

- Finite-dimensional approximation of the Stokes-Dirac structure, i.e. the formally skew symmetric differential operator that defines the structure. The duality of the power

69

982   variables has to be mapped onto the finite approximation. The subspace of the discrete
983   variables will be represented by a Dirac structure.

984 • The Hamiltonian requires as well a suitable discretization, which gives rise to a discrete
985   Hamiltonian.

986 A structure-preserving discretization is able to construct an equivalent pH system that possess
987 the structural properties of the original model:

988

Infinite dimensional pH system	Structure-preserving discretization
PDE with distributed inputs: $$\frac{\partial \boldsymbol{\alpha}}{\partial t}(\boldsymbol{x}, t) = \mathcal{J}\frac{\delta H}{\delta \boldsymbol{\alpha}} + \mathcal{B}\boldsymbol{u}(\boldsymbol{x}, t),$$ $$\boldsymbol{y}(\boldsymbol{x}, t) = \mathcal{B}^*\frac{\delta H}{\delta \boldsymbol{\alpha}}.$$ Boundary conditions: $$\boldsymbol{u}_\partial = \mathcal{B}_\partial \frac{\delta H}{\delta \boldsymbol{\alpha}}, \quad \boldsymbol{y}_\partial = \mathcal{C}_\partial \frac{\delta H}{\delta \boldsymbol{\alpha}}.$$ Power balance (Stokes Theorem): $$\dot{H} = \int_{\partial\Omega} \boldsymbol{u}_\partial \cdot \boldsymbol{y}_\partial \, \mathrm{d}S + \int_\Omega \boldsymbol{u} \cdot \boldsymbol{y} \, \mathrm{d}\Omega.$$	Resulting ODE: $$\dot{\boldsymbol{\alpha}}_d = \mathbf{J}\,\nabla H_d + \mathbf{B}_d \mathbf{u}_d + \mathbf{B}_\partial \mathbf{u}_\partial,$$ $$\mathbf{y}_d = \mathbf{B}_d^\top \nabla H_d,$$ $$\mathbf{y}_\partial = \mathbf{B}_\partial^\top \nabla H_d.$$ Discretized Hamiltonian: $$H_d := H(\boldsymbol{\alpha} \equiv \boldsymbol{\alpha}_d).$$ Power balance: $$\dot{H} = \mathbf{u}_\partial^\top \mathbf{y}_\partial + \mathbf{u}_d^\top \mathbf{y}_d.$$

989   In this thesis the partitioned finite element method (PFEM), originally presented in
990 [CRML18, CRML19], is chosen to obtain discretized models of dpHs. This procedure boils
991 down to three simple steps

992 1. The system is written in weak form;

993 2. An integration by parts is applied to highlight the appropriate boundary control;

994 3. A Galerkin method is employed to obtain a finite-dimensional system.

995   Once the system has been put into weak form, a subset of the equations is integrated by
996 parts, so that boundary variables are naturally included into the formulation and appear as
997 control inputs, the collocated outputs being defined accordingly. The discretization of energy
998 and co-energy variables (and the associated test functions) leads directly to a full rank rep-
999 resentation for the finite-dimensional pH system. This approach makes possible the usage of
1000 FEM software, like FEniCS [LMW$^+$12], or Firedrake [RHM$^+$17].
1001

1002   Despite the many advantages, this methodology allows obtaining a canonical pH finite
1003 dimensional system only under a uniform causality assumption. The case of mixed boundary
1004 conditions requires additional care and will be treated in the subsequent Section §7.2.

7.1.1 General procedure

Given an open connected set $\Omega \in \mathbb{R}^d$, $d = \{1, 2, 3\}$, consider a generic pH system defined on Ω

$$\partial_t \boldsymbol{\alpha} = \mathcal{J}\boldsymbol{e}, \qquad \boldsymbol{\alpha} \in X, \tag{7.1a}$$

$$\boldsymbol{e} := \delta_{\boldsymbol{\alpha}} H, \qquad \boldsymbol{e} \in H^{\mathcal{J}}, \tag{7.1b}$$

$$\boldsymbol{u}_\partial = \mathcal{B}_\partial \boldsymbol{e}, \qquad \boldsymbol{u}_\partial \in \mathbb{R}^m, \tag{7.1c}$$

$$\boldsymbol{y}_\partial = \mathcal{C}_\partial \boldsymbol{e}, \qquad \boldsymbol{y}_\partial \in \mathbb{R}^m. \tag{7.1d}$$

The Hilbert space X, whose inner product is denoted by $\langle \cdot, \cdot \rangle_X$, is an appropriate Cartesian product of $L^2(\Omega)$ spaces which account for the nature of each variable (that can be scalar, vectorial or tensorial quantities). Its precise definition depends on the example upon consideration. For scalars $(a, b) \in L^2(\Omega)$, vectors $(\boldsymbol{a}, \boldsymbol{b}) \in L^2(\Omega, \mathbb{R}^d)$ and tensors $(\boldsymbol{A}, \boldsymbol{B}) \in L^2(\Omega, \mathbb{R}^{d \times d})$ the L^2 inner product is given by

$$\langle a, b \rangle_{L^2(\Omega)} = \int_\Omega ab \, \mathrm{d}\Omega, \qquad \langle \boldsymbol{a}, \boldsymbol{b} \rangle_{L^2(\Omega, \mathbb{R}^d)} = \int_\Omega \boldsymbol{a} \cdot \boldsymbol{b} \, \mathrm{d}\Omega, \qquad \langle \boldsymbol{A}, \boldsymbol{B} \rangle_{L^2(\Omega, \mathbb{R}^{d \times d})} = \int_\Omega \boldsymbol{A} : \boldsymbol{B} \, \mathrm{d}\Omega. \tag{7.2}$$

For scalars $a_\partial, b_\partial \in L^2(\partial\Omega)$ and vectors $\boldsymbol{a}_\partial, \boldsymbol{b}_\partial \in L^2(\partial\Omega, \mathbb{R}^m)$ defined on the boundary the inner product is defined as

$$\langle a_\partial, b_\partial \rangle_{L^2(\partial\Omega)} = \int_{\partial\Omega} a_\partial b_\partial \, \mathrm{d}S, \qquad \langle \boldsymbol{a}_\partial, \boldsymbol{b}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^m)} = \int_{\partial\Omega} \boldsymbol{a}_\partial \cdot \boldsymbol{b}_\partial \, \mathrm{d}S. \tag{7.3}$$

For simplicity both $L^2(\partial\Omega)$ and $L^2(\partial\Omega, , \mathbb{R}^m)$ are denoted by $L^2(\partial\Omega)$ in the inner product notation, since the use of bold letters clearly distinguishes vectors from scalars. The Hilbert space $H^{\mathcal{J}}$ is defined to be

$$H^{\mathcal{J}} := \{\boldsymbol{u} \in X \mid \mathcal{J}\boldsymbol{u} \in X\}. \tag{7.4}$$

The Hamiltonian functional of Eq. (7.1b) is allowed to be non linear in the energy variables

$$H = \int_\Omega \mathcal{H}(\boldsymbol{\alpha}) \, \mathrm{d}\Omega,$$

where $\mathcal{H}(\boldsymbol{\alpha}) : X \to \mathbb{R}$ is a non linear function.

To applied this methodology the non linearities are restricted to the Hamiltonian and a uniform causality condition is supposed to characterize the system. It is required as well that the system admits a splitting of the variables. This requirement is always encounter in the following examples. These hypotheses are resumed in the following assumptions.

Assumption 1

Consider system (7.1a). It is assumed that the Hilbert space X admits the splitting $X = X_1 \times X_2$ (meaning that the system is made up of two main blocks). The operator $\mathcal{J}$ is

assumed to be skew-symmetric (or formally skew-adjoint) on X and linear:

$$\mathcal{J} = \mathcal{J}_a + \mathcal{J}_d, \tag{7.5}$$

where $\mathcal{J}_a$ is the algebraic contribution (a skew-symmetric matrix) and $\mathcal{J}_d$ the differential contribution. The algebraic part is assumed to take the form

$$\mathcal{J}_a = \begin{bmatrix} 0 & -\boldsymbol{L}^\top \\ \boldsymbol{L} & 0 \end{bmatrix}, \qquad \begin{matrix} \boldsymbol{L}^\top : X_2 \to X_1, \\ \boldsymbol{L} \ : X_1 \to X_2, \end{matrix} \tag{7.6}$$

where $\boldsymbol{L}$ is a bounded operator. Analogously, the linear differential operator $\mathcal{J}_d$ is assumed to be of the form

$$\mathcal{J}_d = \begin{bmatrix} 0 & -\mathcal{L}^* \\ \mathcal{L} & 0 \end{bmatrix}, \qquad \begin{matrix} \mathcal{L}^* : X_2 \to X_1, \\ \mathcal{L} \ : X_1 \to X_2, \end{matrix} \tag{7.7}$$

where $\mathcal{L}^*$ denotes the formal adjoint of the linear differential operator $\mathcal{L}$. The operator $\mathcal{L}$ is unbounded and can be either a first or a second order differential operator. In the latter case it can be expressed as $\mathcal{L} = \mathcal{L}_1 \circ \mathcal{L}_2$. Given the splitting $X_1 \times X_2 = X$ the Hilbert space $H^{\mathcal{J}}$ can be split as well as

$$H^{\mathcal{J}} = H^{\mathcal{L}} \times H^{-\mathcal{L}^*}, \qquad \begin{matrix} H^{\mathcal{L}} := \{\boldsymbol{u}_1 \in X_1 | \ \mathcal{L}\boldsymbol{u}_1 \in X_2\}, \\ H^{-\mathcal{L}^*} := \{\boldsymbol{u}_2 \in X_2 | \ -\mathcal{L}^*\boldsymbol{u}_2 \in X_1\} \end{matrix} \tag{7.8}$$

The boundary operators are then supposed to fulfill the following assumption, that guarantees a uniform causality condition.

Assumption 2

Assume that there exist two boundary operators $\mathcal{N}_{\partial,1}$, $\mathcal{N}_{\partial,2}$ such that for $(\boldsymbol{u}_1, \boldsymbol{u}_2) \in H^{\mathcal{L}} \times H^{-\mathcal{L}^*}$ a general integration by parts formula holds

$$\langle \boldsymbol{u}_2, \, \mathcal{L}\,\boldsymbol{u}_1 \rangle_{X_2} - \langle \mathcal{L}^*\,\boldsymbol{u}_2, \, \boldsymbol{u}_1 \rangle_{X_1} = \langle \mathcal{N}_{\partial,1}\boldsymbol{u}_1, \mathcal{N}_{\partial,2}\boldsymbol{u}_2 \rangle_{L^2(\partial\Omega)}. \tag{7.9}$$

The boundary operators $\mathcal{B}_\partial, \mathcal{C}_\partial$ of Eqs. (7.1c), (7.1d), are then assumed to verify, in an exclusive manner, either

$$\mathcal{B}_\partial = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2} \end{bmatrix}, \quad \mathcal{C}_\partial = \begin{bmatrix} \mathcal{N}_{\partial,1} & 0 \end{bmatrix} \tag{7.10}$$

or

$$\mathcal{B}_\partial = \begin{bmatrix} \mathcal{N}_{\partial,1} & 0 \end{bmatrix}, \quad \mathcal{C}_\partial = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2} \end{bmatrix} \tag{7.11}$$

where the operators $\mathcal{N}_{\partial,1}$, $\mathcal{N}_{\partial,2}$ are defined by the integration by part formula (7.9).

Remark 9

The integration by part formula establishes a duality pairing between Sobolev spaces. This duality pairing is then compatible with an L^2 inner product in presence of a rigged Hilbert space (Gelfand triple). Without entering into technical details, we shall always use this equivalence of representation. Therefore, the boundary integrals are expressed as L^2 inner product over the boundary.

Thanks to Assumption 1, System (7.1) is rewritten as

$$\partial_t \begin{pmatrix} \boldsymbol{\alpha}_1 \\ \boldsymbol{\alpha}_2 \end{pmatrix} = \begin{bmatrix} 0 & -\boldsymbol{L}^\top - \mathcal{L}^* \\ \boldsymbol{L} + \mathcal{L} & 0 \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix}, \qquad \begin{aligned} \boldsymbol{\alpha}_1 &\in X_1, \\ \boldsymbol{\alpha}_2 &\in X_2, \end{aligned} \tag{7.12a}$$

$$\begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix} := \begin{pmatrix} \delta_{\boldsymbol{\alpha}_1} H \\ \delta_{\boldsymbol{\alpha}_2} H \end{pmatrix}, \qquad \begin{aligned} \boldsymbol{e}_1 &\in H^{\mathcal{L}}, \\ \boldsymbol{e}_2 &\in H^{-\mathcal{L}^*}. \end{aligned} \tag{7.12b}$$

Then thanks to Assumption 2 the boundary variables are given by

$$\boldsymbol{u}_\partial = \mathcal{N}_2 \boldsymbol{e}_2, \qquad \boldsymbol{y}_\partial = \mathcal{N}_1 \boldsymbol{e}_1, \qquad \boldsymbol{u}_\partial, \, \boldsymbol{y}_\partial \in \mathbb{R}^m, \tag{7.13}$$

if Eq. (7.10) holds. Otherwise, if Eq. (7.11) applies, then

$$\boldsymbol{u}_\partial = \mathcal{N}_1 \boldsymbol{e}_1, \qquad \boldsymbol{y}_\partial = \mathcal{N}_2 \boldsymbol{e}_2, \qquad \boldsymbol{u}_\partial, \, \boldsymbol{y}_\partial \in \mathbb{R}^m. \tag{7.14}$$

In both cases, the power balance reads

$$\begin{aligned} \dot{H} &= \langle \boldsymbol{e}_1, \, \partial_t \boldsymbol{\alpha}_1 \rangle_{X_1} + \langle \boldsymbol{e}_2, \, \partial_t \boldsymbol{\alpha}_2 \rangle_{X_2}, \\ &= \langle \boldsymbol{e}_1, \, -\mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1} + \langle \boldsymbol{e}_2, \, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}, \\ &= \langle \mathcal{N}_{\partial,1} \boldsymbol{e}_1, \, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}, \\ &= \langle \boldsymbol{y}_\partial, \, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)}. \end{aligned} \tag{7.15}$$

We are now in a position to illustrate the methodology.

Step 1 First consider the weak form of system (7.12a), obtained by taking the L^2 inner product introducing an appropriate test function $\boldsymbol{v} = (\boldsymbol{v}_1, \boldsymbol{v}_2) \in X_1 \times X_2 = X$ and integrating over the domain Ω

$$\begin{aligned} \langle \boldsymbol{v}_1, \, \partial_t \boldsymbol{\alpha}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1, \, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \boldsymbol{v}_1, \, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1}, \\ \langle \boldsymbol{v}_2, \, \partial_t \boldsymbol{\alpha}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \, \boldsymbol{L} \boldsymbol{e}_1 \rangle_{X_2} + \langle \boldsymbol{v}_2, \, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}. \end{aligned} \tag{7.16}$$

To obtain a closed system, the constitutive law (7.12b) and the output variables (7.1d) are put in weak form

$$\begin{aligned} \langle \boldsymbol{v}_1, \, \boldsymbol{e}_1 \rangle_{X_1} &= \langle \boldsymbol{v}_1, \, \delta_{\boldsymbol{\alpha}_1} H \rangle_{X_1}, \\ \langle \boldsymbol{v}_2, \, \boldsymbol{e}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \, \delta_{\boldsymbol{\alpha}_2} H \rangle_{X_2}, \\ \langle \boldsymbol{v}_\partial, \, \boldsymbol{y}_\partial \rangle_{L^2(\partial\Omega)} &= \langle \boldsymbol{v}_\partial, \, \mathcal{C}_\partial \boldsymbol{e} \rangle_{L^2(\partial\Omega)}, \end{aligned} \tag{7.17}$$

where the test function $\boldsymbol{v}_\partial \in L^2(\partial\Omega, \mathbb{R}^m)$ is defined on the boundary $\partial\Omega$ and $\mathcal{C}_\partial$ is defined either by Eq. (7.10) or (7.11).

Step 2 Next the integration by part has to be carried out. The choice is dictated by the boundary control to be imposed on the system. Consider again Eq. (7.16). The integration by parts can be carried out either on term $-\langle \boldsymbol{v}_1, \, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1}$, or on term $\langle \boldsymbol{v}_2, \, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}$. Depending

o which line undergoes the integration by parts (this explains the name Partitioned Finite Element method), two structure preserving weak forms are obtained. These differ by the boundary causality imposed to the system.

Integration by parts of the term $-\langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1}$ In this case case, using Eq. (7.9), it is obtained

$$-\langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1} = -\langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2} + \langle \mathcal{N}_{\partial,1} \boldsymbol{v}_1, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}. \tag{7.18}$$

Then the weak form of the system dynamics reads

$$\begin{aligned}
\langle \boldsymbol{v}_1, \partial_t \boldsymbol{\alpha}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2} + \langle \mathcal{N}_{\partial,1} \boldsymbol{v}_1, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)}, \\
\langle \boldsymbol{v}, \partial_t \boldsymbol{\alpha} \rangle_X &= \langle \boldsymbol{v}_2, \boldsymbol{L} \boldsymbol{e}_1 \rangle_{X_2} + \langle \boldsymbol{v}_2, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2},
\end{aligned} \tag{7.19}$$

The following proposition is crucial as the lossless character of the infinite-dimensional system (due to the formally skew-adjoint operator) translates into an equivalent property for the corresponding bilinear form in the weak form.

Proposition 8
Given the Hilbert space $H_2^{\mathcal{L}} := H^{\mathcal{L}} \times X_2$ and variables $\boldsymbol{v} = (\boldsymbol{v}_1, \boldsymbol{v}_2) \in H_2^{\mathcal{L}}$, $\boldsymbol{e} = (\boldsymbol{e}_1, \boldsymbol{e}_2) \in H_2^{\mathcal{L}}$, the bilinear form

$$\begin{aligned}
j_{\mathcal{L}} : H_2^{\mathcal{L}} \times H_2^{\mathcal{L}} &\longrightarrow \mathbb{R}, \\
(\boldsymbol{v}, \boldsymbol{e}) &\longrightarrow -\langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2} + \langle \boldsymbol{v}_2, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}
\end{aligned}$$

is skew-symmetric.

Proof. The proof is obtained by the following computation

$$\begin{aligned}
j_{\mathcal{L}}(\boldsymbol{v}, \boldsymbol{e}) &= -\langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2} + \langle \boldsymbol{v}_2, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}, \\
&= -\left(-\langle \boldsymbol{v}_2, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2} + \langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2} \right), \\
&= -\left(-\langle \mathcal{L} \boldsymbol{e}_1, \boldsymbol{v}_2 \rangle_{X_2} + \langle \boldsymbol{e}_2, \mathcal{L} \boldsymbol{v}_1 \rangle_{X_2} \right) = -j_{\mathcal{L}}(\boldsymbol{e}, \boldsymbol{v}).
\end{aligned}$$

$\square$

Now assume that the system satisfies the boundary causality condition 7.13. Then, this choice of the integration by parts lead to the following weak formulation

$$\begin{aligned}
\langle \boldsymbol{v}_1, \partial_t \boldsymbol{\alpha}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2} + \langle \mathcal{N}_{\partial,1} \boldsymbol{v}_1, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)}, \\
\langle \boldsymbol{v}_2, \partial_t \boldsymbol{\alpha}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \boldsymbol{L} \boldsymbol{e}_1 \rangle_{X_2} + \langle \boldsymbol{v}_2, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}, \\
\langle \boldsymbol{v}_1, \boldsymbol{e}_1 \rangle_{X_1} &= \langle \boldsymbol{v}_1, \delta_{\boldsymbol{\alpha}_1} H \rangle_{X_1}, \\
\langle \boldsymbol{v}_2, \boldsymbol{e}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \delta_{\boldsymbol{\alpha}_2} H \rangle_{X_2}, \\
\langle \boldsymbol{v}_\partial, \boldsymbol{y}_\partial \rangle_{L^2(\partial\Omega)} &= \langle \boldsymbol{v}_\partial, \mathcal{N}_{\partial,1} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}.
\end{aligned} \tag{7.20}$$

Integration by parts of the term $\langle \boldsymbol{v}_2, \mathcal{L}\boldsymbol{e}_1 \rangle_{X_2}$ Using Eq. (7.9), it is obtained

$$\langle \boldsymbol{v}_2, \mathcal{L}\boldsymbol{e}_1 \rangle_{X_2} = \langle \mathcal{L}^* \boldsymbol{v}_2, \boldsymbol{e}_1 \rangle_{X_1} + \langle \mathcal{N}_{\partial,2}\boldsymbol{v}_2, \mathcal{N}_{\partial,1}\boldsymbol{e}_1 \rangle_{L^2(\partial\Omega)}. \tag{7.21}$$

Then the weak form of the system dynamics reads

$$\begin{aligned}
\langle \boldsymbol{v}_1, \partial_t \boldsymbol{\alpha}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1}, \\
\langle \boldsymbol{v}_2, \partial_t \boldsymbol{\alpha}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \boldsymbol{L}\boldsymbol{e}_1 \rangle_{X_2} + \langle \mathcal{L}^* \boldsymbol{v}_2, \boldsymbol{e}_1 \rangle_{X_1} + \langle \mathcal{N}_{\partial,2}\boldsymbol{v}_2, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)},
\end{aligned} \tag{7.22}$$

Again the bilinear form arising from the formally skew-adjoint operator is skew-symmetric.

Proposition 9
Given the Hilbert space $H_1^{-\mathcal{L}^*} = X_1 \times H^{-\mathcal{L}^*}$ *and variables* $\boldsymbol{v} = (\boldsymbol{v}_1, \boldsymbol{v}_2) \in H_1^{-\mathcal{L}^*}$, $\boldsymbol{e} = (\boldsymbol{e}_1, \boldsymbol{e}_2) \in H_1^{-\mathcal{L}^*}$, *the bilinear form*

$$\begin{aligned}
j_{-\mathcal{L}^*} : H_1^{-\mathcal{L}^*} \times H_1^{-\mathcal{L}^*} &\longrightarrow \mathbb{R}, \\
(\boldsymbol{v}, \boldsymbol{e}) &\longrightarrow -\langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1} + \langle \mathcal{L}^* \boldsymbol{v}_2, \boldsymbol{e}_1 \rangle_{X_1}
\end{aligned}$$

is skew-symmetric.

Proof. The proof follows from the computation

$$\begin{aligned}
j_{-\mathcal{L}^*}(\boldsymbol{v}, \boldsymbol{e}) &= -\langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1} + \langle \mathcal{L}^* \boldsymbol{v}_2, \boldsymbol{e}_1 \rangle_{X_1}, \\
&= -\left(-\langle \mathcal{L}^* \boldsymbol{v}_2, \boldsymbol{e}_1 \rangle_{X_1} + \langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1} \right), \\
&= -\left(-\langle \boldsymbol{e}_1, \mathcal{L}^* \boldsymbol{v}_2 \rangle_{X_1} + \langle \mathcal{L}^* \boldsymbol{e}_2, \boldsymbol{v}_1 \rangle_{X_1} \right) = -j_{-\mathcal{L}^*}(\boldsymbol{e}, \boldsymbol{v}).
\end{aligned}$$

$\square$

Now assume that the system satisfies the boundary causality condition (7.14). Then, the final weak formulation reads

$$\begin{aligned}
\langle \boldsymbol{v}_1, \partial_t \boldsymbol{\alpha}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1}, \\
\langle \boldsymbol{v}_2, \partial_t \boldsymbol{\alpha}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \boldsymbol{L}\boldsymbol{e}_1 \rangle_{X_2} + \langle \mathcal{L}^* \boldsymbol{v}_2, \boldsymbol{e}_1 \rangle_{X_1} + \langle \mathcal{N}_{\partial,2}\boldsymbol{v}_2, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)}, \\
\langle \boldsymbol{v}_1, \boldsymbol{e}_1 \rangle_{X_1} &= \langle \boldsymbol{v}_1, \delta_{\boldsymbol{\alpha}_1} H \rangle_{X_1}, \\
\langle \boldsymbol{v}_2, \boldsymbol{e}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \delta_{\boldsymbol{\alpha}_2} H \rangle_{X_2}, \\
\langle \boldsymbol{v}_\partial, \boldsymbol{y}_\partial \rangle_{L^2(\partial\Omega)} &= \langle \boldsymbol{v}_\partial, \mathcal{N}_{\partial,2}\boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}.
\end{aligned} \tag{7.23}$$

Galerkin discretization   To conclude the illustration of this methodology, consider a Galerkin discretization is introduced. This means that test, energy and co-energy functions are discretized using the same basis. Furthermore the boundary variables are discretized as

well using bases defined over the boundary

$$
\begin{aligned}
\boldsymbol{v}_1 &\approx \sum_{i=1}^{n_1} \boldsymbol{\phi}_1^i(\boldsymbol{x})v_1^i, & \boldsymbol{\alpha}_1 &\approx \sum_{i=1}^{n_1} \phi_1^i(\boldsymbol{x})\alpha_1^i(t), & \boldsymbol{e}_1 &\approx \sum_{i=1}^{n_1} \boldsymbol{\phi}_1^i(\boldsymbol{x})e_1^i(t), & \boldsymbol{x} &\in \Omega, \\
\boldsymbol{v}_2 &\approx \sum_{i=1}^{n_2} \boldsymbol{\phi}_2^i(\boldsymbol{x})v_2^i, & \boldsymbol{\alpha}_2 &\approx \sum_{i=1}^{n_2} \phi_2^i(\boldsymbol{x})\alpha_2^i(t), & \boldsymbol{e}_2 &\approx \sum_{i=1}^{n_2} \boldsymbol{\phi}_2^i(\boldsymbol{x})e_2^i(t), & \boldsymbol{x} &\in \Omega, \quad (7.24) \\
\boldsymbol{v}_\partial &\approx \sum_{i=1}^{n_\partial} \boldsymbol{\phi}_\partial^i(\boldsymbol{s})v_\partial^i, & \boldsymbol{u}_\partial &\approx \sum_{i=1}^{n_\partial} \phi_\partial^i(\boldsymbol{s})u_\partial^i(t), & \boldsymbol{y}_\partial &\approx \sum_{i=1}^{n_\partial} \boldsymbol{\phi}_\partial^i(\boldsymbol{s})y_\partial^i(t), & \boldsymbol{s} &\in \partial\Omega.
\end{aligned}
$$

Discretization of the weak form (7.20) Plugging the approximation into the weak form (7.20) and consider that the resulting equation holds $\forall v_1^i,\, v_2^j,\, v_\partial^k$ ($i \in \{1, n_1\}$, $j \in \{1, n_2\}$, $k \in \{1, n_\partial\}$), the finite dimensional system is obtained

$$
\begin{aligned}
\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \dot{\boldsymbol{\alpha}}_{d,1} \\ \dot{\boldsymbol{\alpha}}_{d,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_\mathcal{L}^\top \\ \mathbf{D}_0 + \mathbf{D}_\mathcal{L} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{B}_1 \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\
\begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} &= \begin{bmatrix} \partial_{\boldsymbol{\alpha}_{d,1}} H_d(\boldsymbol{\alpha}_d) \\ \partial_{\boldsymbol{\alpha}_{d,2}} H_d(\boldsymbol{\alpha}_d) \end{bmatrix}, \qquad (7.25) \\
\mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{B}_1^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}.
\end{aligned}
$$

Vectors $\boldsymbol{\alpha}_{d,1}$, $\boldsymbol{\alpha}_{d,2}$, $\mathbf{e}_1$, $\mathbf{e}_2$, $\mathbf{u}_\partial$, $\mathbf{y}_\partial$ are given by the column-wise concatenation of their respective degrees of freedom. The matrices are defined as follows

$$
\begin{aligned}
M_1^{ij} &= \left\langle \boldsymbol{\phi}_1^i, \boldsymbol{\phi}_1^j \right\rangle_{X_1}, & D_0^{mi} &= \left\langle \boldsymbol{\phi}_2^m, \boldsymbol{L}\boldsymbol{\phi}_1^i \right\rangle_{X_2}, & B_1^{ik} &= \left\langle \boldsymbol{\phi}_1^i, \boldsymbol{\phi}_\partial^k \right\rangle_{L^2(\partial\Omega)}, \\
M_2^{mn} &= \langle \boldsymbol{\phi}_2^m, \boldsymbol{\phi}_2^n \rangle_{X_2}, & D_\mathcal{L}^{mi} &= \left\langle \boldsymbol{\phi}_2^m, \mathcal{L}\boldsymbol{\phi}_1^i \right\rangle_{X_2}, & M_\partial^{lk} &= \left\langle \boldsymbol{\phi}_\partial^l, \boldsymbol{\phi}_\delta^k \right\rangle_{L^2(\partial\Omega)},
\end{aligned}
\qquad (7.26)
$$

where $i, j \in \{1, n_1\}$, $m, n \in \{1, n_2\}$, $l, k \in \{1, n_\partial\}$. Introducing the definitions

$$
\delta_{\boldsymbol{\alpha}_{d,1}} H_d := \delta_{\boldsymbol{\alpha}_1} H \left(\boldsymbol{\alpha}_1 = \sum_{i=1}^{n_1} \phi_1^i \alpha_1^i, \; \boldsymbol{\alpha}_2 = \sum_{i=1}^{n_1} \phi_2^i \alpha_2^i \right),
$$

$$
\delta_{\boldsymbol{\alpha}_{d,2}} H_d := \delta_{\boldsymbol{\alpha}_2} H \left(\boldsymbol{\alpha}_1 = \sum_{i=1}^{n_1} \phi_1^i \alpha_1^i, \; \boldsymbol{\alpha}_2 = \sum_{i=1}^{n_1} \phi_2^i \alpha_2^i \right),
$$

the discretized gradient of the Hamiltonian read

$$
\begin{aligned}
\partial_{\alpha_{d,1}^i} H_d(\boldsymbol{\alpha}_d) &= \left\langle \phi_1^i, \delta_{\boldsymbol{\alpha}_{d,1}} H_d \right\rangle_{X_1}, & i &\in \{1, n_1\}, \\
\partial_{\alpha_{d,2}^j} H_d(\boldsymbol{\alpha}_d) &= \left\langle \phi_2^j, \delta_{\boldsymbol{\alpha}_{d,2}} H_d \right\rangle_{X_2}, & j &\in \{1, n_2\}.
\end{aligned}
\qquad (7.27)
$$

A pH system in canonical form is found observing that Sys. (7.25) is compactly rewritten as

$$\mathbf{M}\dot{\boldsymbol{\alpha}}_d = \mathbf{J}_{\mathcal{L}}\mathbf{e} + \mathbf{B}\mathbf{u}_\partial, \tag{7.28}$$

$$\mathbf{M}\mathbf{e} = \nabla H_d(\boldsymbol{\alpha}_d), \tag{7.29}$$

$$\mathbf{M}_\partial \mathbf{y}_\partial = \mathbf{B}^\top \mathbf{e}, \tag{7.30}$$

where $\boldsymbol{\alpha}_d = (\boldsymbol{\alpha}_{d,1}^\top \ \boldsymbol{\alpha}_{d,2}^\top)^\top$, $\mathbf{e} = (\mathbf{e}_1^\top \ \mathbf{e}_2^\top)^\top$, $\nabla H_d(\boldsymbol{\alpha}_d) = (\partial_{\boldsymbol{\alpha}_{d,1}}^\top H_d(\boldsymbol{\alpha}_d) \ \partial_{\boldsymbol{\alpha}_{d,2}}^\top H_d(\boldsymbol{\alpha}_d))^\top$ and

$$\mathbf{M} = \begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix}, \qquad \mathbf{J}_{\mathcal{L}} = \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_{\mathcal{L}}^\top \\ \mathbf{D}_0 + \mathbf{D}_{\mathcal{L}} & \mathbf{0} \end{bmatrix}, \qquad \mathbf{B} = \begin{bmatrix} \mathbf{B}_1 \\ \mathbf{0} \end{bmatrix}. \tag{7.31}$$

Plugging (7.29) into (7.28), a pH system in canonical form is obtained

$$\begin{aligned} \dot{\boldsymbol{\alpha}}_d &= \mathbf{J}\,\nabla H_d(\boldsymbol{\alpha}_d) + \mathbf{B}\,\mathbf{u}_\partial, && \text{where} && \mathbf{J} = \mathbf{M}^{-1}\mathbf{J}_{\mathcal{L}}\mathbf{M}^{-1}, \\ \hat{\mathbf{y}}_\partial &= \mathbf{B}^\top \nabla H_d(\boldsymbol{\alpha}_d), && \text{where} && \hat{\mathbf{y}}_\partial = \mathbf{M}_\partial \mathbf{y}_\partial. \end{aligned} \tag{7.32}$$

The structure preserving character of the method is evident from the preservation at the discrete level of the power balance. The finite dimensional counterpart of the energy rate is given by

$$\begin{aligned} \dot{H}_d &= \nabla^\top H_d(\boldsymbol{\alpha}_d)\dot{\boldsymbol{\alpha}}_d, \\ &= \nabla^\top H_d(\boldsymbol{\alpha}_d)\mathbf{J}\,\nabla H_d(\boldsymbol{\alpha}_d) + \nabla^\top H_d(\boldsymbol{\alpha}_d)\mathbf{B}\,\mathbf{u}_\partial, && \text{Skew-symmetry of } \mathbf{J} \\ &= \hat{\mathbf{y}}_\partial^\top \mathbf{u}_\partial. \end{aligned} \tag{7.33}$$

This result mimics its infinite dimensional equivalent (7.15).

Discretization of the weak form (7.23) Plugging the approximation into the weak form (7.23) a finite dimensional system with a different causality is obtained

$$\begin{aligned} \begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \dot{\boldsymbol{\alpha}}_{d,1} \\ \dot{\boldsymbol{\alpha}}_{d,2} \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top + \mathbf{D}_{-\mathcal{L}^*} \\ \mathbf{D}_0 - \mathbf{D}_{-\mathcal{L}^*}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{0} \\ \mathbf{B}_2 \end{bmatrix} \mathbf{u}_\partial, \\ \begin{bmatrix} \mathbf{M}_1 & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_2 \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} &= \begin{pmatrix} \partial_{\boldsymbol{\alpha}_{d,1}} H_d(\boldsymbol{\alpha}_d) \\ \partial_{\boldsymbol{\alpha}_{d,2}} H_d(\boldsymbol{\alpha}_d) \end{pmatrix}, \\ \mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{0} & \mathbf{B}_2^\top \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}. \end{aligned} \tag{7.34}$$

The differences with respect to formulation (7.25) reside in matrices $\mathbf{D}_{-\mathcal{L}^*}$, $\mathbf{B}_2$, whose definitions are

$$D_{-\mathcal{L}^*}^{im} = \left\langle \phi_1^i, -\mathcal{L}^* \phi_2^m \right\rangle_{X_1}, \qquad B_2^{mk} = \left\langle \phi_2^m, \phi_\partial^k \right\rangle_{X_{\partial\Omega}} \qquad i \in \{1, n_1\}, \ m \in \{1, n_2\}, \ k \in \{1, n_\partial\}. \tag{7.35}$$

1103 System (7.34) can be put in canonical form by replacing the co-energy variables by the
1104 discretized gradient.

1105 **Example: the irrotational shallow water equations**   Consider as an example the shal-
1106 low water equations detailed in Sec. §3.2.3. The flow is assumed to be irrotational ($\nabla \times \boldsymbol{v} = 0$).
1107 As a consequence the term $\boldsymbol{\mathcal{G}}$ in Eq. (3.29) vanishes. To fulfill Assumption 2, the incoming
1108 volumetric flow is known at the boundary, so that a uniform Neumann condition is imposed.
1109 This lead to the following boundary control system, defined on an open connected set $\Omega \subset \mathbb{R}^2$

$$
\begin{aligned}
\frac{\partial}{\partial t}\begin{pmatrix} \alpha_h \\ \boldsymbol{\alpha}_v \end{pmatrix} &= -\begin{bmatrix} 0 & \mathrm{div} \\ \mathrm{grad} & \boldsymbol{0} \end{bmatrix}\begin{pmatrix} e_h \\ \boldsymbol{e}_v \end{pmatrix}, & \alpha_h &\in L^2(\Omega), \\
\begin{pmatrix} e_h \\ \boldsymbol{e}_v \end{pmatrix} &:= \begin{pmatrix} \delta_{\alpha_h} H \\ \delta_{\boldsymbol{\alpha}_v} H \end{pmatrix} = \begin{pmatrix} \frac{1}{2\rho}\|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h, \\ \frac{1}{\rho}\alpha_h \boldsymbol{\alpha}_v. \end{pmatrix}, & \boldsymbol{\alpha}_v &\in L^2(\Omega, \mathbb{R}^2), \\
& & e_h &\in H^1(\Omega), \\
u_\partial &= -\boldsymbol{e}_v \cdot \boldsymbol{n}, & \boldsymbol{e}_v &\in H^{\mathrm{div}}(\Omega, \mathbb{R}^2), \\
y_\partial &= e_h, & u_\partial &\in \mathbb{R}, \\
& & y_\partial &\in \mathbb{R},
\end{aligned}
\tag{7.36}
$$

where the Hamiltonian is a non linear functional in the energy variables

$$
H(\alpha_h, \boldsymbol{\alpha}_v) = \frac{1}{2}\int_\Omega \left\{\frac{1}{\rho}\alpha_h\|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h^2\right\}\,\mathrm{d}\Omega.
$$

1110 The energy and co-energy variables are related to the physical variables (fluid height and
1111 velocity) through Eqs. (3.26), (3.28). In this case $X_1 = L^2(\Omega)$, $X_2 = L^2(\Omega, \mathbb{R}^2)$ and $\mathcal{L} =$
1112 grad, $-\mathcal{L}^* = \mathrm{div}$. This implies $H^{\mathcal{L}} = H^1(\Omega)$, $H^{-\mathcal{L}^*} = H^{\mathrm{div}}(\Omega, \mathbb{R}^2)$. As shown in (3.30), the
1113 energy rate is given by

$$
\dot{H} = -\langle \boldsymbol{e}_v,\, \mathrm{grad}\, e_h \rangle_{L^2(\Omega, \mathbb{R}^2)} - \langle \mathrm{div}\, \boldsymbol{e}_v,\, e_h \rangle_{L^2(\Omega)} = \langle -\boldsymbol{e}_v \cdot \boldsymbol{n},\, e_h \rangle_{L^2(\partial\Omega)}.
\tag{7.37}
$$

1114 The boundary operators are therefore given by

$$
\begin{aligned}
u_\partial &= \mathcal{N}_{\partial,2}\boldsymbol{e}_v = -\gamma_n \boldsymbol{e}_v = -\boldsymbol{e}_v \cdot \boldsymbol{n}|_{\partial\Omega}, \\
y_\partial &= \mathcal{N}_{\partial,1}e_h = \gamma_0 e_h = e_h|_{\partial\Omega}.
\end{aligned}
\tag{7.38}
$$

1115 This system represents a particular example of the general formulation of the general frame-
1116 work (7.12), together with boundary conditions (7.13). To obtain a finite dimensional system,
1117 the test variables v_h, $\boldsymbol{v}_v$ are introduced and the integration by parts is performed on the div
1118 operator, leading to the weak form

$$\langle v_h, \partial_t \alpha_h \rangle_{L^2(\Omega)} = \langle \operatorname{grad} v_h, \boldsymbol{e}_v \rangle_{L^2(\Omega,\mathbb{R}^2)} + \langle \gamma_0 v_h, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)},$$

$$\langle \boldsymbol{v}_v, \partial_t \boldsymbol{\alpha}_v \rangle_{L^2(\Omega,\mathbb{R}^2)} = - \langle \boldsymbol{v}_v, \operatorname{grad} e_h \rangle_{L^2(\Omega,\mathbb{R}^2)},$$

$$\langle v_h, e_h \rangle_{L^2(\Omega)} = \left\langle v_h, \frac{1}{2\rho} \|\boldsymbol{\alpha}_v\|^2 + \rho g \alpha_h \right\rangle_{L^2(\Omega)}, \tag{7.39}$$

$$\langle \boldsymbol{v}_v, \boldsymbol{e}_v \rangle_{L^2(\Omega,\mathbb{R}^2)} = \left\langle \boldsymbol{v}_v, \frac{1}{\rho} \alpha_h \boldsymbol{\alpha}_v \right\rangle_{L^2(\Omega,\mathbb{R}^2)},$$

$$\langle v_\partial, y_\partial \rangle_{L^2(\partial\Omega)} = \langle v_\partial, \gamma_0 e_h \rangle_{L^2(\partial\Omega)}.$$

Introducing a Galerkin approximation as in (7.24)

$$v_h \approx \sum_{i=1}^{n_h} \phi_h^i(\boldsymbol{x}) v_h^i, \qquad \alpha_h \approx \sum_{i=1}^{n_h} \phi_h^i(\boldsymbol{x}) \alpha_h^i(t), \qquad e_h \approx \sum_{i=1}^{n_h} \phi_h^i(\boldsymbol{x}) e_h^i(t), \quad \boldsymbol{x} \in \Omega,$$

$$\boldsymbol{v}_v \approx \sum_{i=1}^{n_v} \boldsymbol{\phi}_v^i(\boldsymbol{x}) v_v^i, \qquad \boldsymbol{\alpha}_v \approx \sum_{i=1}^{n_{2v}} \boldsymbol{\phi}_v^i(\boldsymbol{x}) \alpha_v^i(t), \qquad \boldsymbol{e}_v \approx \sum_{i=1}^{n_v} \boldsymbol{\phi}_v^i(\boldsymbol{x}) e_v^i(t), \quad \boldsymbol{x} \in \Omega, \tag{7.40}$$

$$v_\partial \approx \sum_{i=1}^{n_\partial} \phi_\partial^i(\boldsymbol{s}) v_\partial^i, \qquad u_\partial \approx \sum_{i=1}^{n_\partial} \phi_\partial^i(\boldsymbol{s}) u_\partial^i(t), \qquad y_\partial \approx \sum_{i=1}^{n_\partial} \phi_\partial^i(\boldsymbol{s}) y_\partial^i(t), \quad \boldsymbol{s} \in \partial\Omega,$$

the finite dimensional system is obtained

$$\begin{bmatrix} \mathbf{M}_h & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_v \end{bmatrix} \begin{pmatrix} \dot{\boldsymbol{\alpha}}_{d,h} \\ \dot{\boldsymbol{\alpha}}_{d,v} \end{pmatrix} = - \begin{bmatrix} \mathbf{0} & -\mathbf{D}_{\operatorname{grad}}^\top \\ \mathbf{D}_{\operatorname{grad}} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_h \\ \mathbf{e}_v \end{pmatrix} + \begin{bmatrix} \mathbf{B}_h \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial,$$

$$\begin{bmatrix} \mathbf{M}_h & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_v \end{bmatrix} \begin{pmatrix} \mathbf{e}_h \\ \mathbf{e}_v \end{pmatrix} = \begin{bmatrix} \partial_{\boldsymbol{\alpha}_{d,h}} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v}) \\ \partial_{\boldsymbol{\alpha}_{d,v}} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v}) \end{bmatrix}, \tag{7.41}$$

$$\mathbf{M}_\partial \mathbf{y}_\partial = \begin{bmatrix} \mathbf{B}_h^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_h \\ \mathbf{e}_v \end{pmatrix}.$$

The matrices are defined as follows

$$\begin{aligned} M_h^{ij} &= \left\langle \phi_h^i, \phi_h^j \right\rangle_{L^2(\Omega)}, & D_{\operatorname{grad}}^{mi} &= \left\langle \boldsymbol{\phi}_v^m, \operatorname{grad} \phi_h^i \right\rangle_{L^2(\Omega,\mathbb{R}^2)}, \\ M_v^{mn} &= \left\langle \boldsymbol{\phi}_v^m, \boldsymbol{\phi}_v^n \right\rangle_{L^2(\Omega,\mathbb{R}^2)}, & B_h^{ik} &= \left\langle \phi_h^i, \phi_\partial^k \right\rangle_{L^2(\partial\Omega)}, \\ M_\partial^{lk} &= \left\langle \phi_\partial^l, \phi_\delta^k \right\rangle_{L^2(\partial\Omega)}, \end{aligned} \tag{7.42}$$

where $i, j \in \{1, n_h\}$, $m, n \in \{1, n_v\}$, $l, k \in \{1, n_\partial\}$. The discretized gradient of the Hamiltonian read

$$\partial_{\alpha_{d,h}^i} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v}) = \left\langle \phi_h^i, \frac{1}{2\rho} \left\| \sum_{r=1}^{n_2} \boldsymbol{\phi}_v^r \alpha_v^r \right\|^2 + \rho g \sum_{r=1}^{n_1} \phi_h^r \alpha_h^r \right\rangle_{L^2(\Omega)}, \qquad i \in \{1, n_h\},$$

$$\partial_{\alpha_{d,v}^m} H_d(\boldsymbol{\alpha}_{d,h}, \boldsymbol{\alpha}_{d,v}) = \left\langle \boldsymbol{\phi}_v^m, \frac{1}{\rho} \left(\sum_{r=1}^{n_1} \phi_h^r \alpha_h^r \right) \left(\sum_{r=1}^{n_2} \boldsymbol{\phi}_v^r \alpha_v^r \right) \right\rangle_{L^2(\Omega,\mathbb{R}^2)}, \qquad m \in \{1, n_v\}. \tag{7.43}$$

One possible finite element discretization for this problem can be found in [Pir89]. The non linear nature of the problem strongly complicates the analysis. The presence of shocks has to accounted for in the numerical discretization. The proposed methodology has to copy with finite time shocks to become a valid alternative to already well established strategies.

7.1.2   Linear case

The general framework detailed in Sec. 7.1.1 is valid for both linear and non linear system. However, in the linear case a major simplification occurs since the constitutive law connecting energy and co-energy variables is easily invertible. This allows using only to describe the dynamics using the co-energy variables only.

The additional assumption required to make the system linear is introduced.

Assumption 3
The Hamiltonian is assumed to be a positive quadratic functional in the energy variables $\boldsymbol{\alpha}_1$, $\boldsymbol{\alpha}_2$. Furthermore, the Hamiltonian is considered to be separable with respect to $\boldsymbol{\alpha}_1$, $\boldsymbol{\alpha}_2$ (this hypothesis is always met for the systems under consideration). Therefore, it can be expressed as

$$H = \frac{1}{2} \langle \boldsymbol{\alpha}_1,\, \mathcal{Q}_1 \boldsymbol{\alpha}_1 \rangle_{X_1} + \frac{1}{2} \langle \boldsymbol{\alpha}_2,\, \mathcal{Q}_2 \boldsymbol{\alpha}_2 \rangle_{X_2}, \tag{7.44}$$

where $\mathcal{Q}_1$, $\mathcal{Q}_2$ are bounded symmetric operators, verifying

$$m_1 \boldsymbol{I}_1 \leq \mathcal{Q}_1 \leq M_1 \boldsymbol{I}_1, \qquad m_2 \boldsymbol{I}_2 \leq \mathcal{Q}_2 \leq M_2 \boldsymbol{I}_2.$$

Because of assumption 3, the co-energy variables are given by

$$\boldsymbol{e}_1 := \delta_{\alpha_1} H = \mathcal{Q}_1 \boldsymbol{\alpha}_1, \qquad \boldsymbol{e}_2 := \delta_{\alpha_2} H = \mathcal{Q}_2 \boldsymbol{\alpha}_2 \tag{7.45}$$

Since $\mathcal{Q}_1$, $\mathcal{Q}_2$ are positive bounded symmetric operators, it is possible to invert them to obtain

$$\boldsymbol{\alpha}_1 = \mathcal{Q}_1^{-1} \boldsymbol{e}_1 = \mathcal{M}_1 \boldsymbol{e}_1, \qquad \boldsymbol{\alpha}_2 = \mathcal{Q}_2^{-1} \boldsymbol{e}_2 = \mathcal{M}_2 \boldsymbol{e}_2, \qquad \mathcal{M}_1 := \mathcal{Q}_1^{-1},\ \mathcal{M}_2 := \mathcal{Q}_2^{-1}. \tag{7.46}$$

The Hamiltonian is then written in terms of co-energy variables as

$$H = \frac{1}{2} \langle \boldsymbol{e}_1,\, \mathcal{M}_1 \boldsymbol{e}_1 \rangle_{X_1} + \frac{1}{2} \langle \boldsymbol{e}_2,\, \mathcal{M}_2 \boldsymbol{e}_2 \rangle_{X_2}. \tag{7.47}$$

Under assumptions 1, 2, 3, a pH linear system is expressed as

$$\begin{bmatrix} \mathcal{M}_1 & 0 \\ 0 & \mathcal{M}_2 \end{bmatrix} \partial_t \begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix} = \begin{bmatrix} 0 & -\boldsymbol{L}^\top - \mathcal{L}^* \\ \boldsymbol{L} + \mathcal{L} & 0 \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix}, \qquad \begin{aligned} \boldsymbol{e}_1 &\in H^{\mathcal{L}}, \\ \boldsymbol{e}_2 &\in H^{-\mathcal{L}^*}. \end{aligned} \tag{7.48}$$

If Eq. (7.10) holds the boundary variables equal

$$\boldsymbol{u}_\partial = \mathcal{N}_2 \boldsymbol{e}_2, \qquad \boldsymbol{y}_\partial = \mathcal{N}_1 \boldsymbol{e}_1, \qquad \boldsymbol{u}_\partial,\, \boldsymbol{y}_\partial \in \mathbb{R}^m. \tag{7.49}$$

Whereas if Eq. (7.11) holds, then

$$\boldsymbol{u}_\partial = \mathcal{N}_1 \boldsymbol{e}_1, \qquad \boldsymbol{y}_\partial = \mathcal{N}_2 \boldsymbol{e}_2, \qquad \boldsymbol{u}_\partial,\, \boldsymbol{y}_\partial \in \mathbb{R}^m. \tag{7.50}$$

From equation (7.47), the power balance reads

$$\begin{aligned}
\dot{H} &= \langle \boldsymbol{e}_1,\, \mathcal{M}_1 \partial_t \boldsymbol{e}_1 \rangle_{X_1} + \langle \boldsymbol{e}_2,\, \mathcal{M}_2 \partial_t \boldsymbol{e}_2 \rangle_{X_2}, \\
&= \langle \boldsymbol{e}_1,\, -\mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1} + \langle \boldsymbol{e}_2,\, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}, \\
&= \langle \mathcal{N}_{\partial,1} \boldsymbol{e}_1,\, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}, \\
&= \langle \boldsymbol{y}_\partial,\, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)}.
\end{aligned} \tag{7.51}$$

To get a finite dimensional approximation the same procedure detailed in Sec. §7.1.1 is followed. The only difference is that there is no need to discretize the constitutive relations as those are already incorporated in the dynamics.

Once the system is put into weak form, if the operator $-\mathcal{L}^*$ is integrated by parts, one obtains the weak form

$$\begin{aligned}
\langle \boldsymbol{v}_1,\, \mathcal{M}_1 \partial_t \boldsymbol{e}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1,\, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \mathcal{L} \boldsymbol{v}_1,\, \boldsymbol{e}_2 \rangle_{X_2} + \langle \mathcal{N}_{\partial,1} \boldsymbol{v}_1,\, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)}, \\
\langle \boldsymbol{v}_2,\, \mathcal{M}_2 \partial_t \boldsymbol{e}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2,\, \boldsymbol{L} \boldsymbol{e}_1 \rangle_{X_2} + \langle \boldsymbol{v}_2,\, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}, \\
\langle \boldsymbol{v}_\partial,\, \boldsymbol{y}_\partial \rangle_{L^2(\partial\Omega)} &= \langle \boldsymbol{v}_\partial,\, \mathcal{N}_{\partial,1} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}.
\end{aligned} \tag{7.52}$$

Otherwise, if operator $\mathcal{L}$ is integrated by parts, it is found

$$\begin{aligned}
\langle \boldsymbol{v}_1,\, \mathcal{M}_1 \partial_t \boldsymbol{e}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1,\, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \boldsymbol{v}_1,\, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1}, \\
\langle \boldsymbol{v}_2,\, \mathcal{M}_2 \partial_t \boldsymbol{e}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2,\, \boldsymbol{L} \boldsymbol{e}_1 \rangle_{X_2} + \langle \mathcal{L}^* \boldsymbol{v}_2,\, \boldsymbol{e}_1 \rangle_{X_1} + \langle \mathcal{N}_{\partial,2} \boldsymbol{v}_2,\, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega)}, \\
\langle \boldsymbol{v}_\partial,\, \boldsymbol{y}_\partial \rangle_{L^2(\partial\Omega)} &= \langle \boldsymbol{v}_\partial,\, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}.
\end{aligned} \tag{7.53}$$

After introducing a Galerkin approximation as in (7.24), the discretized version of the weak form (7.52) reads

$$\begin{aligned}
\begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{M}_2} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \end{pmatrix} &= \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_{\mathcal{L}}^\top \\ \mathbf{D}_0 + \mathbf{D}_{\mathcal{L}} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{B}_1 \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial, \\
\mathbf{M}_\partial \mathbf{y}_\partial &= \begin{bmatrix} \mathbf{B}_1^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}.
\end{aligned} \tag{7.54}$$

The only difference with respect to Eq. (7.25) concerns the mass matrices

$$M_{\mathcal{M}_1}^{ij} = \left\langle \phi_1^i, \mathcal{M}_1 \phi_1^j \right\rangle_{X_1}, \qquad M_{\mathcal{M}_2}^{mn} = \left\langle \phi_2^m, \mathcal{M}_2 \phi_2^n \right\rangle_{X_2} \qquad i, j \in \{1, n_1\}, \ m, n \in \{1, n_2\}. \tag{7.55}$$

If the Galerkin approximation is applied to the weak form (7.53), it is obtained

$$\begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\mathcal{M}_2} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \end{pmatrix} = \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top + \mathbf{D}_{-\mathcal{L}^*} \\ \mathbf{D}_0 - \mathbf{D}_{-\mathcal{L}^*}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix} + \begin{bmatrix} \mathbf{0} \\ \mathbf{B}_2 \end{bmatrix} \mathbf{u}_\partial,$$

$$\mathbf{M}_\partial \mathbf{y}_\partial = \begin{bmatrix} \mathbf{0} & \mathbf{B}_2^\top \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \end{pmatrix}. \tag{7.56}$$

In both cases, it is easy to verify that the Hamiltonian

$$H_d = \frac{1}{2} \mathbf{e}_1^\top \mathbf{M}_{\mathcal{M}_1} \mathbf{e}_1 + \frac{1}{2} \mathbf{e}_2^\top \mathbf{M}_{\mathcal{M}_2} \mathbf{e}_2, \tag{7.57}$$

once differentiated in time, provides the energy rate

$$\dot{H}_d = \mathbf{y}_\partial^\top \mathbf{M}_\partial \mathbf{u}_\partial = \widehat{\mathbf{y}}_\partial^\top \mathbf{u}_\partial, \qquad \text{where} \qquad \widehat{\mathbf{y}}_\partial := \mathbf{M}_\partial \mathbf{y}_\partial. \tag{7.58}$$

This result mimics its finite dimensional counterpart (7.51).

7.1.3   Linear flexible structures

In this section, some linear example from the elasticity realms are considered. We restrict the discussion to linear problems. This case is anyway significant, as these examples are frequently encountered in engineering applications.

7.1.3.1   Euler-Bernoulli beam

We reconsider the example discussed in Sec. §3.2.1. The relation between energy and co-energy variables is given by Eqs. (3.20), (3.22)

$$\alpha_w = \rho A\, e_w, \qquad \alpha_\kappa = \frac{1}{EI}\, e_\kappa \tag{7.59}$$

The coefficients ρ, A, E and I are the mass density, the cross section area, Young's modulus of elasticity and the moment of inertia of the cross section.

Control through forces and torques   Given an interval $\Omega = (0, L)$, a thin beam under free boundary condition (forces and torques imposed at the boundary) can be modeled in terms of co-energy variables by the following system

$$\begin{bmatrix} \rho A & 0 \\ 0 & (EI)^{-1} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} \\ \partial_{xx} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \qquad \begin{array}{l} e_w \in H^2(\Omega), \\ e_\kappa \in H^2(\Omega), \end{array} \tag{7.60a}$$

$$\boldsymbol{u}_\partial = \begin{bmatrix} 0 & \boldsymbol{\gamma}_0 \\ 0 & -\boldsymbol{\gamma}_1 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \qquad \boldsymbol{u}_\partial \in \mathbb{R}^4, \tag{7.60b}$$

$$\boldsymbol{y}_\partial = \begin{bmatrix} \boldsymbol{\gamma}_1 & 0 \\ \boldsymbol{\gamma}_0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \qquad \boldsymbol{y}_\partial \in \mathbb{R}^4. \tag{7.60c}$$

The boundary operator $\boldsymbol{\gamma}_0$, $\boldsymbol{\gamma}_1$ denote the trace and the first derivative trace along the boundary. In a one-dimensional domain the boundary degenerates to two single points

$$\boldsymbol{\gamma}_0 a = a|_{\partial\Omega} = \begin{pmatrix} -a(0) \\ +a(L) \end{pmatrix}, \qquad \boldsymbol{\gamma}_1 a = \partial_x a|_{\partial\Omega} = \begin{pmatrix} -\partial_x a(0) \\ +\partial_x a(L) \end{pmatrix}. \tag{7.61}$$

In this case $X_1 = X_2 = L^2(\Omega)$. The operators $\mathcal{L}$, $N_{\partial,1}$, $N_{\partial,2}$ read

$$\mathcal{L} = \partial_{xx}, \qquad N_{\partial,1} = \begin{bmatrix} \boldsymbol{\gamma}_1 \\ \boldsymbol{\gamma}_0 \end{bmatrix}, \qquad N_{\partial,2} = \begin{bmatrix} \boldsymbol{\gamma}_0 \\ -\boldsymbol{\gamma}_1 \end{bmatrix}. \tag{7.62}$$

The Hamiltonian is given by

$$H = \frac{1}{2} \int_\Omega \left\{ \rho A \, e_w^2 + (EI)^{-1} \, e_\kappa^2 \right\} \, d\Omega. \tag{7.63}$$

Applying twice the integration by parts formula, one obtains the power balance

$$\begin{aligned} \dot{H} &= \langle e_w, \rho A \, \partial_t e_w \rangle_{L^2(\Omega)} + \left\langle e_\kappa, (EI)^{-1} \, \partial_t e_\kappa \right\rangle_{L^2(\Omega)}, \\ &= \langle e_w, -\partial_{xx} e_\kappa \rangle_{L^2(\Omega)} + \langle e_\kappa, \partial_{xx} e_w \rangle_{L^2(\Omega)}, \\ &= \langle \boldsymbol{\gamma}_1 e_w, \boldsymbol{\gamma}_0 e_\kappa \rangle_{\mathbb{R}^2} + \langle \boldsymbol{\gamma}_0 e_w, -\boldsymbol{\gamma}_1 e_\kappa \rangle_{\mathbb{R}^2}, \\ &= \langle \boldsymbol{y}_\partial, \boldsymbol{u}_\partial \rangle_{\mathbb{R}^4}. \end{aligned} \tag{7.64}$$

Given the test functions v_w, v_κ, the weak form is readily obtained as

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= \langle v_w, -\partial_{xx} e_\kappa \rangle_{L^2(\Omega)}, \\ \left\langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \right\rangle_{L^2(\Omega)} &= \langle v_\kappa, \partial_{xx} e_w \rangle_{L^2(\Omega)}. \end{aligned} \tag{7.65}$$

If the integration by parts is applied twice to the first line of Eq. (7.60a), it is obtained

$$\begin{aligned} \langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} &= -\langle \partial_{xx} v_w, e_\kappa \rangle_{L^2(\Omega)} + \langle \boldsymbol{\gamma}_1 v_w, (u_{\partial,1}, u_{\partial,2}) \rangle_{\mathbb{R}^2} + \langle \boldsymbol{\gamma}_0 v_w, (u_{\partial,3}, u_{\partial,4}) \rangle_{\mathbb{R}^2}, \\ \left\langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \right\rangle_{L^2(\Omega)} &= \langle v_\kappa, \partial_{xx} e_w \rangle_{L^2(\Omega)}. \end{aligned}$$

$$\tag{7.66}$$

Introducing a Galerkin discretization for test and efforts functions

$$v_w = \sum_{i=1}^{n_w} \phi_w^i v_w^i, \qquad e_w = \sum_{i=1}^{n_w} \phi_w^i e_w^i(t), \qquad v_\kappa = \sum_{i=1}^{n_\kappa} \phi_\kappa^i v_\kappa^i, \qquad e_\kappa = \sum_{i=1}^{n_\kappa} \phi_\kappa^i e_\kappa^i(t), \qquad (7.67)$$

and considering that $\boldsymbol{u}_\partial \in \mathbb{R}^4, \boldsymbol{y}_\partial \in \mathbb{R}^4$, the following is obtained

$$\begin{bmatrix} \mathbf{M}_{\rho A} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{EI^{-1}} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \end{pmatrix} = \begin{bmatrix} \mathbf{0} & -\mathbf{D}_{\partial_{xx}}^\top \\ \mathbf{D}_{\partial_{xx}} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix} + \begin{bmatrix} \mathbf{B}_w \\ \mathbf{0} \end{bmatrix} \mathbf{u}_\partial,$$

$$\mathbf{y}_\partial = \begin{bmatrix} \mathbf{B}_w^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix}. \tag{7.68}$$

The matrices $\mathbf{M}_{\rho A}$, $\mathbf{M}_{EI^{-1}}$, $\mathbf{D}_{\partial_{xx}}$ are defined as ($i, j \in \{1, n_w\}$, $m, n \in \{1, n_\kappa\}$)

$$M_{\rho A}^{ij} = \left\langle \phi_w^i, \rho A \phi_w^j \right\rangle_{L^2(\Omega)}, \quad M_{EI^{-1}}^{mn} = \left\langle \phi_\kappa^m, (EI)^{-1} \phi_\kappa^n \right\rangle_{L^2(\Omega)}, \quad D_{\partial_{xx}}^{mi} = \left\langle \phi_\kappa^m, \partial_{xx} \phi_w^i \right\rangle_{L^2(\Omega)}. \tag{7.69}$$

The $\mathbf{B}_w$ is composed of four column vectors $\mathbf{B}_w = [\mathbf{b}_w^1 \ \mathbf{b}_w^2 \ \mathbf{b}_w^3 \ \mathbf{b}_w^4]$

$$b_w^{1,i} = -\partial_x \phi_w^i(0), \qquad b_w^{2,i} = \partial_x \phi_w^i(L), \qquad b_w^{3,i} = -\phi_w^i(0), \qquad b_w^{4,i} = \phi_w^i(L), \qquad i \in \{1, n_w\}. \tag{7.70}$$

Control through linear and angular velocities   Equivalently, the second line of Eq. (7.60a) could have been integrated by parts to control trough the linear and angular velocities at the extremities. Consider the system with known forces and torques at the extremities

$$\begin{bmatrix} \rho A & 0 \\ 0 & (EI)^{-1} \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\partial_{xx} \\ \partial_{xx} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \qquad \begin{aligned} e_w &\in H^2(\Omega), \\ e_\kappa &\in H^2(\Omega), \end{aligned} \qquad (7.71a)$$

$$\boldsymbol{u}_\partial = \begin{bmatrix} \gamma_1 & 0 \\ \gamma_0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \qquad \boldsymbol{u}_\partial \in \mathbb{R}^4, \qquad (7.71b)$$

$$\boldsymbol{y}_\partial = \begin{bmatrix} 0 & \gamma_0 \\ 0 & -\gamma_1 \end{bmatrix} \begin{pmatrix} e_w \\ e_\kappa \end{pmatrix}, \qquad \boldsymbol{y}_\partial \in \mathbb{R}^4. \qquad (7.71c)$$

Once the system is put into weak form and the second line of Eq. (7.71a) is integrated twice, it is computed

$$\langle v_w, \rho A \partial_t e_w \rangle_{L^2(\Omega)} = \langle v_w, -\partial_{xx} e_\kappa \rangle_{L^2(\Omega)},$$

$$\left\langle v_\kappa, (EI)^{-1} \partial_t e_\kappa \right\rangle_{L^2(\Omega)} = \langle \partial_{xx} v_\kappa, e_w \rangle_{L^2(\Omega)} + \langle \gamma_0 v_\kappa, (u_{\partial,1}, u_{\partial,2}) \rangle_{\mathbb{R}^2} + \langle -\gamma_1 v_\kappa, (u_{\partial,3}, u_{\partial,4}) \rangle_{\mathbb{R}^2}. \tag{7.72}$$

Replacing a Galerkin approximation, it is obtained

$$
\begin{bmatrix} \mathbf{M}_{\rho A} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{EI^{-1}} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\kappa \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{D}_{-\partial_{xx}} \\ -\mathbf{D}_{-\partial_{xx}}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix} + \begin{bmatrix} \mathbf{0} \\ \mathbf{B}_\kappa \end{bmatrix} \mathbf{u}_\partial,
$$

$$
\mathbf{y}_\partial = \begin{bmatrix} \mathbf{0} & \mathbf{B}_\kappa^\top \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\kappa \end{pmatrix}.
$$

(7.73)

The matrice $\mathbf{D}_{-\partial_{xx}}$ is defined as $(i, \in \{1, n_w\}, \ m \in \{1, n_\kappa\})$

$$
D_{-\partial_{xx}}^{im} = \left\langle \phi_w^i, -\partial_{xx} \phi_\kappa^m \right\rangle_{L^2(\Omega)}.
$$

(7.74)

The $\mathbf{B}_\kappa$ is composed of four column vectors $\mathbf{B}_\kappa = [\mathbf{b}_\kappa^1 \ \mathbf{b}_\kappa^2 \ \mathbf{b}_\kappa^3 \ \mathbf{b}_\kappa^4]$

$$
b_\kappa^{1,m} = -\phi_\kappa^m(0), \quad b_\kappa^{2,m} = \phi_\kappa^m(L), \quad b_\kappa^{3,m} = \partial_x \phi_\kappa^m(0), \quad b_\kappa^{4,m} = -\partial_x \phi_\kappa^m(L), \quad m \in \{1, n_\kappa\}.
$$

(7.75)

Both discretization require the use of Hermite polynomials to meet the regularity requirement. Indeed, to lower the regularity requirement for the finite elements employed in the discretization, both lines can be integrated by parts. This will be discussed in Chap. 8.

7.1.3.2 Kirchhoff plate

The link beetween the energy and co-energy variables for the isotropic Kirchhoff model is the following (5.33)

$$
\alpha_w = \rho h e_w, \qquad \boldsymbol{A}_\kappa = \boldsymbol{\mathcal{C}}_b \boldsymbol{E}_\kappa, \qquad \text{where} \qquad \boldsymbol{\mathcal{C}}_b := \boldsymbol{\mathcal{D}}_b^{-1}
$$

(7.76)

where ρ is the mass density, h the plate thickness and $\boldsymbol{\mathcal{D}}_b$, the bending rigidity tensor, cf. Eq. (5.11). The bending compliance is given by

$$
\boldsymbol{\mathcal{C}}_b = \frac{12}{Eh^3}[(1+\nu)(\cdot) - \nu \operatorname{Tr}(\cdot)\boldsymbol{I}_{2\times 2}].
$$

(7.77)

Given an open connected set $\Omega \subset \mathbb{R}^2$, the Kirchhoff plate model (5.42) in co-energy form controlled by forces and momenta is then expressed as

$$
\begin{bmatrix} \rho h & 0 \\ 0 & \boldsymbol{\mathcal{C}}_b \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix} = \begin{bmatrix} 0 & -\operatorname{div}\operatorname{Div} \\ \operatorname{Hess} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix}, \qquad \begin{aligned} e_w &\in H^2(\Omega), \\ \boldsymbol{E}_\kappa &\in H^{\operatorname{div}\operatorname{Div}}(\Omega, \mathbb{R}^{2\times 2}_{\text{sym}}), \end{aligned}
$$

(7.78a)

$$
\boldsymbol{u}_\partial = \begin{bmatrix} 0 & \gamma_{nn,1} \\ 0 & \gamma_{nn} \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix}, \qquad \boldsymbol{u}_\partial \in \mathbb{R}^2,
$$

(7.78b)

$$
\boldsymbol{y}_\partial = \begin{bmatrix} \gamma_0 & 0 \\ \gamma_1 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{E}_\kappa \end{pmatrix}, \qquad \boldsymbol{y}_\partial \in \mathbb{R}^2,
$$

(7.78c)

1196   We recall the expressions of the trace maps

$$\gamma_0 a = a|_{\partial\Omega}, \qquad \gamma_{nn,1}\boldsymbol{A} = -\boldsymbol{n}\cdot\mathrm{Div}\,\boldsymbol{A} - \partial_s(\boldsymbol{A}:(\boldsymbol{n}\otimes\boldsymbol{s}))|_{\partial\Omega},$$
$$\gamma_1 a = \partial_{\boldsymbol{n}}a|_{\partial\Omega}, \qquad \gamma_{nn}\boldsymbol{A} = \boldsymbol{A}:(\boldsymbol{n}\otimes\boldsymbol{n})|_{\partial\Omega}. \tag{7.79}$$

1197   The Hilbert spaces here considered are $X_1 = L^2(\Omega)$, $X_2 = L^2(\Omega,\mathbb{R}^{2\times2}_{\mathrm{sym}})$. The operators
1198 $\mathcal{L}$, $N_{\partial,1}$, $N_{\partial,2}$ are

$$\mathcal{L} = \mathrm{Hess}, \qquad N_{\partial,1} = \begin{bmatrix}\gamma_0\\\gamma_1\end{bmatrix}, \qquad N_{\partial,2} = \begin{bmatrix}\gamma_{nn,1}\\\gamma_{nn}\end{bmatrix}. \tag{7.80}$$

1199   The energy rate from Eq. (5.39) equals $\dot{H} = \langle\boldsymbol{y}_\partial,\,\boldsymbol{u}_\partial\rangle_{L^2(\partial\Omega,\mathbb{R}^2)}$. Introducing the test
1200   functions $(v_w,\,\boldsymbol{V}_\kappa)$ and integrating by parts twice the first line of (7.78a) one gets

$$\langle v_w, \rho h\partial_t e_w\rangle_{L^2(\Omega)} = -\langle\mathrm{Hess}\,v_w, \boldsymbol{E}_\kappa\rangle_{L^2(\Omega,\mathbb{R}^{2\times2}_{\mathrm{sym}})} + \langle\gamma_0 v_w, u_{\partial,1}\rangle_{L^2(\partial\Omega)} + \langle\gamma_1 v_w, u_{\partial,2}\rangle_{L^2(\partial\Omega)},$$
$$\langle\boldsymbol{V}_\kappa, \boldsymbol{\mathcal{C}_b}\partial_t\boldsymbol{V}_\kappa\rangle_{L^2(\Omega,\mathbb{R}^{2\times2}_{\mathrm{sym}})} = \langle\boldsymbol{V}_\kappa, \mathrm{Hess}\,e_w\rangle_{L^2(\Omega,\mathbb{R}^{2\times2}_{\mathrm{sym}})}. \tag{7.81}$$

1201   Introducing a Galerkin discretization for test and efforts functions

$$v_w = \sum_{i=1}^{n_w}\phi_w^i v_w^i, \qquad \boldsymbol{V}_\kappa = \sum_{i=1}^{n_\kappa}\boldsymbol{\Phi}_\kappa^i v_\kappa^i, \qquad \boldsymbol{v}_\partial = \sum_{i=1}^{n_\partial}\phi_\partial^i v_\partial^i,$$
$$\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad\qquad \boldsymbol{y}_\partial = \sum_{i=1}^{n_\partial}\phi_\partial^i y_\partial^i. \tag{7.82}$$
$$e_w = \sum_{i=1}^{n_w}\phi_w^i e_w^i, \qquad \boldsymbol{E}_\kappa = \sum_{i=1}^{n_\kappa}\boldsymbol{\Phi}_\kappa^i e_\kappa^i \qquad \boldsymbol{u}_\partial = \sum_{i=1}^{n_\partial}\phi_\partial^i u_\partial^i,$$

1202   the following finite dimensional system is obtained

$$\begin{bmatrix}\mathbf{M}_{\rho h} & \mathbf{0}\\\mathbf{0} & \mathbf{M}_{\mathcal{C}_b}\end{bmatrix}\begin{pmatrix}\dot{\mathbf{e}}_w\\\dot{\mathbf{e}}_\kappa\end{pmatrix} = \begin{bmatrix}\mathbf{0} & -\mathbf{D}_{\mathrm{Hess}}^\top\\\mathbf{D}_{\mathrm{Hess}} & \mathbf{0}\end{bmatrix}\begin{pmatrix}\mathbf{e}_w\\\mathbf{e}_\kappa\end{pmatrix} + \begin{bmatrix}\mathbf{B}_w & \mathbf{B}_{\partial_{\boldsymbol{n}}w}\\\mathbf{0} & \mathbf{0}\end{bmatrix}\mathbf{u}_\partial,$$
$$\mathbf{M}_\partial\mathbf{y}_\partial = \begin{bmatrix}\mathbf{B}_w^\top & \mathbf{0}\\\mathbf{B}_{\partial_{\boldsymbol{n}}w}^\top & \mathbf{0}\end{bmatrix}\begin{pmatrix}\mathbf{e}_w\\\mathbf{e}_\kappa\end{pmatrix}. \tag{7.83}$$

1203   The matrices $\mathbf{M}_{\rho h}$, $\mathbf{M}_{\mathcal{C}_b}$, $\mathbf{D}_{\mathrm{Hess}}$ are defined as ($i,j \in \{1,n_w\}$, $m,n \in \{1,n_\kappa\}$)

$$M_{\rho h}^{ij} = \left\langle\phi_w^i, \rho h\phi_w^j\right\rangle_{L^2(\Omega)}, \quad M_{\mathcal{C}_b}^{mn} = \langle\boldsymbol{\Phi}_\kappa^m, \boldsymbol{\mathcal{C}}_b\boldsymbol{\Phi}_\kappa^n\rangle_{L^2(\Omega,\mathbb{R}^{2\times2}_{\mathrm{sym}})}, \quad D_{\mathrm{Hess}}^{mi} = \left\langle\boldsymbol{\Phi}_\kappa^m, \mathrm{Hess}\,\phi_w^i\right\rangle_{L^2(\Omega)}. \tag{7.84}$$

1204   Matrices $\mathbf{B}_w$, $\mathbf{B}_{\partial_{\boldsymbol{n}}w}$ are given by

$$B_w^{il} = \left\langle\gamma_0\phi_w^i, \phi_{\partial,1}^l\right\rangle_{L^2(\partial\Omega)}, \qquad B_{\partial_{\boldsymbol{n}}w}^{il} = \left\langle\gamma_1\phi_w^i, \phi_{\partial,2}^l\right\rangle_{L^2(\partial\Omega)}, \qquad l \in \{1,n_\partial\}. \tag{7.85}$$

1205   This kind of discretization requires H^2 conforming element. The construction of those is
1206   rather involved [AFS68, Bel69] and they are computationally expensive. Nevertheless, this
1207   kind of discretization is able to handle generic boundary conditions [GSV18]. For this reason,
1208   it is the most adapted for the pH framework.

1209

1210   To lower the regularity requirement for the finite elements many non conforming dis-
1211 cretization have been proposed. The most employed is the Hellan-Herrmann-Johnson element
1212 [AB85, BR90]. However, this method does not handle generic non homogeneous boundary
1213 conditions. Given the unavailability of the boundary for interconnections, the modularity
1214 feature of pHs cannot be fully exploited.

1215

1216   Equivalently, the second line of Eq. (7.78a) can be integrated by parts twice to obtain
1217 a discretized system whose input are the linear velocity and the angular velocity at the
1218 boundary. However, while for the H^2 space conforming finite elements are available, for the
1219 $H^{\mathrm{div\,Div}}$ no conforming finite elements have been proposed. This makes the discretization
1220 unfeasible.

1221 ### 7.1.3.3   Mindlin plate

1222 Using Eqs. (5.22) and (5.24), the relation between co-energy and energy variables for the
1223 isotropic Mindlin plate is found to be

$$
\begin{aligned}
\alpha_w &= \rho h e_w, & \boldsymbol{\alpha}_\theta &= I_\theta \boldsymbol{e}_\theta, & I_\theta &:= \rho h^3/12, \\
\boldsymbol{A}_\kappa &= \boldsymbol{\mathcal{C}}_b \boldsymbol{E}_\kappa, & \boldsymbol{\alpha}_\gamma &= C_s \boldsymbol{e}_\gamma, & C_s &:= 1/(kGh),
\end{aligned}
\tag{7.86}
$$

1224 where k is the shear correction factor, G the shear modulus. The other variables have the
1225 same meaning as in Sec. §7.1.3.2.

1226 **Control through forces and torques**   A pH representation in co-energy variables with
1227 known forces and momenta at the boundary is given by the system

$$
\begin{bmatrix} \rho h & 0 & 0 & 0 \\ \mathbf{0} & I_\theta & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathcal{C}_b & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & C_s \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix} = \begin{bmatrix} 0 & 0 & 0 & \mathrm{div} \\ \mathbf{0} & \mathbf{0} & \mathrm{Div} & \boldsymbol{I}_{2\times 2} \\ \mathbf{0} & \mathrm{Grad} & \mathbf{0} & \mathbf{0} \\ \mathrm{grad} & -\boldsymbol{I}_{2\times 2} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix}, \quad \begin{aligned} & e_w \in H^1(\Omega), \\ & \boldsymbol{e}_\theta \in H^{\mathrm{Grad}}(\Omega, \mathbb{R}^2), \\ & \boldsymbol{E}_\kappa \in H^{\mathrm{Div}}(\Omega, \mathbb{R}^{2\times 2}_{\mathrm{sym}}), \\ & \boldsymbol{e}_\gamma \in H^{\mathrm{div}}(\Omega, \mathbb{R}^2), \end{aligned}
$$
$$(7.87\mathrm{a})$$

$$
\boldsymbol{u}_\partial = \begin{bmatrix} 0 & 0 & 0 & \gamma_n \\ 0 & 0 & \gamma_{nn} & 0 \\ 0 & 0 & \gamma_{ns} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix}, \qquad \boldsymbol{u}_\partial \in \mathbb{R}^3, \tag{7.87b}
$$

$$
\boldsymbol{y}_\partial = \begin{bmatrix} \gamma_0 & 0 & 0 & 0 \\ 0 & \gamma_n & 0 & 0 \\ 0 & \gamma_s & 0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ \boldsymbol{e}_\theta \\ \boldsymbol{E}_\kappa \\ \boldsymbol{e}_\gamma \end{pmatrix}, \qquad \boldsymbol{y}_\partial \in \mathbb{R}^3. \tag{7.87c}
$$

The trace operators are defined as

$$
\gamma_0 a = a|_{\partial\Omega}, \qquad \begin{aligned} \gamma_n \boldsymbol{a} &= \boldsymbol{a} \cdot \boldsymbol{n}|_{\partial\Omega}, & \gamma_{nn}\boldsymbol{A} &= \boldsymbol{A} : (\boldsymbol{n} \otimes \boldsymbol{n})|_{\partial\Omega}, \\ \gamma_s \boldsymbol{a} &= \boldsymbol{a} \cdot \boldsymbol{s}|_{\partial\Omega}, & \gamma_{ns}\boldsymbol{A} &= \boldsymbol{A} : (\boldsymbol{n} \otimes \boldsymbol{s})|_{\partial\Omega}. \end{aligned} \tag{7.88}
$$

For this example, the Hilbert spaces under consideration are $X_1 = L^2(\Omega) \times L^2(\Omega, \mathbb{R}^2)$, $X_2 = L^2(\Omega, \mathbb{R}^{2\times 2}_{\mathrm{sym}}) \times L^2(\Omega, \mathbb{R}^2)$. The $\boldsymbol{L}$, $\mathcal{L}$, $\mathcal{N}_{\partial,1}$, $\mathcal{N}_{\partial,1}$ operators are

$$
\boldsymbol{L} = \begin{bmatrix} \mathbf{0} & \mathbf{0} \\ \mathbf{0} & -\boldsymbol{I}_{2\times 2} \end{bmatrix}, \qquad \mathcal{L} = \begin{bmatrix} \mathbf{0} & \mathrm{Grad} \\ \mathrm{grad} & \mathbf{0} \end{bmatrix}, \qquad \mathcal{N}_{\partial,1} = \begin{bmatrix} \gamma_0 & 0 \\ 0 & \gamma_n \\ 0 & \gamma_s \end{bmatrix}, \qquad \mathcal{N}_{\partial,2} = \begin{bmatrix} 0 & \gamma_n \\ \gamma_{nn} & 0 \\ \gamma_{ns} & 0 \end{bmatrix}. \tag{7.89}
$$

The energy rate is retrieved from Eq. (5.26) $\dot{H} = \langle \boldsymbol{y}_\partial, \boldsymbol{u}_\partial \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$. Introducing the test functions $(v_w, \boldsymbol{v}_\theta, \boldsymbol{V}_\kappa, \boldsymbol{v}_\gamma)$ and integrating by parts the first two lines of (7.87a) one gets

$$
\begin{aligned}
\langle v_w, \rho h \partial_t e_w \rangle_{L^2(\Omega)} &= -\langle \mathrm{grad}\, v_w, \boldsymbol{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \gamma_0 v_w, u_{\partial,1} \rangle_{L^2(\partial\Omega)}, \\
\langle \boldsymbol{v}_\theta, I_\theta \partial_t \boldsymbol{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} &= -\langle \mathrm{Grad}\, \boldsymbol{v}_\theta, \boldsymbol{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}^{2\times 2}_{\mathrm{sym}})} + \langle \boldsymbol{v}_\theta, \boldsymbol{e}_\gamma \rangle_{L^2(\Omega)} + \langle \gamma_0 \boldsymbol{v}_\theta, \gamma_n \boldsymbol{E}_\kappa \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}, \\
\langle \boldsymbol{V}_\kappa, \mathcal{C}_b \partial_t \boldsymbol{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}^{2\times 2}_{\mathrm{sym}})} &= \langle \boldsymbol{V}_\kappa, \mathrm{Grad}\, \boldsymbol{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^{2\times 2}_{\mathrm{sym}})}, \\
\langle \boldsymbol{v}_\gamma, C_s \partial_t \boldsymbol{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)} &= \langle \boldsymbol{v}_\gamma, \mathrm{grad}\, e_w \rangle_{L^2(\Omega, \mathbb{R}^2)} - \langle \boldsymbol{v}_\gamma, \boldsymbol{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)}.
\end{aligned}
\tag{7.90}
$$

The term $\langle \boldsymbol{\gamma}_0 \boldsymbol{v}_\theta, \boldsymbol{u}_{\partial,2} \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$ can be decomposed in its tangential and normal components

$$
\langle \boldsymbol{\gamma}_0 \boldsymbol{v}_\theta, \boldsymbol{\gamma}_n \boldsymbol{E}_\kappa \rangle_{L^2(\partial\Omega, \mathbb{R}^2)} = \langle \gamma_n \boldsymbol{v}_\theta, u_{\partial,2} \rangle_{L^2(\partial\Omega)} + \langle \gamma_s \boldsymbol{v}_\theta, u_{\partial,3} \rangle_{L^2(\partial\Omega)} \tag{7.91}
$$

1234 Introducing a Galerkin discretization for test and efforts functions

$$
v_w = \sum_{i=1}^{n_w} \phi_w^i v_w^i, \qquad \boldsymbol{v}_\theta = \sum_{i=1}^{n_\theta} \boldsymbol{\phi}_\theta^i v_\theta^i, \qquad \boldsymbol{V}_\kappa = \sum_{i=1}^{n_\kappa} \boldsymbol{\Phi}_\kappa^i v_\kappa^i, \qquad \boldsymbol{v}_\gamma = \sum_{i=1}^{n_\gamma} \boldsymbol{\phi}_\gamma^i v_\gamma^i, \qquad \boldsymbol{v}_\partial = \sum_{i=1}^{n_\partial} \boldsymbol{\phi}_\partial^i v_\partial^i,
$$

$$
e_w = \sum_{i=1}^{n_w} \phi_w^i e_w^i, \qquad \boldsymbol{e}_\theta = \sum_{i=1}^{n_\theta} \boldsymbol{\phi}_\theta^i e_\theta^i, \qquad \boldsymbol{E}_\kappa = \sum_{i=1}^{n_\kappa} \boldsymbol{\Phi}_\kappa^i e_\kappa^i, \qquad \boldsymbol{e}_\gamma = \sum_{i=1}^{n_\gamma} \boldsymbol{\phi}_\gamma^i e_\gamma^i, \qquad \boldsymbol{u}_\partial = \sum_{i=1}^{n_\partial} \boldsymbol{\phi}_\partial^i u_\partial^i,
$$

$$
\boldsymbol{y}_\partial = \sum_{i=1}^{n_\partial} \boldsymbol{\phi}_\partial^i y_\partial^i. \tag{7.92}
$$

1235 the following finite dimensional system is obtained

$$
\mathrm{Diag}\begin{bmatrix} \mathbf{M}_{\rho h} \\ \mathbf{M}_{I_\theta} \\ \mathbf{M}_{\mathcal{C}_b} \\ \mathbf{M}_{C_s} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\theta \\ \dot{\mathbf{e}}_\kappa \\ \dot{\mathbf{e}}_\gamma \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & -\mathbf{D}_{\mathrm{grad}}^\top \\ \mathbf{0} & \mathbf{0} & -\mathbf{D}_{\mathrm{Grad}}^\top & -\mathbf{D}_0^\top \\ \mathbf{0} & \mathbf{D}_{\mathrm{Grad}} & \mathbf{0} & \mathbf{0} \\ \mathbf{D}_{\mathrm{grad}} & \mathbf{D}_0 & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix} + \begin{bmatrix} \mathbf{B}_w & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\theta_n} & \mathbf{B}_{\theta_s} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{u}_\partial,
$$

$$
\mathbf{M}_\partial \mathbf{y}_\partial = \begin{bmatrix} \mathbf{B}_w^\top & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{\theta_n}^\top & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{B}_{\theta_s}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}.
$$

$$\tag{7.93}$$

1236 The notation Diag denotes a block diagonal matrix. The mass matrices $\mathbf{M}_{\rho h}$, $\mathbf{M}_{I_\theta}$, $\mathbf{M}_{\mathcal{C}_b}$, $\mathbf{M}_{C_s}$
1237 are computed as

$$
\begin{aligned}
M_{\rho h}^{ij} &= \left\langle \phi_w^i, \, \rho h \phi_w^j \right\rangle_{L^2(\Omega)}, & M_{\mathcal{C}_b}^{pq} &= \left\langle \boldsymbol{\Phi}_\kappa^p, \, \mathcal{C}_b \boldsymbol{\Phi}_\kappa^q \right\rangle_{L^2(\Omega, \mathbb{R}_{\mathrm{sym}}^{2\times2})}, \\
M_{I_\theta}^{mn} &= \left\langle \phi_\kappa^m, \, I_\theta \phi_\kappa^n \right\rangle_{L^2(\Omega, \mathbb{R}^2)}, & M_{C_s}^{rs} &= \left\langle \phi_\gamma^r, \, C_s \phi_\gamma^s \right\rangle_{L^2(\Omega, \mathbb{R}^2)},
\end{aligned} \tag{7.94}
$$

1238 where $i, j \in \{1, n_w\}$, $m, n \in \{1, n_\theta\}$, $p, q \in \{1, n_\kappa\}$, $r, s \in \{1, n_\gamma\}$. Matrices $\mathbf{D}_{\mathrm{grad}}$, $\mathbf{D}_{\mathrm{Grad}}$, $\mathbf{D}_0$
1239 assume the form

$$
\begin{aligned}
D_{\mathrm{grad}}^{rj} &= \left\langle \boldsymbol{\phi}_\gamma^r, \, \mathrm{grad}\, \phi_w^j \right\rangle_{L^2(\Omega, \mathbb{R}^2)}, \\
D_{\mathrm{Grad}}^{pn} &= \left\langle \boldsymbol{\Phi}_\kappa^p, \, \mathrm{Grad}\, \boldsymbol{\phi}_\theta^n \right\rangle_{L^2(\Omega, \mathbb{R}_{\mathrm{sym}}^{2\times2})},
\end{aligned} \qquad D_0^{rn} = -\left\langle \boldsymbol{\phi}_\gamma^r, \, \boldsymbol{\phi}_\theta^n \right\rangle_{L^2(\Omega, \mathbb{R}^2)}. \tag{7.95}
$$

1240 Matrix $\mathbf{B}_w$, $\mathbf{B}_{\theta_n}$, $\mathbf{B}_{\theta_s}$ are computed as ($l \in \{1, n_\partial\}$)

$$
B_w^{il} = \left\langle \gamma_0 \phi_w^i, \, \phi_{\partial,1}^l \right\rangle_{L^2(\partial\Omega)}, \qquad B_{\theta_n}^{ml} = \left\langle \gamma_n \boldsymbol{\phi}_\theta^m, \, \phi_{\partial,2}^l \right\rangle_{L^2(\partial\Omega)}, \qquad B_{\theta_s}^{ml} = \left\langle \gamma_s \boldsymbol{\phi}_\theta^m, \, \phi_{\partial,3}^l \right\rangle_{L^2(\partial\Omega)}. \tag{7.96}
$$

Control through linear and angular velocities If instead the opposite causality is considered, the continuous system read

$$
\begin{bmatrix} \rho h & 0 & 0 & 0 \\ \mathbf{0} & I_\theta & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathcal{C}_b & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & C_s \end{bmatrix} \frac{\partial}{\partial t} \begin{pmatrix} e \\ e_\theta \\ E_\kappa \\ e_\gamma \end{pmatrix} = \begin{bmatrix} 0 & 0 & 0 & \mathrm{div} \\ \mathbf{0} & \mathbf{0} & \mathrm{Div} & I_{2\times 2} \\ \mathbf{0} & \mathrm{Grad} & \mathbf{0} & \mathbf{0} \\ \mathrm{grad} & -I_{2\times 2} & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} e_w \\ e_\theta \\ E_\kappa \\ e_\gamma \end{pmatrix},
\tag{7.97a}
$$

$$
\boldsymbol{u}_\partial = \begin{bmatrix} \gamma_0 & 0 & 0 & 0 \\ 0 & \gamma_n & 0 & 0 \\ 0 & \gamma_s & 0 & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\theta \\ E_\kappa \\ e_\gamma \end{pmatrix}, \qquad \boldsymbol{u}_\partial \in \mathbb{R}^3,
\tag{7.97b}
$$

$$
\boldsymbol{y}_\partial = \begin{bmatrix} 0 & 0 & 0 & \gamma_n \\ 0 & 0 & \gamma_{nn} & 0 \\ 0 & 0 & \gamma_{ns} & 0 \end{bmatrix} \begin{pmatrix} e_w \\ e_\theta \\ E_\kappa \\ e_\gamma \end{pmatrix}, \qquad \boldsymbol{y}_\partial \in \mathbb{R}^3.
\tag{7.97c}
$$

integrating by parts the last two lines of (7.97a) one gets

$$
\begin{aligned}
\langle v_w, \rho h \partial_t e_w \rangle_{L^2(\Omega)} &= \langle v_w, \mathrm{div}\, \boldsymbol{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)}, \\
\langle \boldsymbol{v}_\theta, I_\theta \partial_t \boldsymbol{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} &= \langle \boldsymbol{v}_\theta, \mathrm{Div}\, \boldsymbol{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \boldsymbol{v}_\theta, \boldsymbol{e}_\gamma \rangle_{L^2(\Omega)}, \\
\langle \boldsymbol{V}_\kappa, \mathcal{C}_b \partial_t \boldsymbol{E}_\kappa \rangle_{L^2(\Omega, \mathbb{R}^{2\times 2}_{\mathrm{sym}})} &= -\langle \mathrm{Div}\, \boldsymbol{V}_\kappa, \boldsymbol{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \boldsymbol{\gamma}_n \boldsymbol{V}_\kappa, \gamma_0 \boldsymbol{e}_\theta \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}, \\
\langle \boldsymbol{v}_\gamma, C_s \partial_t \boldsymbol{e}_\gamma \rangle_{L^2(\Omega, \mathbb{R}^2)} &= -\langle \mathrm{div}\, \boldsymbol{v}_\gamma, e_w \rangle_{L^2(\Omega)} - \langle \boldsymbol{v}_\gamma, \boldsymbol{e}_\theta \rangle_{L^2(\Omega, \mathbb{R}^2)} + \langle \gamma_0 v_w, u_{\partial,1} \rangle_{L^2(\partial\Omega)}.
\end{aligned}
\tag{7.98}
$$

The term $\langle \boldsymbol{\gamma}_n \boldsymbol{V}_\kappa, \gamma_0 \boldsymbol{e}_\theta \rangle_{L^2(\partial\Omega, \mathbb{R}^2)}$ can be decomposed in its tangential and normal components

$$
\langle \boldsymbol{\gamma}_n \boldsymbol{V}_\kappa, \gamma_0 \boldsymbol{e}_\theta \rangle_{L^2(\partial\Omega, \mathbb{R}^2)} = \langle \gamma_{nn} \boldsymbol{V}_\kappa, u_{\partial,2} \rangle_{L^2(\partial\Omega)} + \langle \gamma_{ns} \boldsymbol{V}_\kappa, u_{\partial,3} \rangle_{L^2(\partial\Omega)}.
\tag{7.99}
$$

Plugging approximation (7.92) into this system, one computes

$$
\mathrm{Diag} \begin{bmatrix} \mathbf{M}_{\rho h} \\ \mathbf{M}_{I_\theta} \\ \mathbf{M}_{\mathcal{C}_b} \\ \mathbf{M}_{C_s} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_w \\ \dot{\mathbf{e}}_\theta \\ \dot{\mathbf{e}}_\kappa \\ \dot{\mathbf{e}}_\gamma \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{D}_{\mathrm{div}} \\ \mathbf{0} & \mathbf{0} & \mathbf{D}_{\mathrm{Div}} & -\mathbf{D}_0^\top \\ \mathbf{0} & -\mathbf{D}_{\mathrm{Div}}^\top & \mathbf{0} & \mathbf{0} \\ -\mathbf{D}_{\mathrm{div}}^\top & \mathbf{D}_0 & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix} + \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_{M_{nn}} & \mathbf{B}_{M_{ns}} \\ \mathbf{B}_{q_n} & \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{u}_\partial,
$$

$$
\mathbf{M}_\partial \mathbf{y}_\partial = \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{B}_{q_n}^\top \\ \mathbf{0} & \mathbf{0} & \mathbf{B}_{M_{nn}}^\top & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{B}_{M_{ns}}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_w \\ \mathbf{e}_\theta \\ \mathbf{e}_\kappa \\ \mathbf{e}_\gamma \end{pmatrix}.
\tag{7.100}
$$

Matrices $\mathbf{D}_{\mathrm{div}}$, $\mathbf{D}_{\mathrm{Div}}$ assume the form ($i, j \in \{1, n_w\}$, $m, n \in \{1, n_\theta\}$, $p, q \in \{1, n_\kappa\}$, $r, s \in \{1, n_\gamma\}$)

$$
D_{\mathrm{div}}^{is} = \left\langle \phi_w^i, \mathrm{div}\, \boldsymbol{\phi}_\gamma^s \right\rangle_{L^2(\Omega)}, \qquad D_{\mathrm{Div}}^{mq} = \langle \boldsymbol{\phi}_\theta^m, \mathrm{Div}\, \boldsymbol{\Phi}_\kappa^q \rangle_{L^2(\Omega, \mathbb{R}^2)}.
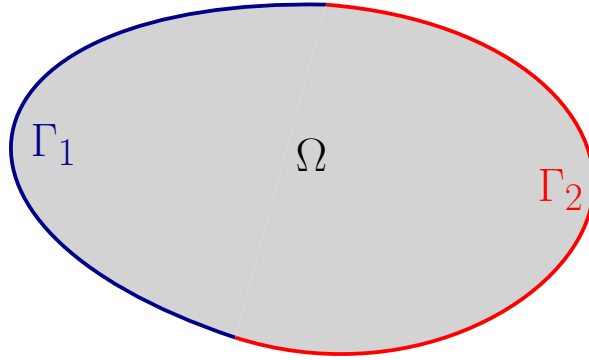\tag{7.101}
$$

Figure 7.1: Partition of boundary into two connected sets.

Matrix $\mathbf{B}_{q_n}$, $\mathbf{B}_{M_{nn}}$, $\mathbf{B}_{M_{ns}}$ are computed as ($l \in \{1, n_\partial\}$)

$$B_{q_n}^{rl} = \left\langle \gamma_n \boldsymbol{\phi}_\gamma^r, \phi_{\partial,1}^l \right\rangle_{L^2(\partial\Omega)}, \quad B_{M_{nn}}^{pl} = \left\langle \gamma_{nn} \boldsymbol{\Phi}_\kappa^p, \phi_{\partial,2}^l \right\rangle_{L^2(\partial\Omega)}, \quad B_{M_{ns}}^{pl} = \left\langle \gamma_{ns} \boldsymbol{\Phi}_\kappa^p, \phi_{\partial,3}^l \right\rangle_{L^2(\partial\Omega)}. \tag{7.102}$$

This finite dimensional system represents a purely mixed discretization of the problem and is really close to the plane elasticity system. Conforming finite elements for the plane elasticity system on simplicial meshes have been constructed in [AW02]. The resulting element is rather cumbersome and computationally expensive as the stress tensor has at least 24 degrees of freedom on a triangle For this reason, many finite element discretization imposes the symmetry of the stress tensor weakly [AFW07]. To actually implement the discretization, in Chap. 8 the Mindlin plate problem is going to be reformulated so that the momenta tensor is only weakly symmetric.

7.2 Mixed boundary conditions

In this section the assumption of uniform boundary condition 2 is removed. This allows considering general non homogeneous boundary conditions. To tackle this, two methodologies are proposed. One introduces Lagrange multipliers to enforce the mixed causality. Finite dimensional differential algebraic port-Hamiltonian systems (pHDAE) have been introduced in [BMXZ18] for linear systems and in [MM19] for non linear systems. This enriched description share all the crucial features of ordinary pHs, but easily account for algebraic constraints, time-dependent transformations and explicit dependence on time in the Hamiltonian. The other method employs a domain decomposition technique to interconnect systems with different causalities.

We will limit the illustration to the linear case. The open connected set $\Omega \subset \mathbb{R}^d$, $d = \{1, 2, 3\}$, with Lipschitz boundary $\partial\Omega$ represent the spatial domain. The boundary is split into two partition $\partial\Omega = \overline{\Gamma}_1 \cup \overline{\Gamma}_2$, $\Gamma_1 \cap \Gamma_2 = \{\emptyset\}$. For ease of presentation, Γ_1, Γ_2 are considered to be connected, cf. Fig. 7.1. Disconnected sets can be handled as well. For scalars

$a_{\partial,*}, b_{\partial,*} \in L^2(\Gamma_*)$ and vectors $\boldsymbol{a}_{\partial,*}, \boldsymbol{b}_{\partial,*} \in L^2(\Gamma_*, \mathbb{R}^m)$ defined on the boundary partition Γ_* the inner product is defined as

$$\langle a_{\partial,*}, b_{\partial,*} \rangle_{L^2(\Gamma_*)} = \int_{\Gamma_*} a_{\partial,*} b_{\partial,*} \, \mathrm{d}\Gamma_*, \qquad \langle \boldsymbol{a}_{\partial,*}, \boldsymbol{b}_{\partial,*} \rangle_{L^2(\Gamma_*, \mathbb{R}^m)} = \int_{\Gamma_*} \boldsymbol{a}_{\partial,*} \cdot \boldsymbol{b}_{\partial,*} \, \mathrm{d}\Gamma_*. \quad (7.103)$$

Consider now the following boundary control linear pH system in co-energy form

$$\begin{bmatrix} \mathcal{M}_1 & 0 \\ 0 & \mathcal{M}_2 \end{bmatrix} \partial_t \begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix} = \begin{bmatrix} 0 & -\boldsymbol{L}^\top - \mathcal{L}^* \\ \boldsymbol{L} + \mathcal{L} & 0 \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix}, \qquad \begin{aligned} \boldsymbol{e}_1 &\in H^{\mathcal{L}}, \\ \boldsymbol{e}_2 &\in H^{-\mathcal{L}^*}. \end{aligned} \quad (7.104\mathrm{a})$$

$$\begin{pmatrix} \boldsymbol{u}_{\partial,1} \\ \boldsymbol{u}_{\partial,2} \end{pmatrix} = \begin{bmatrix} \mathcal{N}_{\partial,1}^{\Gamma_1} & 0 \\ 0 & \mathcal{N}_{\partial,2}^{\Gamma_2} \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix}, \qquad \begin{aligned} \boldsymbol{u}_{\partial,1} &\in \mathbb{R}^m, \\ \boldsymbol{u}_{\partial,2} &\in \mathbb{R}^m, \end{aligned} \quad (7.104\mathrm{b})$$

$$\begin{pmatrix} \boldsymbol{y}_{\partial,1} \\ \boldsymbol{y}_{\partial,2} \end{pmatrix} = \begin{bmatrix} 0 & \mathcal{N}_{\partial,2}^{\Gamma_1} \\ \mathcal{N}_{\partial,1}^{\Gamma_2} & 0 \end{bmatrix} \begin{pmatrix} \boldsymbol{e}_1 \\ \boldsymbol{e}_2 \end{pmatrix}, \qquad \begin{aligned} \boldsymbol{y}_{\partial,1} &\in \mathbb{R}^m, \\ \boldsymbol{y}_{\partial,2} &\in \mathbb{R}^m. \end{aligned} \quad (7.104\mathrm{c})$$

The operator $\mathcal{N}_{\partial,*}^{\Gamma_\circ}$ with $*, \circ \in \{1, 2\}$ represent the restriction of operator $\mathcal{N}_{\partial,*}$, defined in Eq. (7.9), over the subset $\Gamma_\circ$. The boundary inputs and output are now vectors $\mathbb{R}^{2m}$. This does not mean that the boundary conditions have been doubled, but only that the components of $\boldsymbol{u}_\partial, \boldsymbol{y}_\partial$ are only defined on the subsets Γ_1, Γ_2 of the overall boundary. Given the additive property of the integral, it is possible to write

$$\begin{aligned} \langle \mathcal{N}_{\partial,1} \boldsymbol{e}_1, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)} &= \left\langle \mathcal{N}_{\partial,1}^{\Gamma_1} \boldsymbol{e}_1, \mathcal{N}_{\partial,2}^{\Gamma_1} \boldsymbol{e}_2 \right\rangle_{L^2(\Gamma_1)} + \left\langle \mathcal{N}_{\partial,1}^{\Gamma_2} \boldsymbol{e}_1, \mathcal{N}_{\partial,2}^{\Gamma_2} \boldsymbol{e}_2 \right\rangle_{L^2(\Gamma_2)}, \\ &= \langle \boldsymbol{u}_{\partial,1}, \boldsymbol{y}_{\partial,1} \rangle_{L^2(\Gamma_1)} + \langle \boldsymbol{y}_{\partial,2}, \boldsymbol{u}_{\partial,2} \rangle_{L^2(\Gamma_2)}. \end{aligned} \quad (7.105)$$

The continuous power balance is obtained using Eqs. (7.51) and (7.105)

$$\dot{H} = \langle \boldsymbol{u}_{\partial,1}, \boldsymbol{y}_{\partial,1} \rangle_{L^2(\Gamma_1)} + \langle \boldsymbol{y}_{\partial,2}, \boldsymbol{u}_{\partial,2} \rangle_{L^2(\Gamma_2)}. \quad (7.106)$$

7.2.1   Solution using Lagrange multipliers

This solution consists in introducing a Lagrange multiplier for the boundary control that does not arise in the weak form. To illustrate the idea, consider again the weak form 7.52 (obtained by integration by parts of the $-\mathcal{L}^*$ partitioned) of Sys. 7.104

$$\begin{aligned} \langle \boldsymbol{v}_1, \mathcal{M}_1 \partial_t \boldsymbol{e}_1 \rangle_{X_1} &= -\langle \boldsymbol{v}_1, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1} - \langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2} + \langle \mathcal{N}_{\partial,1} \boldsymbol{v}_1, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}, \\ \langle \boldsymbol{v}_2, \mathcal{M}_2 \partial_t \boldsymbol{e}_2 \rangle_{X_2} &= \langle \boldsymbol{v}_2, \boldsymbol{L} \boldsymbol{e}_1 \rangle_{X_2} + \langle \boldsymbol{v}_2, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2}, \end{aligned} \quad (7.107)$$

The term $\langle \mathcal{N}_{\partial,1}\boldsymbol{v}_1, \mathcal{N}_{\partial,2}\boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)}$ can be split into the two boundary contributions, as in Eq. (7.105). The variable $\boldsymbol{y}_{\partial,1}$ plays here the role of a Lagrange multiplier $\boldsymbol{y}_{\partial,1} = \boldsymbol{\lambda}_{\partial,1}$

$$
\begin{aligned}
\langle \mathcal{N}_{\partial,1}\boldsymbol{v}_1, \mathcal{N}_{\partial,2}\boldsymbol{e}_2 \rangle_{L^2(\partial\Omega)} &= \left\langle \mathcal{N}_{\partial,1}^{\Gamma_1}\boldsymbol{v}_1, \mathcal{N}_{\partial,2}^{\Gamma_1}\boldsymbol{e}_2 \right\rangle_{L^2(\Gamma_1)} + \left\langle \mathcal{N}_{\partial,1}^{\Gamma_2}\boldsymbol{v}_1, \mathcal{N}_{\partial,2}^{\Gamma_2}\boldsymbol{e}_2 \right\rangle_{L^2(\Gamma_2)}, \\
&= \left\langle \mathcal{N}_{\partial,1}^{\Gamma_1}\boldsymbol{v}_1, \boldsymbol{y}_{\partial,1} \right\rangle_{L^2(\Gamma_1)} + \left\langle \mathcal{N}_{\partial,1}^{\Gamma_2}\boldsymbol{v}_1, \boldsymbol{u}_{\partial,2} \right\rangle_{L^2(\Gamma_2)}, \\
&= \left\langle \mathcal{N}_{\partial,1}^{\Gamma_1}\boldsymbol{v}_1, \boldsymbol{\lambda}_{\partial,1} \right\rangle_{L^2(\Gamma_1)} + \left\langle \mathcal{N}_{\partial,1}^{\Gamma_2}\boldsymbol{v}_1, \boldsymbol{u}_{\partial,2} \right\rangle_{L^2(\Gamma_2)},
\end{aligned}
\tag{7.108}
$$

If test function $\boldsymbol{v}_{\partial,1},\ \boldsymbol{v}_{\partial,2} \in L^2(\Gamma_1) \times L^2(\Gamma_2)$ are introduced, the input and outputs definitions

$$
\boldsymbol{u}_{\partial,1} = \mathcal{N}_{\partial,1}^{\Gamma_1}\boldsymbol{e}_1, \qquad \boldsymbol{y}_{\partial,1} = \boldsymbol{\lambda}_{\partial,1}, \qquad \boldsymbol{y}_{\partial,2} = \mathcal{N}_{\partial,1}^{\Gamma_2}\boldsymbol{e}_1
\tag{7.109}
$$

can be put into weak form to obtain

$$
\begin{aligned}
\langle \boldsymbol{v}_{\partial,1}, \boldsymbol{u}_{\partial,1} \rangle_{L^2(\Gamma_1)} &= \left\langle \boldsymbol{v}_{\partial,1}, \mathcal{N}_{\partial,1}^{\Gamma_1}\boldsymbol{e}_1 \right\rangle_{L^2(\Gamma_1)}, \\
\langle \boldsymbol{v}_{\partial,1}, \boldsymbol{y}_{\partial,1} \rangle_{L^2(\Gamma_1)} &= \langle \boldsymbol{v}_{\partial,1}, \boldsymbol{\lambda}_{\partial,1} \rangle_{L^2(\Gamma_1)}, \\
\langle \boldsymbol{v}_{\partial,2}, \boldsymbol{y}_{\partial,2} \rangle_{L^2(\Gamma_1)} &= \left\langle \boldsymbol{v}_{\partial,2}, \mathcal{N}_{\partial,1}^{\Gamma_2}\boldsymbol{e}_1 \right\rangle_{L^2(\Gamma_1)},
\end{aligned}
\tag{7.110}
$$

As usual, a Galerkin approximation is introduced

$$
\begin{aligned}
\boldsymbol{v}_1 &\approx \sum_{i=1}^{n_1} \boldsymbol{\phi}_1^i(\boldsymbol{x})v_1^i, & \boldsymbol{e}_1 &\approx \sum_{i=1}^{n_1} \boldsymbol{\phi}_1^i(\boldsymbol{x})e_1^i(t), & \triangle_{\partial,1} &\approx \sum_{i=1}^{n_{\partial,1}} \boldsymbol{\phi}_{\partial,1}^i(\boldsymbol{s}_1)\triangle_{\partial,1}^i, & \boldsymbol{s}_1 &\in \Gamma_1, \\
\boldsymbol{v}_2 &\approx \sum_{i=1}^{n_2} \boldsymbol{\phi}_2^i(\boldsymbol{x})v_2^i, & \boldsymbol{e}_2 &\approx \sum_{i=1}^{n_2} \boldsymbol{\phi}_2^i(\boldsymbol{x})e_2^i(t), & \square_{\partial,2} &\approx \sum_{i=1}^{n_{\partial,2}} \boldsymbol{\phi}_{\partial,2}^i(\boldsymbol{s}_2)\square_\partial^i(t), & \boldsymbol{s}_2 &\in \Gamma_2.
\end{aligned}
\tag{7.111}
$$

where $\triangle$ stays for u, y, λ and $\square$ for u, y. Replacing the approximation 7.111 into Eqs. 7.107, 7.108, 7.110, the following system differential-algebraic system is obtained

$$
\begin{aligned}
&\mathrm{Diag}\begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} \\ \mathbf{M}_{\mathcal{M}_2} \\ \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \\ \dot{\boldsymbol{\lambda}}_{\partial,1} \end{pmatrix} = \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top - \mathbf{D}_{\mathcal{L}}^\top & \mathbf{B}_{1,\Gamma_1} \\ \mathbf{D}_0 + \mathbf{D}_{\mathcal{L}} & \mathbf{0} & \mathbf{0} \\ -\mathbf{B}_{1,\Gamma_1}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,1} \end{pmatrix} + \begin{bmatrix} \mathbf{0} & \mathbf{B}_{1,\Gamma_2} \\ \mathbf{0} & \mathbf{0} \\ \mathbf{M}_{\partial,1} & \mathbf{0} \end{bmatrix} \begin{bmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,2} \end{bmatrix}, \\
&\begin{bmatrix} \mathbf{M}_{\partial,1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,2} \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{0} & \mathbf{M}_{\partial,1} \\ \mathbf{B}_{1,\Gamma_2}^\top & \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,1} \end{pmatrix}.
\end{aligned}
\tag{7.112}
$$

Apart for matrices $\mathbf{M}_{\partial,1}, \mathbf{M}_{\partial,2}, \mathbf{B}_{1,\Gamma_1}, \mathbf{B}_{1,\Gamma_2}$,

$$
\begin{aligned}
M_{\partial,1}^{lk} &= \left\langle \boldsymbol{\phi}_{\partial,1}^l, \boldsymbol{\phi}_{\partial,1}^k \right\rangle_{L^2(\Gamma_1)}, & (l,k) &\in \{1, n_{\partial,1}\}, & B_{1,\Gamma_1}^{ik} &= \left\langle \boldsymbol{\phi}_1^i, \boldsymbol{\phi}_{\partial,1}^k \right\rangle_{L^2(\Gamma_1)}, \\
M_{\partial,2}^{fg} &= \left\langle \boldsymbol{\phi}_{\partial,2}^f, \boldsymbol{\phi}_{\partial,2}^g \right\rangle_{L^2(\Gamma_2)}, & (f,g) &\in \{1, n_{\partial,2}\}, & B_{1,\Gamma_2}^{ig} &= \left\langle \boldsymbol{\phi}_1^i, \boldsymbol{\phi}_{\partial,2}^g \right\rangle_{L^2(\Gamma_2)},
\end{aligned}
\qquad i \in \{1, n_1\},
\tag{7.113}
$$

the other matrices keep the same definition as in (7.54). The discrete Hamiltonian, whose expressive is [BMXZ18]

$$H_d = \frac{1}{2}\mathbf{e}_1^\top \mathbf{M}_{\mathcal{M}_1} \mathbf{e}_1 + \frac{1}{2}\mathbf{e}_2^\top \mathbf{M}_{\mathcal{M}_2} \mathbf{e}_2. \tag{7.114}$$

gives rise to the discrete power balance

$$
\begin{aligned}
\dot{H}_d &= \mathbf{e}_1^\top \mathbf{M}_{\mathcal{M}_1} \dot{\mathbf{e}}_1 + \mathbf{e}_2^\top \mathbf{M}_{\mathcal{M}_2} \dot{\mathbf{e}}_2, \\
&= -\mathbf{e}_1^\top (\mathbf{D}_0 + \mathbf{D}_{\mathcal{L}})^\top \mathbf{e}_2 + \mathbf{e}_2^\top (\mathbf{D}_0 + \mathbf{D}_{\mathcal{L}})\mathbf{e}_1 + \mathbf{e}_1^\top (\mathbf{B}_{1,\Gamma_1}\boldsymbol{\lambda}_{\partial,1} + \mathbf{B}_{1,\Gamma_2}\mathbf{u}_{\partial,2}), \\
&= \mathbf{y}_{\partial,1}^\top \mathbf{M}_{\partial,1}\mathbf{u}_{\partial,1} + \mathbf{y}_{\partial,2}^\top \mathbf{M}_{\partial,2}\mathbf{u}_{\partial,2}, \\
&= \widehat{\mathbf{y}}_{\partial,1}^\top \mathbf{u}_{\partial,1} + \widehat{\mathbf{y}}_{\partial,2}^\top \mathbf{u}_{\partial,2}, \qquad \text{where} \qquad \widehat{\mathbf{y}}_{\partial,1} := \mathbf{M}_{\partial,1}\mathbf{y}_{\partial,1}, \ \widehat{\mathbf{y}}_{\partial,2} := \mathbf{M}_{\partial,2}\mathbf{y}_{\partial,2}.
\end{aligned}
\tag{7.115}
$$

This result is the finite dimensional equivalent of (7.106).

Equivalently, the weak form Eq.7.53 may be used as a starting point. The computation follows in a completely analogous manner. The only difference is that $\boldsymbol{y}_{\partial,2} = \boldsymbol{\lambda}_{\partial,2}$ plays the role of the Lagrange multiplier. The final finite dimensional system then is given by

$$
\begin{aligned}
&\text{Diag}\begin{bmatrix} \mathbf{M}_{\mathcal{M}_1} \\ \mathbf{M}_{\mathcal{M}_2} \\ \mathbf{0} \end{bmatrix} \begin{pmatrix} \dot{\mathbf{e}}_1 \\ \dot{\mathbf{e}}_2 \\ \dot{\boldsymbol{\lambda}}_{\partial,2} \end{pmatrix} = \begin{bmatrix} \mathbf{0} & -\mathbf{D}_0^\top + \mathbf{D}_{-\mathcal{L}^*} & \mathbf{0} \\ \mathbf{D}_0 - \mathbf{D}_{-\mathcal{L}^*}^\top & \mathbf{0} & \mathbf{B}_{2,\Gamma_2} \\ \mathbf{0} & -\mathbf{B}_{2,\Gamma_2}^\top & \mathbf{0} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,2} \end{pmatrix} + \begin{bmatrix} \mathbf{0} & \mathbf{0} \\ \mathbf{B}_{2,\Gamma_1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{bmatrix} \mathbf{u}_{\partial,1} \\ \mathbf{u}_{\partial,2} \end{bmatrix}, \\
&\begin{bmatrix} \mathbf{M}_{\partial,1} & \mathbf{0} \\ \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{pmatrix} \mathbf{y}_{\partial,1} \\ \mathbf{y}_{\partial,2} \end{pmatrix} = \begin{bmatrix} \mathbf{0} & \mathbf{B}_{2,\Gamma_1}^\top & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{M}_{\partial,2} \end{bmatrix} \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \boldsymbol{\lambda}_{\partial,2} \end{pmatrix}.
\end{aligned}
\tag{7.116}
$$

where $\mathbf{B}_{2,\Gamma_1}, \mathbf{B}_{2,\Gamma_2}$ are given by

$$B_{2,\Gamma_1}^{mk} = \left\langle \phi_2^m, \phi_{\partial,1}^k \right\rangle_{L^2(\Gamma_1)}, \quad B_{2,\Gamma_2}^{mg} = \left\langle \phi_2^m, \phi_{\partial,2}^g \right\rangle_{L^2(\Gamma_2)}, \quad . \tag{7.117}$$

where $m \in \{1, n_2\}$, $k \in \{1, n_{\partial,1}\}$, $g \in \{1, n_{\partial,2}\}$. This solution can be applied to incorporate all possible mixed boundary conditions in a systematic manner. However the finite element discretization is required to satisfy the inf-sup condition. The simulation in time of resulting system is harder, since the algebraic constrains pose additional difficulties.

7.2.2 Virtual domain decomposition

If the domain is split into subdomains with different causalities, then the interconnection od the two provides a final system with the correct boundary conditions. To illustrate the idea, in Fig. 7.2 the splitting of the domain is accomplished by introducing the interface Γ_{12}, that can be freely chosen. However, as a general guideline, it has be such that the meshing of the subdomains generate regular triangles.

To obtain a final system with the desired causality, the weak form has to carried separately on each subdomain. In particular, on subdomain Ω_1 the $\mathcal{L}$ operator is integrated by parts, whereas on subdomain Ω_2 the $-\mathcal{L}^2$ operator undergoes the integration by parts. As a result on
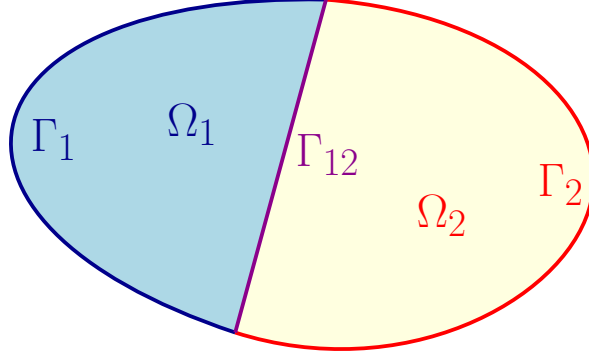
Figure 7.2: Splitting of the domain into Ω_1, Ω_2.

subdomains Ω_1, (Ω_2) the boundary input $\boldsymbol{u}_{\partial,1}$, $(\boldsymbol{u}_{\partial,2})$ explicitly appears. Let $X_1(\Omega_1)$, $X_1(\Omega_2)$ be the X_1 space restricted to the subdomain Ω_1, Ω_2, as analogously let $X_2(\Omega_1)$, $X_2(\Omega_2)$ the restriction of X_2 to Ω_1, Ω_2 respectively. Then Sys. (7.104) is put into weak form on the two subdomains. For the Ω_1 contribution, it is obtained

$$\langle \boldsymbol{v}_1, \mathcal{M}_1 \partial_t \boldsymbol{e}_1 \rangle_{X_1(\Omega_1)} = -\langle \boldsymbol{v}_1, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1(\Omega_1)} - \langle \boldsymbol{v}_1, \mathcal{L}^* \boldsymbol{e}_2 \rangle_{X_1(\Omega_1)}$$
$$\langle \boldsymbol{v}_2, \mathcal{M}_2 \partial_t \boldsymbol{e}_2 \rangle_{X_2(\Omega_1)} = \langle \boldsymbol{v}_2, \boldsymbol{L}\boldsymbol{e}_1 \rangle_{X_2(\Omega_1)} + \langle \mathcal{L}^* \boldsymbol{v}_2, \boldsymbol{e}_1 \rangle_{X_1(\Omega_1)} + \langle \mathcal{N}_{\partial,2} \boldsymbol{v}_2, \mathcal{N}_{\partial,1} \boldsymbol{e}_1 \rangle_{L^2(\partial\Omega_1)}.$$
$$(7.118)$$

For Ω_2, we get

$$\langle \boldsymbol{v}_1, \mathcal{M}_1 \partial_t \boldsymbol{e}_1 \rangle_{X_1(\Omega_2)} = -\langle \boldsymbol{v}_1, \boldsymbol{L}^\top \boldsymbol{e}_2 \rangle_{X_1(\Omega_2)} - \langle \mathcal{L} \boldsymbol{v}_1, \boldsymbol{e}_2 \rangle_{X_2(\Omega_2)} + \langle \mathcal{N}_{\partial,1} \boldsymbol{v}_1, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega_2)},$$
$$\langle \boldsymbol{v}_2, \mathcal{M}_2 \partial_t \boldsymbol{e}_2 \rangle_{X_2(\Omega_2)} = \langle \boldsymbol{v}_2, \boldsymbol{L}\boldsymbol{e}_1 \rangle_{X_2(\Omega_2)} + \langle \boldsymbol{v}_2, \mathcal{L} \boldsymbol{e}_1 \rangle_{X_2(\Omega_2)},$$
$$(7.119)$$

Since $\partial\Omega_1 = \Gamma_1 \cup \Gamma_{12}$ and $\partial\Omega_2 = \Gamma_2 \cup \Gamma_{12}$, the boundary terms $\langle \mathcal{N}_{\partial,2} \boldsymbol{v}_2, \mathcal{N}_{\partial,1} \boldsymbol{e}_1 \rangle_{L^2(\partial\Omega_1)}$, $\langle \mathcal{N}_{\partial,1} \boldsymbol{v}_1, \mathcal{N}_{\partial,2} \boldsymbol{e}_2 \rangle_{L^2(\partial\Omega_2)}$ and can be split to give

The second solution requires suitable finite elements for both kind of discretization detailed in Sec. 7.1.1. Some particular cases of boundary control cannot be handled nevertheless. The interface that separates the domain is an additional degree of freedom, as it can be freely drawn.

7.3 Conclusion

Convergence numerical study

8.1   Plate problems using known mixed finite elements

8.2   Non-standard discretization of flexible structures

Numerical applications

9.1 Boundary stabilization

9.2 Thermoelastic wave propagation

9.3 Mixed boundary conditions

9.3.1 Trajectory tracking of a thin beam

9.3.2 Vibroacoustic under mixed boundary conditions

9.4 Modal analysis of plates

Part IV

Port-Hamiltonian flexible multibody dynamics

Modular multibody systems in port-Hamiltonian form

10.1 Reminder of the rigid case

10.2 Flexible floating body

10.3 Modular construction of multibody systems

Validation

11.1 Beam systems

11.1.1 Modal analysis of a flexible mechanism

11.1.2 Non-linear crank slider

11.1.3 Hinged beam

11.2 Plate systems

11.2.1 Boundary interconnection with a rigid element

11.2.2 Actuated plate

Conclusion

Conclusions and future directions

Je n'ai cherché de rien prouver, mais de bien peindre et d'éclairer bien ma peinture.

André Gide
Préface de L'Immoraliste

Mathematical tools

A.1   Differential operators

The space of all, symmetric and skew-symmetric $d \times d$ matrices are denoted by $\mathbb{M}$, $\mathbb{S}$, $\mathbb{K}$ respectively. The space of $\mathbb{R}^d$ vectors is denoted by $\mathbb{V}$. $\Omega \subset \mathbb{R}^d$ is an open connected set. For a scalar field $u : \Omega \to \mathbb{R}$ the gradient is defined as

$$\mathrm{grad}(u) = \nabla u := \left(\partial_{x_1} u \ldots \partial_{x_d} u \right)^\top .$$

For a vector field $\boldsymbol{u} : \Omega \to \mathbb{V}$, with components u_i, the gradient (Jacobian) is defined as

$$\mathrm{grad}(\boldsymbol{u})_{ij} := (\nabla \boldsymbol{u})_{ij} = \partial_{x_i} u_j.$$

The symmetric part of the gradient operator Grad (i. e. the deformation gradient in continuum mechanics) is thus given by

$$\mathrm{Grad}(\boldsymbol{u}) := \frac{1}{2} \left(\nabla \boldsymbol{u} + (\nabla \boldsymbol{u})^\top \right) \in \mathbb{S}.$$

The Hessian operator of u is then computed as follows

$$\mathrm{Hess}(u) = \nabla^2 u = \mathrm{Grad}(\mathrm{grad}(u)),$$

For a tensor field $\boldsymbol{U} : \Omega \to \mathbb{M}$, with components u_{ij}, the divergence is a vector, defined column-wise as

$$\mathrm{Div}(\boldsymbol{U}) = \nabla \cdot \boldsymbol{U} := \left(\sum_{i=1}^{d} \partial_{x_i} u_{ij} \right)_{j=1,\ldots,d} .$$

The double divergence of a tensor field $\boldsymbol{U}$ is then a scalar field defined as

$$\mathrm{div}(\mathrm{Div}(\boldsymbol{U})) := \sum_{i=1}^{d} \sum_{j=1}^{d} \partial_{x_i} \partial_{x_j} u_{ij}.$$

Definition 6 (Formal adjoint, Def. 5.80 [RR04])
Consider the differential operator defined on Ω

$$\mathcal{L}(\boldsymbol{x}, \partial) = \sum_{|\alpha| \leq k} a_\alpha(\boldsymbol{x}) \partial^\alpha, \tag{A.1}$$

where $\alpha := (\alpha_1, \dots, \alpha_d)$ is a multi-index of order $|\alpha| := \sum_{i=1}^{d} \alpha_i$, a_α are a set of real scalars and $\partial^\alpha := \partial_{x_1}^{\alpha_1} \dots \partial_{x_d}^{\alpha_d}$ is a differential operator of order $|\alpha|$ resulting from a combination of spatial derivatives. The formal adjoint of $\mathcal{L}$ is the operator defined by

$$\mathcal{L}^*(\boldsymbol{x}, \partial)u = \sum_{|\alpha| \leq k} (-1)^\alpha \partial^\alpha (a_\alpha(\boldsymbol{x})u(\boldsymbol{x})). \tag{A.2}$$

The importance of this definition lies in the fact that

$$\langle \phi, \mathcal{L}(\boldsymbol{x}, \partial)\psi \rangle_\Omega = \langle \mathcal{L}^*(\boldsymbol{x}, \partial)\phi, \psi \rangle_\Omega \tag{A.3}$$

for every $\phi, \psi \in C_0^\infty(\Omega)$. If the assumption of compact support is removed, then (A.3) no longer holds; instead the integration by parts yields additional terms involving integrals over the boundary $\partial\Omega$. However, these boundary terms vanish if ϕ and ψ satisfy certain restrictions on the boundary.

A.2   Integration by parts

Theorem 5 (Integration by parts for tensors)
Consider a smooth tensor-valued function $\boldsymbol{A} \in \mathbb{R}^{d \times d}$ and vector-valued function $\boldsymbol{b} \in \mathbb{V} = \mathbb{R}^d$. The following integration by parts formula holds

$$\int_\Omega \{\mathrm{Div}(\boldsymbol{A}) \cdot \boldsymbol{b} + \boldsymbol{A} : \mathrm{grad}(\boldsymbol{b})\} \, \mathrm{d}\Omega = \int_\Omega \mathrm{div}(\boldsymbol{Ab}) \, \mathrm{d}\Omega = \int_{\partial\Omega} (\boldsymbol{A}^\top \boldsymbol{n}) \cdot \boldsymbol{b} \, \mathrm{d}S, \tag{A.4}$$

where $\boldsymbol{n}$ is the outward normal at the boundary and $\mathrm{d}S$ the infinitesimal surface.

Proof. Consider the components expression of Eq. (A.4)

$$\int_\Omega \{\mathrm{Div}(\boldsymbol{A}) \cdot \boldsymbol{b} + \boldsymbol{A} : \mathrm{grad}(\boldsymbol{b})\} \, \mathrm{d}\Omega = \int_\Omega \sum_{i=1}^{d} \sum_{j=1}^{d} \{(\partial_{x_i} A_{ij})b_j + A_{ij}(\partial_{x_i} b_j)\} \, \mathrm{d}\Omega,$$

$$= \int_\Omega \sum_{i=1}^{d} \sum_{j=1}^{d} \partial_{x_i}(A_{ij} b_j) \, \mathrm{d}\Omega = \int_\Omega \mathrm{div}(\boldsymbol{Ab}) \, \mathrm{d}\Omega, \tag{A.5}$$

$$= \int_{\partial\Omega} \sum_{i=1}^{d} \sum_{j=1}^{d} (n_i A_{ij})b_j \, \mathrm{d}S = \int_{\partial\Omega} (\boldsymbol{A}^\top \boldsymbol{n}) \cdot \boldsymbol{b} \, \mathrm{d}S.$$

$\square$

The previous result can be specialized for symmetric tensor field [BBF$^+$13, Chapter 1].

Theorem 6 (Integration by parts for symmetric tensors)
Consider a smooth tensor-valued function $\boldsymbol{M} \in \mathbb{S} = \mathbb{R}_{sym}^{d \times d}$ and vector-valued function $\boldsymbol{b} \in \mathbb{V} =$

1384 $\mathbb{R}^d$. *Then, it holds*

$$\int_\Omega \{\text{Div}(\boldsymbol{S}) \cdot \boldsymbol{b} + \boldsymbol{M} : \text{Grad}(\boldsymbol{b})\} \ \mathrm{d}\Omega = \int_\Omega \text{div}(\boldsymbol{M}\boldsymbol{b}) \ \mathrm{d}\Omega = \int_{\partial\Omega} (\boldsymbol{M}\,\boldsymbol{n}) \cdot \boldsymbol{b} \ \mathrm{d}S. \tag{A.6}$$

1385 *Proof.* Consider the components expression of Eq. (A.6)

$$\int_\Omega \{\text{Div}(\boldsymbol{M}) \cdot \boldsymbol{b} + \boldsymbol{M} : \text{Grad}(\boldsymbol{b})\} \ \mathrm{d}\Omega = \int_\Omega \sum_{i=1}^d \sum_{j=1}^d \left\{ (\partial_{x_i} M_{ij}) b_j + M_{ij} \frac{1}{2}(\partial_{x_i} b_j + \partial_{x_j} b_i) \right\} \ \mathrm{d}\Omega, \tag{A.7}$$

1386 The term $M_{ij}\frac{1}{2}(\partial_{x_i} b_j + \partial_{x_j} b_i)$ can be manipulated exploiting the symmetry of the tensor $\boldsymbol{M}$

$$\begin{aligned} \sum_{i=1}^d \sum_{j=1}^d \frac{1}{2}(M_{ij}\partial_{x_i} b_j + M_{ij}\partial_{x_j} b_i) &= \sum_{i=1}^d \sum_{j=1}^d \frac{1}{2}(M_{ij}\partial_{x_i} b_j + M_{ji}\partial_{x_i} b_j), \\ &= \sum_{i=1}^d \sum_{j=1}^d \frac{1}{2}(M_{ij} + M_{ji})\partial_{x_i} b_j \qquad \text{Since } \boldsymbol{M} \text{ is symmetric,} \\ &= \sum_{i=1}^d \sum_{j=1}^d M_{ij}\partial_{x_i} b_j = \boldsymbol{M} : \text{grad}(\boldsymbol{b}) \end{aligned} \tag{A.8}$$

1387 Then it holds

$$\int_\Omega \{\text{Div}(\boldsymbol{M}) \cdot \boldsymbol{b} + \boldsymbol{M} : \text{Grad}(\boldsymbol{b})\} \ \mathrm{d}\Omega = \int_\Omega \{\text{Div}(\boldsymbol{M}) \cdot \boldsymbol{b} + \boldsymbol{M} : \text{grad}(\boldsymbol{b})\} \ \mathrm{d}\Omega \tag{A.9}$$

1388 Using Eq (A.4) then

$$\begin{aligned} \int_\Omega \{\text{Div}(\boldsymbol{M}) \cdot \boldsymbol{b} + \boldsymbol{M} : \text{Grad}(\boldsymbol{b})\} \ \mathrm{d}\Omega &= \int_\Omega \{\text{Div}(\boldsymbol{M}) \cdot \boldsymbol{b} + \boldsymbol{M} : \text{grad}(\boldsymbol{b})\} \ \mathrm{d}\Omega, \\ &= \int_{\partial\Omega} (\boldsymbol{M}^\top \boldsymbol{n}) \cdot \boldsymbol{b} \ \mathrm{d}S, \qquad \text{Since } \boldsymbol{M} \text{ is symmetric,} \\ &= \int_{\partial\Omega} (\boldsymbol{M}\,\boldsymbol{n}) \cdot \boldsymbol{b} \ \mathrm{d}S. \end{aligned} \tag{A.10}$$

1389 This concludes the proof. □

1390 ## A.3 Bilinear forms

Definition 7 (Skew-symmetric bilinear form)
A bilinear form on the Hilbert space H

$$\begin{aligned} b : H \times H &\longrightarrow \mathbb{R}, \\ (\boldsymbol{v}, \boldsymbol{u}) &\longrightarrow b(\boldsymbol{v}, \boldsymbol{u}), \end{aligned}$$

is skew-symmetric iff

$$b(\boldsymbol{v}, \boldsymbol{u}) = -b(\boldsymbol{u}, \boldsymbol{v}).$$

Finite elements gallery

Implementation using FEniCS and Firedrake

Bibliography

[AB85]   Douglas N Arnold and Franco Brezzi. Mixed and nonconforming finite ele-
           ment methods: implementation, postprocessing and error estimates. *ESAIM:*
           Mathematical Modelling and Numerical Analysis-Modélisation Mathématique et
           Analyse Numérique, 19(1):7–32, 1985.

[Abe12]   R. Abeyaratne. *Lecture Notes on the Mechanics of Elastic Solids. Volume II:*
           Continuum Mechanics. Cambridge, MA and Singapore, 1st edition, 2012.

[AFS68]   J. H. Argyris, I. Fried, and D. W. Scharpf. The tuba family of plate ele-
           ments for the matrix displacement method. *The Aeronautical Journal (1968)*,
           72(692):701–709, 1968.

[AFW07]   D. Arnold, R. Falk, and R. Winther. Mixed finite element methods for lin-
           ear elasticity with weakly imposed symmetry. *Mathematics of Computation*,
           76(260):1699–1723, 2007.

[AL00]   G. Avalos and I. Lasiecka. Boundary controllability of thermoelastic plates via
           the free boundary conditions. *SIAM Journal on Control and Optimization*,
           38(2):337–383, 2000.

[AW02]   D. Arnold and R. Winther. Mixed finite elements for elasticity. *Numerische*
           Mathematik, 92(3):401–419, 2002.

[BBF+13]   D. Boffi, F. Brezzi, M. Fortin, et al. *Mixed finite element methods and applica-*
           tions, volume 44. Springer, 2013.

[Bel69]   K. Bell. A refined triangular plate bending finite element. *International Journal*
           for Numerical Methods in Engineering, 1(1):101–122, 1969.

[Bio56]   M. A. Biot. Thermoelasticity and irreversible thermodynamics. *Journal of*
           Applied Physics, 27(3):240–253, 1956.

[BMXZ18]   C. Beattie, V. Mehrmann, H. Xu, and H. Zwart. Linear port-Hamiltonian de-
           scriptor systems. *Mathematics of Control, Signals, and Systems*, 30(4):17, 2018.

[BR90]   H. Blum and R. Rannacher. On mixed finite element methods in plate bending
           analysis. *Computational Mechanics*, 6(3):221–236, May 1990.

[Bre08]   F. Brezzi. *Mixed finite elements, compatibility conditions, and applications.*
           Springer, 2008.

[Car73]   D. E. Carlson. Linear thermoelasticity. In C. Truesdell, editor, *Linear Theo-*
           ries of Elasticity and Thermoelasticity: Linear and Nonlinear Theories of Rods,
           Plates, and Shells, pages 297–345. Springer, Berlin, Heidelberg, 1973.

119

[Cha62]   P Chadwick. On the propagation of thermoelastic disturbances in thin plates and rods. *Journal of the Mechanics and Physics of Solids*, 10(2):99–109, 1962.

[Cia88]   P. G. Ciarlet. *Mathematical Elasticity: Three-Dimensional Elasticity*. Studies in mathematics and its applications. North-Holland, 1988.

[CMKO11]   S. H. Christiansen, H. Z. Munthe-Kaas, and B. Owren. Topics in structure-preserving discretization. *Acta Numerica*, 20:1–119, 2011.

[Cou90]   T.J. Courant. Dirac manifolds. *Transactions of the American Mathematical Society*, 319(2):631–661, 1990.

[CR16]   F.L. Cardoso Ribeiro. *Port-Hamiltonian modeling and control of fluid-structure system*. PhD thesis, Université de Toulouse, Dec. 2016.

[CRML18]   F.L. Cardoso-Ribeiro, D. Matignon, and L. Lefèvre. A structure-preserving partitioned finite element method for the 2d wave equation. *IFAC-PapersOnLine*, 51(3):119 – 124, 2018. 6th IFAC Workshop on Lagrangian and Hamiltonian Methods for Nonlinear Control LHMNC 2018.

[CRML19]   F. L. Cardoso-Ribeiro, D. Matignon, and L. Lefèvre. A partitioned finite element method for power-preserving discretization of open systems of conservation laws, 2019. arXiv preprint arXiv:1906.05965.

[CRMPB17]   F. L. Cardoso-Ribeiro, D. Matignon, and V. Pommier-Budinger. A port-Hamiltonian model of liquid sloshing in moving containers and application to a fluid-structure system. *Journal of Fluids and Structures*, 69:402–427, February 2017.

[DHNLS99]   R. Durán, L. Hervella-Nieto, E. Liberman, and J. Solomin. Approximation of the vibration modes of a plate by Reissner-Mindlin equations. *Mathematics of Computation of the American Mathematical Society*, 68(228):1447–1463, 1999.

[DMSB09]   V. Duindam, A. Macchelli, S. Stramigioli, and H. Bruyninckx. *Modeling and Control of Complex Physical Systems*. Springer Verlag, 2009.

[DZ18]   Pauly D. and W. Zulehner. The divdiv-complex and applications to biharmonic equations. *Applicable Analysis*, pages 1–52, 2018.

[Gri15]   M. Grinfeld. *Mathematical Tools for Physicists*. John Wiley & Sons Inc, 2nd edition, jan 2015.

[GSV18]   T. Gustafsson, R. Stenberg, and J. Videman. A posteriori estimates for conforming kirchhoff plate elements. *SIAM Journal on Scientific Computing*, 40(3):A1386–A1407, 2018.

[HE09]   R. B. Hetnarski and M. R. Eslami. *Thermal stresses: advanced theory and applications*, volume 158. Springer, 2009.

[HM78]   T. J.R. Hughes and J.E. Marsden. Classical elastodynamics as a linear symmetric hyperbolic system. *Journal of Elasticity*, 8(1):97–110, 1978.

[JZ12]   B. Jacob and H. Zwart. *Linear Port-Hamiltonian Systems on Infinite-dimensional Spaces.* Number 223 in Operator Theory: Advances and Applications. Springer Verlag, Germany, 2012. https://doi.org/10.1007/978-3-0348-0399-1.

[KML18]   P. Kotyczka, B. Maschke, and L. Lefèvre. Weak form of Stokes-Dirac structures and geometric discretization of port-Hamiltonian systems. *Journal of Computational Physics*, 361:442 – 476, 2018.

[Kot19]   P. Kotyczka. *Numerical Methods for Distributed Parameter Port-Hamiltonian Systems.* TUM University Press, 2019.

[KZ15]   M. Kurula and H. Zwart. Linear wave systems on n-d spatial domains. *International Journal of Control*, 88(5):1063–1077, 2015. https://www.tandfonline.com/doi/abs/10.1080/00207179.2014.993337.

[KZvdSB10] M. Kurula, H. Zwart, A. J. van der Schaft, and J. Behrndt. Dirac structures and their composition on Hilbert spaces. *Journal of mathematical analysis and applications*, 372(2):402–422, 2010. https://doi.org/10.1016/j.jmaa.2010.07.004.

[Lag89]   J. E. Lagnese. *Boundary Stabilization of Thin Plates.* Society for Industrial and Applied Mathematics, 1989.

[Lee12]   J. Lee. *Mixed methods with weak symmetry for time dependent problems of elasticity and viscoelasticity.* PhD thesis, University of Minnesota, 2012.

[LGZM05]   Y. Le Gorrec, H. Zwart, and B. Maschke. Dirac structures and Boundary Control Systems associated with Skew-Symmetric Differential Operators. *SIAM Journal on Control and Optimization*, 44(5):1864–1892, 2005. https://doi.org/10.1137/040611677.

[LMW$^+$12] A. Logg, K. A. Mardal, G. N. Wells, et al. *Automated Solution of Differential Equations by the Finite Element Method.* Springer, 2012.

[LPKL12]   L. D. Landau, L. P. Pitaevskii, A. M. Kosevich, and E. M. Lifshitz. *Theory of Elasticity.* Butterworth Heinemann, third edition, Dec 2012.

[LR00]   R. Lifshitz and M. L. Roukes. Thermoelastic damping in micro-and nanomechanical systems. *Physical review B*, 61(8):5600, 2000.

[Min51]   R. D. Mindlin. Influence of rotatory inertia and shear on flexural motions of isotropic elastic Plates. *Journal of Applied Mechanics*, 18:31–38, March 1951.

[MM19]   V. Mehrmann and R. Morandin. Structure-preserving discretization for port-hamiltonian descriptor systems. In *2019 IEEE 58th Conference on Decision and Control (CDC)*, pages 6863–6868, 2019.

[MMB05]   A. Macchelli, C. Melchiorri, and L. Bassi. Port-based modelling and control of the Mindlin plate. In *Proceedings of the 44th IEEE Conference on Decision and Control*, pages 5989–5994, Dec. 2005. https://doi.org/10.1109/CDC.2005.1583120.

[MvdSM04]   A. Macchelli, A. J. van der Schaft, and C. Melchiorri. Port Hamiltonian formulation of infinite dimensional systems I. Modeling. In *Proceedings of the 43th IEEE Conference on Decision and Control*, volume 4, pages 3762–3767. IEEE, Dec. 2004.

[Nor06]   A.N. Norris. Dynamics of thermoelastic thin plates: A comparison of four theories. *Journal of Thermal Stresses*, 29(2):169–195, 2006.

[Olv93]   P. J. Olver. *Applications of Lie groups to differential equations*, volume 107 of *Graduate texts in mathematics*. Springer-Verlag New York, 2nd edition, 1993.

[Pir89]   O. A. Pironneau. *Finite element methods for fluids*. John Wiley and Sons, 1989.

[PZ20]   D. Pauly and W. Zulehner. The elasticity complex, 2020. arXiv preprint arXiv:2001.11007.

[Red03]   J. N. Reddy. *Mechanics of laminated composite plates and shells: theory and analysis*. CRC press, 2003.

[Red06]   J. N. Reddy. *Theory and analysis of elastic plates and shells*. CRC press, 2006.

[Rei47]   E. Reissner. On bending of elastic plates. *Quarterly of Applied Mathematics*, 5(1):55–68, 1947.

[RHM+17]   F. Rathgeber, D.A. Ham, L. Mitchell, M. Lange, F. Luporini, A. T.T. McRae, G.T. Bercea, G. R. Markall, and P.H.J. Kelly. Firedrake: automating the finite element method by composing abstractions. *ACM Transactions on Mathematical Software (TOMS)*, 43(3):24, 2017.

[RR04]   M. Renardy and R. C. Rogers. *An Introduction to Partial Differential Equations*. Number 13 in Texts in Applied Mathematics. Springer-Verlag New York, 2nd edition, 2004.

[RZ18]   K. Rafetseder and W. Zulehner. A decomposition result for Kirchhoff plate bending problems and a new discretization approach. *SIAM Journal on Numerical Analysis*, 56(3):1961–1986, 2018.

[SHM19a]   A. Serhani, G. Haine, and D. Matignon. Anisotropic heterogeneous n-D heat equation with boundary control and observation: I. Modeling as port-Hamiltonian system. *IFAC-PapersOnLine*, 52(7):51 – 56, 2019. 3rd IFAC Workshop on Thermodynamic Foundations for a Mathematical Systems Theory TFMST 2019.

[SHM19b] A. Serhani, G. Haine, and D. Matignon. Anisotropic heterogeneous n-D heat equation with boundary control and observation: II. Structure-preserving discretization. *IFAC-PapersOnLine*, 52(7):57 – 62, 2019. 3rd IFAC Workshop on Thermodynamic Foundations for a Mathematical Systems Theory TFMST 2019.

[Sim99] J. G. Simmonds. Major simplifications in a current linear model for the motion of a thermoelastic plate. *Quarterly of Applied Mathematics*, 57(4):673–679, 1999.

[Skr19] N. Skrepek. Well-posedness of linear first order port-Hamiltonian systems on multidimensional spatial domains, 2019. arXiv preprint arXiv:1910.09847.

[SS17] M. Schöberl and K. Schlacher. Variational Principles for Different Representations of Lagrangian and Hamiltonian Systems. In Hans Irschik, Alexander Belyaev, and Michael Krommer, editors, *Dynamics and Control of Advanced Structures and Machines*, pages 65–73. Springer International Publishing, 2017.

[TRLGK18] V. Trenchant, H. Ramírez, Y. Le Gorrec, and P. Kotyczka. Finite differences on staggered grids preserving the port-Hamiltonian structure with application to an acoustic duct. *Journal of Computational Physics*, 373, 06 2018.

[TW09] M. Tucsnak and G. Weiss. *Observation and control for operator semigroups.* Springer Science & Business Media, 2009.

[TWK59] S. Timoshenko and S. Woinowsky-Krieger. *Theory of plates and shells.* Engineering societies monographs. McGraw-Hill, 1959.

[vdSM02] A.J. van der Schaft and B. Maschke. Hamiltonian formulation of distributed-parameter systems with boundary energy flow. *Journal of Geometry and Physics*, 42(1):166 – 194, 2002.

[Vil07] J.A. Villegas. *A Port-Hamiltonian Approach to Distributed Parameter Systems.* PhD thesis, University of Twente, May 2007.

[Yao11] P.F. Yao. *Modeling and Control in Vibrational and Structural Dynamics: A Differential Geometric Approach.* Chapman & Hall/CRC Applied Mathematics & Nonlinear Science. Taylor & Francis, 2011.

Résumé –– Malgré l'abondante littérature sur le formalisme pH, les problèmes d'élasticité en deux ou trois dimensions géométriques n'ont presque jamais été considérés. Cette thèse vise à étendre l'approche port-Hamiltonienne (pH) à la mécanique des milieux continus. L'originalité apportée réside dans trois contributions majeures. Tout d'abord, la nouvelle formulation pH des modèles de plaques et des phénomènes thermoélastiques couplés est présentée. L'utilisation du calcul tensoriel est obligatoire pour modéliser les milieux continus et l'introduction de variables tensorielles est nécessaire pour obtenir une description pH équivalente qui soit intrinsèque, c'est-à-dire indépendante des coordonnées choisies. Deuxièmement, une technique de discrétisation basée sur les éléments finis et capable de préserver la structure du problème de la dimension infinie au niveau discret est développée et validée. La discrétisation des problèmes d'élasticité nécessite l'utilisation d'éléments finis non standard. Néanmoins, l'implémentation numérique est réalisée grâce à des bibliothèques open source bien établies, fournissant aux utilisateurs externes un outil facile à utiliser pour simuler des systèmes flexibles sous forme pH. Troisièmement, une nouvelle formulation pH de la dynamique multicorps flexible est dérivée. Cette reformulation, valable sous de petites hypothèses de déformations, inclut toutes sortes de modèles élastiques linéaires et exploite la modularité intrinsèque des systèmes pH.

Mots clés : Systèmes port-Hamiltonien, méchanique des solides, discretisation symplectique, méthode des éléments finis, dynamique multicorps

Abstract –– Despite the large literature on pH formalism, elasticity problems in higher geometrical dimensions have almost never been considered. This work establishes the connection between port-Hamiltonian distributed systems and elasticity problems. The originality resides in three major contributions. First, the novel pH formulation of plate models and coupled thermoelastic phenomena is presented. The use of tensor calculus is mandatory for continuum mechanical models and the inclusion of tensor variables is necessary to obtain an equivalent and intrinsic, i.e. coordinate free, pH description. Second, a finite element based discretization technique, capable of preserving the structure of the infinite-dimensional problem at a discrete level, is developed and validated. The discretization of elasticity problems requires the use of non-standard finite elements. Nevertheless, the numerical implementation is performed thanks to well-established open-source libraries, providing external users with an easy to use tool for simulating flexible systems in pH form. Third, flexible multibody systems are recast in pH form by making use of a floating frame description valid under small deformations assumptions. This reformulation include all kinds of linear elastic models and exploits the intrinsic modularity of pH systems.

Keywords: Port-Hamiltonian systems, continuum mechanics, structure preserving discretization, finite element method, multibody dynamics.