

GP1S53V/GP1S58V


Compact Photointerrupter

■ Features

1. Compact type
2. High sensing accuracy (Slit width : 0.5mm)
3. PWB direct mounting type
4. With positioning pin (GP1S58V)

■ Outline Dimensions

(Unit : mm)

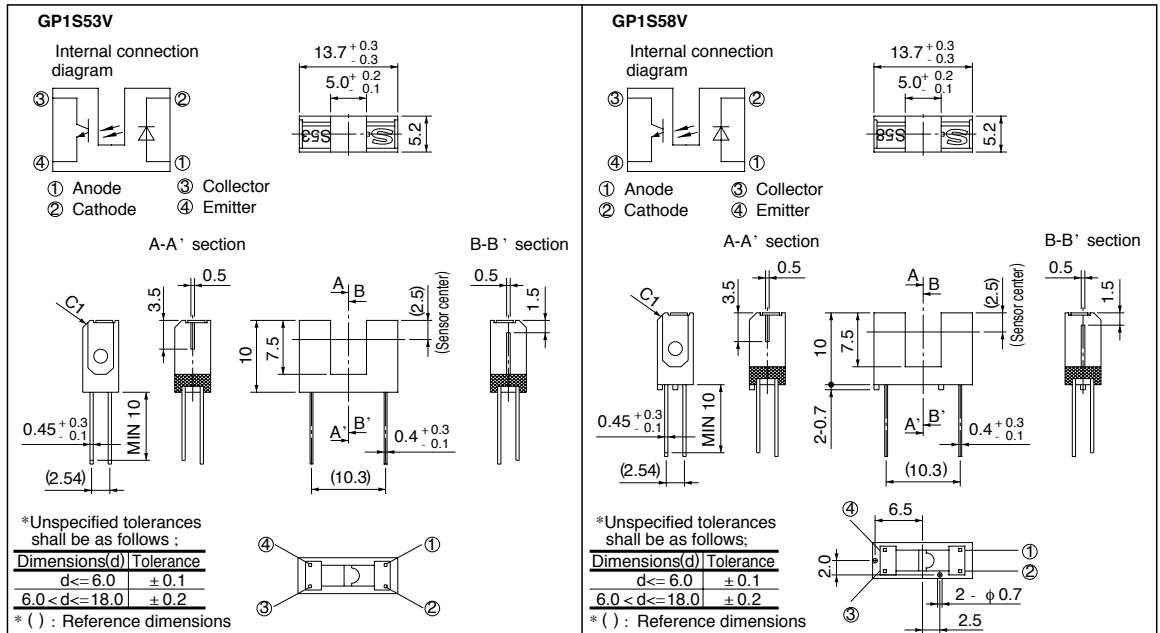

■ Absolute Maximum Ratings (Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V_{CEO}	35	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	20	mA
	Collector power dissipation	P_C	75	mW
	Operating temperature	T_{opr}	- 25 to + 85	°C
	Storage temperature	T_{stg}	- 40 to + 100	°C
	*2 Soldering temperature	T_{sol}	260	°C

*1 Pulse width $\leq 100 \mu s$, Duty ratio = 0.01

*2 For 5 seconds

Electro-optical Characteristics

(Ta= 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		VF	IF = 20mA	-	1.25	1.4	V
	Peak forward voltage		VFM	IFM = 0.5A	-	3	4	V
	Reverse current		IR	VR = 3V	-	-	10	μA
Output	Collector dark current		ICEO	VCE = 20V	-	1	100	nA
Transfer characteristics	Collector Current		Ic	IF = 20mA, VCE = 5V	0.5	-	1.5	mA
	Collector-emitter saturation voltage		VCE(sat)	IF = 40mA, IC = 0.2mA	-	-	0.4	V
	Response time	Rise time	tr	VCE = 2V, IC = 2mA RL = 100Ω	-	3	15	μs
		Fall time	tf		-	4	20	μs

Fig. 1 Forward Current vs. Ambient Temperature

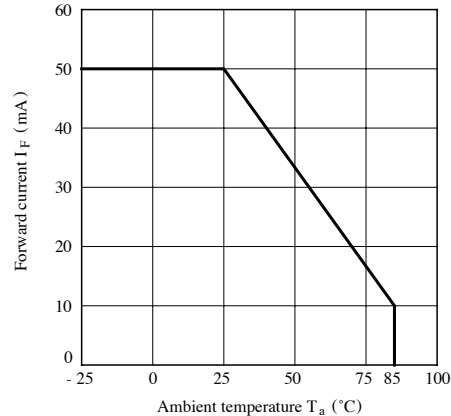


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

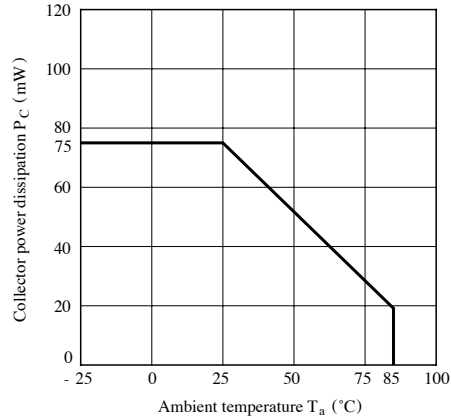


Fig. 3 Peak Forward Current vs. Duty Ratio

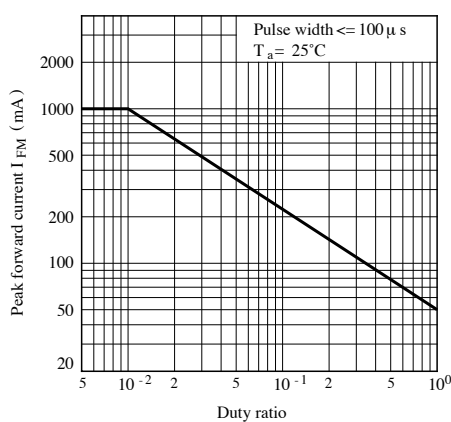


Fig. 4 Forward Current vs. Forward Voltage

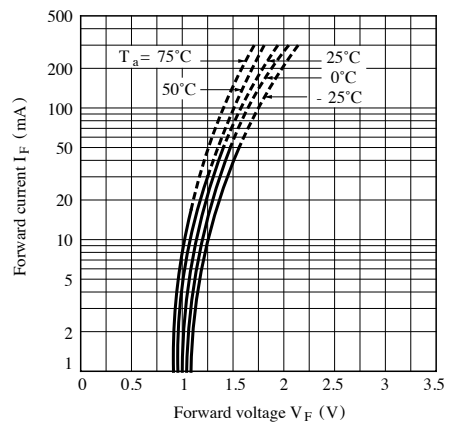


Fig. 5 Collector Current vs. Forward Current

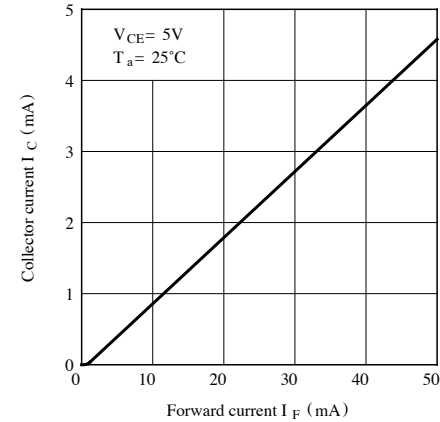


Fig. 6 Collector Current vs. Collector-emitter Voltage

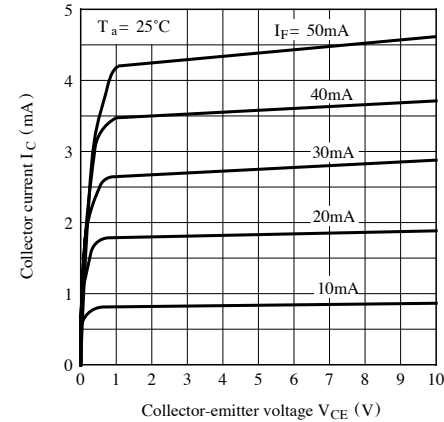


Fig. 7 Collector Current vs. Ambient Temperature

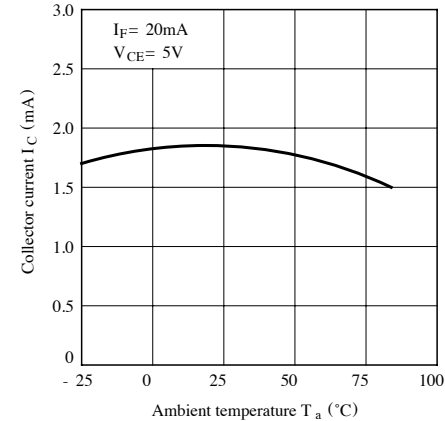


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature


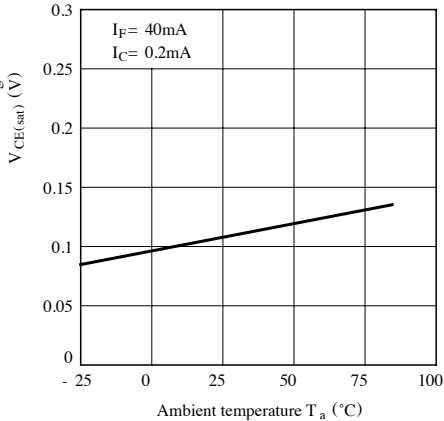


Fig. 9 Response Time vs. Load Resistance

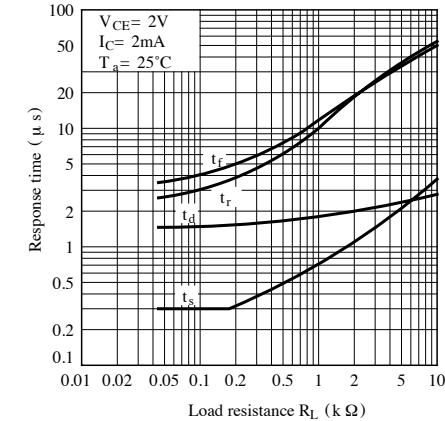

Test Circuit for Response Time

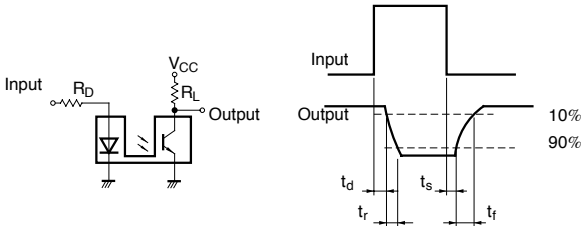


Fig.10 Frequency Response

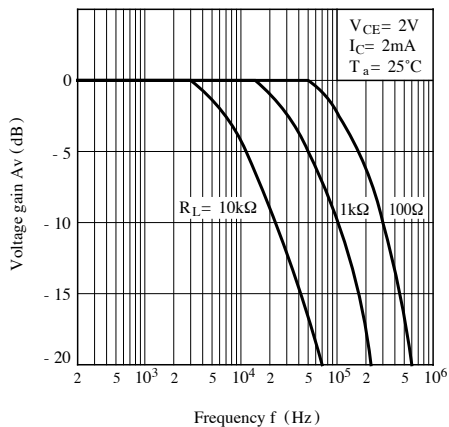


Fig.12 Relative Collector Current vs. Shield Distance (1)

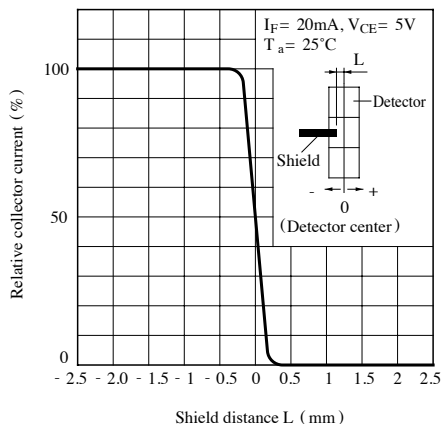


Fig.11 Collector Dark Current vs. Ambient Temperature


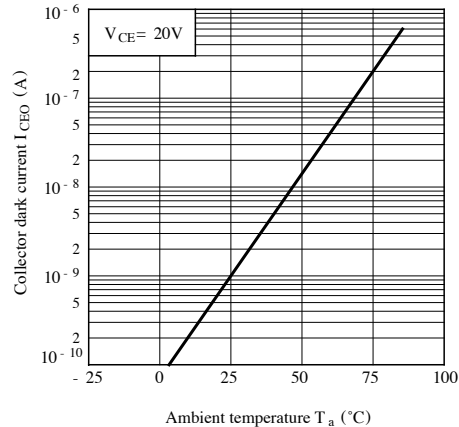


Fig.13 Relative Collector Current vs. Shield Distance (2)

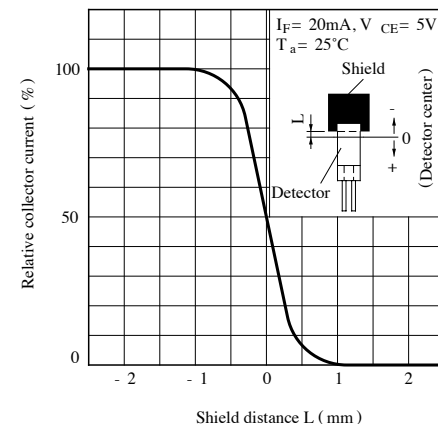

■ Precautions for Use

- (1) In case of cleaning, use only the following type of cleaning solvent.
Ethyl alcohol, methyl alcohol, Isopropyl alcohol
- (2) As for other general cautions, refer to the chapter "Precautions for Use".