

Heltec WiFi LoRa 32(V2) PINOUT

Pinout reference · ESP32

GPIO

safe

use with care

serial, USB

PWM capable

ADC

touch / DAC

RTC

32 kHz crystal

SPI

JTAG

UART

strapping


on-board feature

default function

power

ground

EN / reset

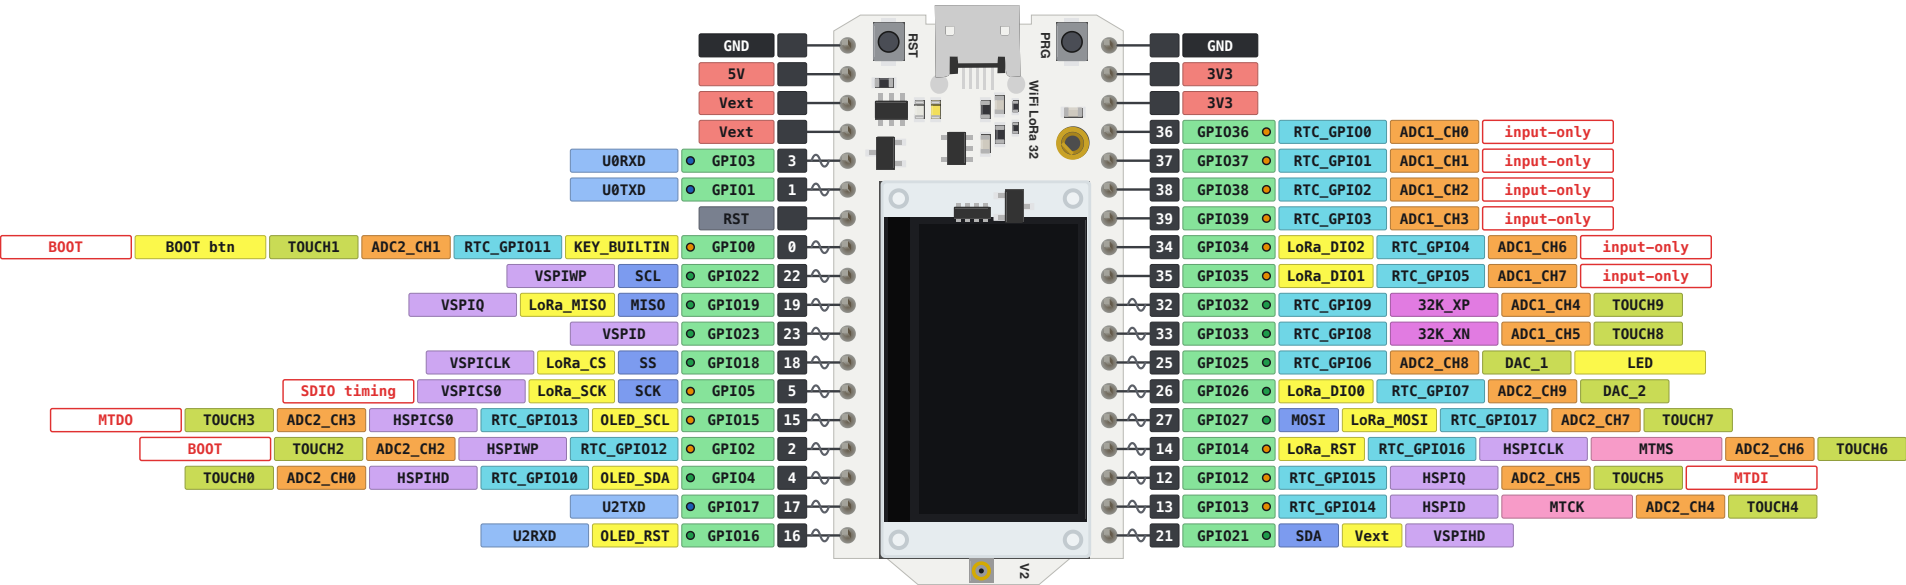

Pin functions from the ESP32 Series Datasheet v5.3. Strapping pins per Espressif.

© 2026 espboards.dev · CC BY-NC 4.0



ESPboards

espboards.dev/esp32/heltec-wifi-lora-32-v2