

Input: 5V / DIN / GND. U1 (AHCT, TTL input) accepts 3.3 V or 5 V data.

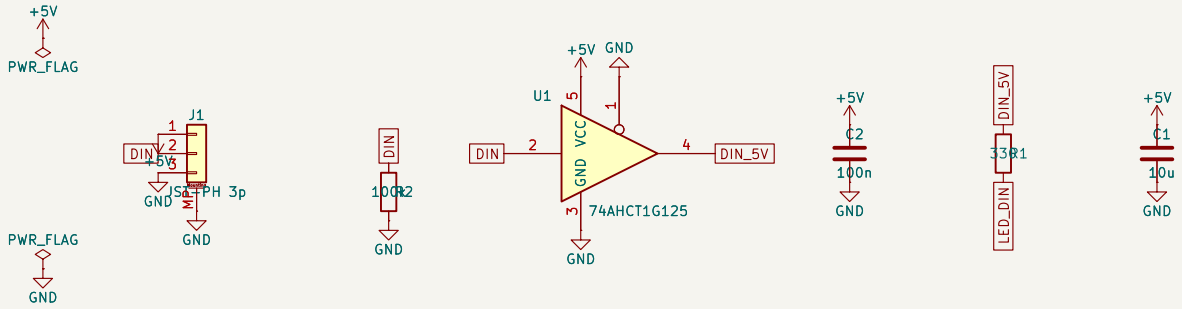


LED chain: LED1 centre, LED2 top point, then clockwise. LED9 DOUT unused.

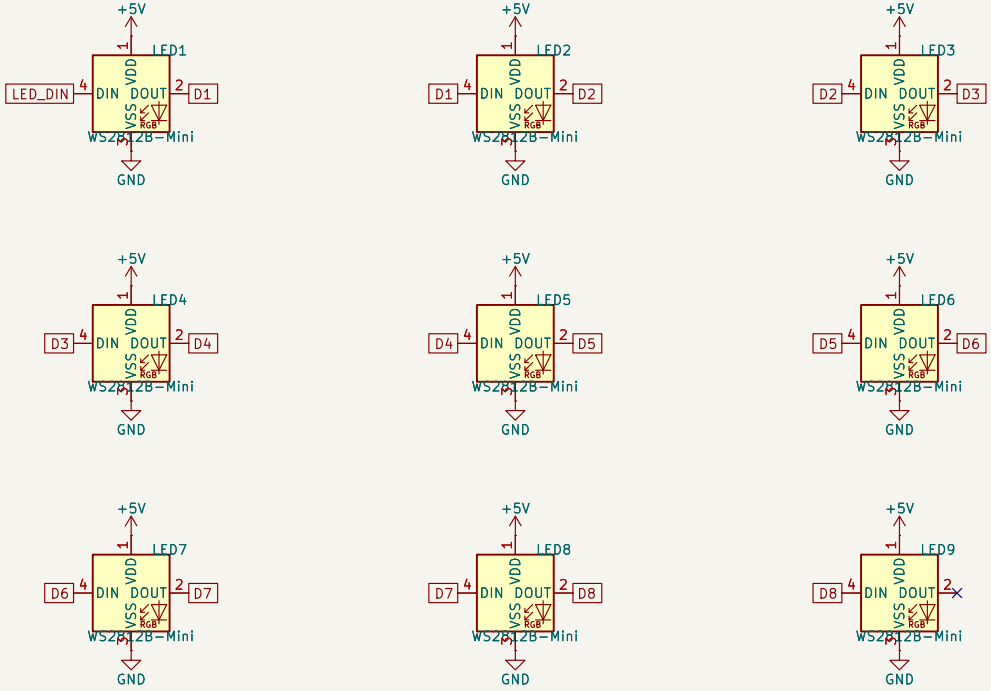


Created with sparkles by @andreban

Sheet: /

File: neopixel-star-hotplate.kicad_sch

**Title: NeoPixel Star (hot-plate)**

| Size: A4 | Date: | Rev: |
|---|---|---|
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |