

Input: 5V / DIN / GND. WS2812D-F5 accepts 3.3 V or 5 V data directly (VIH = 2.7 V).

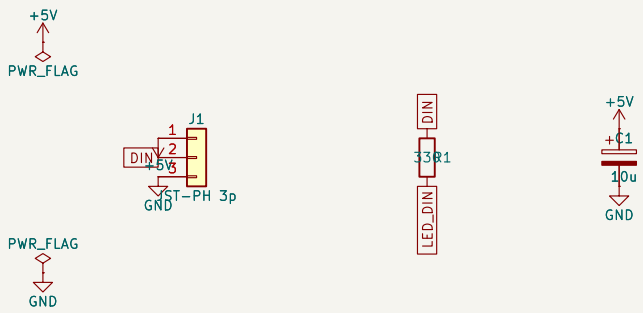

LED chain: LED1 centre, LED2 top point, then clockwise. LED9 DOUT unused.

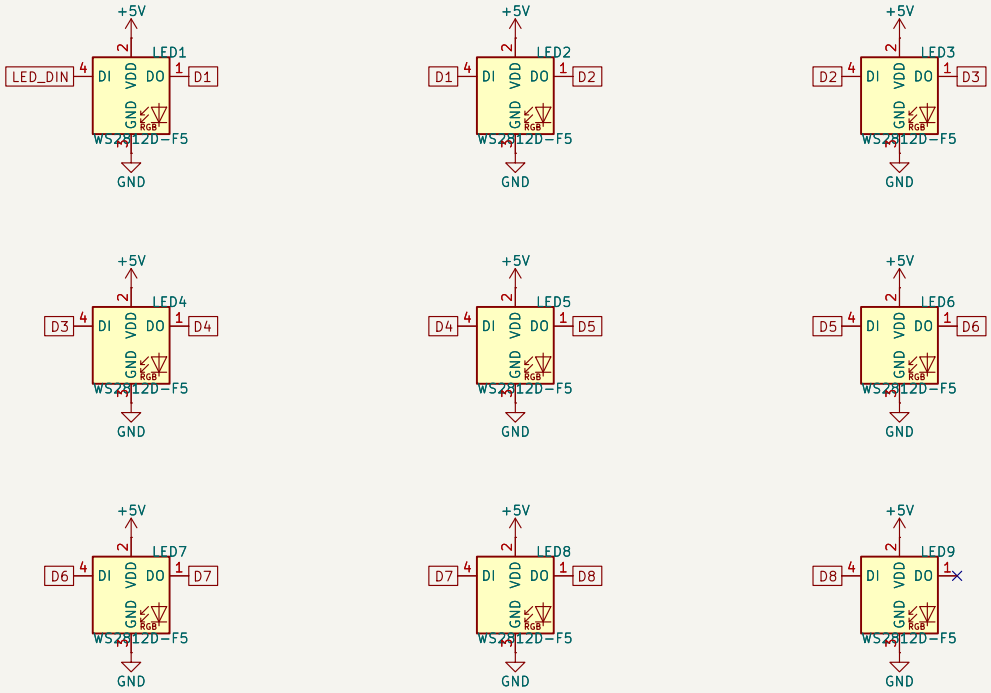

Created with sparkles by @andreban

Sheet: /

File: neopixel-star-tht.kicad_sch

Title: NeoPixel Star (through-hole)

Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 1/1