

USB-C on the XIAO powers the LEDs (5V = USB VBUS): its D3 drives the chain. Any XIAO fits.

WS2812B-MINI-V6 accepts 3.3 V data directly (VIH = 0.55 x VDD).

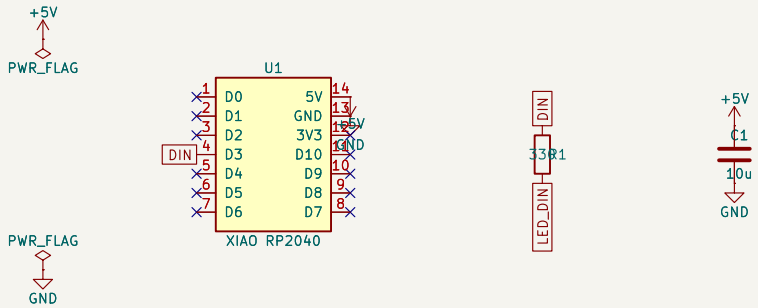

LED chain: LED1 centre, LED2 top point, then clockwise. LED9 DOUT unused.

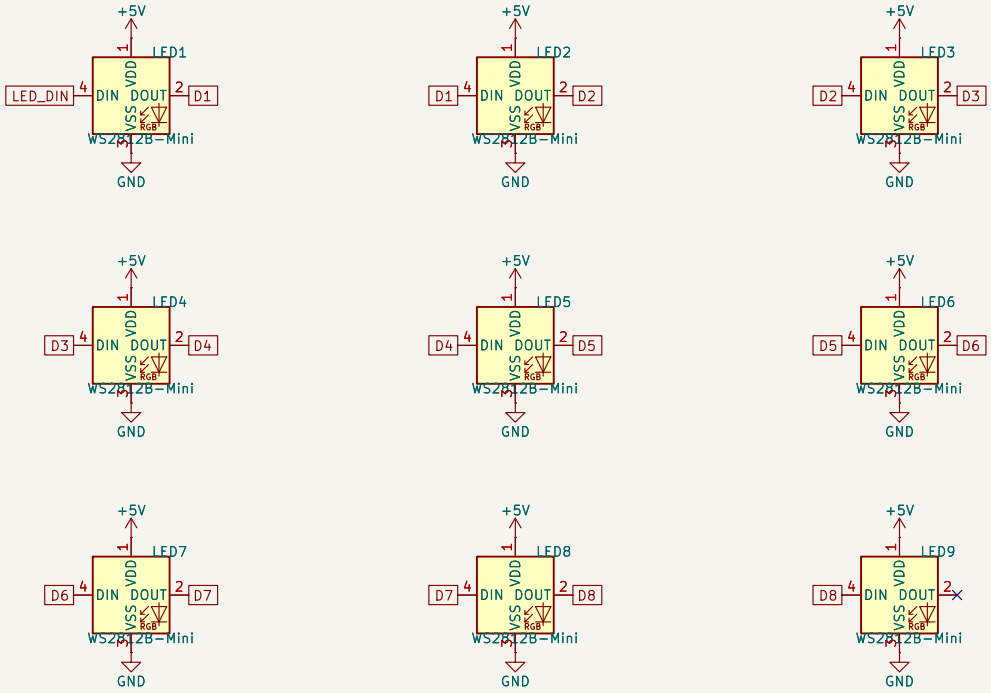

Created with sparkles by @andreban

Sheet: /

File: neopixel-star-xiao.kicad_sch

Title: NeoPixel Star (XIAO)

Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 1/1