
NeoPixel Star (through-hole): front

seen from the front

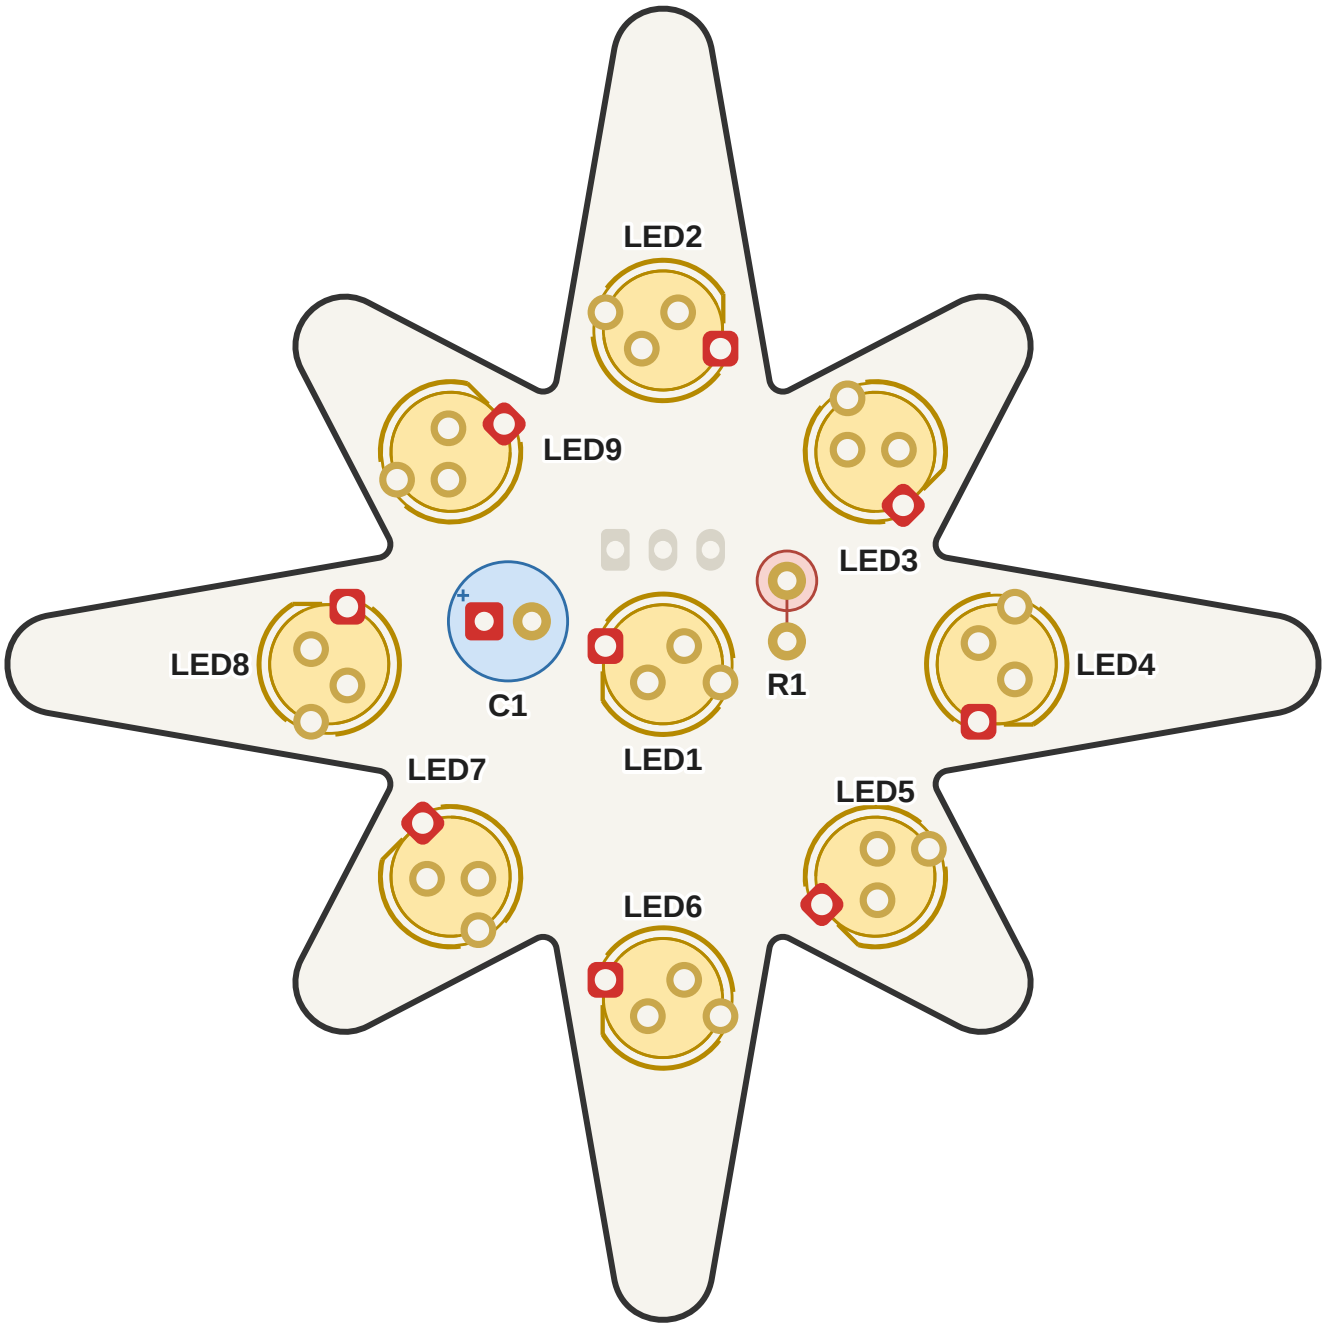

C1 10u: 10 uF 25 V electrolytic, 5 x 11 mm, bulk


LED1–LED9 WS2812D-F5: Addressable RGB LED, 5 mm through-hole

R1 330: 330 R 1/4 W metal film, data series resistor

pin 1 (+ on capacitors)

NeoPixel Star (through-hole): back

seen from the back (board turned over)

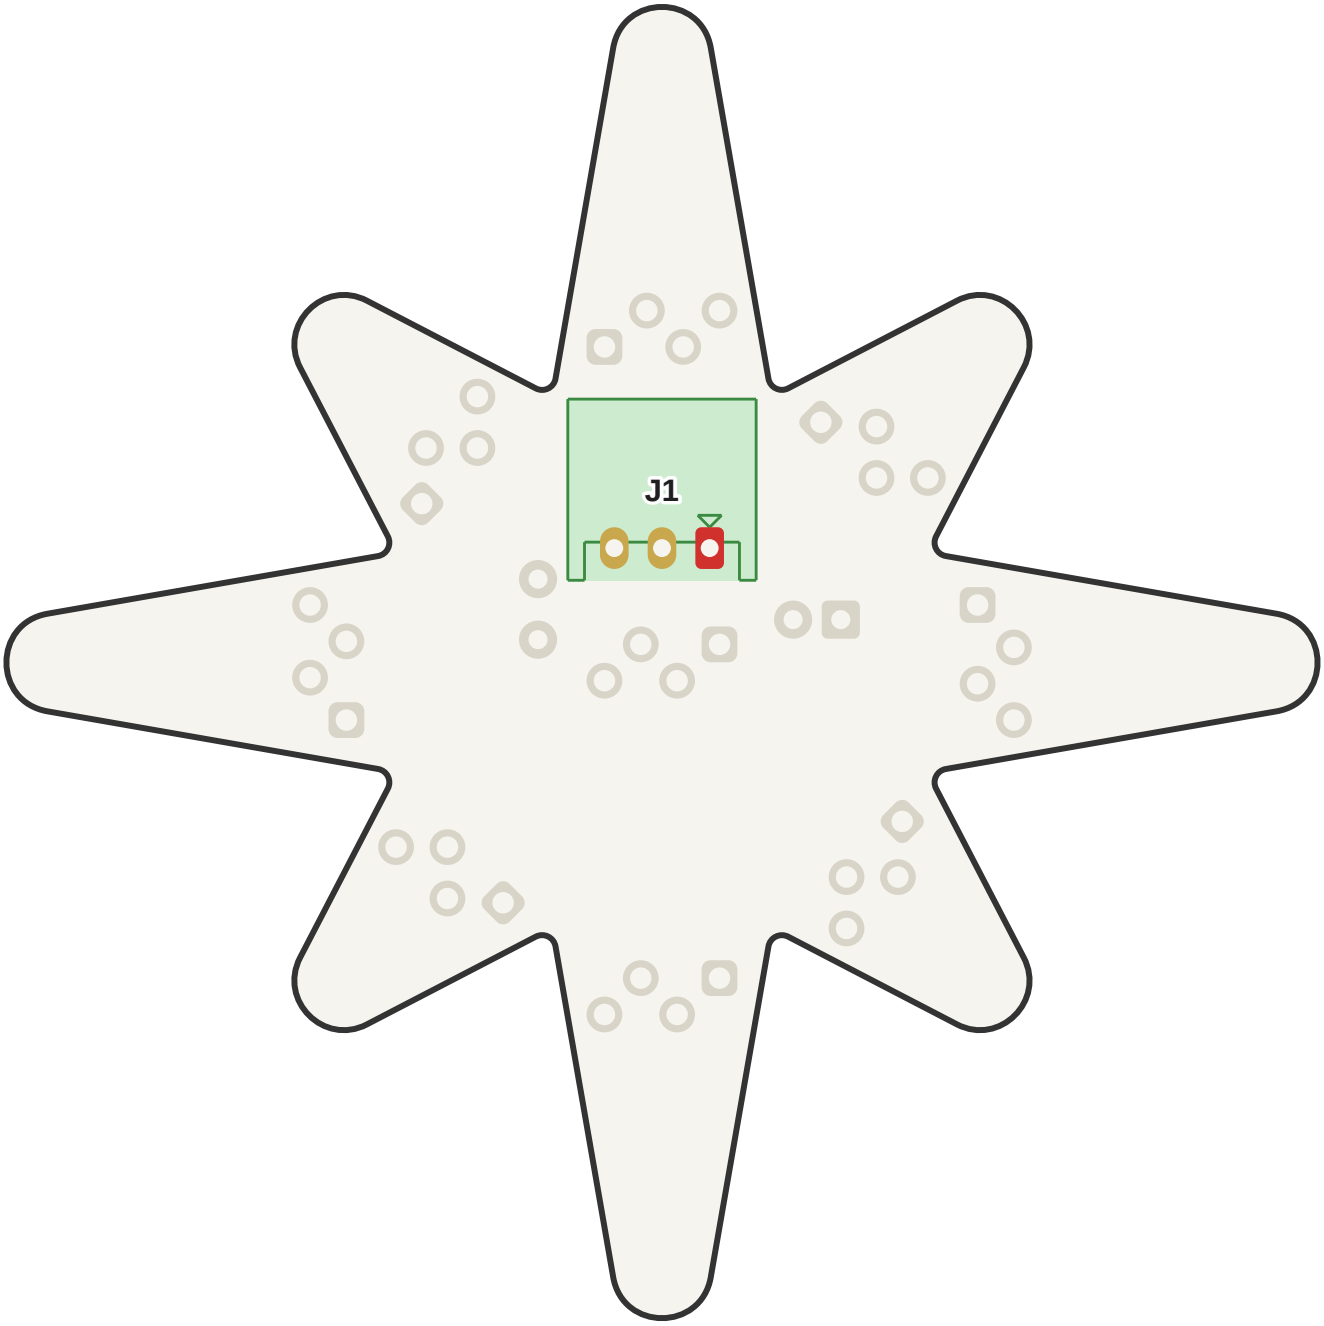

J1 JST-PH 3p: JST PH 2.0 mm 3-pin, through-hole side entry

pin 1