

Input: 5V / DIN / GND. U1 (AHCT, TTL input) accepts 3.3 V or 5 V data.

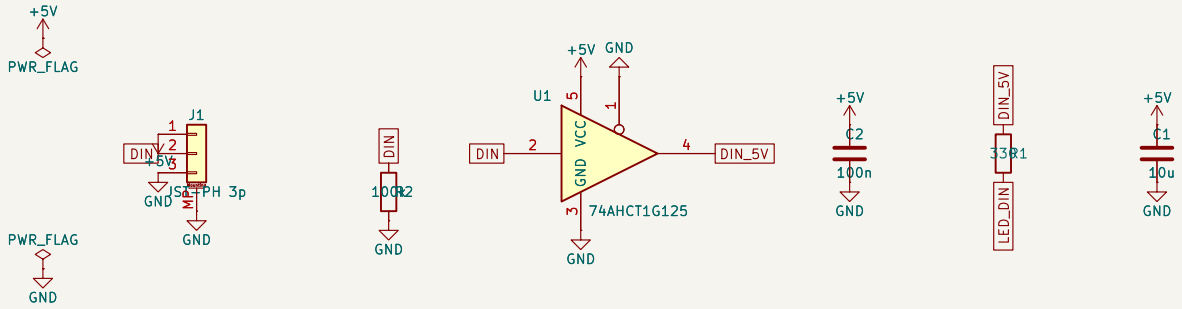

LED chain: LED1 centre, LED2 top point, then clockwise. LED9 DOUT unused.

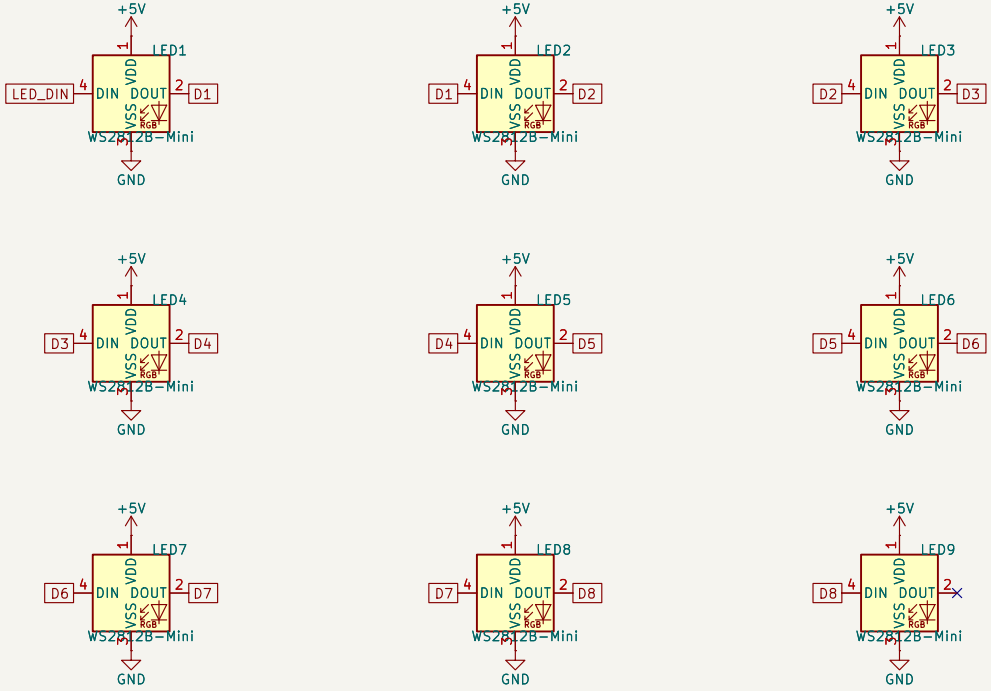

Created with sparkles by @andreban

Sheet: /

File: neopixel-star-hotplate.kicad_sch

Title: NeoPixel Star (hot-plate)

Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 1/1