

USB-C on the XIAO powers the LEDs (5V = USB VBUS): its D3 drives the chain. Any XIAO fits.

WS2812B-MINI-V6 accepts 3.3 V data directly (VIH = 0.55 x VDD).

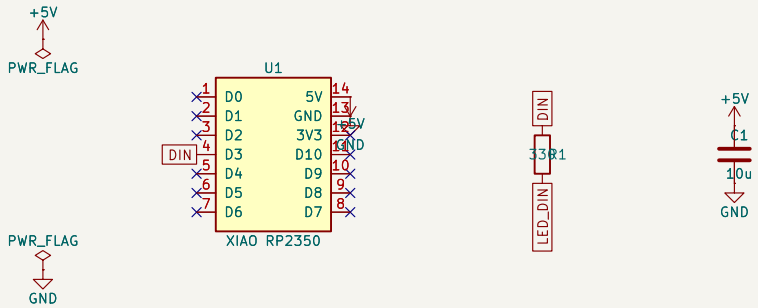


LED chain: LED1 centre, LED2 top point, then clockwise. LED9 DOUT unused.

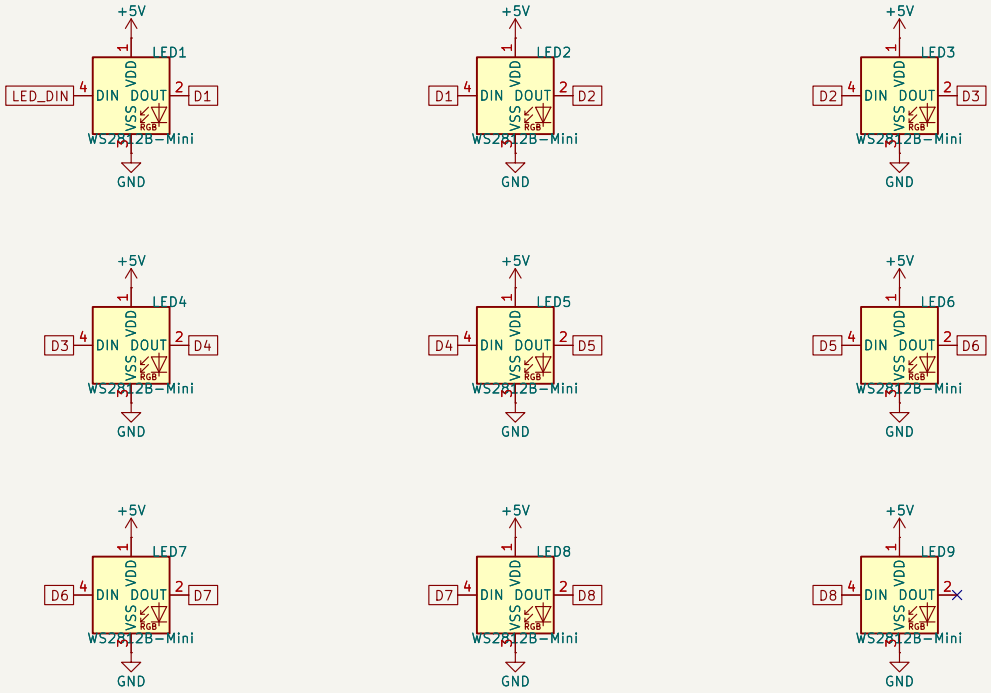


Created with sparkles by @andreban

Sheet: /

File: neopixel-star-xiao.kicad_sch

**Title: NeoPixel Star (XIAO)**

| Size: A4 | Date: | Rev: |
|---|---|---|
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |